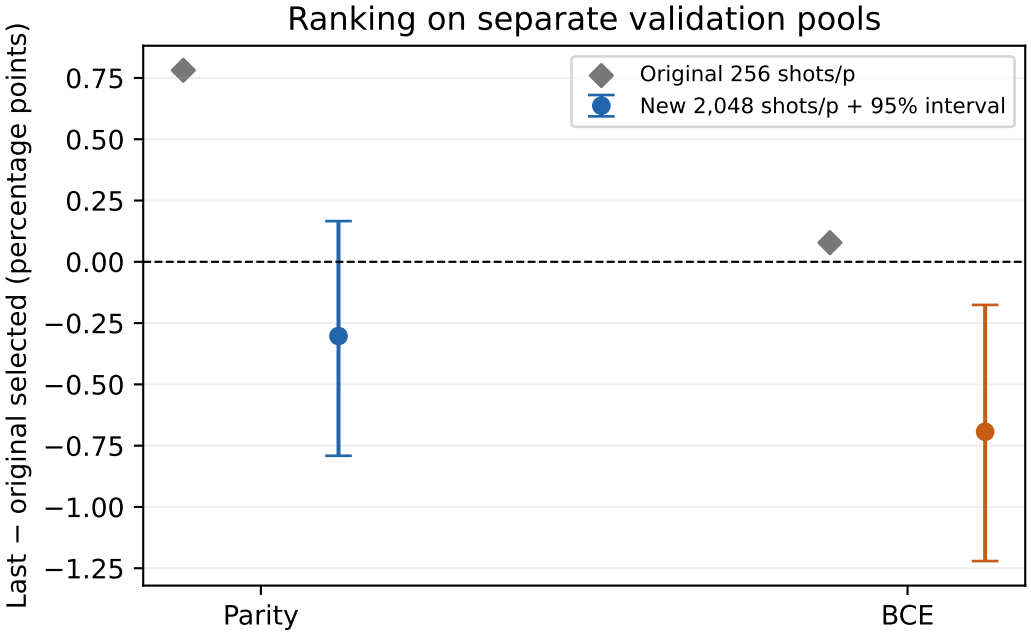

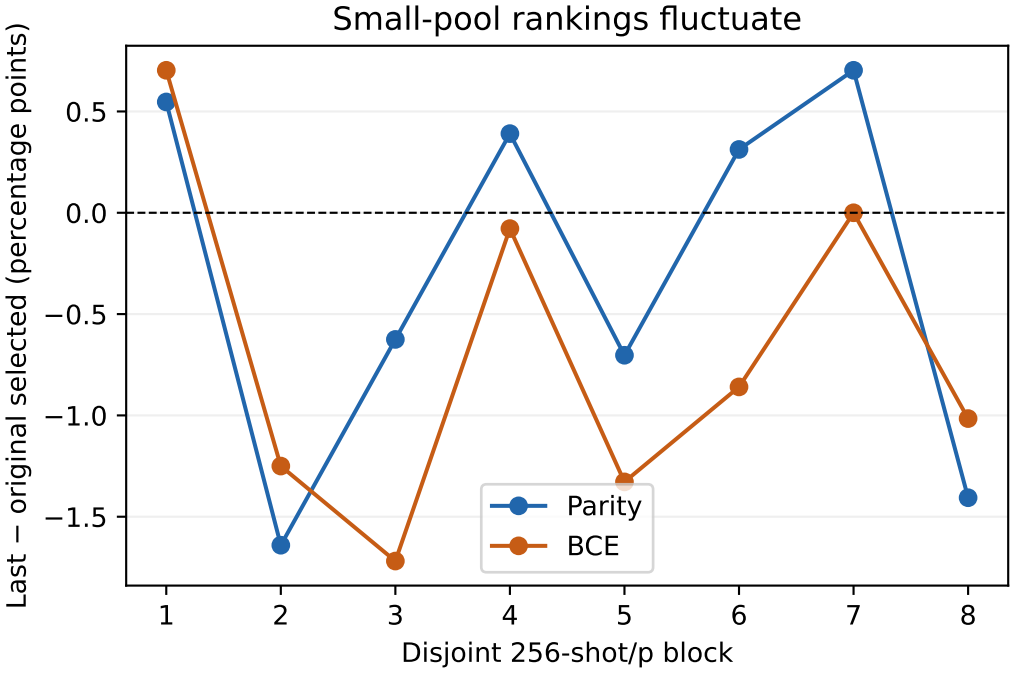

Negative values favor the final checkpoint. Validation only; intervals are descriptive. Original model files are unchanged.