

Hash Community Platform - Product Bible

HCP Product Team

August 11, 2026

Hash Community Platform — Product Bible

Complete compiled edition — Chapters 1 through 24

Compiled 2026-08-10 for stakeholder distribution.

Hash Community Platform Product Bible

Chapter 1 --- Vision, Mission & Product Philosophy

Introduction

The Hash Community Platform (HCP) is a purpose-built digital ecosystem for the worldwide Hash House Harriers community. It supports the complete lifecycle of a Hash run---from planning and trail creation to live participation, AI-assisted trail reports, and permanent historical archives.

Why This Product Exists

Hash information is fragmented across messaging apps, social media, websites, and personal archives. HCP provides a digital home where every Hash run can be prepared, experienced, documented, and remembered.

Vision Statement

To become the world's most trusted digital home for the global Hash House Harriers community, preserving every run, every trail, every story, and every memory for generations of Hashers.

Mission Statement

Simplify the organization of Hash events while strengthening relationships between Hashers worldwide using modern tools that respect Hash traditions.

Product Philosophy

- Community Before Technology
- Preserve the Story
- Design Around the Complete Hash Lifecycle
- Offline by Design

- Mobile First
- History is a Product Feature
- Simplicity Over Complexity
- Global Platform, Local Identity

Core Product Objectives

1. Digitize the lifecycle of every Hash run.
2. Preserve Hash history.
3. Strengthen the global community.
4. Reduce committee administration.
5. Enable reliable live participation, even offline.
6. Build an extensible platform for future innovation.

Product Values

Inclusive, community-driven, respectful of traditions, fun, reliable, secure, accessible, privacy-conscious, sustainable, historically meaningful.

Product Positioning

The platform is not merely a fitness tracker, event manager, social network, or mapping application. It combines the strengths of each into a platform purpose-built for Hash House Harriers.

Success Definition

Success is achieved when Hashers instinctively use the platform before, during, and after every run, and when it becomes the permanent digital memory of the Hash community.

Hash DNA (Core Domain Model)

Hash DNA is adopted as a first-class domain model.

Every completed run develops a unique digital fingerprint derived from: - Terrain - Weather - Trail design - Beer checks - Attendance - Media - Trail reports - Reactions - Memorable moments

Hash DNA influences search, AI, analytics, storytelling, historical archives, recommendations, and future platform capabilities.

Chapter Summary

This chapter defines the vision, mission, philosophy, values, objectives, and foundational concepts that govern every future design and engineering decision for the Hash Community Platform.

HCP Design Principles

1. Digitize traditions. Never replace them.
2. Preserve memories before adding features.
3. Technology should be invisible during the run.
4. Every interaction should strengthen community.
5. Local kennel traditions always take precedence.
6. Every run deserves to become history.
7. Build globally. Respect locally.
8. AI assists. Humans decide.
9. Offline first whenever practical.
10. Every Run. Every Trail. Every Story.

A traditional information system ages as its data becomes obsolete.

The Hash Community Platform grows more valuable with every run, every conversation, every photograph, every story, every trail, every friendship, and every generation that contributes to it.

Every run is another breath of life.

Hash Community Platform Product Bible

Chapter 2 --- Understanding Hash House Harriers

Version: 2.0

Status: Living Document

1. Purpose

This chapter introduces the traditions, terminology, roles, workflows, and concepts of Hash House Harriers so every contributor understands the domain before building the platform.

2. What is Hash House Harriers?

Hash House Harriers (HHH) is a worldwide network of social running clubs founded in Kuala Lumpur in 1938. Hashing combines running, walking, exploration, storytelling, humour, friendship, and tradition.

3. Philosophy

- Every Hash is unique.
- Every kennel has its own traditions.
- Community comes before performance.
- Every run creates stories worth preserving.

4. Lifecycle of a Hash Run

1. Planning
2. Trail Creation
3. Gathering / Chalk Talk
4. Live Run
5. Circle

6. Trail Report

7. Historical Archive

The platform is designed around this lifecycle rather than treating a run as a single event.

5. Organizational Structure

Each Kennel operates independently and manages its own members, officers, permissions, branding, and events.

6. Common Roles

GRAND MASTER (GM)

Leads the kennel and manages administration.

JOINT MASTER

Supports the GM.

HARE RAISER

Coordinates future Hares.

HARE

Creates, edits and publishes trails.

HASH SCRIBE

Writes and publishes trail reports, assisted by AI if desired.

RELIGIOUS ADVISER (RA)

Facilitates Circle traditions and records awards.

HASH CASH

Responsible for finances and future donation integrations.

ON SEC

Handles announcements and communications.

7. Core Terminology

Term Software Entity

Kennel Kennel Run Run Hare User Role Hasher User Trail Trail Waypoint Trail Waypoint
Beer Check Waypoint Type Circle Run Activity Trail Report Report Down-Down Circle
Event Visitor Temporary Membership Virgin User Status Hash DNA Core Domain Model

8. Digital Trail

A Trail is composed of: - Route - Waypoints - Media - Comments - Weather - Attendance
- Stories - Hash DNA

9. Waypoints

Supported waypoint types include: - Beer Check - Water Stop - Check - False Trail -
Back Check - River Crossing - Hazard - Scenic Viewpoint - Photo Spot - Finish

Each waypoint can contain photos, videos, audio, comments, reactions, timestamps and
GPS coordinates.

10. Hash DNA

Hash DNA is a first-class domain model representing the unique fingerprint of every
completed run.

Dimensions include: - Trail characteristics - Environment - Attendance - Community
engagement - Media - Trail report richness - Memorable moments

Hash DNA powers: - AI storytelling - Recommendations - Historical comparisons - Memory search - Analytics - Future gamification

11. Domain Relationships

- Users join multiple Kennels.
- Kennels organize Runs.
- Runs contain one Trail.
- Trails contain many Waypoints.
- Waypoints contain Media.
- Runs have one Trail Report.
- Runs have one Hash DNA profile.

12. Design Principles

- Preserve traditions.
- Treat every run as a story.
- Design for offline use.
- Respect local autonomy.
- Preserve history permanently.

Chapter Summary

This chapter defines the Hash domain and establishes Hash DNA as a foundational model for the platform.

Hash Community Platform Product Bible

Chapter 3 --- Market Research & Competitive Analysis

Version: 2.0

Purpose

Understand the digital landscape surrounding Hash House Harriers, identify gaps, and define the positioning of the Hash Community Platform (HCP).

Current State

Most kennels rely on fragmented tools including WhatsApp, Facebook, email, GPX files, Google Maps, Strava, and individual websites. No single platform supports the complete lifecycle of a Hash run.

Fragmentation

Activity Typical Tool

Announcements WhatsApp/Facebook RSVP WhatsApp Navigation GPX/Maps Photos
WhatsApp/Facebook Reports Email/Websites Archive Inconsistent

Market Opportunity

HCP creates a new category: **Community Lifecycle Management for Hash House Harriers**, replacing multiple disconnected tools with one integrated platform.

Competitor Categories

- Fitness Tracking (Strava, Garmin)
- Route Planning (Komoot, AllTrails)
- Event Management (Meetup)

- Social Platforms (Facebook, WhatsApp)
- Mapping Platforms (OpenStreetMap, Mapbox)

Key Differentiators

- Complete Hash lifecycle
- Hash-native workflows
- Hidden live trail release
- AI-assisted trail reports
- Geospatial storytelling
- Hash DNA
- Permanent historical archive

SWOT

STRENGTHS

Purpose-built, offline-first, AI-enabled, globally scalable.

WEAKNESSES

Requires community adoption and long-term infrastructure.

OPPORTUNITIES

Worldwide Hash adoption, Interhash, historical preservation.

THREATS

Change resistance, privacy concerns, future competitors.

Positioning

The first mobile-first, offline-capable, AI-powered platform built specifically for Hash House Harriers.

Strategic Principle

HCP integrates with external platforms where beneficial but never depends on them. Runs, Trails, Reports, Media and Hash DNA always remain the authoritative source of truth within HCP.

Hash Community Platform Product Bible

Chapter 4 --- Product Principles

Purpose

These principles govern every product, design, and engineering decision.

Principles

1. Community Before Features
2. Hash Before Technology
3. Every Run Is a Story
4. Hash DNA Is Sacred
5. History Is Never Deleted
6. Offline First
7. Mobile First
8. Global Platform, Local Identity
9. Open, Not Dependent
10. AI Assists, Humans Decide
11. Respect Privacy
12. Simplicity Over Complexity
13. Build for the Next Decade
14. Measure Success by Community Value

Principle Hierarchy

1. Community First
2. Preserve History
3. Hash Before Technology
4. Offline First
5. Mobile First
6. Privacy
7. Simplicity

- 8. Open Integration
- 9. Scalability
- 10. Innovation

Strategic Decision

HCP is a living specification. All future requirements, APIs, UX flows and architecture trace back to these principles.

Hash Community Platform Product Bible

Chapter 5 --- User Personas

Purpose

Defines the primary users, their goals, permissions, motivations and success criteria.

Personas

HASHER

Goals: Join runs, follow trails, upload media, interact with community. Permissions: Join kennels, RSVP, upload media, comment, react.

HARE

Goals: Design and publish trails. Permissions: Create/edit trails, manage release time, configure waypoints.

HASH SCRIBE

Goals: Publish official trail reports. AI assists with draft generation while the Scribe retains editorial control.

GRAND MASTER

Manages kennel operations, officers and settings.

COMMITTEE MEMBER

Supports operations according to assigned role.

VISITOR

Discovers and participates in runs hosted by other kennels.

VIRGIN

First-time participant with onboarding guidance.

PHOTOGRAPHER

Captures and geo-tags photos and videos.

PLATFORM ADMINISTRATOR

Maintains the global platform, moderation and verification.

Cross-Persona Collaboration

Hares create trails, Hashers experience them, Scribes preserve them, GMs manage communities, Visitors expand them, Photographers document them.

Accessibility

Offline-first, large touch targets, multilingual readiness, screen-reader support.

Success Metrics

Each persona has measurable success criteria focused on participation, administration efficiency and historical preservation.

Chapter 6 --- User Journeys

Purpose

Defines complete end-to-end user journeys that drive UX, APIs, database design and testing.

JOURNEY 1: NEW HASHER

1. Register
2. Discover kennel
3. Join kennel
4. RSVP to run
5. Download offline maps
6. Attend run
7. Upload media
8. Read trail report

JOURNEY 2: HARE CREATES TRAIL

- Create/import GPX
- Add waypoints
- Configure beer checks
- Set hidden release time
- Publish

JOURNEY 3: LIVE RUN

- Trail released
- Navigate
- Check in
- Upload media
- Finish run

JOURNEY 4: SCRIBE

- Review run
- Generate AI draft
- Edit
- Publish report

JOURNEY 5: VISITOR

Discover foreign kennel, RSVP, attend, contribute media.

JOURNEY 6: OFFLINE RECOVERY

Continue navigation, capture media, sync later.

JOURNEY 7: HISTORICAL ARCHIVE

Run archived, Hash DNA finalized, searchable forever.

All journeys define personas, permissions, offline behaviour, notifications and acceptance criteria.

Chapter 7 --- Feature Inventory & Capability Matrix

Purpose

Master catalogue of all platform capabilities.

Domains

- Authentication
- Kennels
- Membership
- Runs
- Trails
- Waypoints
- Media
- Trail Reports
- Hash DNA
- Search
- Notifications
- Offline Sync
- AI
- Administration
- Analytics
- Integrations

Sample Features

ID Feature Priority

FEAT-AUTH-001 User Registration Must FEAT-KENNEL-001 Create Kennel Must FEAT-RUN-001 Create Run Must FEAT-TRAIL-001 Hidden Trail Release Must FEAT-MEDIA-001 Waypoint Media Must FEAT-REPORT-001 AI Trail Report Should FEAT-DNA-001 Generate Hash DNA Must

Every feature links to personas, journeys, FRs, APIs and database entities.

Hash Community Platform Product Bible

Chapter 8 --- Functional Requirements Specification (FRS)

Document ID: HCP-PB-08

Version: 2.0 (Draft)

1. Purpose

This chapter defines the complete functional behavior of the Hash Community Platform (HCP). Every implemented capability shall trace back to one or more functional requirements defined in this document.

2. Requirement Identification Convention

Requirement IDs follow:

```
FR-<DOMAIN>-###
```

Examples:

- FR-AUTH-001
- FR-USER-001
- FR-KENNEL-001
- FR-RUN-001
- FR-TRAIL-001

Requirement IDs are immutable and shall never be reused.

3. Priority Levels

Priority Meaning

Must Required for MVP Should Important but not mandatory Could Valuable
enhancement Won't Deferred

4. Functional Domains

Domain Prefix

Authentication AUTH Users USER Kennels KENNEL Membership MEMBER Runs RUN
Trails TRAIL Waypoints WAYPOINT Navigation NAV Media MEDIA Reports REPORT
Search SEARCH Notifications NOTIFY Hash DNA DNA AI AI Administration ADMIN
Settings SETTINGS

5. Standard Requirement Template

Each requirement includes:

- Requirement ID
- Title
- Description
- Rationale
- Priority
- Personas
- Related User Journeys
- Related Product Principles
- Business Rules
- Preconditions
- Trigger
- Main Flow
- Alternative Flows
- Exception Flows
- Postconditions
- Acceptance Criteria
- Dependencies

- Future Enhancements
-

Domain 1 --- Authentication

FR-AUTH-001 --- User Registration

DESCRIPTION

The system shall allow any eligible user to register using an email address and password.

RATIONALE

Registration establishes a persistent identity that can participate across multiple kennels.

PRIORITY

Must

PERSONAS

- Hasher
- Visitor
- Hare
- Hash Scribe
- Committee Member
- Grand Master

RELATED USER JOURNEY

Journey 1 --- New Hasher Joins Their First Kennel

BUSINESS RULES

- Email addresses must be unique.
- Password policy shall be enforced.
- Terms of Service and Privacy Policy must be accepted.
- New accounts remain in **Pending Verification** until verified.

PRECONDITIONS

- User is not authenticated.

TRIGGER

User selects **Create Account**.

MAIN FLOW

1. Enter personal details.
2. Enter optional Hash Name.
3. Enter email.
4. Enter password.
5. Confirm password.
6. Accept Terms.
7. Submit registration.
8. Validate fields.
9. Check email uniqueness.
10. Create account.
11. Send verification email.

ALTERNATIVE FLOWS

- Future Google Sign-In.
- Future Apple Sign-In.

EXCEPTION FLOWS

- Duplicate email.
- Invalid email.
- Weak password.
- Email delivery failure.

POSTCONDITIONS

Account exists in **Pending Verification** state.

ACCEPTANCE CRITERIA

- Duplicate emails rejected.
- Verification email generated.
- Protected resources unavailable until verification.

DEPENDENCIES

- Authentication Service
- Email Service
- User Database

FUTURE ENHANCEMENTS

- Passkeys
 - Passwordless login
 - Enterprise SSO
-

FR-AUTH-002 --- Email Verification

DESCRIPTION

The system shall require email verification before granting full platform access.

BUSINESS RULES

- Verification links expire after a configurable period.
- Users may request a new verification email.

ACCEPTANCE CRITERIA

- Valid links activate the account.
 - Expired links are rejected.
 - Successful verification changes account status to **Active**.
-

FR-AUTH-003 --- User Login

DESCRIPTION

The system shall authenticate verified users using their registered credentials.

BUSINESS RULES

- Only verified accounts may log in.
- Failed login attempts shall be rate limited.
- Sessions shall be securely established.

ACCEPTANCE CRITERIA

- Successful login opens the user dashboard.
 - Invalid credentials return a generic error.
 - Repeated failures trigger temporary logout.
-

FR-AUTH-004 --- Password Reset

DESCRIPTION

The system shall provide a secure password reset workflow.

ACCEPTANCE CRITERIA

- Reset tokens are single-use.
 - Tokens expire after a configurable period.
 - Password reset invalidates existing sessions.
-

Progress

This chapter establishes:

- Functional requirement conventions

- Requirement template
- Authentication domain
- Initial production-ready authentication requirements

Subsequent revisions will expand this document with User, Kennel, Run, Trail, Waypoint, Media, Report, Notification, AI, Administration, and Offline functional requirements until the complete specification is finished.

Annex 08B --- User Management Functional Requirements

Document ID: HCP-PB-08B

Parent Document: Chapter 8 --- Functional Requirements Specification

Domain: User Management (FR-USER-*)

Status: Draft

1. Purpose

This annex defines all functional requirements related to user identity, personal profiles, preferences, account lifecycle, and participation across multiple kennels.

2. Scope

- User profile
 - Hash identity
 - Avatars
 - Bio
 - Privacy
 - Preferences
 - Multi-kennel membership
 - Statistics
 - Activity history
 - Data export
 - Account deactivation
 - Account deletion
 - User discovery
 - Verification badges
-

3. Functional Requirements

FR-USER-001 --- Create User Profile

Description

The system shall automatically create a user profile immediately after successful account registration.

Business Rules

- One profile per account.
- Profile cannot exist without an account.
- Profile receives a globally unique identifier.

Acceptance Criteria

- Profile created automatically.
 - Creation timestamp recorded.
-

FR-USER-002 --- Edit Profile

Users shall be able to edit:

- First Name
- Last Name
- Preferred Display Name
- Hash Name
- Biography
- Home City
- Country
- Pronouns (optional)
- Date of Birth (optional)
- Profile Visibility
- Social Links (optional)

Acceptance Criteria

- Validation enforced.
 - Changes saved immediately.
 - Audit timestamp updated.
-

FR-USER-003 --- Hash Name Management

Users may maintain one or more Hash Names.

Business Rules

- One primary Hash Name.
 - Historical names retained.
 - Hash Names need not be globally unique.
-

FR-USER-004 --- Avatar Management

Supported formats:

- JPEG
- PNG
- WEBP

Future support:

- Animated avatars
 - Event frames
-

FR-USER-005 --- Profile Visibility

Visibility levels:

- Public

- Registered Users
- Kennel Members
- Private

Each field may have independent visibility.

FR-USER-006 --- Home Kennel

Users may designate a single Home Kennel while remaining members of multiple kennels.

FR-USER-007 --- Multi-Kennel Membership

Users may belong to multiple kennels simultaneously.

Officer roles apply only within their assigned kennel.

FR-USER-008 --- User Statistics

Automatically maintained statistics include:

- Runs Attended
 - Trails Laid
 - Reports Authored
 - Beer Checks Visited
 - Countries Hashed
 - Kennels Joined
 - Distance Covered
 - Elevation Climbed
 - Photos Uploaded
 - Videos Uploaded
 - Years Active
-

FR-USER-009 --- Activity Timeline

Timeline events include:

- Joined Kennel
- Attended Run
- Laid Trail
- Uploaded Media
- Published Report
- Earned Badge

Supports filtering and search.

FR-USER-010 --- Profile Completeness

Completeness score considers:

- Avatar
- Biography
- Hash Name
- Home Kennel
- Language
- Preferences

Completeness never blocks participation.

FR-USER-011 --- Data Export

Supported export formats:

- JSON
- CSV

Future:

- PDF Activity Summary
-

FR-USER-012 --- Account Deactivation

Users may deactivate accounts while preserving historical participation.

FR-USER-013 --- Permanent Account Deletion

Personally identifiable information shall be removed or anonymized where appropriate while preserving historical run integrity.

FR-USER-014 --- Verification Badges

Supported badges:

- Verified Officer
 - Verified Hare
 - Verified Scribe
 - Platform Administrator
 - Community Contributor
-

FR-USER-015 --- User Discovery

Users may be searched by:

- Hash Name
- Real Name (if public)
- Home Kennel
- City
- Country
- Badge

Search shall respect privacy settings.

4. Domain Completion Criteria

This domain is complete when users can manage identity, privacy, participation across multiple kennels, historical records and data portability.

Progress

- Annex 08A --- Authentication 
 - Annex 08B --- User Management 
 - Next: Annex 08C --- Kennels
-

Annex 08C --- Kennels Functional Requirements

Document ID: HCP-PB-08C

Parent: Chapter 8 --- Functional Requirements Specification

Domain: Kennels (FR-KENNEL-*)

Status: Draft

Purpose

Defines the lifecycle, governance, identity, discovery and administration of Hash House Harrier kennels.

Core Product Principle: Every kennel is a **Living Clubhouse**, not just a profile page.

Scope

- Creation & verification
- Branding
- Officer management
- Discovery
- Announcements
- Calendar
- Gallery
- Statistics
- Historical archive
- Sister kennels
- Clubhouse experience

Functional Requirements

FR-KENNEL-001 --- CREATE KENNEL

The system shall allow eligible users to submit a kennel creation request.

Required: Name, Short Name, Country, State/Province, City, Time Zone, Description, Logo, Banner.

Business Rules - Creator becomes provisional administrator. - Duplicate local kennel names are not permitted. - New kennels start as Pending Verification.

FR-KENNEL-002 --- VERIFY KENNEL

Support Pending, Community Verified, Officer Verified and Platform Verified states. Verification confirms authenticity within HCP only.

FR-KENNEL-003 --- KENNEL PROFILE

Each kennel shall expose a public profile containing branding, officers, schedule, statistics, gallery, reports and upcoming runs.

FR-KENNEL-004 --- LIVING CLUBHOUSE

Each kennel shall have a dynamic clubhouse containing: - Welcome message - Countdown to next run - Live notice board - New member welcomes - Active visitors - Recent trail reports - Featured photos - Upcoming events - Club milestones - Configurable widgets

FR-KENNEL-005 --- BRANDING

Custom logo, banner, colors, motto and landing message.

FR-KENNEL-006 --- OFFICER DIRECTORY

Support Grand Master, Joint Master, RA, Hash Cash, Hash Scribe, Hare Raiser, Trail Master, On Sec, Web Master, Committee Members and future custom roles.

FR-KENNEL-007 --- OFFICER ASSIGNMENT

Officer appointments shall include start/end dates and preserve historical records.

FR-KENNEL-008 --- ANNOUNCEMENTS

Pinned, scheduled and categorized announcements.

FR-KENNEL-009 --- CALENDAR

Support weekly runs, campouts, AGMs, Interhash, Nash Hash, Red Dress Runs, charity events and workshops.

FR-KENNEL-010 --- GALLERY

Photo albums, videos and featured collections sourced from runs or direct uploads.

FR-KENNEL-011 --- STATISTICS

Automatically maintain member counts, runs, trails, reports, countries represented and media totals.

FR-KENNEL-012 --- SISTER KENNELS

Allow formal relationships with regional and international partner kennels.

FR-KENNEL-013 --- HISTORICAL ARCHIVE

Preserve officers, reports, runs, awards, media and milestones permanently.

FR-KENNEL-014 --- DISCOVERY

Search by location, name, activity, meeting day and verification.

FR-KENNEL-015 --- LIFECYCLE

Draft → Pending Verification → Active → Inactive → Archived.

Completion Criteria

A kennel can be created, verified, branded, managed, discovered and preserved historically while functioning as a living digital clubhouse.

Annex 08D — Membership Functional Requirements

Document ID: HCP-PB-08D

Parent Document: Chapter 8 — Functional Requirements Specification

Domain: Membership (FR-MEMBER-*)

Status: Draft

1. Purpose

This annex defines how users become members of kennels, participate in the global Hash community, hold officer positions, maintain membership history, and build their lifelong **Hash Passport**.

Membership is intentionally independent from authentication and user profiles because a hasher may belong to multiple kennels throughout their lifetime.

2. Scope

This annex includes:

- Membership requests
 - Membership approval
 - Membership types
 - Membership statuses
 - Invitations
 - Officer eligibility
 - Visitor participation
 - Guest participation
 - Membership history
 - Suspensions
 - Reinstatement
 - Leaving a kennel
 - Member removal
 - Hash Passport
 - Achievements
 - Milestones
-

3. Functional Requirements

FR-MEMBER-001 — Request Membership

DESCRIPTION

The system shall allow authenticated users to request membership in any discoverable kennel.

BUSINESS RULES

- Users may belong to multiple kennels.
- Duplicate pending requests are prohibited.
- Hidden kennels require invitations.

ACCEPTANCE CRITERIA

- Membership request submitted successfully.
 - Officers receive notification.
 - User can monitor request status.
-

FR-MEMBER-002 — Membership Approval

DESCRIPTION

Authorized officers shall approve or reject membership requests.

BUSINESS RULES

- Approval records the approving officer.
- Timestamp is stored.
- Optional approval notes are supported.
- Reapplication cooldown is configurable.

ACCEPTANCE CRITERIA

- Approved users become Active Members.
 - Rejected users receive notification.
 - Audit log captures every decision.
-

FR-MEMBER-003 — Membership Types

Supported membership classifications include:

- Full Member
- Associate Member
- Visiting Hasher
- Honorary Member
- Life Member
- Guest
- Virgin
- Committee Member

FUTURE ENHANCEMENTS

- Custom membership types per kennel.
-

FR-MEMBER-004 — Membership Status

Supported statuses:

- Pending
- Active
- Suspended
- Inactive
- Resigned
- Removed
- Archived

BUSINESS RULES

- Historical status changes shall never be deleted.
 - Status transitions shall be recorded in the audit log.
-

FR-MEMBER-005 — Invitations

DESCRIPTION

Officers may invite users using:

- Email
- QR Code
- Invitation Link

BUSINESS RULES

- Invitation expiry is configurable.
 - Invitations may be revoked before acceptance.
-

FR-MEMBER-006 — Visitor Participation

DESCRIPTION

Hashers visiting another kennel shall participate without changing permanent membership.

VISITOR PARTICIPATION CONTRIBUTES TO

- Personal statistics
 - Run attendance
 - Passport history
 - Country statistics
 - Kennel visitor analytics
-

FR-MEMBER-007 — Home Kennel Transfer

DESCRIPTION

Users may change their Home Kennel.

BUSINESS RULES

- Historical memberships remain intact.
 - Previous Home Kennel remains in history.
-

FR-MEMBER-008 — Suspension

DESCRIPTION

Authorized officers may suspend members.

REQUIRED INFORMATION

- Reason
- Start Date
- End Date (optional)

BUSINESS RULES

Suspension never removes historical participation.

FR-MEMBER-009 — Reinstatement

DESCRIPTION

Suspended or inactive members may be reinstated.

BUSINESS RULES

The platform preserves:

- Original join date
 - Membership history
 - Milestones
 - Attendance records
-

FR-MEMBER-010 — Membership Timeline

Each membership shall maintain a permanent timeline.

Supported events include:

- Joined
- Approved
- Officer Appointment
- Suspension
- Reinstatement
- Promotion
- Resignation
- Removal

Timeline entries shall be immutable.

FR-MEMBER-011 — Officer Eligibility

Only eligible Active Members may receive officer appointments.

Eligibility rules remain configurable by each kennel.

FR-MEMBER-012 — Membership Badges

Examples include:

- Founding Member

- Veteran Hasher
- Visiting Hasher
- Life Member
- Committee Member
- Officer
- Trail Legend
- Beer Stop Hero

BUSINESS PRINCIPLE

Badges recognize participation rather than competition.

FR-MEMBER-013 — Membership History

The platform shall permanently preserve:

- Join dates
- Officer appointments
- Membership types
- Awards
- Milestones
- Historical participation

Historical data survives account deactivation where appropriate.

FR-MEMBER-014 — Leave Kennel

DESCRIPTION

Members may voluntarily leave a kennel.

BUSINESS RULES

- Officer roles must be relinquished first.

- Historical attendance remains preserved.
 - Passport history remains unaffected.
-

FR-MEMBER-015 — Remove Member

DESCRIPTION

Authorized officers may remove members.

REQUIRED INFORMATION

- Removal reason
- Audit record
- Notification

Historical contributions remain attributed.

4. Hash Passport

Vision

Every hasher owns a **Hash Passport**—a lifelong digital record of adventures, friendships, trails, and achievements across the global Hash community.

Unlike a profile, the Passport represents a living history that grows with every run.

FR-PASSPORT-001 — Automatic Passport Creation

Every user shall receive a Hash Passport immediately after registration.

The Passport is permanent and linked to the user's account.

FR-PASSPORT-002 — Passport Stamps

The platform shall automatically award stamps for significant milestones.

Examples:

- First Hash
 - First Hare
 - First Beer Check
 - First Trail Report
 - First Visiting Kennel
 - First International Run
 - First Interhash
 - Nash Hash
 - Red Dress Run
 - Charity Run
-

FR-PASSPORT-003 — Countries Hashed

The Passport shall automatically record:

- Countries
- States / Provinces
- Cities
- Kennels Visited

Interactive maps may be supported in future releases.

FR-PASSPORT-004 — Milestones

Examples include:

- 10 Runs
- 50 Runs
- 100 Runs
- 500 Runs
- 1,000 Runs

The milestone engine shall remain configurable.

FR-PASSPORT-005 — Lifetime Statistics

The Passport maintains:

- Runs Attended
- Trails Laid
- Beer Checks
- Reports Written
- Photos Uploaded
- Videos Uploaded
- Countries Hashed

- Kennels Joined
- Years Active
- Distance Covered

Statistics update automatically.

FR-PASSPORT-006 — Memories

Users may pin memorable moments to their Passport.

Examples include:

- Favorite Trail
 - Favorite Beer Stop
 - Favorite Photo
 - Memorable Interhash
 - Personal Notes
-

FR-PASSPORT-007 — Passport Sharing

Users may share a public version of their Passport using:

- Read-only Link
- QR Code

Sharing shall respect user privacy settings.

5. Business Principles

- Membership is lifelong history.
 - Historical participation must never be lost.
 - Visitors are first-class participants.
 - Recognition celebrates experiences rather than competition.
 - Every hasher's journey deserves to be preserved.
-

6. Domain Completion Criteria

This domain is complete when:

- Users can request and manage memberships.
 - Officers can govern memberships.
 - Visitor participation is fully supported.
 - Membership history is permanently preserved.
 - Every hasher owns a living Hash Passport documenting their journey.
-

Progress Tracker

-  Annex 08A — Authentication
 -  Annex 08B — User Management
 -  Annex 08C — Kennels
 -  Annex 08D — Membership
 -  Next: Annex 08E — Runs
-

Annex 08E — Runs

Part 1 — Overview & Lifecycle

Document ID: HCP-PB-08E

Parent Document: Chapter 8 — Functional Requirements Specification

Domain: Runs

Status: Draft

Version: 1.0

Purpose

This annex defines the lifecycle, governance, execution, participation, archival, and historical preservation of every Hash Run within the Hash Community Platform.

Unlike traditional event-management systems, HCP models every Run as a **Run Session**.

A Run Session is a living object that evolves before, during and after the physical run.

Every Run Session ultimately becomes a permanent **Run Capsule**, preserving the complete story of that day.

Product Philosophy

A Run is not simply an event.

It is the central experience of the Hash.

Everything else revolves around it.

- Trails exist because of Runs.
- Beer Checks exist because of Runs.
- Photos belong to Runs.
- Videos belong to Runs.
- Trail Reports describe Runs.
- Passport stamps are awarded because of Runs.

The Run Session therefore becomes the primary aggregate within HCP.

Guiding Principle

Every Run.

Every Trail.

Every Story.

Core Concepts

Run Session

A Run Session represents the complete lifecycle of one scheduled Hash Run.

It includes planning, execution, participation, reporting, media, statistics and archival.

Run Capsule

After completion, every Run Session becomes immutable.

Instead of disappearing into history, it becomes a permanent digital record known as a **Run Capsule**.

Run Capsules preserve the collective memory of the Hash community.

Run Timeline

Every Run Session progresses through a series of well-defined stages.

Announcement
|
Planning
|
Hares Assigned
|
Trail Design
|
Trail Hidden
|
Trail Released
|
Check-in Opens
|
Run Begins
|
Beer Checks
|
Circle
|
Trail Report
|
Media Collection
|
AI Story Generation
|
Run Capsule
|
Passport Updates

Lifecycle States

A Run Session shall always exist in one of the following states.

Draft

Being planned.

Only organizers may view.

Scheduled

Visible to participants.

Trail remains hidden.

Attendance opens.

Trail Hidden

Trail exists.

Navigation unavailable.

Participants cannot access the route.

Trail Released

Trail becomes available according to Hare configuration.

Navigation activates.

Live

Run is in progress.

Attendance locked.

Live map enabled.

Beer Stops become interactive.

Media uploads begin.

Comments enabled.

Circle

Run completed.

Circle activities recorded.

Awards recorded.

Songs recorded.

Announcements captured.

Reporting

Hash Scribe publishes official report.

Community uploads continue.

AI may generate first draft.

Archived

Run closes.

Statistics finalized.

Passport updates completed.

Run becomes read-only.

Run Capsule

Permanent historical record.

Never deleted.

Searchable forever.

Primary Actors

The following personas participate in a Run Session.

- Hare
 - Co-Hare
 - Grand Master
 - RA
 - Hash Scribe
 - Committee
 - Registered Hasher
 - Visiting Hasher
 - Guest
 - Spectator (future)
-

Run Session Ownership

Every Run Session belongs to exactly one Kennel.

A Kennel may own many Run Sessions.

A Run Session cannot exist without a Kennel.

Relationships

A Run Session owns:

- Trail
 - Waypoints
 - Beer Checks
 - Attendance
 - Visitors
 - Media
 - Circle
 - Awards
 - Songs
 - Trail Report
 - AI Story
 - Comments
 - Likes
 - Passport Updates
 - Statistics
-

Business Principles

The platform shall preserve every Run permanently.

No Run Session may be physically deleted once participants have attended.

Corrections shall occur through audited revisions rather than destructive edits.

Success Criteria

A successful Run Session should answer every question a Hasher might ask years later.

Who laid it?

Who attended?

Where did it go?

Where was the Beer Check?

What happened in Circle?

Who wrote the report?

What photos exist?

What memories remain?

Next Part

Part 2 introduces the complete Functional Requirements for planning, scheduling and managing Run Sessions.

Requirement IDs begin with:

FR-RUN-001

Annex 08E — Runs

Part 2 — Run Lifecycle

Document ID: HCP-PB-08E-01

Parent Document: Annex 08E — Runs

Domain: Run Session Lifecycle

Status: Draft


Purpose

This document defines the lifecycle of every Run Session from creation to permanent archival as a Run Capsule.

A Run Session progresses through predefined lifecycle states to ensure consistency, auditability, and preservation of Hash history.

Lifecycle Overview

Every Run Session shall progress through the following lifecycle:

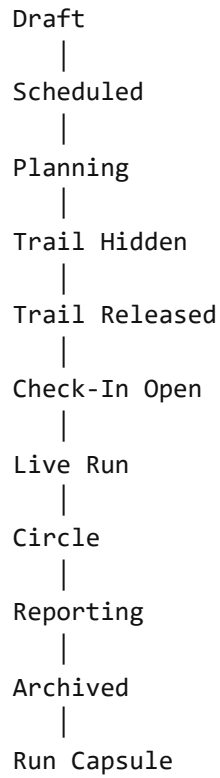

The system shall prevent invalid state transitions.

FR-RUN-001 — Create Run Session

Priority

Critical

Actors

- Grand Master
- Trail Master
- Hare
- Authorized Officer

Description

Authorized users shall be able to create a new Run Session.

Preconditions

- User is authenticated.
 - User belongs to the kennel.
 - User has permission to create runs.
-

Required Information

- Run Number
- Title (optional)
- Kennel
- Date
- Start Time
- Meeting Location

- Theme (optional)
 - Hare(s)
 - Run Type
 - Visibility
-

Postconditions

A Draft Run Session is created.

Business Rules

- Run Numbers must be unique within a kennel.
 - Multiple hares are supported.
 - Future recurring runs are supported.
-

Acceptance Criteria

- Run saved successfully.
 - Draft state assigned.
 - Audit record created.
-

FR-RUN-002 — Schedule Run Session

Priority

Critical

Actors

- Hare
- Grand Master
- Trail Master

Description

Draft runs may be scheduled for public viewing.

Preconditions

Run exists.

Postconditions

State changes to Scheduled.

Business Rules

Scheduling automatically:

- Publishes event
- Enables RSVP
- Notifies followers

- Adds event to kennel calendar
-

Acceptance Criteria

Participants can view the upcoming run.

FR-RUN-003 — Assign Hares

Priority

Critical

Multiple Hares and Co-Hares may be assigned.

The system shall preserve assignment history.

Changes shall generate notifications.

FR-RUN-004 — Planning Phase

Planning includes:

- Venue confirmation
- Theme
- Safety notes
- Trail planning
- Beer check planning
- Water stop planning
- Emergency contacts
- Optional GPX preparation

Planning remains editable.

FR-RUN-005 — Lock Planning

Planning may be locked.

Only officers may unlock.

Locking prevents accidental edits.

FR-RUN-006 — Hide Trail

Trail remains invisible.

Even attendees cannot view:

- Route
- Waypoints
- Beer Checks
- False Trails
- Checkpoints

Release timing is configurable.

FR-RUN-007 — Release Trail

Supported Modes

- Immediately
- Scheduled Time
- Manual Release
- At Check-In
- At Run Start

Trail release activates:

- Navigation
 - Live Map
 - Waypoints
-

FR-RUN-008 — Open Check-In

Participants may check in using:

- GPS
- QR Code
- Officer Approval
- Manual Check-In

Future:

- NFC
 - Bluetooth Beacon
-

FR-RUN-009 — Start Run

The Run Session enters Live mode.

Automatically activates:

- Live navigation
 - Media uploads
 - Live comments
 - Attendance tracking
 - Visitor logging
-

FR-RUN-010 — Pause Run

Authorized officers may temporarily pause a run.

Reasons include:

- Weather
- Emergency
- Safety issue
- Lost participant

Participants receive immediate notification.

FR-RUN-011 — Resume Run

Paused runs may resume.

Timeline records pause duration.

FR-RUN-012 — End Run

Ending the run:

- Stops live tracking
 - Locks attendance
 - Preserves route
 - Activates Circle
-

FR-RUN-013 — Transition to Circle

Circle begins after the run.

Circle becomes its own managed activity.

Future annex defines Circle domain.

FR-RUN-014 — Transition to Reporting

Once Circle concludes:

- Hash Scribe notified
 - AI report generation becomes available
 - Media uploads remain open
-

FR-RUN-015 — Archive Run

Archiving finalizes:

- Attendance
- Statistics
- Trail
- Comments
- Media associations

Archived runs become read-only.

FR-RUN-016 — Create Run Capsule

Archiving automatically generates a Run Capsule.

The Run Capsule permanently preserves:

- Trail
- Report
- Photos
- Videos
- Beer Stops
- Awards
- Songs
- Attendance
- Visitors
- Weather
- AI Story
- Passport Events

Run Capsules cannot be deleted.

Administrative corrections require an audited revision process.

State Transition Rules

Allowed transitions:

```
graph TD; Draft --> Scheduled; Scheduled --> Planning; Planning --> TrailHidden[Trail Hidden]; TrailHidden --> TrailReleased[Trail Released]; TrailReleased --> CheckInOpen[Check-In Open]; CheckInOpen --> LiveRun[Live Run]; LiveRun --> Circle; Circle --> Reporting; Reporting --> Archived; Archived --> RunCapsule[Run Capsule];
```

Draft
↓
Scheduled
↓
Planning
↓
Trail Hidden
↓
Trail Released
↓
Check-In Open
↓
Live Run
↓
Circle
↓
Reporting
↓
Archived
↓
Run Capsule

Invalid transitions shall be rejected.

Business Principles

- Every Run tells a story.
 - Nothing meaningful should be lost.
 - Historical accuracy outweighs convenience.
 - Transparency is preferred over silent edits.
 - Every completed Run becomes part of Hash history.
-

Completion Criteria

This document is complete when:

- The lifecycle is fully defined.
 - State transitions are enforced.
 - Every Run can progress from creation to Run Capsule.
 - Auditability is guaranteed.
 - Passport integration points are identified.
-

Next Document

08E-02 — Run Planning

This document will specify every planning activity before the day of the run, including hare collaboration, trail preparation, venue logistics, risk assessments, participant limits, and scheduling.

Annex 08E — Runs

Part 3 — Run Planning

Document ID: HCP-PB-08E-02

Parent Document: Annex 08E — Runs

Domain: Run Planning

Status: Draft

Version: 1.0

Purpose

This document defines all planning activities required before a Run Session transitions to the live execution phase.

Run Planning encompasses scheduling, hare coordination, venue preparation, trail planning, logistics, participant communication, safety, and operational readiness.

The objective is to ensure that every Run Session is well-organized while preserving the spontaneity and traditions of the Hash.

Planning Principles

The planning process shall:

- Preserve the surprise of the trail.
 - Minimize administrative overhead.
 - Encourage collaboration among hares.
 - Support both simple and complex runs.
 - Record planning decisions for future reference where appropriate.
-

FR-RUNPLAN-001 — Define Run Details

Priority

Critical

Actors

- Hare
- Co-Hare
- Trail Master
- Grand Master

DESCRIPTION

The system shall allow authorized users to define the core details of a Run Session.

REQUIRED INFORMATION

- Run Number
- Run Name (optional)
- Theme
- Date
- Start Time
- Check-in Time
- Kennel
- Venue
- Expected Duration
- Run Type

ACCEPTANCE CRITERIA

- Required fields validated.

- Draft saved.
 - Changes tracked in the audit log.
-

FR-RUNPLAN-002 — Hare Collaboration

The platform shall support multiple Hares working on the same Run Session.

CAPABILITIES

- Assign Lead Hare.
 - Assign Co-Hares.
 - View collaborator list.
 - Record planning notes.
 - Track changes made by each Hare.
-

FR-RUNPLAN-003 — Venue Management

Each Run Session shall define:

- Start location
- Finish location
- Circle location
- Parking information
- Public transport guidance
- Accessibility notes

Future support:

- Multiple venue checkpoints
 - Venue templates
-

FR-RUNPLAN-004 — Trail Planning

The planning interface shall allow Hares to prepare:

- Preliminary route
- Estimated distance
- Terrain type
- Elevation profile
- Estimated duration
- False trails
- Checkpoints
- Regroups
- Beer Stops
- Water Stops
- Hazard locations

Trail data remains hidden until release.

FR-RUNPLAN-005 — Trail Visibility

Supported visibility modes:

- Hidden Until Start
- Hidden Until Scheduled Time
- Manual Release
- Visible to Hares Only
- Visible to Officers Only

Visibility changes are audited.

FR-RUNPLAN-006 — Participant Limits

The system may enforce configurable participant limits.

OPTIONS

- Unlimited
 - Maximum Capacity
 - Invitation Only
 - Waiting List
-

FR-RUNPLAN-007 — Registration & RSVP

Participants may:

- RSVP Going
- RSVP Maybe
- RSVP Not Going
- Withdraw RSVP

The platform shall maintain attendance forecasts.

FR-RUNPLAN-008 — Safety Planning

Run planners may record:

- Emergency contacts
- Medical notes
- Hazard warnings
- Weather considerations
- Water availability
- Escape routes
- Emergency meeting points

Safety information may be marked as officer-only.

FR-RUNPLAN-009 — Equipment Checklist

The system shall provide a configurable checklist.

Example items:

- Chalk
- Flour
- Whistle
- First Aid Kit
- Water
- Beer
- Ice
- Cups
- Snacks
- Lighting
- GPS Device
- Phone Charger

Kennels may customize checklist templates.

FR-RUNPLAN-010 — Communications

Authorized users may schedule communications including:

- Run announcement
- Reminder notifications
- Venue changes
- Safety updates
- Last-minute notices

Notifications shall support scheduled delivery.

FR-RUNPLAN-011 — Weather Monitoring

The platform may display weather forecasts for the planned route.

Future releases may include:

- Rain alerts
- Heat warnings
- Lightning notifications

Weather does not automatically cancel a Run Session.

FR-RUNPLAN-012 — Planning Checklist

The platform shall maintain a planning progress indicator.

Example checklist:

- Hares Assigned
- Venue Confirmed
- Trail Planned
- Beer Stop Confirmed
- Safety Reviewed
- Communications Sent
- Trail Hidden
- Ready for Release

Progress assists organizers but does not prevent scheduling unless required by kennel policy.

FR-RUNPLAN-013 — Draft Review

Before publishing, authorized officers may review the Run Session.

Review may include:

- Completeness
- Safety
- Scheduling conflicts
- Venue accuracy
- Hare assignments

Review outcomes are recorded.

FR-RUNPLAN-014 — Publish Run Session

Publishing makes the Run Session visible according to its visibility settings.

Publishing automatically:

- Adds the Run Session to the kennel calendar.
- Enables participant RSVP.
- Sends notifications (if configured).

Trail information remains hidden unless explicitly released.

FR-RUNPLAN-015 — Planning Audit

All planning activities shall be recorded.

Audit entries include:

- Field modified
- Previous value
- New value
- User
- Timestamp

Audit history is read-only.

Business Principles

- Planning should enhance—not replace—the traditional role of the Hare.
 - The element of surprise is central to the Hash experience.
 - Safety and preparedness should be encouraged without making the process bureaucratic.
 - Collaboration should be simple and transparent.
 - Planning data should become part of the historical Run Capsule where appropriate.
-

Completion Criteria

This document is complete when:

- Runs can be fully planned.
 - Multiple Hares can collaborate.
 - Trail secrecy is preserved.
 - Logistics are documented.
 - Safety planning is supported.
 - Audit history is maintained.
 - Run Sessions are ready for execution.
-

Next Document

08E-03 — Run Day

This document will define everything that happens from check-in through the live run, including attendance, live maps, beer checks, participant tracking, media capture, and real-time interactions.

Annex 08E — Runs

Part 4 — Run Day

Document ID: HCP-PB-08E-03

Domain: Run Execution

Status: Draft

Version: 1.0

Purpose

This document defines everything that occurs during the execution of a Run Session, from participant arrival through completion of the trail.

Run Day is where planning transitions into live experience.

The platform shall support real-time coordination while remaining unobtrusive to the traditions of the Hash.


Guiding Principle

Technology should assist the Hash.

It should never become the center of attention.

Participants should always be able to enjoy the run without constantly interacting with their phones.

Run Day Timeline

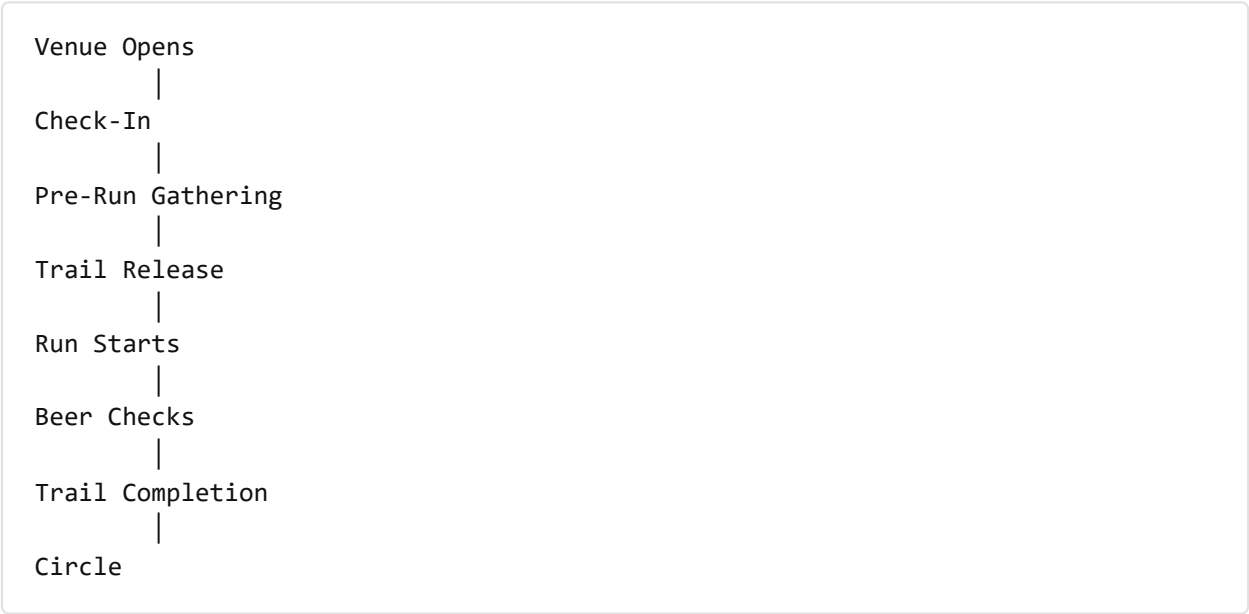

FR-RUNDAY-001 — Open Check-In

Priority

Critical

The system shall allow participants to check into a Run Session.

Supported methods:

- QR Code
- GPS Verification
- Manual Officer Check-In
- Invitation Code

Future:

- NFC
 - Bluetooth Beacon
-

FR-RUNDAY-002 — Attendance Register

Attendance shall record:

- Arrival Time
- Check-In Method
- Membership Type
- Visitor Status
- Home Kennel
- Country

Attendance updates in real time.

FR-RUNDAY-003 — Live Participant Count

The platform shall display:

- Checked-In Participants
- Visitors
- Guests
- Virgins
- Officers Present

Counts update automatically.

FR-RUNDAY-004 — Trail Release

Trail visibility follows the Hare's configured release policy.

Supported release modes:

- Immediate
- Scheduled
- Manual
- At Run Start

Once released:

- Navigation activates.
 - Waypoints appear.
 - Beer Stops become visible according to configuration.
-

FR-RUNDAY-005 — Live Navigation

Participants may navigate using:

- Interactive Map
- Compass Mode
- Breadcrumb Trail
- Direction Arrows

Navigation shall support offline map tiles where available.

FR-RUNDAY-006 — Waypoint Interaction

Participants may interact with:

- Beer Stops
- Water Stops
- Regroups
- Scenic Points
- Hazards

Each waypoint may include:

- Photos
 - Videos
 - Notes
 - Reactions
 - Comments
-

FR-RUNDAY-007 — Beer Check Experience

Beer Stops become interactive community moments.

Features include:

- Live arrival feed
- Photo uploads
- Toast reactions
- Group photos
- Short comments
- GPS confirmation

The Hare may optionally reveal trivia or messages at each Beer Check.

FR-RUNDAY-008 — Live Media Uploads

Participants may upload:

- Photos
- Videos
- Voice Notes (future)

Media may be tagged to:

- Run Session
 - Trail Segment
 - Beer Stop
 - Circle
 - General Run Gallery
-

FR-RUNDAY-009 — Live Community Feed

Each Run Session shall include a live activity feed.

Examples:

- John checked in.
- Sarah reached Beer Check #2.
- 12 new photos uploaded.
- Trail released.
- Circle started.

The feed is chronological and updates in real time.

FR-RUNDAY-010 — Participant Safety

Authorized officers may issue live safety notices.

Examples:

- Severe weather
- Trail closure
- Route diversion
- Emergency assistance
- Lost participant alert

Critical notices override normal notifications.

FR-RUNDAY-011 — Visitor Recognition

Visiting Hashers shall be highlighted during the Run Session.

Information includes:

- Home Kennel
- Country
- First Visit
- Returning Visitor

Visitor data contributes to Passport history.

FR-RUNDAY-012 — Live Reactions

Participants may react during the run using lightweight interactions such as:

- 🍻 Cheers
- 🦶 On Trail
- 😂 Funny
- ❤️ Loved It

Reactions are designed to be quick and non-disruptive.

FR-RUNDAY-013 — Run Completion

Authorized officers shall end the active Run Session.

The system automatically:

- Stops live tracking
 - Locks attendance
 - Preserves the route
 - Prepares Circle activities
-

FR-RUNDAY-014 — Transition to Circle

The platform transitions to the Circle phase.

Circle becomes the next managed stage of the Run Session.

Media uploads remain open.

FR-RUNDAY-015 — Run Day Analytics

The platform records:

- Total Attendance
- Visitors
- Trail Distance
- Duration
- Beer Stops Visited
- Media Uploaded
- Comments
- Reactions
- Check-In Methods

These metrics contribute to the Run Capsule and Hash Passport.

Business Principles

- The phone should support the experience, not dominate it.
 - Interaction should be lightweight and optional.
 - Community moments should be preserved naturally.
 - Safety takes precedence over convenience.
 - Every participant contributes to the collective story.
-

Completion Criteria

This document is complete when:

- Participants can check in.
 - Trail release is managed.
 - Navigation is available.
 - Beer Stops are interactive.
 - Live media is supported.
 - Safety notifications function.
 - Run data is preserved for archival.
-

Next Document

08E-04 — Circle

This document will define one of the most culturally significant phases of the Hash lifecycle, including Circle proceedings, songs, awards, announcements, and traditions.

Annex 08E — Runs

Part 5 — Circle

Document ID: HCP-PB-08E-04

Parent: Annex 08E — Runs

Domain: Circle

Status: Draft

Version: 1.0

Purpose

This document defines the management of the Circle phase of a Run Session.


The Circle is one of the defining traditions of the Hash House Harriers. It serves as the social and ceremonial conclusion of a run where announcements are made, songs are sung, newcomers are welcomed, visitors are recognized, achievements are celebrated, and light-hearted “justice” is dispensed according to the traditions of each kennel.

HCP exists to document and preserve the Circle—not to dictate how it is conducted.

Guiding Principles

- Respect local kennel traditions.
 - Avoid enforcing a single interpretation of Circle customs.
 - Preserve memories rather than interfere with participation.
 - Allow documentation without disrupting the experience.
 - Make Circle records available for future generations of Hashers.
-

Circle Timeline

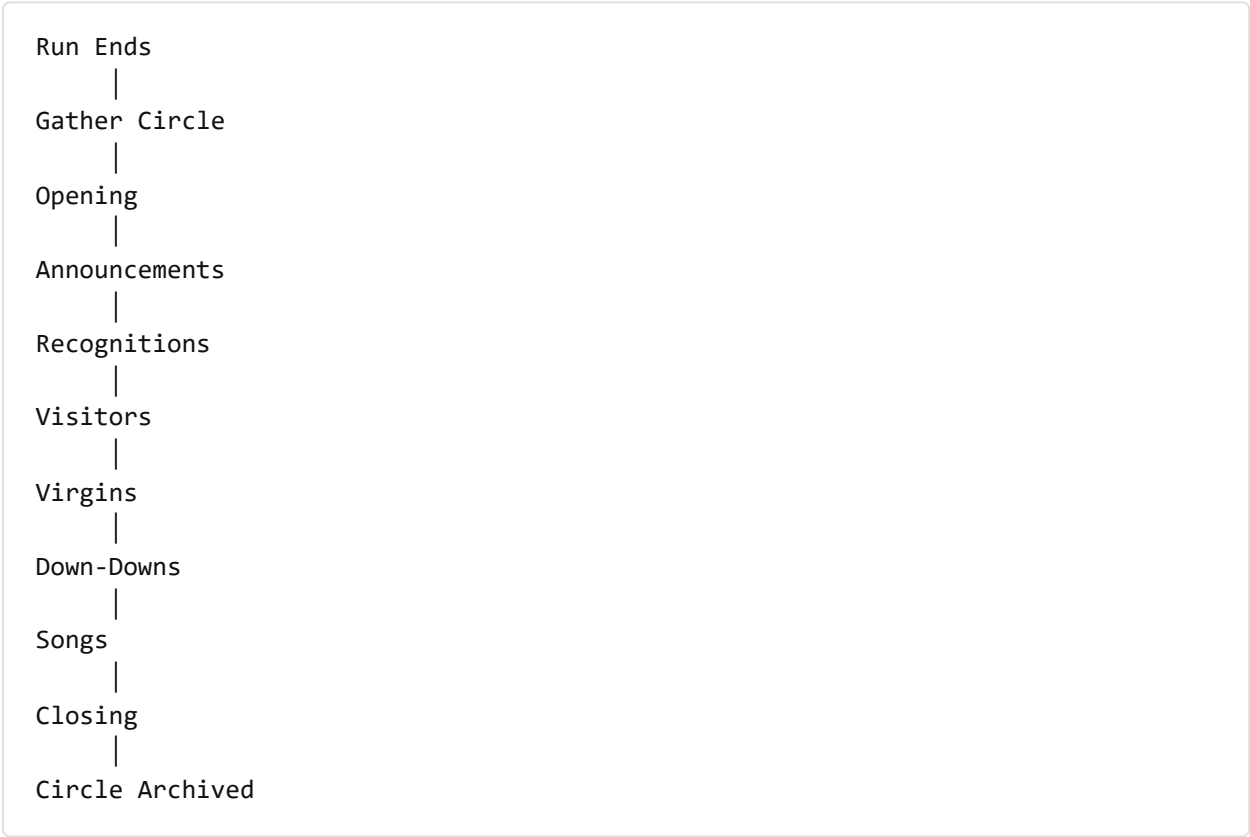

FR-CIRCLE-001 — Start Circle

Priority

Critical

ACTORS

- Grand Master
- Religious Advisor
- Authorized Officer

DESCRIPTION

An authorized officer may officially begin the Circle.

POSTCONDITIONS

- Run Session enters Circle state.
 - Circle timeline begins.
 - Circle media tagging becomes available.
-

FR-CIRCLE-002 — Circle Attendance

The platform shall record participants present during the Circle.

Attendance may differ from trail attendance.

The system shall preserve both records independently.

FR-CIRCLE-003 — Announcements

Authorized officers may publish announcements during or after the Circle.

Examples:

- Upcoming runs
- Charity activities
- AGM notices
- Interhash travel
- Kennel updates
- Special celebrations

Announcements become part of the Run Capsule.

FR-CIRCLE-004 — Visitor Recognition

Visiting Hashers may be formally recognized.

The platform may record:

- Home Kennel
- Country
- Number of previous visits
- First-time visitor status

Recognition contributes to the visitor's Hash Passport.

FR-CIRCLE-005 — Virgins

The platform may record first-time participants (“Virgins”) for historical purposes.

Where culturally appropriate, the system may award a “First Hash” Passport stamp.

Participation remains optional and subject to local traditions.

FR-CIRCLE-006 — Down-Down Records

The platform may record Down-Downs where appropriate.

Recorded information may include:

- Recipient
- Reason
- Category
- Optional notes

The platform shall not judge or rank Down-Downs.

Kennels may disable this feature.

FR-CIRCLE-007 — Songs

Circle songs may be documented.

Supported content:

- Song title
- Lyrics reference (where permitted)
- Audio recording (optional)
- Video recording (optional)

Songs become part of the historical Run Capsule.

FR-CIRCLE-008 — Awards & Recognitions

The Circle may record:

- Hare recognition
- Best trail
- Milestones
- Service awards
- Fun awards
- Kennel-specific recognitions

Awards contribute to Passport achievements where applicable.

FR-CIRCLE-009 — Circle Media

Participants may upload:

- Photos
- Videos

Media may be tagged specifically to the Circle phase.

FR-CIRCLE-010 — Circle Notes

The Hash Scribe or authorized officers may capture notes summarizing the Circle.

These notes may later assist AI-generated trail reports.

FR-CIRCLE-011 — AI Circle Summary

Where enabled, AI may generate a draft summary of the Circle using:

- Official notes
- Announcements
- Tagged media
- Recorded recognitions

The Hash Scribe remains responsible for reviewing and publishing the final report.

FR-CIRCLE-012 — Close Circle

Authorized officers may formally close the Circle.

Closing transitions the Run Session into the Reporting phase.

FR-CIRCLE-013 — Historical Preservation

Circle records become part of the permanent Run Capsule.

Historical records remain immutable except through audited administrative revisions.

FR-CIRCLE-014 — Privacy Controls

Kennels may configure whether Circle content is:

- Public
- Members only
- Attendees only
- Officers only

Privacy settings apply independently from the overall Run Session.

FR-CIRCLE-015 — Cultural Flexibility

The platform shall support configurable Circle workflows to accommodate the traditions of different kennels and regions.

HCP shall never require a fixed sequence of Circle activities.

Business Principles

- HCP documents traditions; it does not define them.
 - Circle culture belongs to each kennel.
 - Documentation should respect the spontaneity and humor of the Hash.
 - Historical preservation is prioritized over rigid standardization.
-

Completion Criteria

This document is complete when:

- Circle phases are recorded.
 - Announcements are preserved.
 - Visitors and Virgins are recognized.
 - Songs and awards are documented.
 - Circle transitions cleanly into Reporting.
 - Circle history becomes part of the Run Capsule.
-

Next Document

08E-05 — Run Capsule

This document defines how every completed Run Session becomes a permanent, searchable, media-rich historical archive and the foundation for future storytelling and Hash heritage.

Annex 08E — Runs

Part 6 — Run Capsule

Document ID: HCP-PB-08E-05

Parent: Annex 08E — Runs

Domain: Run Capsule

Status: Draft

Version: 1.0

Purpose

This document defines the Run Capsule, the permanent digital archive created from every completed Run Session.

A Run Capsule preserves the complete history of a run, including planning, participation, trail, media, Circle activities, reports, achievements, and memories.

Unlike traditional event archives, a Run Capsule is designed to remain useful decades after the run took place.

Vision

A Run Capsule answers every important question about a run.

- What happened?
- Who attended?
- Who laid the trail?
- Where did the trail go?
- Where were the Beer Checks?
- What was written in the Trail Report?
- What photos were taken?
- What stories are remembered?

The Capsule is the definitive historical record of the Run Session.

Guiding Principles

- Preserve, never replace, the memories of participants.
 - Maintain historical integrity.
 - Keep the archive searchable.
 - Allow future generations to explore the history of their kennel.
 - Respect privacy and local traditions.
-

Capsule Contents

Each Run Capsule may contain:

- Run metadata
 - Kennel information
 - Hare(s)
 - Co-Hare(s)
 - Venue
 - Theme
 - Attendance
 - Visitors
 - Trail
 - Waypoints
 - Beer Stops
 - Circle
 - Trail Report
 - AI Story
 - Photos
 - Videos
 - Comments
 - Reactions
 - Awards
 - Songs
 - Weather
 - Passport events
 - Statistics
 - Historical revisions
-

FR-CAPSULE-001 — Automatic Capsule Creation

Priority

Critical

The platform shall automatically generate a Run Capsule when a Run Session enters the Archived state.

The creation process shall require no manual intervention.

FR-CAPSULE-002 — Immutable Historical Record

Once created, a Run Capsule shall become read-only.

Corrections shall be performed through audited revision records.

Original historical data shall remain preserved.

FR-CAPSULE-003 — Interactive Timeline

Each Capsule shall include a chronological timeline showing key moments such as:

- Run announced
- Trail released
- First check-in
- Beer Stops reached
- Circle started
- Report published
- AI Story generated

Timeline entries shall be searchable.

FR-CAPSULE-004 — Interactive Map Replay

The Capsule shall provide an interactive map showing:

- Planned trail
- Actual trail (where available)
- Beer Stops
- Waypoints
- Tagged media
- Scenic locations
- Hazards (if shared)

Map controls shall support zoom, replay, and point selection.

FR-CAPSULE-005 — Living Trail Replay

Participants may revisit the trail through the Living Trail experience.

The replay shall display media, comments, reactions, and notes at their original geographic locations.

FR-CAPSULE-006 — Media Archive

The Capsule shall organize media by:

- Trail segment
- Beer Stop
- Circle
- General gallery
- Contributor

Media shall remain linked to their original context.

FR-CAPSULE-007 — Trail Report

The official Trail Report shall be permanently attached to the Capsule.

If AI assisted in generating the report, the final published version shall be clearly identified as reviewed and approved by the Hash Scribe.

FR-CAPSULE-008 — Community Contributions

Participants may contribute after the run by adding:

- Photos
- Videos
- Comments
- Memories
- Corrections (subject to review)

Kennels may configure contribution deadlines.

FR-CAPSULE-009 — Search & Discovery

Users may search Run Capsules using:

- Run number
- Date
- Kennel
- Hare
- Location
- Theme
- Visitor
- Country
- Tag
- Keyword

Search results shall respect privacy settings.

FR-CAPSULE-010 — Historical Analytics

The Capsule shall display analytics such as:

- Attendance
- Visitor count
- Media contributions
- Trail distance
- Duration
- Beer Stops
- Engagement

Analytics provide historical insight without ranking participants.

FR-CAPSULE-011 — Passport Integration

Publishing a Run Capsule shall trigger updates to participants' Hash Passports.

Examples include:

- Run attendance
- First visit to a kennel
- First international run
- Trail laid
- Trail report authored
- Milestones reached

Passport updates shall be automatic.

FR-CAPSULE-012 — Preservation Policy

Run Capsules shall not be permanently deleted once participants have attended the run.

Administrative removal shall be limited to exceptional circumstances and recorded through audited processes.

FR-CAPSULE-013 — Sharing

Capsules may be shared using:

- Public link
- QR Code
- Read-only mode

Sharing shall respect the kennel's privacy settings.

FR-CAPSULE-014 — Historical Collections

The platform shall support curated collections such as:

- Best Trails of the Year
- Anniversary Runs
- Red Dress Runs
- Charity Runs
- Interhash Participation
- Kennel Milestones

Collections help preserve institutional memory.

FR-CAPSULE-015 — Legacy Preservation

Run Capsules shall remain accessible across future platform versions through migration strategies and data preservation policies.

The platform shall treat historical data as a long-term community asset.

Business Principles

- Every Run deserves a permanent place in history.
 - Historical accuracy is more valuable than convenience.
 - Community memories belong to the community.
 - The archive should become richer over time.
 - Preservation should outlive technology changes.
-

Completion Criteria

This document is complete when:

- Every Run Session automatically becomes a Run Capsule.
 - Historical records are immutable.
 - Media remains contextually linked.
 - Search and replay are available.
 - Passport updates are triggered.
 - Capsules become the definitive historical record of each run.
-

Next Document

08E-06 — Business Rules & Acceptance Criteria

This document consolidates cross-cutting rules, validation requirements, lifecycle constraints, permissions, edge cases, and acceptance criteria that apply across the entire Run Session domain.

Annex 08E — Runs

Part 7 — Cross-Cutting Business Rules & Acceptance Criteria

Document ID: HCP-PB-08E-06

Parent: Annex 08E — Runs

Domain: Run Session Business Rules

Status: Draft

Version: 1.0

Purpose

This document defines the cross-cutting business rules, validations, permissions, lifecycle constraints, and acceptance criteria that apply to all aspects of the Run Session domain.

These rules ensure consistency across the platform regardless of implementation.

Business Rule Categories

- Identity
 - Scheduling
 - Participation
 - Trail Management
 - Media
 - Reporting
 - Historical Preservation
 - Permissions
 - Notifications
 - Data Integrity
-

BR-RUN-001 — Run Number Uniqueness

Every Run Session shall have a unique Run Number within its owning Kennel.

Different kennels may reuse the same Run Number.

BR-RUN-002 — Single Ownership

A Run Session belongs to exactly one Kennel.

A Run Session cannot exist independently.

BR-RUN-003 — Hare Requirement

Every Run Session shall have at least one Hare before publication.

Co-Hares are optional.

BR-RUN-004 — Trail Ownership

Every Trail belongs to exactly one Run Session.

A Trail cannot exist without an associated Run Session.

BR-RUN-005 — Circle Requirement

Every completed Run Session should transition into the Circle phase unless explicitly skipped by an authorized officer.

Skipping the Circle shall require a recorded reason.

BR-RUN-006 — Official Trail Report

Each Run Session may have only one official published Trail Report.

Drafts and revisions are permitted.

The final published report shall remain associated with the Hash Scribe.

BR-RUN-007 — Media Ownership

Every media item shall be associated with at least one of the following:

- Run Session
- Trail Segment
- Beer Stop
- Circle
- General Gallery

Unlinked media shall not be permitted.

BR-RUN-008 — Attendance Integrity

Attendance records become immutable once the Run Session is archived.

Administrative corrections require audit records.

BR-RUN-009 — Visitor Recognition

Visitors retain attribution to their Home Kennel regardless of where they participate.

Visitor history contributes to Passport records.

BR-RUN-010 — Time Consistency

Lifecycle events shall occur in chronological order.

The platform shall reject invalid timestamps.

BR-RUN-011 — Trail Secrecy

Trail visibility shall follow the Hare's configured release policy.

No unauthorized participant may access hidden trail information.

BR-RUN-012 — Media Moderation

Kennels may configure moderation rules for participant uploads.

Moderation options include:

- Immediate publication
 - Officer approval
 - AI-assisted moderation
 - Community reporting
-

BR-RUN-013 — Notification Rules

Notifications shall only be sent for events enabled by the Kennel.

Examples include:

- Run published
 - Trail released
 - Venue changed
 - Circle started
 - Report published
-

BR-RUN-014 — AI Transparency

Where AI-generated content is used, the platform shall identify it as AI-assisted.

Official publication remains the responsibility of the Hash Scribe or an authorized officer.

BR-RUN-015 — Historical Integrity

Archived Run Sessions and Run Capsules shall not be destructively edited.

All corrections shall be implemented through audited revisions.

Permission Matrix

Action	Member	Hare	Officer	Admin
View Run	✓	✓	✓	✓
RSVP	✓	✓	✓	✓
Upload Media	✓	✓	✓	✓
Create Run		✓	✓	✓
Edit Planning		✓	✓	✓
Publish Run			✓	✓
Release Trail		✓	✓	✓
Start Run		✓	✓	✓
End Run		✓	✓	✓
Archive Run			✓	✓
Publish Report			✓	✓
Delete Draft Run			✓	✓

Global Acceptance Criteria

A Run Session implementation shall be considered complete when:

- Runs progress through the defined lifecycle.
 - Trail secrecy is preserved until release.
 - Attendance is accurately recorded.
 - Media remains contextually linked.
 - Circle transitions correctly.
 - Official reports are published.
 - Run Capsules are generated automatically.
 - Hash Passports are updated.
 - Historical records are immutable.
 - Audit trails exist for administrative changes.
-

Non-Functional Expectations

The platform should support:

- Thousands of concurrent Run Sessions globally.
 - Offline operation where practical.
 - Eventual synchronization after connectivity is restored.
 - Real-time updates for live activities.
 - Scalable media storage.
 - Efficient map rendering.
-

Future Enhancements

Potential future capabilities include:

- AI-generated route summaries.
 - Automatic highlight reels.
 - Wearable device integration.
 - Satellite imagery overlays.
 - Trail heat maps.
 - Voice-guided navigation.
 - Live translation for international events.
 - Environmental impact metrics.
-

Business Principles

- Preserve the traditions of the Hash.
 - Build technology that remains invisible during the experience.
 - Prioritize historical preservation.
 - Respect local kennel autonomy.
 - Design for global scale from day one.
-

Completion Criteria

The Run Session domain is complete when:

- Functional requirements are satisfied.
 - Business rules are enforceable.
 - Permission boundaries are defined.
 - Validation rules are documented.
 - Acceptance criteria are measurable.
 - Future extensibility has been considered.
-

Annex 08E Completion

The following Run Session specification documents now comprise the complete Annex 08E:

- 08E-00 — Overview & Lifecycle
- 08E-01 — Run Lifecycle
- 08E-02 — Run Planning
- 08E-03 — Run Day
- 08E-04 — Circle
- 08E-05 — Run Capsule
- 08E-06 — Business Rules & Acceptance Criteria

These documents collectively define the complete lifecycle of a Run Session within the Hash Community Platform.

Annex 08F — Trail Studio

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08F-00

Parent: Chapter 8 — Functional Requirements

Domain: Trail Studio

Status: Draft

Version: 1.0

Purpose

This document defines Trail Studio, the dedicated workspace used by Hares to design, manage, publish, and preserve Hash trails.

Trail Studio is not simply a map editor.

It is a professional planning environment built specifically around the traditions and practices of the Hash House Harriers.

Vision

Every memorable Hash Run begins with a great trail.

Trail Studio gives Hares the tools to create challenging, enjoyable, safe, and memorable trails while preserving the mystery that defines the Hash.

Philosophy

The objective of Trail Studio is not to replace traditional trail laying.

It is to enhance it.

Technology should support creativity while remaining invisible during the actual run.

Guiding Principles

- Preserve the spirit of trail laying.
 - Protect trail secrecy until release.
 - Encourage creativity.
 - Make planning enjoyable.
 - Preserve trail history for future generations.
-

What Is a Trail?

Within HCP, a Trail is a first-class domain.

A Trail is more than a line on a map.

It consists of:

- Route
 - Waypoints
 - Checks
 - False Trails
 - Splits
 - Beer Checks
 - Regroups
 - Hazards
 - Scenic Points
 - Notes
 - Timing
 - Difficulty
 - Terrain
 - Story
-

Relationship to Run Session

Every Trail belongs to exactly one Run Session.

A Run Session may have one or more Trails where supported by the Kennel.

Examples include:

- A Trail
 - B Trail
 - C Trail
 - Family Trail
 - Walkers Trail
 - Cyclists Trail
-

Core Concepts

Trail Workspace

The private planning environment used by Hares before publication.

Living Trail

The participant experience during the Run.

The trail evolves as participants interact with it.

Historic Trail

The preserved version stored within the Run Capsule.

Trail Lifecycle



Trail Components

Every Trail may include:

- Start
 - Finish
 - Waypoints
 - Trail Marks
 - Beer Checks
 - Water Stops
 - Regroups
 - False Trails
 - Split Trails
 - Hazards
 - Scenic Locations
 - Notes
 - Media
 - Elevation
 - Distance
 - Estimated Time
-

Trail Types

The platform shall support configurable trail types including:

- Standard Trail
- Long Trail
- Short Trail
- Family Trail
- Walkers Trail
- Cycling Trail
- Charity Trail
- Special Event Trail

Kennels may define custom trail types.

Design Goals

Trail Studio should enable a Hare to:

- Plan with confidence.
 - Collaborate with Co-Hares.
 - Keep the trail secret.
 - Release the trail at the right moment.
 - Capture the story of the trail.
 - Preserve it forever.
-

Success Criteria

Trail Studio succeeds when:

- Hares enjoy using it.
 - Trail secrecy is maintained.
 - Planning becomes easier.
 - Participants experience a richer run.
 - Every trail becomes part of the historical record.
-

Next Document

08F-01 — Trail Lifecycle & Planning

Annex 08F — Trail Studio

Part 2 — Trail Lifecycle & Planning

Document ID: HCP-PB-08F-01

Parent: Annex 08F — Trail Studio

Domain: Trail Lifecycle

Status: Draft

Version: 1.0

Purpose

This document defines the complete lifecycle of a Trail, from its initial concept through planning, publication, execution, archival, and historical preservation.

Every Trail exists to support exactly one Run Session while remaining an independently managed domain.

Philosophy

A great trail is not measured only by distance.

It is measured by the memories it creates.

Trail Studio should empower Hares to design memorable experiences while preserving secrecy and respecting traditional Hash practices.

Trail Lifecycle



Each state has defined permissions and transition rules.

FR-TRAIL-001 — Create Trail

Priority

Critical

ACTORS

- Hare
- Co-Hare
- Trail Master

DESCRIPTION

Authorized users shall be able to create a Trail for a Run Session.

A Trail cannot exist without an associated Run Session.

REQUIRED INFORMATION

- Trail Name (optional)
- Trail Type
- Associated Run Session
- Lead Hare
- Estimated Distance
- Estimated Duration
- Terrain Type

ACCEPTANCE CRITERIA

- Trail is created in Draft state.
 - Ownership is assigned.
 - Audit record created.
-

FR-TRAIL-002 — Draft Planning

During Draft, Hares may:

- Sketch routes
- Add notes
- Import GPX files
- Estimate timing
- Invite Co-Hares
- Save incomplete work

Draft Trails remain private.

FR-TRAIL-003 — Collaborative Planning

Multiple Hares may work on the same Trail.

The system shall:

- Record changes.
 - Prevent edit conflicts.
 - Track contributor history.
 - Maintain version history.
-

FR-TRAIL-004 — Trail Review

Before publication, Hares may review:

- Route continuity
- Distance
- Elevation
- Hazards
- Beer Stops
- Regroups
- Water Stops
- Split Trails

Trail Review shall identify incomplete planning.

FR-TRAIL-005 — Lock Trail

Locked Trails cannot be edited except by authorized officers.

Locking protects against accidental changes before the run.

FR-TRAIL-006 — Hidden State

While Hidden:

- Route is invisible.
- Waypoints are invisible.
- Beer Stops are invisible.
- False Trails are invisible.
- GPS data is protected.

Only authorized planners may access Hidden Trails.

FR-TRAIL-007 — Release Trail

The Hare controls how the Trail is released.

Supported release modes:

- Manual
- Scheduled
- Run Start
- Check-In Complete
- Geofenced Release

Release automatically enables participant navigation.

FR-TRAIL-008 — Live Trail

Once Live:

- Navigation activates.
 - Waypoints appear according to configuration.
 - Beer Stops may reveal progressively.
 - Media tagging becomes available.
 - Participant interactions begin.
-

FR-TRAIL-009 — Complete Trail

When the Run concludes:

- Trail editing stops.
 - Statistics finalize.
 - Replay data is generated.
 - Historical preservation begins.
-

FR-TRAIL-010 — Archive Trail

Archived Trails become part of the Run Capsule.

Trail geometry, metadata, and associated content remain available according to the kennel's privacy settings.

State Transition Rules

Allowed transitions:

```
graph TD; Idea --> Draft; Draft --> Planning; Planning --> Review; Review --> Locked; Locked --> Hidden; Hidden --> Released; Released --> Live; Live --> Completed; Completed --> Archived; Archived --> Historic_Trail[Historic Trail];
```

Idea
↓
Draft
↓
Planning
↓
Review
↓
Locked
↓
Hidden
↓
Released
↓
Live
↓
Completed
↓
Archived
↓
Historic Trail

Invalid transitions shall be rejected by the platform.

Business Principles

- Trails belong to Run Sessions.
 - Every Trail tells part of the Run's story.
 - Secrecy is fundamental until release.
 - Planning should encourage creativity.
 - Every completed Trail contributes to the historical archive.
-

Completion Criteria

This document is complete when:

- Trail states are fully defined.
 - State transitions are validated.
 - Collaborative planning is supported.
 - Secrecy is preserved.
 - Historical preservation is guaranteed.
-

Next Document

08F-02 — Digital Chalk & Trail Components

Annex 08F — Trail Studio

Part 3 — Digital Chalk & Trail Components

Document ID: HCP-PB-08F-02

Parent: Annex 08F — Trail Studio

Domain: Digital Chalk

Status: Draft

Version: 1.0

Purpose

This document defines the Digital Chalk system used within Trail Studio.

Digital Chalk is HCP's visual language for trail design and navigation. Rather than replacing traditional Hash markings, it translates them into a digital experience that remains familiar to Hashers across the world.

The objective is to preserve the traditions of trail laying while enhancing planning, navigation, historical preservation, and accessibility.

Philosophy

Traditional chalk marks are the language of the trail.

Digital Chalk is that same language expressed through modern technology.

The platform shall never force GPS-style navigation where symbolic trail interpretation better reflects the culture of the Hash.

Guiding Principles

- Respect traditional trail markings.
 - Support regional kennel variations.
 - Allow customization.
 - Preserve mystery.
 - Prioritize readability.
 - Support offline use.
-

Digital Chalk Library

Trail Studio shall provide a configurable library of Digital Chalk symbols.

Symbols are grouped into categories.

Category — Direction

Examples include:

- ON ON
- Left Turn
- Right Turn
- Straight Ahead
- Sharp Left
- Sharp Right
- U-Turn

Each symbol may include:

- Icon
 - Meaning
 - Localized description
 - Optional animation
 - Custom kennel variant
-

Category — Checks

Supported symbols include:

- Check
- False Trail
- True Trail
- Three-Way Check
- Circle Check
- Back Check

Kennels may extend the library with their own symbols.

Category — Stops

Supported stop types include:

- Beer Check
- Water Stop
- Food Stop
- Regroup
- Rest Area

Stops may contain:

- GPS coordinates
 - Photos
 - Videos
 - Notes
 - Opening conditions
 - Visibility rules
-

Category — Hazards

Examples include:

- River Crossing
- Busy Road
- Steep Hill
- Mud
- Slippery Surface
- Wildlife
- Construction

Hazards may be:

- Public
 - Hare Only
 - Officer Only
-

Category — Finish

Supported finish types include:

- Finish
 - Circle Location
 - Shuttle Pickup
 - Return Route
-

FR-CHALK-001 — Place Digital Chalk

Priority

Critical

Authorized Hares shall be able to place Digital Chalk symbols directly onto the map.

Symbols snap to the trail unless free placement is selected.

FR-CHALK-002 — Edit Chalk Marks

Hares may:

- Move
- Rotate
- Duplicate
- Delete
- Group
- Annotate

All edits are versioned.

FR-CHALK-003 — Progressive Reveal

Each Digital Chalk mark may define a visibility strategy.

Supported strategies include:

- Immediately visible
- At scheduled time
- When participant reaches previous marker
- Geofence activation
- Manual reveal

This allows the trail to unfold naturally.

FR-CHALK-004 — Symbol Metadata

Each symbol may contain:

- Title
- Description
- Timestamp
- Creator
- Associated waypoint
- Photos
- Audio
- Notes

Metadata becomes part of the Run Capsule.

FR-CHALK-005 — Custom Kennel Symbols

Kennels may define their own Digital Chalk symbols.

Custom symbols may include:

- Icon
- Name
- Meaning
- Color
- Usage guidance

These remain private to the kennel unless shared publicly.

FR-CHALK-006 — Symbol Templates

Trail Studio shall support reusable symbol templates.

Example templates:

- Standard Beer Check
- Scenic Viewpoint
- Safety Warning
- Typical Regroup

Templates accelerate trail planning.

FR-CHALK-007 — Symbol Validation

The system shall detect common planning issues such as:

- Isolated symbols
- Missing continuation
- Overlapping symbols
- Duplicate finish markers
- Conflicting directions

Validation warnings assist Hares but do not automatically block publication.

FR-CHALK-008 — Offline Rendering

Digital Chalk symbols shall be available without network connectivity.

Participants who download the trail beforehand should continue to see symbols even if mobile coverage is lost.

FR-CHALK-009 — Historical Preservation

Every Digital Chalk symbol shall become part of the Historic Trail.

Future viewers may explore the original trail exactly as it was laid.

FR-CHALK-010 — Accessibility

Digital Chalk shall support:

- High-contrast mode
- Scalable icons
- Screen reader descriptions
- Color-independent recognition

Accessibility enhancements shall preserve the traditional meaning of the symbols.

Business Principles

- Chalk remains the heart of trail communication.
 - Digital representation should reinforce—not replace—traditional knowledge.
 - Every symbol contributes to the story of the run.
 - Regional diversity should be celebrated.
-

Completion Criteria

This document is complete when:

- A standardized Digital Chalk library exists.
 - Kennels can customize symbols.
 - Progressive reveal is supported.
 - Offline rendering works.
 - Historical preservation is guaranteed.
-

Next Document

08F-03 — Trail Mapping, Waypoints & Interactive Navigation

Annex 08F — Trail Studio

Part 4 — Trail Mapping, Waypoints & Interactive Navigation

Document ID: HCP-PB-08F-03

Parent: Annex 08F — Trail Studio

Domain: Trail Mapping & Navigation

Status: Draft

Version: 1.0

Purpose

This document defines how Trail Studio manages maps, waypoints, navigation, live participant interaction, and the Living Trail experience.

Unlike traditional navigation systems, Trail Studio is designed to preserve the mystery, challenge, and social nature of Hash trails while enhancing safety and historical preservation.

Philosophy

Participants should never feel like they are simply following GPS.

Instead, the platform should recreate the excitement of reading trail marks, making decisions, discovering Beer Checks, and sharing memorable moments along the route.

Technology supports the adventure—it never replaces it.

Guiding Principles

- Preserve exploration.
 - Encourage observation.
 - Support multiple navigation styles.
 - Work offline whenever possible.
 - Keep navigation lightweight and optional.
-

Core Concepts

Living Trail

The Living Trail evolves throughout the Run Session.

Participants gradually unlock information based on the Hare's release rules.

The map grows richer as people contribute photos, comments, and reactions.

Waypoints

Waypoints represent meaningful locations on the trail.

Examples include:

- Trail Start
 - Direction Change
 - Check
 - False Trail
 - Beer Check
 - Water Stop
 - Scenic View
 - Regroup
 - Hazard
 - Finish
-

Trail Segments

A Trail consists of multiple connected segments.

Each segment maintains:

- Geometry

- Estimated time
 - Terrain
 - Elevation
 - Difficulty
 - Associated Digital Chalk
 - Linked media
-

FR-MAP-001 — Interactive Trail Map

Priority

Critical

Participants shall be able to view the active trail using an interactive map.

Supported capabilities include:

- Zoom
 - Rotate
 - Compass
 - Current location
 - Trail overlay
 - Offline tiles
-

FR-MAP-002 — Waypoint Management

Trail Studio shall allow Hares to create and configure waypoints.

Each waypoint may contain:

- Name
 - Type
 - Coordinates
 - Description
 - Visibility rules
 - Media
 - Notes
 - Digital Chalk
-

FR-MAP-003 — Progressive Waypoint Reveal

Waypoints may become visible:

- At a scheduled time
- When a participant reaches a previous waypoint
- When manually released
- Within a geofence
- At the Hare's discretion

This preserves the spirit of discovery.

FR-MAP-004 — Beer Check Experience

Beer Checks are interactive locations.

Each Beer Check may include:

- Photos
- Videos
- Comments
- Reactions
- Arrival count
- Optional trivia
- Hare messages

Beer Checks remain visible in the Historic Trail after the run.

FR-MAP-005 — Participant Position

Where enabled and with participant consent, the platform may display approximate participant positions.

Privacy modes include:

- Hidden
- Officers Only
- Friends
- Entire Run Session

Exact location sharing shall always be optional.

FR-MAP-006 — Offline Navigation

Participants may download the trail before the run.

Offline mode shall include:

- Map tiles
- Digital Chalk
- Waypoints
- Navigation logic

Media uploads shall synchronize when connectivity returns.

FR-MAP-007 — Hazard Management

Hares may identify hazards during planning.

Hazards may include:

- Busy roads
- Rivers
- Steep climbs
- Mud
- Wildlife
- Construction
- Restricted access

Hazards may trigger safety notifications during the run.

FR-MAP-008 — Scenic Locations

Scenic locations may be highlighted.

Participants may:

- Capture media
- Add comments
- Leave memories

Scenic points enrich the Run Capsule.

FR-MAP-009 — Live Trail Feed

The Living Trail shall display real-time activity, including:

- Beer Check arrivals
- New media uploads
- Trail milestones
- Officer announcements

Participants may disable the feed to reduce distractions.

FR-MAP-010 — Trail Replay

After the Run Session concludes, participants may replay the trail.

Replay options include:

- Animated progression
- Media overlays
- Waypoint timeline
- Comments
- Official Trail Report excerpts

Trail Replay becomes part of the Run Capsule.

FR-MAP-011 — Multi-Trail Support

The platform shall support multiple concurrent trails for a single Run Session, such as:

- A Trail
- B Trail
- Family Trail
- Walkers Trail
- Cycling Trail

Each trail maintains independent mapping and analytics.

FR-MAP-012 — Map Layers

Participants may enable or disable map layers including:

- Trail geometry
- Digital Chalk
- Beer Checks
- Hazards
- Terrain
- Elevation
- Satellite imagery (future)

Layer visibility respects trail secrecy rules.

FR-MAP-013 — Accessibility

Navigation shall support:

- High-contrast maps
- Scalable labels
- Voice prompts (future)
- Haptic guidance (future)

Accessibility features remain optional.

FR-MAP-014 — Trail Integrity

The platform shall preserve the original trail exactly as it was published.

Subsequent edits create revision records without overwriting historical data.

FR-MAP-015 — Historical Mapping

Historic Trails shall remain explorable from within the Run Capsule.

Users may compare:

- Planned route
- Actual route (where available)
- Historic media
- Waypoints
- Trail reports

This supports historical storytelling and future trail planning.

Business Principles

- Maps should tell stories, not just show routes.
 - Discovery is more important than efficiency.
 - Privacy and safety must always be respected.
 - Historical context should grow richer over time.
-

Completion Criteria

This document is complete when:

- Interactive mapping is supported.
 - Waypoints are configurable.
 - Progressive reveal works.
 - Offline navigation is available.
 - Living Trail is functional.
 - Historical replay is preserved.
-

Next Document

08F-04 — Hare Workspace & Trail Collaboration

Annex 08F — Trail Studio

Part 5 — Hare Workspace & Trail Collaboration

Document ID: HCP-PB-08F-04

Parent: Annex 08F — Trail Studio

Domain: Hare Workspace

Status: Draft

Version: 1.0

Purpose

This document defines the Hare Workspace, a dedicated planning environment where Hares collaborate to design, review, and prepare memorable trails while preserving secrecy and respecting Hash traditions.

The Hare Workspace is not an administration screen.

It is a creative studio designed specifically for trail planning.

Vision

The Hare Workspace should feel like sitting around a table with fellow Hares planning the next great Hash.

It combines maps, planning tools, checklists, collaboration, AI assistance, and historical insight into one cohesive experience.

Guiding Principles

- Planning should be enjoyable.
 - Collaboration should be effortless.
 - Secrecy should be preserved.
 - History should inform, not constrain.
 - The Hare remains in complete control.
-

Workspace Overview

The Hare Workspace includes:

- Interactive map
 - Digital Chalk palette
 - Trail timeline
 - Beer Check planner
 - Waypoint manager
 - Safety planner
 - Equipment checklist
 - Collaboration panel
 - AI Assistant
 - Run preview
 - Trail release controls
-

FR-HARE-001 — Workspace Dashboard

The dashboard shall display:

- Current Run Session
 - Assigned Hares
 - Planning progress
 - Countdown to run day
 - Weather forecast
 - Outstanding tasks
 - Recent activity
-

FR-HARE-002 — Collaborative Editing

Multiple Hares may work simultaneously.

The platform shall:

- Display active collaborators.
 - Prevent conflicting edits.
 - Synchronize changes in real time.
 - Record planning history.
-

FR-HARE-003 — Planning Notes

Hares may create private planning notes.

Notes may include:

- Trail ideas
- Logistics
- Supplies
- Parking reminders
- Landowner permissions
- Contingency plans

Notes remain private to authorized planners.

FR-HARE-004 — Equipment Checklist

The workspace shall provide configurable checklists.

Example items:

- Chalk
- Flour
- Whistle
- Beer
- Water
- First Aid Kit
- Ice
- Cups
- Headlamps
- GPS Device
- Phone Charger

Templates may be reused across runs.

FR-HARE-005 — AI Planning Assistant

Where enabled, AI may assist by:

- Estimating trail duration.
- Calculating elevation gain.
- Identifying steep sections.
- Suggesting Beer Check spacing.
- Highlighting potential hazards.
- Detecting overlaps with recent trails.

AI recommendations are advisory only.

FR-HARE-006 — Trail Preview

Hares may preview the participant experience before publication.

Preview modes include:

- Planner View
 - Participant View
 - Living Trail View
 - Historic Trail View
-

FR-HARE-007 — Historical Reference

The workspace may display previous trails from the same area.

Hares may compare:

- Distance
- Terrain
- Elevation
- Beer Check locations
- Difficulty
- Themes

Historical data is intended to inspire, not encourage duplication.

FR-HARE-008 — Trail Secrecy Controls

Hares control:

- Release timing
- Visibility rules
- Progressive reveal
- Officer access
- Emergency override

Default behavior keeps trails hidden until release.

FR-HARE-009 — Risk Assessment

The workspace shall support recording:

- Known hazards
- Escape routes
- Emergency contacts
- Medical facilities
- Mobile coverage
- Water availability

Risk assessments may be reviewed by officers before publication.

FR-HARE-010 — Publish Trail

Publishing validates the trail and prepares it for release.

Validation checks include:

- Missing finish
- Unconnected segments
- Duplicate Beer Checks
- Incomplete metadata

Warnings are presented before publication.

Business Principles

- The Hare owns the trail.
 - AI supports, never replaces, creativity.
 - Collaboration should reduce effort.
 - Historical knowledge should improve future planning.
 - Secrecy remains essential until release.
-

Completion Criteria

This document is complete when:

- Hares can plan collaboratively.
 - AI assistance is available.
 - Equipment and safety planning are integrated.
 - Trail preview works.
 - Secrecy controls are enforced.
-

Next Document

08F-05 — Trail Analytics, Trail DNA & Historical Intelligence

Annex 08F — Trail Studio

Part 6 — Trail Analytics, Trail DNA & Historical Intelligence

Document ID: HCP-PB-08F-05

Parent: Annex 08F — Trail Studio

Domain: Trail Analytics & Historical Intelligence

Status: Draft

Version: 1.0

Purpose

This document defines how HCP analyzes, preserves, and presents trail-related intelligence while respecting the traditions and values of the Hash House Harriers.

The purpose is not competition.

The purpose is understanding, storytelling, planning, and preserving the unique identity of each Hare and each kennel.

Philosophy

Every Hare leaves a signature.

Some trails are remembered for impossible checks.

Some for beautiful scenery.

Some for relentless hills.

Some for unforgettable Beer Checks.

Trail DNA exists to preserve those signatures—not to score them.

Guiding Principles

- Celebrate creativity over competition.
 - Preserve historical context.
 - Avoid gamification that changes Hash culture.
 - Surface meaningful insights.
 - Make analytics useful for future planning.
-

Core Concepts

Trail DNA

A long-term profile describing the characteristics of a Hare's trails.

Trail DNA evolves naturally as more trails are completed.

It is descriptive, not prescriptive.

Kennel DNA

A profile that reflects the traditions and planning patterns of a kennel over time.

Examples include:

- Average trail length
 - Typical terrain
 - Common themes
 - Beer Check culture
 - Visitor participation
 - Seasonal preferences
-

Historical Intelligence

Historical Intelligence helps Hares and officers learn from previous runs without encouraging repetition.

FR-DNA-001 — Generate Trail DNA

Priority

High

The platform shall automatically generate a Trail DNA profile for each Hare based on completed trails.

Example characteristics include:

- Average distance
- Preferred terrain
- Elevation profile
- Typical duration
- Beer Check frequency
- False trail frequency
- Split trail usage
- Scenic waypoint usage

Trail DNA shall update after each completed Run Capsule.

FR-DNA-002 — Generate Kennel DNA

The platform shall generate an evolving profile for each kennel.

Insights may include:

- Annual activity
 - Attendance trends
 - Trail diversity
 - Geographic coverage
 - Visitor participation
 - Historic milestones
-

FR-DNA-003 — Trail Comparison

Authorized Hares may compare trails using metrics such as:

- Distance
- Elevation
- Terrain
- Duration
- Waypoints
- Beer Stops
- Hazard density

Comparison is intended for planning and learning rather than ranking.

FR-DNA-004 — Historical Explorer

The platform shall provide tools to explore historical trails.

Filters include:

- Year
- Hare
- Kennel
- Country
- Theme
- Terrain
- Difficulty
- Trail type

Historical exploration supports inspiration and education.

FR-DNA-005 — AI Planning Insights

Where enabled, AI may analyze previous trails to provide suggestions such as:

- Areas rarely explored
- Repeated route segments
- Typical Beer Check spacing
- Seasonal route suitability
- Potential safety concerns

Recommendations remain optional.

FR-DNA-006 — Signature Trail Recognition

The platform may identify trails that become historically significant within a kennel.

Examples include:

- Anniversary Runs
- Charity Runs
- Interhash Trails
- Landmark Trails

Recognition is informational and not competitive.

FR-DNA-007 — Trail Evolution

The platform may visualize how a Hare's trail style changes over time.

Visualizations may include:

- Distance trends
 - Terrain diversity
 - Elevation changes
 - Planning complexity
 - Beer Check patterns
-

FR-DNA-008 — Planning Intelligence

Trail Studio may recommend planning considerations based on historical data.

Examples:

- Frequently congested start areas
- Popular regroup locations
- Typical completion times
- Weather patterns
- Accessibility considerations

Recommendations assist planning without dictating it.

FR-DNA-009 — Community Insights

Kennels may view aggregate insights including:

- Total trails laid
- Historic attendance
- Geographic expansion
- Volunteer participation
- Trail variety

Individual privacy settings shall always be respected.

FR-DNA-010 — Preservation

Trail intelligence becomes part of the long-term historical archive.

Analytics may evolve over time, but original trail data remains unchanged.

Business Principles

- Analytics should celebrate stories, not create competition.
 - Historical insight should improve future planning.
 - Every Hare has a unique style worth preserving.
 - Data belongs to the community that created it.
 - Context matters more than numbers.
-

Completion Criteria

This document is complete when:

- Trail DNA profiles are generated.
 - Kennel DNA is maintained.
 - Historical exploration is supported.
 - AI insights assist planning.
 - Analytics preserve culture rather than distort it.
-

Next Document

08F-06 — Business Rules, Permissions & Acceptance Criteria

Annex 08F — Trail Studio

Part 7 — Business Rules, Permissions & Acceptance Criteria

Document ID: HCP-PB-08F-06

Parent: Annex 08F — Trail Studio

Domain: Trail Studio Governance

Status: Draft

Version: 1.0

Purpose

This document defines the governance, validation rules, permissions, lifecycle constraints, audit requirements, and acceptance criteria for Trail Studio.

These rules ensure that trail planning remains secure, collaborative, historically accurate, and faithful to Hash traditions.

Guiding Principles

- The Hare owns the creative process.
 - Officers govern, but do not redesign trails.
 - Historical trails should never be silently altered.
 - Secrecy is a first-class feature.
 - Every change should be auditable.
-

Business Rule Categories

- Identity
 - Ownership
 - Planning
 - Collaboration
 - Publication
 - Navigation
 - Media
 - Historical Preservation
 - Security
 - Audit
-

BR-TRAIL-001 — Trail Identity

Each Trail shall have a globally unique identifier.

Within a Run Session, Trail Names shall be unique.

Examples:

- Main Trail
 - A Trail
 - B Trail
 - Walkers Trail
-

BR-TRAIL-002 — Run Association

A Trail must belong to one and only one Run Session.

Deleting a Run Session shall never automatically delete an archived Trail.

Archived Trails remain accessible through their Run Capsule.

BR-TRAIL-003 — Hare Ownership

Every Trail must have:

- One Lead Hare
- Zero or more Co-Hares

Only the Lead Hare may publish a Trail unless delegated by an authorized officer.

BR-TRAIL-004 — Draft Protection

Draft Trails are private.

Only authorized planners and designated officers may access them.

They shall never appear in public search results.

BR-TRAIL-005 — Secrecy Enforcement

Until the configured release condition is met, the platform shall prevent unauthorized access to:

- Route geometry
 - Digital Chalk
 - Waypoints
 - Beer Checks
 - Notes
 - Media
 - Hazard planning
-

BR-TRAIL-006 — Publication Validation

Before publication, Trail Studio shall validate:

- Connected route
- Start location
- Finish location
- Required metadata
- Assigned Hare
- Release policy
- Safety review status (if required by the kennel)

Validation failures prevent publication.

Warnings may be overridden by authorized users where appropriate.

BR-TRAIL-007 — Digital Chalk Integrity

Digital Chalk symbols must:

- Reference a valid Trail
- Use a recognized symbol definition
- Contain valid coordinates
- Respect visibility rules

Deleted symbols remain in the audit history.

BR-TRAIL-008 — Version History

All planning changes shall generate immutable revision records including:

- Editor
- Timestamp
- Changed elements
- Previous values
- Reason (optional)

Trail history supports accountability and historical research.

BR-TRAIL-009 — Collaborative Editing

The platform shall:

- Prevent conflicting edits.
 - Indicate active collaborators.
 - Resolve synchronization conflicts gracefully.
 - Preserve revision history.
-

BR-TRAIL-010 — Offline Consistency

Offline edits shall synchronize automatically when connectivity is restored.

If conflicts occur, users shall be prompted to resolve them without data loss.

BR-TRAIL-011 — Navigation Integrity

Participants shall never receive navigation data beyond their permitted visibility level.

Progressive reveal rules must be enforced consistently across mobile and web clients.

BR-TRAIL-012 — Media Association

Every media item uploaded during a trail shall be linked to at least one of:

- Trail
- Trail Segment
- Waypoint
- Beer Check
- Scenic Location

Orphaned media shall not be permitted.

BR-TRAIL-013 — AI Transparency

AI-generated planning recommendations shall be clearly identified.

Publishing decisions remain the responsibility of the Hare.

BR-TRAIL-014 — Historical Preservation

Once a Trail becomes Historic:

- Geometry becomes immutable.
- Digital Chalk is preserved.
- Analytics remain reproducible.
- Replay remains available.

Administrative corrections create revision records without replacing original data.

BR-TRAIL-015 — Privacy

Kennels may configure visibility for:

- Historic Trails
- Planning data
- Media
- Analytics
- Replay
- Trail DNA

Privacy policies apply independently from Run Session settings.

Permission Matrix

Action	Member	Hare	Co-Hare	Officer	Admin
View Published Trail	✓	✓	✓	✓	✓
Download Offline Trail	✓	✓	✓	✓	✓
Upload Trail Media	✓	✓	✓	✓	✓
Create Trail		✓		✓	✓
Edit Trail		✓	✓	✓	✓
Place Digital Chalk		✓	✓	✓	✓
Publish Trail		✓		✓	✓
Lock Trail		✓		✓	✓
Release Trail		✓		✓	✓
Archive Trail				✓	✓
Restore Draft		✓	✓	✓	✓

Acceptance Criteria

Trail Studio shall be considered complete when:

- Trails support the full lifecycle.
 - Collaborative planning functions correctly.
 - Digital Chalk behaves consistently.
 - Secrecy rules are enforced.
 - Offline support works reliably.
 - Historical replay is preserved.
 - Trail DNA is generated.
 - Permissions are respected.
 - Audit history is complete.
-

Non-Functional Expectations

Trail Studio should support:

- Thousands of simultaneous live trails.
 - Efficient rendering of large route datasets.
 - Offline-first operation.
 - Fast synchronization after reconnection.
 - Low battery consumption during navigation.
 - Scalable media storage.
-

Future Enhancements

Potential future capabilities include:

- Augmented Reality Digital Chalk.
 - Smartwatch companion mode.
 - Drone-assisted trail preview.
 - Environmental impact reporting.
 - Wildlife observation integration.
 - Live marshal dashboards.
 - Predictive crowd flow analysis.
 - AI-assisted accessibility planning.
-

Business Principles

- Trail laying is an art.
 - Technology should amplify creativity, not standardize it.
 - Historical preservation is a responsibility.
 - Community knowledge should compound over time.
 - Every Trail deserves to be remembered.
-

Completion Criteria

Annex 08F is complete when:

- Trail planning is fully specified.
 - Digital Chalk is standardized.
 - Navigation is defined.
 - Collaboration is documented.
 - Analytics preserve culture.
 - Governance and permissions are enforceable.
 - Historical preservation is guaranteed.
-

Annex 08F Completion

The following documents together define Trail Studio:

- 08F-00 — Vision & Domain Overview
- 08F-01 — Trail Lifecycle & Planning
- 08F-02 — Digital Chalk & Trail Components
- 08F-03 — Trail Mapping, Waypoints & Interactive Navigation
- 08F-04 — Hare Workspace & Trail Collaboration
- 08F-05 — Trail Analytics, Trail DNA & Historical Intelligence
- 08F-06 — Business Rules, Permissions & Acceptance Criteria

Trail Studio is now fully specified as a standalone domain within the Hash Community Platform.

Annex 08G — Scribe Studio

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08G-00

Parent: Chapter 8 — Functional Requirements

Domain: Scribe Studio

Status: Draft

Version: 1.0

Purpose

This document defines Scribe Studio, the dedicated workspace where Hash Scribes create, edit, publish, and preserve the official history of every Run Session.

Scribe Studio transforms notes, memories, media, and participant contributions into the permanent narrative of the run.

Vision

Every Hash run deserves more than a collection of photos.

It deserves a story.

Scribe Studio provides the tools to capture the atmosphere, humor, traditions, and memorable moments that make every run unique.

Philosophy

Technology should never replace the voice of the Scribe.

Instead, it should reduce repetitive work, organize information, and preserve historical accuracy while allowing the Scribe's personality and writing style to remain at the heart of every Trail Report.

Guiding Principles

- Preserve the voice of the Scribe.
 - AI assists but never publishes.
 - Reports should become part of history.
 - Media should enrich storytelling.
 - Collaboration should remain optional.
 - Historical authenticity takes precedence over automation.
-

Why Scribe Studio Exists

Traditional Trail Reports often rely on:

- Memory
- Handwritten notes
- Participant recollections
- Photographs
- Emails
- Social media posts

Important moments can be forgotten.

Scribe Studio brings everything together into one storytelling environment.

Core Concepts

Trail Report

The official written account of the Run Session.

Only one official Trail Report exists for each Run Session.

Story Timeline

A chronological collection of events captured during the run.

Examples include:

- Trail released
- First Beer Check
- Circle opened
- Visitor introductions
- Down-Downs
- Awards
- Memorable incidents

The timeline serves as the foundation for report writing.

Story Assets

Supporting materials used by the Scribe, including:

- Photos
- Videos
- Audio recordings
- GPS timeline
- Participant comments

- Officer notes
 - AI summaries
-

Narrative Draft

The editable working version of the Trail Report.

Drafts support version history and collaborative review where enabled.

Published Report

The final approved version of the Trail Report.

Publishing automatically links the report to the Run Capsule.

Relationship to Other Domains

Scribe Studio consumes information from:

- Run Session
- Trail Studio
- Living Trail
- Circle
- Community Contributions
- Media Library

Scribe Studio produces:

- Official Trail Report
 - Story Timeline
 - AI-assisted Summary
 - Historical Narrative
-

Lifecycle



Success Criteria

Scribe Studio succeeds when:

- Reports remain personal and authentic.
 - AI reduces administrative effort.
 - Historical accuracy improves.
 - Media naturally supports storytelling.
 - Every report strengthens the community's shared memory.
-

Business Principles

- Every run deserves to be remembered.
 - Every Scribe has a unique voice.
 - AI supports creativity without replacing it.
 - Reports are cultural artifacts, not just documentation.
 - Stories become the bridge between today's Hashers and tomorrow's.
-

Next Document

08G-01 — Story Collection & Narrative Lifecycle

Annex 08G — Scribe Studio

Part 2 — Story Collection & Narrative Lifecycle

Document ID: HCP-PB-08G-01

Parent: Annex 08G — Scribe Studio

Domain: Story Collection & Narrative Lifecycle

Status: Draft

Version: 1.0

Purpose

This document defines how HCP collects story assets throughout a Run Session and transforms them into the official Trail Report.

Storytelling in HCP is continuous. The platform begins gathering context before the run starts and continues until the final report is published and archived.


Philosophy

Stories are not written after the run.

They are collected throughout the entire lifecycle of the event.

Every photo, comment, Beer Check, visitor, song, and memorable moment contributes to the final narrative.

Story Lifecycle

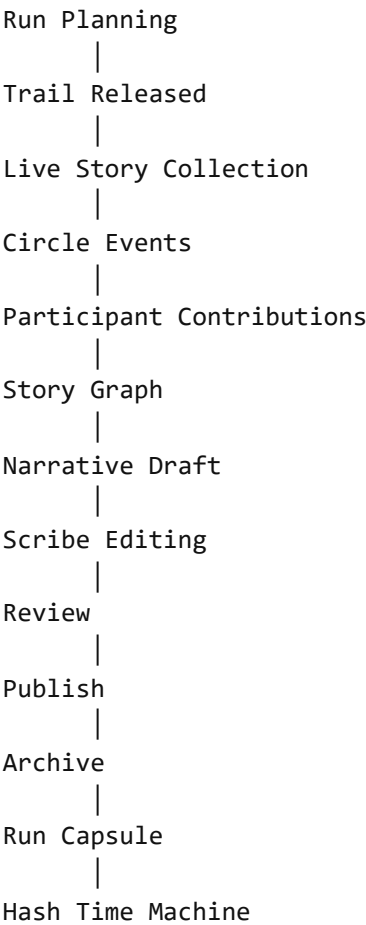

Story Assets

The platform continuously collects structured story assets, including:

- Trail events
- GPS timeline
- Beer Checks
- Waypoints
- Participant comments
- Media uploads
- Officer announcements
- Circle activities
- Awards
- Visitor recognitions
- Down-Down records
- Weather conditions
- Attendance statistics

Each asset includes metadata such as timestamp, location, contributor, and source.

FR-STORY-001 — Automatic Story Collection

Priority

Critical

The platform shall automatically collect eligible events during the Run Session.

Story collection shall require no manual intervention.

Collected events become part of the Story Graph.

FR-STORY-002 — Manual Story Entries

The Scribe may manually create story entries.

Examples include:

- Funny incidents
- Memorable quotes
- Unexpected events
- Local traditions
- Behind-the-scenes moments

Manual entries remain editable until publication.

FR-STORY-003 — Story Timeline

The Story Timeline displays all collected events in chronological order.

The Scribe may:

- Reorder events
- Merge related events
- Hide irrelevant items
- Pin important moments
- Add narrative notes

The original event history remains unchanged.

FR-STORY-004 — Event Categorization

Story entries may be categorized as:

- Trail
- Beer Check
- Circle
- Visitor
- Award
- Song
- Incident
- Humor
- Safety
- Historical
- General

Categories improve organization and searchability.

FR-STORY-005 — Narrative Sections

The report editor shall support predefined sections such as:

- Opening
- Trail Overview
- Memorable Moments
- Beer Checks
- Circle Highlights
- Awards & Recognitions
- Closing Remarks

Kennels may customize or extend these sections.

FR-STORY-006 — Draft Management

Multiple drafts may exist before publication.

Each draft includes:

- Author
- Timestamp
- Revision notes
- Version history

Previous drafts remain recoverable.

FR-STORY-007 — AI Draft Assistance

Where enabled, AI may generate an initial narrative draft using:

- Story Timeline
- Media metadata
- GPS events
- Participant comments
- Officer notes

The draft is clearly marked as AI-assisted.

Publication always requires Scribe approval.

FR-STORY-008 — Supporting Evidence

Every paragraph in the draft may link back to supporting assets.

Examples include:

- Photo galleries
- Videos
- Map locations
- Beer Check records
- Circle announcements

Readers may explore the evidence behind the story.

FR-STORY-009 — Collaborative Review

If enabled by the kennel, designated reviewers may:

- Suggest edits
- Leave comments
- Approve sections

Only the Hash Scribe (or an authorized delegate) may publish the official report.

FR-STORY-010 — Publish Narrative

Publishing:

- Locks the official report.
 - Creates the historical version.
 - Links the report to the Run Capsule.
 - Triggers Hash Passport updates where applicable.
 - Makes the report available according to privacy settings.
-

Business Principles

- Story collection is continuous.
 - The Scribe remains the author.
 - AI organizes; humans interpret.
 - Every report strengthens the historical archive.
 - Authenticity is more valuable than automation.
-

Completion Criteria

This document is complete when:

- Story assets are collected automatically.
 - Narrative drafts are supported.
 - AI assistance is optional.
 - Revision history is preserved.
 - Published reports become permanent historical records.
-

Next Document

08G-02 — Story Editor, Media Integration & AI Writing Assistant

Annex 08G — Scribe Studio

Part 3 — Story Editor, Media Integration & AI Writing Assistant

Document ID: HCP-PB-08G-02

Parent: Annex 08G — Scribe Studio

Domain: Story Editor

Status: Draft

Version: 1.0

Purpose

This document defines the Story Editor, the primary workspace where Hash Scribes transform collected events into the official Trail Report.

The Story Editor combines structured event data, rich media, interactive maps, AI-assisted writing, and traditional editing tools into a single storytelling experience.

Vision

The Story Editor should feel less like a word processor and more like a documentary editing suite.

Everything the Scribe needs should already be available:

- Story Timeline
- Photos
- Videos
- Map
- Circle events
- Beer Checks
- Participant comments
- Historical references
- AI suggestions

The Scribe simply shapes the story.

Philosophy

The editor exists to reduce administrative effort while protecting the Scribe's unique writing style.

AI writes drafts.

The Scribe writes history.

Workspace Layout

The default editor includes:

- Story Timeline
- Rich Text Editor
- Media Browser
- Interactive Map
- Story Graph
- AI Assistant
- Version History
- Comments & Review
- Preview Panel
- Publishing Controls

Each panel may be resized, hidden, or rearranged.

FR-EDITOR-001 — Rich Story Editor

Priority

Critical

The editor shall support:

- Headings
- Paragraphs
- Quotes
- Lists
- Tables
- Hyperlinks
- Embedded media
- Captions
- Callout boxes
- Horizontal dividers

Formatting should remain clean and accessible across web and mobile.

FR-EDITOR-002 — Drag-and-Drop Story Building

The Scribe may drag items from the Story Timeline directly into the report.

Supported assets include:

- Photos
- Videos
- Beer Checks
- Waypoints
- Comments
- Awards
- Circle moments
- Songs

The editor automatically generates contextual placeholders that the Scribe can refine.

FR-EDITOR-003 — Interactive Media Embeds

Media embedded in the report remains interactive.

Readers may:

- Expand photos
- Play videos
- View image galleries
- Open map locations
- Explore related comments

Media retains its original metadata.

FR-EDITOR-004 — Live Map References

The editor may embed interactive maps showing:

- Trail geometry
- Beer Checks
- Scenic locations
- Hazards
- Circle venue

Maps remain synchronized with the associated Run Capsule.

FR-EDITOR-005 — AI Writing Assistant

The AI Assistant may:

- Generate opening paragraphs.
- Summarize sections.
- Suggest transitions.
- Improve grammar.
- Detect duplicated content.
- Highlight missing events.
- Suggest captions.
- Generate concise or expanded versions.

All AI-generated text is clearly identified until accepted by the Scribe.

FR-EDITOR-006 — Writing Style Profiles

Each Scribe may define a preferred writing style.

Examples include:

- Humorous
- Traditional
- Narrative
- Formal
- Conversational
- Minimalist

AI adapts suggestions to the selected style without attempting to imitate another individual's writing.

FR-EDITOR-007 — Historical References

The editor may surface related historical material such as:

- Previous reports
- Similar themes
- Anniversary runs
- Past Beer Checks
- Historic photos

References inspire the Scribe but are never inserted automatically.

FR-EDITOR-008 — Auto Save & Versioning

The editor shall:

- Auto-save continuously.
- Maintain revision history.
- Support named versions.
- Allow rollback to previous drafts.

No work should be lost due to connectivity issues.

FR-EDITOR-009 — Review Mode

Reviewers may:

- Comment on passages.
- Suggest wording.
- Flag factual issues.
- Approve sections.

Suggestions remain separate until accepted by the Scribe.

FR-EDITOR-010 — Publish Report

Publishing performs the following actions:

- Locks the official report.
- Generates a publish timestamp.
- Links the report to the Run Capsule.
- Updates Hash Passport milestones where applicable.
- Makes the report available according to privacy settings.

Subsequent corrections require a documented revision.

Business Principles

- The Scribe remains the author.
 - AI accelerates writing without replacing creativity.
 - Rich media should enhance, not distract from, the narrative.
 - Every report should remain readable decades into the future.
 - Editorial control always belongs to the Scribe.
-

Completion Criteria

This document is complete when:

- A full-featured Story Editor exists.
 - Media integrates seamlessly.
 - AI suggestions remain optional.
 - Version history is preserved.
 - Reports can be reviewed and published.
-

Next Document

08G-03 — Publishing, Trail Reports & Historical Preservation

Annex 08G — Scribe Studio

Part 4 — Publishing, Trail Reports & Historical Preservation

Document ID: HCP-PB-08G-03

Parent: Annex 08G — Scribe Studio

Domain: Publishing & Historical Preservation

Status: Draft

Version: 1.0

Purpose

This document defines how Trail Reports are reviewed, published, preserved, revised, and integrated into the long-term historical archive of the Hash Community Platform.

Publication is the final editorial step performed by the Hash Scribe.

Once published, the report becomes part of the permanent memory of the Run Session.


Philosophy

Publishing is not simply pressing a button.

It is the official act of recording history.

A published Trail Report represents the collective memory of the Run and becomes a cultural artifact belonging to the community.

Publishing Lifecycle

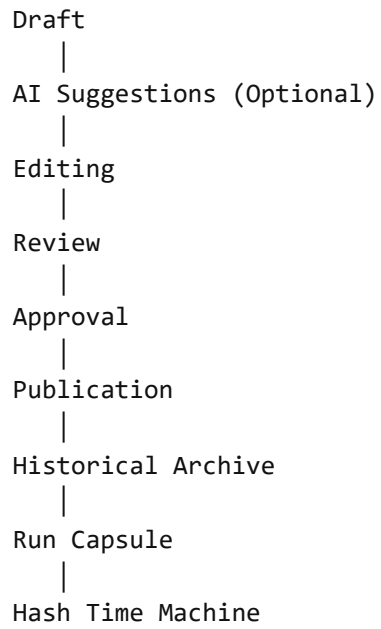

FR-PUBLISH-001 — Publish Official Report

Priority

Critical

Only an authorized Hash Scribe or designated officer may publish the official Trail Report.

Publishing shall:

- Assign a permanent publication timestamp.
 - Generate an immutable report version.
 - Link the report to the associated Run Capsule.
 - Trigger configured notifications.
 - Update eligible Hash Passport achievements.
-

FR-PUBLISH-002 — Report Identity

Every published Trail Report shall receive:

- Unique identifier
- Associated Run Session
- Kennel
- Publication date
- Scribe attribution
- Revision number

These identifiers remain permanent.

FR-PUBLISH-003 — Historical Versioning

Published reports shall never be silently overwritten.

Corrections shall create:

- Revision number
- Editor
- Timestamp
- Reason for revision

Earlier published versions remain accessible to authorized users.

FR-PUBLISH-004 — Multiple Reading Modes

Readers may view reports in different formats:

- Classic article
- Timeline
- Story Cards
- Interactive map
- Media gallery
- Hash Time Machine replay

All modes present the same historical record.

FR-PUBLISH-005 — Interactive References

Published reports may contain references to:

- Beer Checks
- Waypoints
- Photos
- Videos
- Circle events
- Awards
- Songs
- Passport milestones

Selecting a reference opens the related historical context.

FR-PUBLISH-006 — Export

Authorized users may export Trail Reports as:

- PDF
- Markdown
- HTML
- Plain Text

Future formats may include EPUB and print-ready book layouts.

FR-PUBLISH-007 — Translation

Where enabled, reports may be translated into supported languages.

The original report remains the authoritative version.

Translations are clearly identified.

FR-PUBLISH-008 — Citation

Each published report shall include a permanent citation format.

Example:

Owerri Hash House Harriers. Run #412. Trail Report. Published 12 July 2026. Hash Community Platform.

This supports long-term referencing and historical research.

FR-PUBLISH-009 — Search Indexing

Published reports become searchable using:

- Run Number
- Kennel
- Hare
- Scribe
- Date
- Theme
- Country
- Keywords
- Tags

Search respects privacy settings.

FR-PUBLISH-010 — Preservation

The platform shall preserve:

- Original formatting
- Embedded media references
- Interactive links
- Timeline relationships
- Story Graph
- Story Cards

Reports remain usable as technology evolves.

FR-PUBLISH-011 — Community Engagement

Readers may:

- Like reports
- Bookmark reports
- Leave comments (if enabled)
- Share reports
- Recommend reports to other Hashers

Engagement never alters the published report itself.

FR-PUBLISH-012 — Legacy Collections

Kennels may curate collections such as:

- Best Trail Reports
- Anniversary Reports
- Charity Runs
- Red Dress Runs
- Interhash Reports
- Memorial Runs

Collections become part of the kennel archive.

Business Principles

- Publication creates history.
 - History should never be silently rewritten.
 - Reports belong to the community that created them.
 - Every report deserves long-term preservation.
 - Future generations should experience reports as intended.
-

Completion Criteria

This document is complete when:

- Official publication is supported.
 - Version history is immutable.
 - Reports are searchable.
 - Multiple reading modes exist.
 - Long-term preservation is guaranteed.
-

Next Document

08G-04 — Scribe Workspace, Collaboration & Editorial Workflow

Annex 08G — Scribe Studio

Part 5 — Scribe Workspace, Collaboration & Editorial Workflow

Document ID: HCP-PB-08G-04

Parent: Annex 08G — Scribe Studio

Domain: Scribe Workspace

Status: Draft

Version: 1.0

Purpose

This document defines the Scribe Workspace, the dedicated environment where Hash Scribes collect information, organize ideas, collaborate with reviewers, and produce the official Trail Report.

Unlike a generic document editor, the Scribe Workspace is purpose-built around the lifecycle of a Hash run.

Vision

The Scribe Workspace should feel like a newsroom, archive, and creative studio combined.

Every important event from the run is already available.

The Scribe's task is not to remember everything.

It is to shape memories into an engaging story.

Guiding Principles

- Minimize administrative work.
 - Preserve editorial freedom.
 - Keep storytelling enjoyable.
 - Support collaboration without confusion.
 - Protect historical integrity.
-

Workspace Overview

The default workspace consists of:

- Story Timeline
- Story Card Library
- Rich Story Editor
- Interactive Trail Map
- Media Browser
- AI Assistant
- Reviewer Panel
- Version History
- Publishing Console
- Historical Reference Panel

Panels may be customized to match each Scribe's preferred workflow.

FR-WORKSPACE-001 — Personalized Workspace

Each Scribe may customize:

- Panel arrangement
- Theme
- Font size
- Editor layout
- Default writing mode
- Preferred language

Workspace preferences synchronize across devices.

FR-WORKSPACE-002 — Story Card Library

The Story Card Library contains every captured event from the Run Session.

Examples include:

- Beer Check
- Trail milestone
- Visitor introduction
- Award
- Circle event
- Song
- Photo
- Video
- Funny incident
- Officer announcement

Cards may be:

- Filtered
 - Sorted
 - Tagged
 - Grouped
 - Pinned
-

FR-WORKSPACE-003 — Editorial Dashboard

The dashboard displays:

- Draft completion status
- Missing sections
- Unreviewed Story Cards
- Media awaiting captions
- Suggested AI improvements
- Pending reviewer comments

The dashboard helps the Scribe manage progress without interrupting creativity.

FR-WORKSPACE-004 — Editorial Notes

The Scribe may maintain private notes separate from the published report.

Notes may include:

- Writing ideas
- Quotes
- Follow-up questions
- Future revisions
- Interview reminders

Editorial notes are never published.

FR-WORKSPACE-005 — Collaborative Review

Where enabled, reviewers may:

- Suggest edits
- Comment on paragraphs
- Approve sections
- Request clarification
- Highlight factual inconsistencies

The Scribe remains the final decision-maker.

FR-WORKSPACE-006 — Assignment Workflow

Large events such as Interhash may assign sections to multiple contributors.

Example assignments include:

- Trail coverage
- Circle summary
- Visitor interviews
- Awards
- Media captions

The official report is assembled into a single narrative before publication.

FR-WORKSPACE-007 — Editorial Checklist

The workspace provides a configurable checklist including:

- Trail summary completed
- Beer Checks documented
- Circle recorded
- Awards included
- Media captions added
- Contributors acknowledged
- Privacy review completed

The checklist helps maintain consistency across reports.

FR-WORKSPACE-008 — Historical Reference Panel

The Scribe may browse:

- Previous Trail Reports
- Anniversary reports
- Similar themes
- Historic photos
- Related Run Capsules

References remain read-only.

FR-WORKSPACE-009 — Offline Editing

Drafts remain fully editable without network connectivity.

Changes synchronize automatically when connectivity returns.

Conflict resolution preserves all edits.

FR-WORKSPACE-010 — Workspace Audit

The platform records:

- Draft creation
- Significant edits
- Reviewer comments
- Publication approvals
- Revision history

Audit records support transparency and long-term preservation.

Business Principles

- The workspace should disappear behind the writing process.
 - Collaboration should strengthen quality without slowing publication.
 - Historical material should always be discoverable.
 - Creativity should remain in human hands.
 - The official report represents the voice of the community.
-

Completion Criteria

This document is complete when:

- The workspace supports the full editorial workflow.
 - Story Cards integrate seamlessly.
 - Collaboration functions correctly.
 - Offline editing is reliable.
 - Editorial history is preserved.
-

Next Document

08G-05 — Story Analytics, Scribe Intelligence & Knowledge Graph

Annex 08G — Scribe Studio

Part 6 — Story Analytics, Scribe Intelligence & Knowledge Graph

Document ID: HCP-PB-08G-05

Parent: Annex 08G — Scribe Studio

Domain: Story Analytics & Knowledge Graph

Status: Draft

Version: 1.0

Purpose

This document defines how HCP transforms Trail Reports and Story Graphs into a living knowledge base that preserves the collective memory of the global Hash community.

The goal is not to measure writing performance.

The goal is to preserve knowledge, improve discoverability, and strengthen historical continuity.

Philosophy

Every Trail Report is more than a story.

It is a piece of community knowledge.

When connected with thousands of other reports, it forms an evolving picture of Hash traditions across years, kennels, countries, and generations.

Guiding Principles

- Preserve meaning over metrics.
 - Celebrate diversity of storytelling.
 - Respect privacy and local customs.
 - Make history discoverable.
 - AI explains; humans interpret.
-

Core Concepts

Story Knowledge Graph

Every published report contributes structured relationships between:

- Runs
- Kennels
- Hares
- Scribes
- Participants
- Visitors
- Beer Checks
- Songs
- Awards
- Trails
- Locations
- Events

Together these form the Story Knowledge Graph.

Story Intelligence

AI may analyze historical reports to identify recurring themes, traditions, anniversaries, and connections.

Insights are descriptive rather than evaluative.

Cultural Memory

Cultural Memory represents the accumulated traditions and stories preserved by the community.

It becomes richer with every published report.

FR-KNOWLEDGE-001 — Build Story Knowledge Graph

Priority

High

The platform shall continuously build a structured Story Knowledge Graph from published reports and associated Story Cards.

Relationships include:

- Person ↔ Run
- Hare ↔ Trail
- Kennel ↔ Event
- Beer Check ↔ Location
- Song ↔ Circle
- Visitor ↔ Kennel

The graph supports search, analytics, and historical exploration.

FR-KNOWLEDGE-002 — Historical Discovery

Users may discover reports by:

- Theme
- Anniversary
- Country
- Kennel
- Hare
- Scribe
- Visitor
- Landmark
- Song
- Tradition
- Run Number

Discovery respects privacy settings.

FR-KNOWLEDGE-003 — AI Historical Insights

Where enabled, AI may highlight observations such as:

- Frequently visited locations.
- Long-running traditions.
- Rare event types.
- Historic milestones.
- Memorable anniversaries.
- Seasonal patterns.

Insights are presented as observations rather than conclusions.

FR-KNOWLEDGE-004 — Tradition Explorer

The platform may identify recurring traditions within a kennel.

Examples include:

- Annual Red Dress Runs.
- Charity events.
- Special songs.
- Costume themes.
- Memorial Runs.
- Holiday traditions.

These traditions become part of the kennel's historical identity.

FR-KNOWLEDGE-005 — Story Connections

Published reports may display related stories.

Connections may be based on:

- Shared participants.
- Similar routes.
- Anniversary dates.
- Matching themes.
- Historic locations.
- Visitor exchanges.

Readers can navigate seamlessly between related reports.

FR-KNOWLEDGE-006 — Scribe Insights

Each Scribe may view private editorial insights including:

- Reports published.
- Average drafting time.
- Media utilization.
- Revision history.
- Preferred writing structure.

These insights are intended for self-reflection and are not publicly ranked.

FR-KNOWLEDGE-007 — Community Story Map

The platform may visualize stories on an interactive world map.

Users can explore reports geographically while respecting visibility rules.

This capability integrates with the Global Hash Atlas.

FR-KNOWLEDGE-008 — Knowledge Preservation

Structured relationships remain preserved even if presentation formats evolve.

Future interfaces should continue to benefit from decades of accumulated knowledge.

FR-KNOWLEDGE-009 — AI Research Assistant

Authorized users may ask questions such as:

- "Show all Red Dress Runs in Africa."
- "Which trails ended at this landmark?"
- "Find reports mentioning the founding Hare."
- "When did this kennel first host visitors from Japan?"

Responses include links back to the original reports.

FR-KNOWLEDGE-010 — Long-Term Stewardship

The Story Knowledge Graph shall be designed for decades of growth.

New data types may be added without breaking existing historical relationships.

Business Principles

- Knowledge grows through participation.
 - Every report enriches the archive.
 - Analytics should reveal stories, not create competition.
 - Cultural preservation is a long-term commitment.
 - The community owns its shared history.
-

Completion Criteria

This document is complete when:

- The Story Knowledge Graph exists.
 - Historical discovery is supported.
 - AI insights remain optional.
 - Story relationships are preserved.
 - Global historical exploration is possible.
-

Next Document

08G-06 — Business Rules, Permissions & Acceptance Criteria

Annex 08G — Scribe Studio

Part 7 — Business Rules, Permissions & Acceptance Criteria

Document ID: HCP-PB-08G-06

Parent: Annex 08G — Scribe Studio

Domain: Editorial Governance

Status: Draft

Version: 1.0

Purpose

This document defines the governance, permissions, editorial rules, validation requirements, audit trail, and acceptance criteria for Scribe Studio.

These rules ensure that every Trail Report remains authentic, attributable, historically accurate, and properly preserved.

Guiding Principles

- The Scribe owns the narrative.
 - Officers provide governance, not authorship.
 - Reports become permanent historical records.
 - Every editorial decision must be traceable.
 - AI must always remain transparent.
-

Business Rule Categories

- Identity
 - Ownership
 - Editorial Workflow
 - Collaboration
 - Publication
 - Versioning
 - Preservation
 - Security
 - Privacy
 - Audit
-

BR-SCRIBE-001 — Report Identity

Each Trail Report shall have a globally unique identifier.

The identifier shall never change.

A report shall always belong to exactly one Run Session.

BR-SCRIBE-002 — Official Report

Each Run Session may have only one Official Trail Report.

Earlier drafts remain archived but are never presented as the official historical record.

BR-SCRIBE-003 — Editorial Ownership

Each report shall have:

- One Official Hash Scribe
- Optional Assistant Scribes
- Optional Reviewers

The Official Hash Scribe retains final editorial authority unless reassigned by authorized officers.

BR-SCRIBE-004 — Draft Privacy

Draft reports are private.

Access is limited to:

- Assigned Scribe
- Assistant Scribes
- Authorized Reviewers
- Designated Officers

Drafts must never appear in public searches.

BR-SCRIBE-005 — AI Transparency

All AI-generated content shall be clearly identified until accepted by the Scribe.

The system shall never publish AI-generated text automatically.

AI suggestions become human-authored only after explicit acceptance and editing.

BR-SCRIBE-006 — Editorial Integrity

The platform shall prevent:

- Anonymous edits
- Undocumented publication
- Silent revisions
- Loss of revision history

Every published report must remain attributable.

BR-SCRIBE-007 — Publication Validation

Before publication, the platform validates:

- Assigned Scribe
- Associated Run Session
- Required report metadata
- Publication permissions
- Linked Run Capsule
- Privacy configuration

Validation failures prevent publication.

BR-SCRIBE-008 — Version History

Every revision shall record:

- Editor
- Timestamp
- Revision number
- Summary of changes
- Reason for revision (optional)

Historical versions remain accessible according to permissions.

BR-SCRIBE-009 — Collaborative Editing

Concurrent editing shall:

- Prevent conflicting saves.
 - Display active collaborators.
 - Preserve comment threads.
 - Record contributor activity.
-

BR-SCRIBE-010 — Media Integrity

Embedded media shall remain linked to its original source.

Deleting media shall never silently remove historical references.

Missing media shall display a preservation notice rather than breaking the report.

BR-SCRIBE-011 — Historical Preservation

Published reports become immutable historical artifacts.

Corrections create new revisions.

Original publications remain preserved.

BR-SCRIBE-012 — Privacy

Kennels may configure:

- Public visibility
- Member-only access
- Officer-only access
- Historical archive access
- Anonymous viewing

Privacy applies independently to reports, media, and comments.

BR-SCRIBE-013 — Audit Trail

The platform shall record:

- Draft creation
- Editorial changes
- Reviewer activity
- AI assistance usage
- Publication events
- Revision history
- Restoration actions

Audit records are immutable.

BR-SCRIBE-014 — Long-Term Preservation

Published Trail Reports shall remain readable even if:

- Themes change
- User interface evolves
- Media formats are upgraded
- Storage systems are migrated

Historical readability takes precedence over presentation changes.

Permission Matrix

Action	Member	Scribe	Assistant Scribe	Reviewer	Officer	Admin
View Published Report	✓	✓	✓	✓	✓	✓
Comment (if enabled)	✓	✓	✓	✓	✓	✓
Create Draft		✓	✓		✓	✓
Edit Draft		✓	✓		✓	✓
Leave Review Comments				✓	✓	✓
Accept Suggestions		✓	✓		✓	✓
Publish Report		✓			✓	✓
Archive Report					✓	✓
Restore Previous Version					✓	✓

Acceptance Criteria

Scribe Studio shall be considered complete when:

- Editorial workflow is fully documented.
 - AI assistance remains transparent.
 - Collaboration functions correctly.
 - Publication is governed.
 - Revision history is immutable.
 - Permissions are enforced.
 - Historical preservation is guaranteed.
-

Non-Functional Expectations

The platform should support:

- Very large reports.
 - Thousands of embedded media assets.
 - Continuous auto-save.
 - Offline editing.
 - Fast historical search.
 - Decades of archival growth.
-

Future Enhancements

Potential future capabilities include:

- Voice-to-story transcription.
 - Automatic Circle transcription.
 - Multi-language collaborative editing.
 - AI-assisted oral history interviews.
 - Podcast generation from Trail Reports.
 - Documentary timeline generation.
 - Printed Chronicle publishing.
 - Interactive museum exhibits powered by Run Capsules.
-

Business Principles

- Stories define communities.
 - The Scribe is the steward of memory.
 - Technology should preserve authenticity.
 - History deserves transparency.
 - Every Trail Report should remain meaningful for generations.
-

Completion Criteria

Annex 08G is complete when:

- Story collection is defined.
 - The Story Editor is complete.
 - Publishing is governed.
 - Editorial workflow is documented.
 - Knowledge Graph integration is specified.
 - Governance rules are enforceable.
 - Historical preservation is guaranteed.
-

Annex 08G Completion

The following documents together define Scribe Studio:

- 08G-00 — Vision & Domain Overview
- 08G-01 — Story Collection & Narrative Lifecycle
- 08G-02 — Story Editor, Media Integration & AI Writing Assistant
- 08G-03 — Publishing, Trail Reports & Historical Preservation
- 08G-04 — Scribe Workspace, Collaboration & Editorial Workflow
- 08G-05 — Story Analytics, Scribe Intelligence & Knowledge Graph
- 08G-06 — Business Rules, Permissions & Acceptance Criteria

Scribe Studio is now fully specified as a standalone domain within the Hash Community Platform.

Annex 08H — Run Capsule

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08H-00

Parent: Chapter 8 — Functional Requirements

Domain: Run Capsule

Status: Draft

Version: 1.0

Purpose

This document defines the Run Capsule, the central historical artifact of the Hash Community Platform (HCP).

A Run Capsule permanently preserves every significant aspect of a Run Session, transforming a single day on the trail into a rich, searchable, replayable historical record.

The Run Capsule is automatically assembled from all participating HCP domains.

Vision

Every Hash run deserves its own digital time capsule.

A Run Capsule should allow future Hashers to experience a run years—or even decades—after it happened.

It should capture not only what happened, but how it felt.

Philosophy

Hashes are temporary.

Memories should not be.

Run Capsules preserve:

- Adventure
- Community
- Tradition
- Humor
- History

Technology exists to preserve those experiences without changing them.

Guiding Principles

- Every run becomes history.
 - Preserve authenticity.
 - Make memories discoverable.
 - Connect every related artifact.
 - Design for decades, not devices.
-

What is a Run Capsule?

A Run Capsule is the permanent digital record of a single Run Session.

It aggregates structured and unstructured information into one navigable historical artifact.

Unlike a report or photo album, a Run Capsule is interactive, living, and deeply connected.

Capsule Components

Each Run Capsule may include:

Identity

- Run Number
 - Run Name
 - Date
 - Kennel
 - Location
 - Theme
 - Anniversary designation
-

Trail

- Trail geometry
 - Digital Chalk
 - Waypoints
 - Beer Checks
 - Hazards
 - Scenic locations
 - Trail Replay
-

Story

- Official Trail Report
 - Story Timeline
 - Story Cards
 - AI Summary
-

Media

- Photos
 - Videos
 - Audio
 - Captions
 - Galleries
 - Drone footage (future)
-

Participants

- Hares
 - Scribe
 - RA
 - GM
 - Visitors
 - Members
 - Guests
-

Circle

- Songs
 - Down-Downs
 - Awards
 - Announcements
 - Traditions
-

Analytics

- Attendance
- Distance

- Elevation
 - Duration
 - Weather
 - Trail DNA
 - Participation Insights
-

Passport

- Stamps
 - Milestones
 - Achievements
 - Visit History
-

Community

- Comments
 - Reactions
 - Shared memories
 - Media contributions
-

Relationships


Run Capsule consumes information from:

- Identity
- Kennels
- Run Session
- Trail Studio
- Living Trail
- Circle
- Scribe Studio
- Media Library
- Passport
- AI Services

Run Capsule becomes the foundation for:

- Hash Time Machine
 - Global Hash Atlas
 - Chronicles
 - Historical Research
 - AI Knowledge Graph
-

Lifecycle

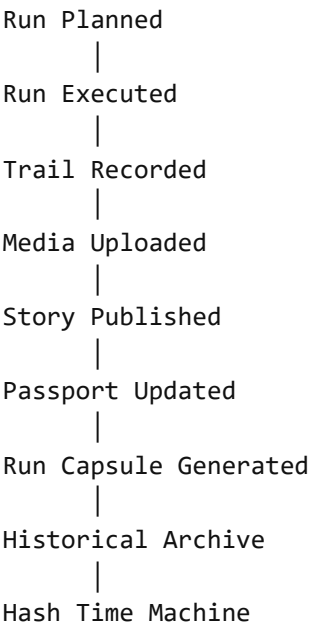

Success Criteria

Run Capsule succeeds when:

- Every run is preserved.
 - Every artifact is connected.
 - Every story remains discoverable.
 - Every participant can relive the experience.
 - Future generations understand what happened.
-

Business Principles

- Every Run.
- Every Trail.
- Every Story.
- One Capsule.

The Run Capsule is the permanent memory of the Hash.

Completion Criteria

This overview is complete when:

- The purpose of Run Capsules is clearly defined.
 - Relationships with all other domains are established.
 - The long-term vision is documented.
-

Next Document

08H-01 — Run Capsule Assembly & Lifecycle

Annex 08H — Run Capsule

Part 2 — Run Capsule Assembly & Lifecycle

Document ID: HCP-PB-08H-01

Parent: Annex 08H — Run Capsule

Domain: Capsule Assembly & Lifecycle

Status: Draft

Version: 1.0

Purpose

This document defines how Run Capsules are automatically assembled, enriched, finalized, and preserved throughout the lifecycle of a Hash Run.

Unlike traditional event archives, a Run Capsule is not created after the event—it grows continuously as the event unfolds.

Philosophy

The best archive is the one that builds itself.

Participants should simply enjoy the run.


HCP quietly captures the story in the background.

By the time the Trail Report is published, most of the Run Capsule already exists.

Guiding Principles

- Automatic wherever possible.
 - Human approval where authenticity matters.
 - Preserve every important moment.
 - Never lose historical context.
 - Every contribution has a place.
-

Capsule Lifecycle

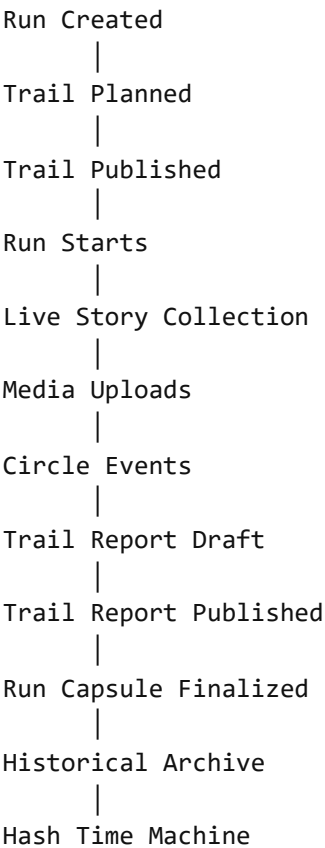

Capsule States

Every Run Capsule transitions through the following states:

- Planned
- Preparing
- Live
- Draft
- Pending Publication
- Published
- Archived
- Legacy

Each state determines what information is visible and editable.

FR-CAPSULE-001 — Automatic Capsule Creation

Priority

Critical

A Run Capsule shall be created automatically when a Run Session is created.

Initial content includes:

- Run identity
- Kennel
- Scheduled date
- Assigned Hare(s)
- Planned trail metadata

The Capsule begins as a living draft.

FR-CAPSULE-002 — Continuous Assembly

As the Run progresses, HCP automatically adds:

- Trail updates
- Waypoints
- Beer Checks
- Participant check-ins
- Photos
- Videos
- Audio
- Circle activities
- Story Cards
- Comments
- Reactions
- Attendance statistics

Each contribution is timestamped and linked to its source.

FR-CAPSULE-003 — Story Integration

When the Official Trail Report is published:

- The report becomes the narrative centerpiece.
 - Story Cards are linked.
 - Timeline events are synchronized.
 - AI summaries are updated.
 - Historical references are generated.
-

FR-CAPSULE-004 — Media Consolidation

All approved media related to the Run Session is automatically organized into:

- Galleries
- Albums
- Timeline collections
- Location collections
- Participant collections

Media retains attribution and metadata.

FR-CAPSULE-005 — Timeline Construction

The platform automatically builds a chronological timeline including:

- Trail release
- Run start
- Beer Checks
- Scenic locations
- Circle opening
- Awards
- Trail Report publication

Additional events may be inserted manually by authorized users.

FR-CAPSULE-006 — Historical Lock

Once the publication workflow is complete:

- The Run Capsule enters Published state.
 - Core historical records become immutable.
 - Subsequent corrections create revisions rather than overwriting history.
-

FR-CAPSULE-007 — Incremental Enrichment

Even after publication, new supporting content may be attached without changing the historical record.

Examples include:

- Newly discovered photographs
- Scanned newsletters
- Interviews with long-time Hashers
- Anniversary reflections

These are stored as supplemental artifacts with clear timestamps.

FR-CAPSULE-008 — Capsule Health

The system continuously validates Capsule completeness.

Indicators may include:

- Missing Trail Report
- Missing Circle information
- Uncaptioned media
- Incomplete participant roles
- Missing weather data

Health indicators assist officers without blocking publication.

FR-CAPSULE-009 — Capsule Timeline

Readers may navigate the Run Capsule using an interactive timeline.

Timeline entries link directly to:

- Story Cards
 - Media
 - Map locations
 - Trail Replay
 - Trail Report sections
-

FR-CAPSULE-010 — Legacy Mode

Historic runs imported from legacy systems may create simplified Run Capsules.

As additional information becomes available, these Capsules can be enriched over time.

Legacy status remains visible to preserve provenance.

Business Principles

- The archive builds itself.
 - Contributors should not duplicate effort.
 - Historical authenticity is paramount.
 - Capsules should become richer over time.
 - Every run deserves preservation.
-

Completion Criteria

This document is complete when:

- Automatic assembly is defined.
 - Lifecycle states are documented.
 - Historical locking is enforced.
 - Incremental enrichment is supported.
 - Legacy imports are accommodated.
-

Next Document

08H-02 — Run Capsule Explorer, Timeline & Interactive Experience

Annex 08H — Run Capsule

Part 3 — Run Capsule Explorer, Timeline & Interactive Experience

Document ID: HCP-PB-08H-02

Parent: Annex 08H — Run Capsule

Domain: Run Capsule Explorer

Status: Draft

Version: 1.0

Purpose

This document defines the Run Capsule Explorer, the primary interface for discovering, navigating, and reliving every preserved Hash run.

The Explorer presents a Run Capsule as an interactive experience rather than a static page.

Vision

Opening a Run Capsule should feel like opening a beautifully curated museum exhibit dedicated to one unforgettable Hash run.

Every interaction should reveal another layer of the story.

Philosophy

History should be explored, not merely displayed.

Users should naturally move between maps, photos, reports, songs, awards, and conversations without losing context.

Guiding Principles

- Exploration over navigation.
 - Storytelling over data presentation.
 - Context before statistics.
 - Rich media without clutter.
 - Consistent across mobile and web.
-

Explorer Overview

The Explorer consists of interconnected sections:

- Hero Overview
- Timeline
- Interactive Trail Map
- Story Report
- Story Cards
- Media Gallery
- Circle
- Participants
- Passport Activity
- Analytics
- Related Capsules

Each section is independently accessible while remaining synchronized.

Hero Overview

The Hero section displays:

- Run Number
- Run Name
- Date
- Kennel
- Theme
- Lead Hare
- Hash Scribe
- Attendance
- Hero Photograph
- AI Summary

The Hero serves as the Capsule's cover page.

FR-EXPLORER-001 — Interactive Timeline

Priority

Critical

Users may scroll through a chronological timeline of the entire Run.

Timeline entries include:

- Trail release
- Start
- Checks
- Beer Stops
- Scenic locations
- Circle
- Awards
- Trail Report publication

Selecting an entry updates all synchronized panels.

FR-EXPLORER-002 — Synchronized Experience

Selecting any item updates related panels automatically.

Example:

Selecting a Beer Check updates:

- Map
- Photos
- Videos
- Story paragraph
- Comments
- Participants present

The Explorer always maintains contextual relationships.

FR-EXPLORER-003 — Interactive Trail

Users may switch between:

- Planned Trail
- Live Trail
- Historic Replay
- Participant Contributions

Map selections synchronize with Story Cards and media.

FR-EXPLORER-004 — Story Reading Modes

Readers may experience the Run Capsule as:

- Traditional article
- Timeline narrative
- Story Card view
- Interactive map
- Hash Time Machine
- Gallery-first mode

Readers choose the experience that suits them.

FR-EXPLORER-005 — Dynamic Media Gallery

Media automatically groups by:

- Time
- Location
- Beer Check
- Circle
- Participant
- Photographer

Every media item links back to the associated Story Card.

FR-EXPLORER-006 — Participant Explorer

Readers may browse:

- Hares
- Scribe
- Officers
- Visitors
- Members

Each participant links to their public Hash profile (subject to privacy settings).

FR-EXPLORER-007 — Circle Experience

The Circle section includes:

- Songs
- Down-Downs
- Awards
- Announcements
- Photos
- Videos
- Quotes

The Circle is presented as its own chapter within the Capsule.

FR-EXPLORER-008 — Related Capsules

The Explorer recommends related Capsules based on:

- Same Hare
- Same Kennel
- Similar trail
- Anniversary
- Shared visitors
- Nearby dates
- Historic themes

Recommendations encourage historical exploration.

FR-EXPLORER-009 — Accessibility

The Explorer supports:

- Keyboard navigation
- Screen readers
- High contrast
- Adjustable text size
- Reduced motion mode

Accessibility features preserve the storytelling experience.

FR-EXPLORER-010 — Offline Viewing

Previously viewed Capsules may be downloaded for offline exploration.

Downloaded content includes:

- Story Report
- Timeline
- Maps
- Media thumbnails
- Story Cards

Large media downloads remain optional.

Business Principles

- Every Capsule should invite exploration.
 - Rich history should remain approachable.
 - Context creates meaning.
 - Discovery strengthens community.
 - Every Run Capsule should feel timeless.
-

Completion Criteria

This document is complete when:

- The Explorer supports immersive navigation.
 - Timeline synchronization functions correctly.
 - Interactive maps integrate with stories.
 - Multiple reading modes exist.
 - Offline viewing is supported.
-

Next Document

08H-03 — Hash Time Machine & Historical Replay

Annex 08H — Run Capsule

Part 4 — Hash Time Machine & Historical Replay

Document ID: HCP-PB-08H-03

Parent: Annex 08H — Run Capsule

Domain: Hash Time Machine

Status: Draft

Version: 1.0

Purpose

This document defines the Hash Time Machine, an immersive replay experience that reconstructs a Hash Run from the preserved Run Capsule.

Rather than simply displaying archived information, the Hash Time Machine allows users to relive the sequence of events as they unfolded.

Vision

A Run Capsule preserves history.

The Hash Time Machine brings that history back to life.

Users should feel as though they are following the trail alongside the Hashers, discovering Beer Checks, hearing Circle songs, and reading the Trail Report as the day unfolds.

Philosophy

History should not remain frozen.

It should be experienced.

The Hash Time Machine reconstructs events while preserving historical accuracy.

No events are invented or reordered.

Guiding Principles

- Authenticity before spectacle.
 - Replay what happened, not what might have happened.
 - Respect privacy settings.
 - Celebrate community participation.
 - Preserve context.
-

Replay Modes

Users may choose from several replay experiences:

- Guided Replay
- Free Exploration
- Timeline Scrubbing
- Story Replay
- Map Replay
- Media Replay
- Circle Replay

Each mode uses the same historical data while presenting it differently.

FR-TIMEMACHINE-001 — Guided Replay

Priority

Critical

The Guided Replay automatically progresses through the Run Session.

Replay includes:

- Trail progression
- Story narration
- Story Cards
- Photos
- Videos
- Beer Checks
- Circle events
- Awards

Users may pause, resume, or jump to any moment.

FR-TIMEMACHINE-002 — Interactive Map Replay

The map animates the trail chronologically.

As playback progresses:

- The route is drawn.
 - Waypoints appear.
 - Beer Checks become active.
 - Story Cards open automatically.
 - Media becomes available at the corresponding location.
-

FR-TIMEMACHINE-003 — Narrative Synchronization

The official Trail Report synchronizes with playback.

As events occur:

- Relevant paragraphs are highlighted.
 - Quotes appear.
 - Photos expand inline.
 - Comments become visible.
 - Timeline advances automatically.
-

FR-TIMEMACHINE-004 — Media Playback

Media appears according to its original timestamp.

Supported media includes:

- Photos
- Videos
- Audio
- Voice notes
- Ambient recordings (future)

Playback never changes the original timestamps.

FR-TIMEMACHINE-005 — Event Overlay

Users may enable overlays such as:

- Weather
- Elevation
- Attendance
- GPS statistics
- Trail difficulty
- Digital Chalk
- Trail DNA

Overlays are optional.

FR-TIMEMACHINE-006 — Replay Speed

Replay supports:

- Real Time
- 2×
- 5×
- 10×
- Story Mode (event-driven rather than time-driven)

Users may also scrub directly to any point in the timeline.

FR-TIMEMACHINE-007 — Historical Context

At any point during replay, users may explore:

- Related Story Cards
- Historical reports
- Similar runs
- Anniversary events
- Participant profiles

Replay pauses while historical references are explored.

FR-TIMEMACHINE-008 — Shared Memories

Participants may attach additional memories after publication, including:

- Personal reflections
- Additional photographs
- Scanned memorabilia
- Anniversary recollections

These appear as supplemental layers and never modify the original historical record.

FR-TIMEMACHINE-009 — Privacy-Aware Replay

Replay respects:

- Media permissions
- Participant privacy
- Kennel visibility
- Regional legal requirements

Restricted content is omitted gracefully without disrupting playback.

FR-TIMEMACHINE-010 — Educational Mode

Kennels may create curated replay experiences for:

- New member orientation
- Historic anniversary runs
- Memorial events
- Charity runs
- Interhash highlights

Educational Mode allows additional narration while preserving the underlying historical record.

Business Principles

- Replay should educate and entertain.
 - Authenticity outweighs visual effects.
 - History should remain accessible.
 - Every participant should recognize the day they experienced.
 - Future generations should understand the traditions they inherit.
-

Completion Criteria

This document is complete when:

- Guided Replay exists.
 - Timeline synchronization functions correctly.
 - Maps, stories, and media remain synchronized.
 - Privacy is respected.
 - Educational replay is supported.
-

Next Document

08H-04 — AI Summaries, Storytelling & Memory Preservation

Annex 08H — Run Capsule

Part 5 — AI Summaries, Storytelling & Memory Preservation

Document ID: HCP-PB-08H-04

Parent: Annex 08H — Run Capsule

Domain: AI Memory & Storytelling

Status: Draft

Version: 1.0

Purpose

This document defines how Artificial Intelligence assists in preserving, summarizing, organizing and discovering memories contained within a Run Capsule.

AI exists to enhance historical preservation—not replace human storytelling.

The Hash Scribe remains the official author of history.

Philosophy

People create memories.

Technology remembers them.

AI helps people rediscover them.

Vision

Years after a Run has finished, a Hasher should be able to open a Run Capsule and instantly understand:

- what happened
- who attended
- what made it memorable
- why the run became significant

without reading hundreds of comments or browsing thousands of photographs.

Guiding Principles

- AI never rewrites history.
 - AI never invents facts.
 - Human stories remain authoritative.
 - Transparency is mandatory.
 - Every generated insight links back to evidence.
-

Memory Layers

Each Run Capsule contains multiple layers of memory.

Layer 1

Raw Events

Examples:

- GPS
 - Photos
 - Videos
 - Comments
 - Beer Checks
 - Attendance
 - Story Cards
-

Layer 2

Structured Story

Created by:

- Trail Report
 - Story Timeline
 - Story Graph
-

Layer 3

AI Understanding

Generated insights include:

- Event summaries
 - Key moments
 - Themes
 - Milestones
 - Traditions
-

Layer 4

Historical Connections

AI discovers links between:

- Previous runs
 - Similar trails
 - Anniversary events
 - Repeat visitors
 - Shared traditions
-

FR-MEMORY-001

Automatic Run Summary

Priority:

Critical

After publication AI generates a concise summary including:

- Run overview
- Trail highlights
- Major events
- Attendance
- Awards
- Beer Checks
- Community moments

The summary always references the official Trail Report.

FR-MEMORY-002

One Minute Summary

Users may request:

| Tell me about Run #842 in one minute.

The generated summary contains only verified historical information.

FR-MEMORY-003

Long-form Narrative

AI may produce:

- Magazine-style articles
- Newsletter summaries
- Anniversary retrospectives
- Historical essays

These are clearly marked as AI-generated derivative works.

FR-MEMORY-004

Memory Highlights

The platform identifies notable moments such as:

- funniest comment
- highest attendance
- longest trail
- first Beer Check
- final Circle
- memorable awards

Highlights link directly to supporting evidence.

FR-MEMORY-005

Photo Story

AI may automatically arrange photographs into a visual story.

Each section includes:

- captions
 - locations
 - timestamps
 - related Story Cards
-

FR-MEMORY-006

Video Story

Future versions may assemble short highlight reels using:

- approved videos
- captions
- map animation
- music licensed by the kennel

Original media remains untouched.

FR-MEMORY-007

Anniversary Reflection

On future anniversaries AI may prepare:

"Five years ago today..."

including:

- original Trail Report
- photos
- participants
- route
- weather
- related memories

Publication requires kennel approval if shared publicly.

FR-MEMORY-008

Memory Search

Users may ask natural-language questions:

Show every run that crossed this river.

When was the first Red Dress Run?

Which runs did this Hare lay?

Find every run mentioning this pub.

Results always cite original records.

FR-MEMORY-009

Historical Themes

AI may identify recurring themes including:

- Halloween
- Christmas
- Charity
- Memorial
- Red Dress
- Full Moon
- Beach Run

Themes enrich historical discovery.

FR-MEMORY-010

Community Memory

Participants may contribute:

- reflections
- stories
- interviews
- anniversary comments

These become supplemental memories attached to the Run Capsule.

The official Trail Report remains unchanged.

Business Principles

AI preserves.

People remember.

Scribes tell stories.

History belongs to the community.

Completion Criteria

Complete when:

- AI summaries exist.
 - Memory search works.
 - Anniversary reflections are supported.
 - Community memories are preserved.
 - Historical integrity is maintained.
-

Next Document

08H-05 — Run Capsule Business Rules, Permissions & Acceptance Criteria

Annex 08H — Run Capsule

Part 6 — Business Rules, Permissions & Acceptance Criteria

Document ID: HCP-PB-08H-05

Parent: Annex 08H — Run Capsule

Domain: Governance & Historical Integrity

Status: Draft

Version: 1.0

Purpose

This document defines the governance model, permissions, business rules, preservation policies, audit requirements, and acceptance criteria for Run Capsules.

These rules ensure that every Run Capsule remains authentic, trustworthy, and historically reliable throughout its lifetime.

Vision

A Run Capsule should remain as trustworthy in fifty years as it was on the day it was published.

Every change must be transparent.

Every contribution must be attributable.

Every historical record must remain preserved.

Guiding Principles

- Preserve authenticity.
 - Never rewrite history.
 - Support community stewardship.
 - Protect contributor rights.
 - Ensure long-term accessibility.
-

Business Rule Categories

- Identity
 - Ownership
 - Lifecycle
 - Visibility
 - Contributions
 - Media
 - Historical Preservation
 - Audit
 - AI
 - Security
-

BR-CAPSULE-001 — Capsule Identity

Every Run Capsule shall have:

- Global unique identifier
- Associated Run Session
- Kennel
- Creation timestamp
- Publication timestamp
- Current state

The identifier is immutable.

BR-CAPSULE-002 — One Capsule Per Run

Each Run Session shall produce exactly one official Run Capsule.

Supplementary collections may exist but always reference the same official Capsule.

BR-CAPSULE-003 — Ownership

The Run Capsule belongs to the kennel that organized the run.

Individual contributors retain attribution for their own content.

Administrative stewardship may change without altering historical ownership.

BR-CAPSULE-004 — Historical Integrity

Core historical elements become immutable after publication, including:

- Run identity
- Trail Report
- Timeline
- Official participant roles
- Publication metadata

Corrections require formal revisions.

BR-CAPSULE-005 — Supplemental Contributions

Additional content may be attached after publication, including:

- Newly discovered media
- Anniversary reflections
- Oral histories
- Interviews
- Historical annotations

Supplemental content is clearly distinguished from the original record.

BR-CAPSULE-006 — Visibility

Kennels may configure visibility levels:

- Public
- Registered Hashers
- Kennel Members
- Invited Guests
- Officers Only

Visibility may differ for media, reports, and participant lists.

BR-CAPSULE-007 — Media Governance

Every media asset shall retain:

- Original uploader
- Upload timestamp
- Licensing information (if provided)
- Associated Story Cards
- Related locations

Media removal shall not invalidate the historical record.

Placeholder references remain when appropriate.

BR-CAPSULE-008 — AI Transparency

Every AI-generated artifact shall include:

- Generation timestamp
- AI model version (where applicable)
- Source references
- Human approval status

AI-generated summaries never replace official records.

BR-CAPSULE-009 — Audit Trail

The platform shall record:

- Capsule creation
- Lifecycle transitions
- Story publication
- Media additions
- Supplemental contributions
- Permission changes
- Administrative actions

Audit logs are immutable.

BR-CAPSULE-010 — Preservation

Run Capsules shall be designed for long-term preservation.

Future migrations must preserve:

- Structure
- Relationships
- Metadata
- References
- Media integrity

Technology may evolve.

History must not.

BR-CAPSULE-011 — Portability

Authorized users may export Run Capsules in preservation-friendly formats including:

- Markdown
- PDF
- JSON Archive
- HTML Package

Future archival standards may be added without affecting existing Capsules.

BR-CAPSULE-012 — Legacy Import

Historic runs imported from newsletters, spreadsheets, or paper archives shall be marked as:

Legacy Capsule

Imported Capsules include provenance metadata describing their source.

BR-CAPSULE-013 — Privacy

Participant privacy settings override Capsule defaults where applicable.

Sensitive information is excluded from public exports.

Privacy changes never silently modify the historical record.

BR-CAPSULE-014 — Community Stewardship

The platform supports community stewardship by allowing authorized officers to:

- Curate collections
- Add historical context
- Approve supplemental contributions
- Preserve legacy material

Editorial stewardship is distinct from historical authorship.

Permission Matrix

Action	Member	Contributor	Hare	Scribe	Officer	Admin
View Capsule	✓	✓	✓	✓	✓	✓
Upload Media	✓	✓	✓	✓	✓	✓
Add Reflection	✓	✓	✓	✓	✓	✓
Edit Official Story				✓	✓	✓
Publish Capsule				✓	✓	✓
Add Historical Annotation					✓	✓
Manage Visibility					✓	✓
Archive Capsule					✓	✓

Acceptance Criteria

Run Capsule is considered complete when:

- Automatic assembly is implemented.
 - Interactive exploration exists.
 - Hash Time Machine functions.
 - AI summaries are transparent.
 - Historical preservation is guaranteed.
 - Governance rules are enforceable.
 - Long-term archival requirements are met.
-

Non-Functional Expectations

The Run Capsule domain should support:

- Millions of Capsules.
 - Decades of historical growth.
 - Global search.
 - Offline viewing.
 - Incremental enrichment.
 - Efficient archival storage.
-

Future Enhancements

Potential future capabilities include:

- Immersive AR trail replays.
 - VR Interhash experiences.
 - Community-contributed oral history collections.
 - Museum exhibition mode.
 - Automated documentary generation.
 - Digital heritage preservation partnerships.
-

Business Principles

Every Run.

Every Trail.

Every Story.

One Capsule.

Forever.

Completion Criteria

Annex 08H is complete when:

- Lifecycle is defined.
 - Explorer is implemented.
 - Hash Time Machine is specified.
 - AI Memory layer is documented.
 - Governance rules exist.
 - Preservation strategy is complete.
-

Annex 08H Completion

The Run Capsule domain consists of:

- 08H-00 — Vision & Domain Overview
- 08H-01 — Run Capsule Assembly & Lifecycle
- 08H-02 — Run Capsule Explorer
- 08H-03 — Hash Time Machine
- 08H-04 — AI Memory & Storytelling
- 08H-05 — Business Rules, Permissions & Acceptance Criteria

The Run Capsule is the canonical historical artifact of the Hash Community Platform.

Annex 08I — Global Hash Atlas

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08I-00

Parent: Chapter 8 — Functional Requirements

Domain: Global Hash Atlas

Status: Draft

Version: 1.0

Purpose

The Global Hash Atlas is the geographic discovery platform of HCP.

It provides an interactive world map through which users can explore the worldwide Hash House Harriers community.

Rather than acting as a simple directory, the Atlas connects geography with history, people, trails, and stories.

Vision

Imagine opening HCP.

Instead of landing on a dashboard...

You see the world.

Thousands of Hash communities are quietly waiting to be explored.

Zoom into any location.

Discover kennels.

Open historic runs.

Replay legendary trails.

Meet people.

Read stories.

Travel through decades of Hash history.

Philosophy

Every trail happens somewhere.

Every memory belongs somewhere.

Every story has a location.

The Atlas is the geographic memory of the Hash.

Guiding Principles

- Geography should encourage discovery.
 - Maps should tell stories.
 - Exploration should be effortless.
 - Every location has history.
 - Local traditions deserve global visibility.
-

Core Objects

The Atlas organizes information geographically.

Primary objects include:

- Continents
 - Countries
 - States / Provinces
 - Cities
 - Kennels
 - Venues
 - Trails
 - Beer Checks
 - Run Capsules
 - Historic Locations
-

Relationships

The Atlas integrates with:

- Kennel Directory
 - Run Capsules
 - Trail Studio
 - Story Cards
 - Media Library
 - Passport
 - Hash Time Machine
 - Community Search
-

Geographic Hierarchy

World



Continent



Country



Region / State



City



Kennel



Run Capsule



Trail



Story Card



Media



People

Explorer Modes

Users may browse the Atlas using:

- World View
- Country Explorer
- City Explorer
- Kennel Explorer
- Trail Explorer
- History Explorer
- Heat Maps
- Timeline View

Each mode reveals a different perspective of the same underlying data.

What Can Be Explored?

The Atlas supports exploration of:

- Active Kennels
 - Historic Kennels
 - Upcoming Runs
 - Historic Runs
 - Beer Checks
 - Trail Networks
 - Memorial Sites
 - Landmarks
 - Interhash Locations
 - Charity Events
 - Red Dress Runs
 - Anniversary Runs
-

Example Journey

A user may:

1. Open the world map.
2. Zoom into Nigeria.
3. Select Aba.
4. Discover Eziukwu Hash House Harriers.
5. Browse Run #742.
6. Open the Run Capsule.
7. Press  ON ON.
8. Experience the run.

Everything is connected.

Success Criteria

The Atlas succeeds when users naturally discover new Hash communities through exploration.

Instead of searching for information, they wander into it.

Business Principles

The world is the homepage.

History is geographic.

Exploration creates community.

Every Hash leaves a footprint.

Completion Criteria

This overview is complete when:

- Geographic scope is defined.
 - Relationships with other domains are established.
 - Explorer philosophy is documented.
-

Next Document

08I-01 — World Explorer, Geographic Navigation & Discovery

Annex 08I — Global Hash Atlas

Part 2 — World Explorer, Geographic Navigation & Discovery

Document ID: HCP-PB-08I-01

Parent: Annex 08I — Global Hash Atlas

Domain: World Explorer

Status: Draft

Version: 1.0

Purpose

This document defines the World Explorer, the primary navigation experience of the Global Hash Atlas.

The World Explorer allows users to discover Hash communities through geography instead of traditional search alone.

Every location in the Atlas becomes an entry point into stories, trails, people, traditions, and history.

Vision

The World Explorer should feel like opening a beautifully illustrated atlas where every place tells a story.

Users are encouraged to wander, zoom, and discover.

Curiosity—not search—is the primary navigation model.

Philosophy

Maps should inspire exploration.

Exploration should create friendships.

Friendships should preserve the Hash.

Guiding Principles

- Discovery before destination.
 - Geography creates context.
 - History enriches exploration.
 - Every zoom level tells a different story.
 - Performance must remain smooth worldwide.
-

Geographic Levels

The Atlas supports seamless navigation through:

- World
- Continent
- Country
- State / Province
- City
- Kennel
- Venue
- Trail
- Run Capsule

Transitions should feel continuous.

FR-ATLAS-001 — World View

Priority

Critical

The World View displays:

- Active Kennels
- Historic Kennels
- Upcoming Runs
- Featured Events
- Interhash locations
- Regional activity heatmaps

Markers intelligently cluster as users zoom out.

FR-ATLAS-002 — Country Explorer

Selecting a country displays:

- Number of kennels
- Upcoming runs
- Historic runs
- Featured trails
- Anniversary events
- Visitor statistics
- Regional summaries

Country pages become living introductions to Hashing in that nation.

FR-ATLAS-003 — City Explorer

Each city presents:

- Active kennels
- Historic kennels
- Meeting venues
- Trail hotspots
- Beer Check locations
- Popular routes
- Recent Run Capsules

Cities become hubs of local discovery.

FR-ATLAS-004 — Kennel Explorer

Selecting a kennel opens:

- Kennel profile
- Officers
- Run schedule
- Historic archive
- Trail statistics
- Anniversary timeline
- Featured Run Capsules

The Atlas links seamlessly into the Kennel domain.

FR-ATLAS-005 — Trail Explorer

Users may explore trails by:

- Difficulty
- Distance
- Surface
- Terrain
- Elevation
- Theme
- Hare

Trails remain subject to visibility settings.

FR-ATLAS-006 — Discovery Filters

Users may filter results using:

- Country
- Kennel
- Date
- Run type
- Theme
- Distance
- Visitor-friendly
- Family-friendly (where applicable)
- Red Dress Runs
- Charity Runs
- Anniversary Runs

Filters update results instantly.

FR-ATLAS-007 — Search Everywhere

Global search supports:

- Kennels
- Cities
- Countries
- Hares
- Scribes
- Run numbers
- Trail names
- Beer Checks
- Landmarks

Search results integrate with Atlas navigation.

FR-ATLAS-008 — Geographic Breadcrumbs

Navigation displays the current geographic path.

Example:

World



Africa



Nigeria



Abia



Aba



Aba Hash House Harriers



Run #742

Users may jump back to any level.

FR-ATLAS-009 — Saved Places

Users may bookmark:

- Countries
- Cities
- Kennels
- Trails
- Run Capsules

Bookmarks synchronize across devices.

FR-ATLAS-010 — Offline Regions

Users may download regions for offline browsing.

Offline support includes:

- Maps
- Kennel information
- Run Capsules
- Basic media previews

Large media downloads remain optional.

Business Principles

- Exploration should feel effortless.
 - Search should complement—not replace—discovery.
 - Every zoom reveals new stories.
 - Geography should connect people.
 - The Atlas belongs to the global Hash community.
-

Completion Criteria

This document is complete when:

- Geographic navigation is fully defined.
 - Multi-level exploration exists.
 - Search integrates with maps.
 - Offline regions are supported.
 - Discovery remains intuitive.
-

Next Document

08I-02 — Interactive Layers, Heatmaps & Story Mapping

Annex 08I — Global Hash Atlas

Part 3 — Interactive Layers, Heatmaps & Story Mapping

Document ID: HCP-PB-08I-02

Parent: Annex 08I — Global Hash Atlas

Domain: Interactive Layers & Story Mapping

Status: Draft

Version: 1.0

Purpose

This document defines the interactive map layers, heatmaps, historical overlays, and story mapping capabilities of the Global Hash Atlas.

These layers transform the Atlas from a navigation tool into a visual representation of the global Hash movement.

Vision

The map should answer questions users never thought to ask.

Where are the oldest kennels?

Which mountain has hosted the most trails?

Which cities have the most visitors?

Where did last weekend's Hashes take place?

The answers should appear visually.

Philosophy

Maps communicate patterns faster than lists.

Stories become more meaningful when viewed geographically.

Every layer reveals a different perspective of the Hash community.

Guiding Principles

- Layers never overwhelm the map.
 - Every overlay can be toggled independently.
 - Smooth performance on mobile.
 - Visual clarity over density.
 - Respect privacy settings.
-

Layer Categories

The Atlas supports multiple categories of layers:

- Community
 - Trails
 - Events
 - History
 - Environment
 - Personal
 - Analytics
 - AI Insights
-

FR-ATLAS-011 — Kennel Layer

Displays:

- Active Kennels
- Historic Kennels
- Dormant Kennels

Each marker reflects current operational status.

FR-ATLAS-012 — Trail Layer

Displays:

- Published trails
- Historic trails
- Upcoming public trails
- Trail difficulty
- Trail type
- Trail frequency

Trails may be filtered independently.

FR-ATLAS-013 — Run Capsule Layer

Displays every published Run Capsule geographically.

Markers expand into:

- Hero image
- Run number
- Date
- Kennel
- Quick summary

Selecting a marker opens the Run Capsule.

FR-ATLAS-014 — Beer Check Layer

Displays:

- Historic Beer Checks
- Scenic refreshment points
- Famous Beer Stops
- Community favorites

Users may browse Beer Checks independently of runs.

FR-ATLAS-015 — Heatmaps

Supported heatmaps include:

- Hash activity
- Attendance
- Trail density
- Visitor movement
- Photo density
- Story density
- Passport stamps

Heatmaps update dynamically.

FR-ATLAS-016 — Historical Timeline Layer

A timeline slider allows users to travel through history.

Examples:

1940



1960



1980



2000



Today

The map updates to show the state of the Hash community during the selected period.

FR-ATLAS-017 — Event Layer

Displays:

- Upcoming Runs
- Interhash
- Nash Hash
- Anniversary events
- Charity runs
- Red Dress Runs

Users can subscribe to selected event types.

FR-ATLAS-018 — Environmental Layers

Optional overlays include:

- Terrain
- Elevation
- Satellite imagery (where available)
- Weather
- Sunrise/Sunset
- Rivers
- Protected areas

Environmental context enhances trail understanding.

FR-ATLAS-019 — Story Layer

Story Cards appear directly on the map.

Markers reveal:

- Photos
- Quotes
- Videos
- Audio
- Historical notes

Users may browse the map as a collection of stories.

FR-ATLAS-020 — AI Discovery Layer

AI may identify:

- Emerging Hash regions
- Frequently visited trails
- Historic milestones
- Significant anniversaries
- Similar trail networks
- Hidden historical connections

AI insights remain clearly identified.

Business Principles

Every layer should answer a meaningful question.

Maps should invite curiosity.

History should become visible.

Exploration should remain joyful.

Completion Criteria

Complete when:

- Layer system is modular.
 - Heatmaps function correctly.
 - Timeline integrates with geography.
 - Story mapping is implemented.
 - AI insights remain transparent.
-

Next Document

08I-03 — Travel, Passport Integration & Global Discovery

Annex 08I — Global Hash Atlas

Part 4 — Travel, Passport Integration & Global Discovery

Document ID: HCP-PB-08I-03

Parent: Annex 08I — Global Hash Atlas

Domain: Travel & Passport

Status: Draft

Version: 1.0

Purpose

This document defines how the Global Hash Atlas integrates with the Passport domain to create a rich travel experience for Hashers.

The Atlas should encourage exploration while the Passport records personal journeys across the global Hash community.

Vision

Every journey leaves a trail.

Every trail earns a memory.

Every memory deserves a place on the map.

The Atlas transforms travel into a lifelong visual story.

Philosophy

Hashing has always encouraged travel.

The Atlas should inspire users to discover new kennels, new traditions, and new friendships.

Guiding Principles

- Travel should be celebrated.
 - Memories should be visual.
 - Discovery should remain organic.
 - Privacy always comes first.
 - Users own their travel story.
-

FR-ATLAS-021 — Passport Mode

Priority

Critical

Users may switch the Atlas into Passport Mode.

Passport Mode overlays personal travel information onto the world map.

Visited locations are visually distinguished from unexplored locations.

FR-ATLAS-022 — Personal Travel Map

Each user has a Living Travel Map showing:

- Countries hashed
- Cities hashed
- Kennels visited
- Runs completed
- Passport stamps earned
- Favorite trails
- Wishlist destinations

The map updates automatically after each verified Run Session.

FR-ATLAS-023 — Destination Explorer

Selecting a city or kennel displays travel-focused information:

- Upcoming runs
 - Visitor friendliness
 - Local traditions
 - Meeting location
 - Language(s)
 - Climate
 - Typical trail distance
 - Local etiquette notes
 - Contact officers (subject to privacy)
-

FR-ATLAS-024 — Travel Wishlist

Users may bookmark destinations they hope to visit.

Wishlist entries may include:

- Personal notes
- Target year
- Friends attending
- Planned trips

The system may notify users about public events in wishlist locations.

FR-ATLAS-025 — Suggested Adventures

The Atlas recommends destinations based on:

- Previous travel
- Passport progress
- Upcoming anniversaries
- Nearby public runs
- Similar trail preferences

Recommendations remain transparent and user-controlled.

FR-ATLAS-026 — Journey Timeline

Users may replay their personal Hash journey chronologically.

The timeline includes:

- First Hash
- First visitor run
- First international run
- Passport milestones
- Major events
- Interhash participation

Each milestone links back to the relevant Run Capsule.

FR-ATLAS-027 — Country Collections

Each country automatically builds a personal collection containing:

- All Runs attended
- Passport stamps
- Photos
- Favorite memories
- Friends met
- Historic notes

Collections become travel journals.

FR-ATLAS-028 — Shared Adventures

Users may optionally share selected journeys.

Examples:

- My European Hash Tour
- Five Countries in Thirty Days
- Red Dress World Tour
- Across West Africa

Shared journeys link together multiple Run Capsules into one travel story.

FR-ATLAS-029 — Global Statistics

Users may view personal statistics including:

- Countries visited
- Kennels visited
- Longest journey
- Total trail distance
- Highest elevation
- Continents explored
- Visitor runs completed

Statistics are calculated from verified participation.

FR-ATLAS-030 — Privacy Controls

Users control visibility of:

- Travel map
- Passport stamps
- Country history
- Journey statistics
- Shared adventures

Private journeys remain excluded from public discovery.

Business Principles

Travel builds friendships.

Friendships strengthen the Hash.

The Atlas should inspire—not pressure—exploration.

Every journey is unique.

Completion Criteria

Complete when:

- Passport Mode exists.
 - Living Travel Maps are supported.
 - Wishlists function.
 - Journey replay is implemented.
 - Privacy controls are comprehensive.
-

Next Document

08I-04 — Analytics, AI Discovery & Cultural Insights

Annex 08I — Global Hash Atlas

Part 5 — Analytics, AI Discovery & Cultural Insights

Document ID: HCP-PB-08I-04

Parent: Annex 08I — Global Hash Atlas

Domain: Analytics & Cultural Intelligence

Status: Draft

Version: 1.0

Purpose

This document defines the analytics, AI-assisted discovery, and cultural insight capabilities of the Global Hash Atlas.

The Atlas should reveal meaningful patterns that help Hashers discover communities, understand traditions, and preserve the evolution of the worldwide Hash movement.

The purpose is understanding—not surveillance.

Philosophy

Data becomes valuable when it helps tell the community's story.

The Atlas should answer questions that would otherwise take years of research.

AI should help reveal patterns while remaining transparent, explainable, and respectful of privacy.

Guiding Principles

- Community before metrics.
 - Transparency before automation.
 - Insights before engagement.
 - Privacy by design.
 - Every insight should be traceable to historical records.
-

Analytics Categories

The Atlas supports insights across:

- Community Growth
 - Travel
 - Trails
 - Events
 - Culture
 - History
 - Participation
 - Preservation
-

FR-ATLAS-031 — Community Growth Dashboard

Priority

High

The Atlas visualizes the growth of the Hash community over time.

Examples include:

- New kennels founded by year
- Active vs dormant kennels
- Geographic expansion
- Growth by continent
- Growth by country
- Anniversary milestones

Users may filter by time period.

FR-ATLAS-032 — Cultural Insights

AI identifies recurring traditions such as:

- Annual Red Dress Runs
- Full Moon Runs
- Charity events
- Holiday traditions
- Memorial Runs
- Regional customs

Insights link back to the Run Capsules from which they were derived.

FR-ATLAS-033 — Trail Intelligence

The Atlas provides aggregate trail insights including:

- Average trail length by region
- Common terrain types
- Seasonal trends
- Elevation profiles
- Typical completion times
- Popular trail formats

Individual private trails remain protected.

FR-ATLAS-034 — Visitor Movement

Using anonymized, aggregated data (with user consent), the Atlas may visualize:

- International visitor flows
- Regional exchanges
- Popular travel corridors
- Interhash participation trends

No individual's movements are exposed without explicit permission.

FR-ATLAS-035 — Historical Milestones

The Atlas automatically highlights significant moments, such as:

- Founding anniversaries
- Landmark runs
- First recorded Hash in a country
- Longest continuously active kennel
- Historic attendance records

Milestones are linked to supporting historical evidence.

FR-ATLAS-036 — AI Discovery

AI assists users in finding interesting content by answering questions like:

- Which coastal kennels have the most scenic trails?
- Which cities have the oldest active Hash traditions?
- Which kennels regularly host charity runs?
- Show me jungle trails in Southeast Asia.

Every answer includes references to underlying Run Capsules or kennel records.

FR-ATLAS-037 — Story Constellations

The Atlas may visualize relationships between:

- Shared Hares
- Visiting Hashers
- Twin kennels
- Sister events
- Recurring traditions

These relationships form an interactive graph of community connections.

FR-ATLAS-038 — Historical Trends

Users may explore long-term trends, including:

- Attendance over decades
- Geographic expansion
- Event frequency
- Trail diversity
- Community participation
- Preservation progress

Trend charts are available at global, regional, and kennel levels.

FR-ATLAS-039 — Preservation Index

Each kennel receives a Preservation Index based on:

- Number of preserved Run Capsules
- Trail Reports archived
- Media completeness
- Historical metadata quality
- Timeline coverage

The index is informational and encourages preservation rather than competition.

FR-ATLAS-040 — Cultural Archive Explorer

Users may browse collections such as:

- Oldest surviving Trail Reports
- Historic songs
- Legendary Beer Checks
- Memorial collections
- Founding stories
- Oral histories

These collections support long-term cultural preservation.

Business Principles

- Preserve culture, not just content.
 - Encourage stewardship rather than competition.
 - Make AI explain its work.
 - Celebrate diversity across kennels.
 - Respect the uniqueness of local traditions.
-

Completion Criteria

This document is complete when:

- Community analytics are defined.
 - AI-assisted discovery is transparent.
 - Historical trends are supported.
 - Cultural preservation tools exist.
 - Privacy safeguards are documented.
-

Next Document

08I-05 — Business Rules, Permissions & Acceptance Criteria

Annex 08I — Global Hash Atlas

Part 6 — Business Rules, Permissions & Acceptance Criteria

Document ID: HCP-PB-08I-05

Parent: Annex 08I — Global Hash Atlas

Domain: Governance & Geographic Integrity

Status: Draft

Version: 1.0

Purpose

This document defines the governance model, permissions, business rules, audit requirements, and acceptance criteria for the Global Hash Atlas.

The Atlas represents the geographic memory of the worldwide Hash community.

Its accuracy, neutrality, and historical integrity must be preserved for generations.

Vision

The Atlas should remain the most trusted geographic representation of the global Hash movement.

Every location should be verifiable.

Every historical record should remain attributable.

Every geographic relationship should preserve its provenance.

Guiding Principles

- Geography is historical evidence.
 - Communities own their identity.
 - Discovery respects privacy.
 - AI assists but never governs.
 - Preservation outweighs convenience.
-

Business Rule Categories

- Geographic Identity
 - Governance
 - Discovery
 - Privacy
 - Historical Preservation
 - AI
 - Analytics
 - Audit
 - Security
 - Portability
-

BR-ATLAS-001 — Geographic Identity

Every mapped entity shall have a permanent geographic identity.

Supported entities include:

- Continents
- Countries
- Regions
- Cities
- Kennels
- Venues
- Trails
- Beer Checks
- Run Capsules
- Landmarks

Identifiers remain immutable even if names change.

BR-ATLAS-002 — Community Stewardship

Each kennel is responsible for maintaining its own geographic information.

Examples include:

- Meeting location
- Regular venue
- Public contact details
- Run schedule
- Historic locations

Changes are recorded in the audit log.

BR-ATLAS-003 — Historical Locations

Historic locations shall never be silently overwritten.

If a kennel relocates:

- Previous locations remain archived.
 - Active location is clearly indicated.
 - Historical Run Capsules continue referencing the original locations.
-

BR-ATLAS-004 — Geographic Accuracy

All mapped coordinates should be:

- Verified
- Timestamped
- Source-attributed
- Auditable

Where exact locations are unknown, approximate markers may be used with appropriate labeling.

BR-ATLAS-005 — Visibility

Visibility rules apply independently to:

- Kennels
- Trails
- Run Capsules
- Beer Checks
- Participant-generated content

Private locations shall never appear in public discovery.

BR-ATLAS-006 — AI Transparency

Every AI-generated recommendation or cultural insight shall:

- State that it is AI-generated.
 - Link to supporting evidence.
 - Respect visibility settings.
 - Avoid speculative conclusions.
-

BR-ATLAS-007 — Analytics Ethics

Community analytics are intended for:

- Historical understanding
- Cultural preservation
- Community planning

Analytics shall not be used for targeted advertising or ranking communities against one another.

BR-ATLAS-008 — Preservation

The Atlas shall preserve:

- Historic kennel locations
- Retired trails
- Legacy Run Capsules
- Anniversary events
- Historic maps

Historical information is additive.

It is never destroyed without explicit archival policy.

BR-ATLAS-009 — Audit Trail

The Atlas records:

- Geographic edits
- Kennel updates
- Trail publication
- Layer changes
- Administrative actions
- AI-generated insight creation
- Historical imports

Audit records are immutable.

BR-ATLAS-010 — Internationalization

The Atlas supports:

- Multiple languages
- Local place names
- Native scripts
- Local date formats
- Regional units of measurement

Users may select their preferred localization without altering the underlying historical record.

BR-ATLAS-011 — Accessibility

The Atlas shall support:

- Screen readers
- Keyboard navigation
- Color-blind-friendly palettes
- High-contrast mode
- Reduced-motion mode

Accessibility applies across all map interactions.

BR-ATLAS-012 — Data Portability

Authorized users may export:

- Geographic datasets
- Public trail metadata
- Run Capsule references
- Analytics summaries
- Historical indexes

Sensitive or private information is excluded according to permissions.

BR-ATLAS-013 — Future Geographic Expansion

The Atlas architecture shall support future additions including:

- Hiking routes
- National parks
- Heritage trails
- Regional event circuits
- Partner organizations
- Community landmarks

Expansion should not require redesigning the geographic model.

Permission Matrix

Action	Visitor	Member	Officer	Kennel Admin	Platform Admin
View Public Atlas	✓	✓	✓	✓	✓
Search Locations	✓	✓	✓	✓	✓
Save Places		✓	✓	✓	✓
Suggest Location Edit		✓	✓	✓	✓
Approve Kennel Location Changes			✓	✓	✓
Manage Kennel Geography				✓	✓
Import Historical Maps				✓	✓
Global Geographic Administration					✓

Acceptance Criteria

The Global Hash Atlas is complete when:

- Geographic hierarchy is implemented.
 - Interactive layers are supported.
 - Passport integration functions.
 - AI discovery is transparent.
 - Historical preservation is guaranteed.
 - Privacy is enforced.
 - Governance is documented.
-

Non-Functional Expectations

The Atlas should support:

- Millions of geographic objects.
 - Tens of millions of Run Capsules.
 - Global search in milliseconds.
 - Efficient map clustering.
 - Offline regional downloads.
 - Continuous historical growth.
-

Future Enhancements

Potential future capabilities include:

- Augmented reality trail overlays.
 - Indoor venue mapping.
 - Historical aerial imagery.
 - Live Interhash event tracking.
 - Smart tourism integrations.
 - Cultural heritage partnerships.
 - Educational geography experiences.
-

Business Principles

Every Place.

Every Trail.

Every Story.

One World.

Completion Criteria

Annex 08I is complete when:

- Geographic architecture is defined.
 - Explorer modes are documented.
 - Interactive layers exist.
 - Passport integration is complete.
 - Analytics are ethical and transparent.
 - Governance preserves historical integrity.
-

Annex 08I Completion

The Global Hash Atlas domain consists of:

- 08I-00 — Vision & Domain Overview
- 08I-01 — World Explorer, Geographic Navigation & Discovery
- 08I-02 — Interactive Layers, Heatmaps & Story Mapping
- 08I-03 — Travel, Passport Integration & Global Discovery
- 08I-04 — Analytics, AI Discovery & Cultural Insights
- 08I-05 — Business Rules, Permissions & Acceptance Criteria

The Global Hash Atlas is the geographic brain of the Hash Community Platform, connecting every kennel, trail, Run Capsule, and journey into a single, explorable world.

Annex 08J — Community Graph

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08J-00

Parent: Chapter 8 — Functional Requirements

Domain: Community Graph

Status: Draft

Version: 1.0

Purpose

The Community Graph models the relationships that naturally emerge through participation in the Hash.

Unlike traditional social networks, relationships are earned through shared experiences rather than created through follows or friend requests.

The Community Graph becomes the social memory of HCP.

Vision

The Hash is built on people.

The Community Graph should help preserve those human connections across decades, continents and generations.

Instead of asking:

"Who follows whom?"

It asks:

"Who has shared adventures together?"

Philosophy

Shared experiences create stronger communities than digital interactions.

Relationships should emerge from participation.

Technology should reflect real-world friendships rather than replace them.

Guiding Principles

- Community before popularity.
 - Experiences before engagement.
 - Privacy before visibility.
 - Authenticity before algorithms.
 - Connections through participation.
-

What is the Community Graph?

The Community Graph is a network of people, kennels, events and shared experiences.

Relationships are formed by real-world participation, such as:

- Running together
- Laying trails together
- Serving as officers
- Visiting kennels
- Attending Interhash
- Writing Trail Reports
- Contributing media
- Organizing events

The graph continuously evolves as members participate in the community.

Core Nodes

The graph contains interconnected nodes representing:

- Hashers
 - Kennels
 - Run Sessions
 - Run Capsules
 - Trails
 - Events
 - Countries
 - Cities
 - Passport Stamps
 - Story Cards
-

Relationship Types

Examples include:

- Hashed With
- Hare For
- Scribed
- Hosted
- Visited
- Mentored
- Served Together
- Organized
- Traveled Together
- Contributed To
- Attended

Every relationship has supporting evidence.

Why It Exists

The Community Graph powers:

- Friend discovery
 - Historical research
 - Visitor introductions
 - Travel recommendations
 - Shared memories
 - AI-assisted storytelling
 - Cultural preservation
-

Example Journey

A Hasher opens their profile.

Instead of seeing:

Followers: 328

They see:

- Hashed with 1,847 people
- Visited 39 kennels
- Shared 212 Run Capsules
- Mentored 8 new Hashers
- Laid 24 trails
- Served as RA for 5 years

The profile tells a life story rather than a popularity story.

Success Criteria

The Community Graph succeeds when it reflects the real relationships created through Hashing.

It should strengthen the community without encouraging vanity metrics.

Business Principles

People create the Hash.

The Graph preserves those connections.

Relationships matter more than numbers.

Completion Criteria

This overview is complete when:

- Purpose is defined.
 - Relationship philosophy is documented.
 - Core entities are identified.
-

Next Document

08J-01 — Relationship Model, Shared Experiences & Community Connections

Annex 08J — Community Graph

Part 2 — Relationship Model, Shared Experiences & Community Connections

Document ID: HCP-PB-08J-01

Parent: Annex 08J — Community Graph

Domain: Relationship Model

Status: Draft

Version: 1.0

Purpose

This document defines how meaningful relationships are formed, maintained, and visualized within the Hash Community Platform.

Relationships are derived primarily from verified participation rather than explicit friend requests.

The Community Graph reflects real-world interaction while respecting privacy and user control.

Philosophy

Hash friendships are built one trail at a time.

Every shared experience strengthens the graph.

The graph is not a social network.

It is a historical record of community participation.

Guiding Principles

- Relationships emerge naturally.
 - Participation creates trust.
 - Every relationship has evidence.
 - Privacy is always respected.
 - Human connections are more important than metrics.
-

Relationship Formation

Relationships may be established through:

- Participating in the same Run Session.
- Completing the same trail.
- Serving as officers together.
- Laying trails together.
- Writing Trail Reports together.
- Attending Interhash events.
- Visiting the same kennel.
- Hosting visiting Hashers.
- Collaborating on community projects.
- Mentorship relationships.

Every relationship references one or more supporting events.

Relationship Strength

Relationship strength is not shown publicly as a score.

Internally, HCP may calculate relationship confidence using factors such as:

- Number of shared runs.
- Number of shared kennels.
- Shared officer service.
- Shared travel.
- Shared Run Capsules.
- Length of acquaintance.

This internal model improves recommendations but is never exposed as a popularity metric.

FR-COMMUNITY-001 — Shared Experiences

Priority

Critical

Each relationship includes a timeline of shared experiences.

Examples:

- First run together.
- Most recent run.
- Shared anniversary runs.
- Shared Red Dress Runs.
- Shared Interhash events.
- Collaborative trail laying.

Every event links back to the relevant Run Capsule.

FR-COMMUNITY-002 — Community Timeline

Users may explore the history of a relationship.

Timeline entries include:

- Runs attended together.
- Officer roles served.
- Trail collaborations.
- Passport milestones.
- Travel history.

The timeline becomes a shared memory rather than a message history.

FR-COMMUNITY-003 — Mentorship

Experienced Hashers may optionally become mentors.

Mentorship records include:

- Start date.
- Kennel.
- Shared runs.
- Learning milestones.

Mentorship relationships remain optional and privacy-controlled.

FR-COMMUNITY-004 — Visitor Connections

When visiting another kennel, users may optionally record:

- Host Hashers.
- Visitor introductions.
- Local guides.
- Twin kennel exchanges.

These relationships enrich both users' Community Graphs.

FR-COMMUNITY-005 — Collaboration

Relationships may include collaborative achievements such as:

- Co-Haring.
- Co-Scribing.
- Event organization.
- Charity initiatives.
- Anniversary planning.

Collaborations are linked to the relevant Run Capsules or events.

FR-COMMUNITY-006 — Twin Kennel Relationships

The graph supports official and informal relationships between kennels.

Examples:

- Twin kennels.
- Sister kennels.
- Frequent exchange partners.
- Historic collaborations.

These links become part of the Atlas and community history.

FR-COMMUNITY-007 — Community Introductions

With user consent, HCP may suggest introductions based on:

- Mutual shared experiences.
- Planned attendance at the same event.
- Common travel destinations.
- Shared mentors.
- Twin kennel relationships.

Suggestions are informational only.

FR-COMMUNITY-008 — Relationship Explorer

Users may visualize their Community Graph through interactive views:

- Personal network.
- Kennel network.
- Travel network.
- Officer network.
- Mentor network.
- Event network.

Visualization focuses on understanding rather than ranking.

FR-COMMUNITY-009 — Relationship Privacy

Users control visibility of:

- Shared runs.
- Shared travel.
- Mentorships.
- Visitor history.
- Collaboration history.

Private relationships are excluded from public discovery.

FR-COMMUNITY-010 — Community Memory

Every relationship preserves historical context.

Even if a member becomes inactive, the shared history remains part of the permanent record, subject to privacy and applicable data protection requirements.

Business Principles

Relationships should reflect reality.

Shared experiences matter more than online interactions.

Community grows through participation.

Completion Criteria

Complete when:

- Relationship formation is defined.
 - Shared timelines exist.
 - Mentorship is supported.
 - Visitor relationships are documented.
 - Privacy controls are comprehensive.
-

Next Document

08J-02 — Reputation, Contributions & Community Recognition

Annex 08J — Community Graph

Part 3 — Reputation, Contributions & Community Recognition

Document ID: HCP-PB-08J-02

Parent: Annex 08J — Community Graph

Domain: Community Recognition

Status: Draft

Version: 1.0

Purpose

This document defines how the Hash Community Platform recognizes meaningful contributions to the community.

Recognition exists to celebrate participation, stewardship, mentorship, and service—not popularity.

The platform intentionally avoids follower counts, engagement rankings, and influencer mechanics.

Vision

Every Hasher contributes differently.

Some lay unforgettable trails.

Some preserve history.

Some mentor newcomers.

Some organize events.

Some travel the world connecting communities.

The platform should celebrate all of these equally.

Philosophy

Recognition should encourage contribution.

Contribution strengthens the community.

Recognition should never become competition.

Guiding Principles

- Contribution over popularity.
 - Stewardship over status.
 - Diversity of contribution.
 - Transparency in recognition.
 - Community-first design.
-

Recognition Categories

HCP recognizes contributions across multiple dimensions:

- Trail Building
- Storytelling
- Mentorship
- Hospitality
- Leadership
- Exploration
- Preservation
- Photography
- Event Organization
- Community Service

No single category is considered more valuable than another.

FR-COMMUNITY-011 — Contribution Profile

Each member profile includes a contribution summary.

Examples:

- Trails Laid
- Trail Reports Written
- Run Capsules Contributed
- Photos Shared
- Visitors Hosted
- Mentorships
- Officer Terms
- Community Projects
- Events Organized

These metrics are descriptive, not competitive.

FR-COMMUNITY-012 — Community Roles

Members may earn long-term recognition roles such as:

-  Trail Builder
-  Storyteller
-  Chronicler
-  Mentor
-  Explorer
-  Hospitality Ambassador
-  Organizer
-  Community Builder
-  Heritage Keeper

Roles reflect sustained contribution rather than isolated achievements.

FR-COMMUNITY-013 — Recognition Timeline

Members may browse a timeline of meaningful milestones.

Examples:

- First Trail Laid
- 100th Run
- First Interhash
- First Mentorship
- 10 Years of Service
- 500th Trail Report
- Heritage Contribution

Every milestone links to supporting historical records.

FR-COMMUNITY-014 — Heritage Recognition

Exceptional long-term contributions may be acknowledged through Heritage Recognition.

Examples include:

- Founding members.
- Long-serving officers.
- Historic Trail Blazers.
- Community Historians.
- Distinguished Mentors.

Recognition is granted through transparent governance and is intended to preserve history rather than create exclusivity.

FR-COMMUNITY-015 — Community Appreciation

Members may express appreciation for specific contributions.

Examples:

- "Thanks for laying today's trail."
- "Great Trail Report."
- "Wonderful hospitality."

Appreciation is attached to the contribution itself rather than increasing a user's popularity score.

FR-COMMUNITY-016 — Contribution Collections

Members automatically build curated collections such as:

- My Trails
- My Stories
- My Photos
- My Events
- My Mentorships
- My Hosted Visitors
- My Heritage Contributions

Collections become part of the member's long-term legacy.

FR-COMMUNITY-017 — Officer Service History

The platform maintains a verified history of official service.

Examples:

- Grand Master
- Religious Adviser
- Hash Cash
- On Sec
- Joint Master
- Trail Master

Each role includes:

- Kennel
 - Start date
 - End date
 - Related events
-

FR-COMMUNITY-018 — Community Contributions Dashboard

Users may privately review summaries of their contributions over time.

Examples:

- Years active
- Communities served
- Visitors welcomed
- Events supported
- Historical content preserved

This dashboard is reflective, not comparative.

FR-COMMUNITY-019 — AI Legacy Summary

With user approval, AI may generate a narrative summary of a member's contributions.

Example:

"Over 22 years, Sarah helped shape three kennels, mentored 27 new Hashers, laid 94 trails, documented hundreds of stories, and welcomed visitors from five continents."

Every statement links back to verifiable records.

FR-COMMUNITY-020 — Recognition Governance

Recognition programs are governed by published criteria.

The platform records:

- Recognition type
- Date awarded
- Awarding authority
- Supporting evidence

Recognition may not be granted solely by automated systems.

Business Principles

Celebrate service.

Encourage stewardship.

Honor history.

Recognize people for what they give back.

Completion Criteria

Complete when:

- Recognition categories are defined.
 - Contribution profiles exist.
 - Heritage recognition is documented.
 - AI summaries are transparent.
 - Governance ensures fairness.
-

Next Document

08J-03 — Discovery, Collaboration & Community Intelligence

Annex 08J — Community Graph

Part 4 — Discovery, Collaboration & Community Intelligence

Document ID: HCP-PB-08J-03

Parent: Annex 08J — Community Graph

Domain: Discovery & Collaboration

Status: Draft

Version: 1.0

Purpose

This document defines how the Community Graph enables meaningful discovery, collaboration, and introductions across the global Hash community.

Recommendations are based on shared experiences, participation, and verified community relationships—not engagement metrics or popularity.

Vision

The Community Graph should help Hashers discover people they are likely to enjoy meeting, working with, or learning from.

Every recommendation should strengthen the community.

Philosophy

Communities grow through introductions.

Technology should facilitate authentic encounters rather than replace them.

Discovery should always be explainable.

Guiding Principles

- Explain every recommendation.
 - Prioritize real-world context.
 - Never recommend based on popularity alone.
 - Respect privacy and consent.
 - Encourage cross-kennel friendships.
-

Discovery Categories

The platform supports:

- People Discovery
 - Mentor Discovery
 - Visitor Discovery
 - Collaboration Discovery
 - Event Discovery
 - Twin Kennel Discovery
 - Community Projects
 - Reunion Discovery
-

FR-COMMUNITY-021 — People You May Know

Recommendations may be based on:

- Shared Run Sessions
- Mutual collaborators
- Shared kennels
- Similar travel history
- Officer service
- Community projects
- Shared mentors

Every recommendation includes an explanation.

Example:

"You both attended Interhash 2032 and have hashed together in Cape Town and Nairobi."

FR-COMMUNITY-022 — Mentor Discovery

New Hashers may browse mentors by:

- Kennel
- Experience
- Languages spoken
- Trail expertise
- Leadership roles
- Availability

Mentorship participation is entirely optional.

FR-COMMUNITY-023 — Collaboration Opportunities

The platform may suggest collaborators for:

- Trail laying
- Event organization
- Charity initiatives
- Heritage preservation
- Photography
- Trail Reports
- Oral history interviews

Suggestions are based on complementary skills and previous collaboration.

FR-COMMUNITY-024 — Visitor Connections

Traveling Hashers may discover:

- Local hosts
- Visitor-friendly kennels
- Nearby public runs
- Language-compatible members
- Twin kennel contacts

All introductions require user consent.

FR-COMMUNITY-025 — Reunion Discovery

The platform highlights opportunities to reconnect.

Examples:

- "You last hashed with Alex eight years ago."
- "Five members from your first Hash are attending this anniversary run."
- "Your former RA is visiting your city next month."

These prompts celebrate community continuity.

FR-COMMUNITY-026 — Community Projects

Members may discover and join projects including:

- Archive digitization
- Anniversary planning
- Charity events
- Trail restoration
- Oral history collections
- Historical research

Projects become collaborative spaces linked to the Community Graph.

FR-COMMUNITY-027 — Twin Kennel Discovery

AI may identify kennels with strong historical or cultural similarities based on:

- Shared visitor history
- Similar traditions
- Comparable trail styles
- Collaborative events

Suggested partnerships require approval by both kennels.

FR-COMMUNITY-028 — Community Intelligence

AI may identify opportunities such as:

- Under-documented history
- Emerging visitor patterns
- Potential mentorship gaps
- Preservation priorities

Insights are advisory and always explainable.

FR-COMMUNITY-029 — Explainable Recommendations

Every recommendation includes:

- Supporting evidence
- Data sources
- User-controlled preferences
- Ability to dismiss or hide future suggestions

Recommendations remain transparent.

FR-COMMUNITY-030 — Consent & Privacy

Users control whether they may be:

- Suggested to others
- Listed as mentors
- Contacted by visitors
- Included in collaboration recommendations

Consent may be updated at any time.

Business Principles

Discovery should create friendships.

Collaboration should preserve culture.

Recommendations should always respect autonomy.

Completion Criteria

Complete when:

- Discovery features are defined.
 - Collaboration workflows exist.
 - AI recommendations are explainable.
 - Consent controls are comprehensive.
 - Community projects integrate with the graph.
-

Next Document

08J-04 — Community Analytics, Legacy & Historical Networks

Annex 08J — Community Graph

Part 5 — Community Analytics, Legacy & Historical Networks

Document ID: HCP-PB-08J-04

Parent: Annex 08J — Community Graph

Domain: Community Analytics & Legacy

Status: Draft

Version: 1.0

Purpose

This document defines how the Community Graph preserves long-term community history while providing ethical analytics and AI-assisted insights.

The objective is to help the Hash community understand its evolution, celebrate its contributors, and preserve relationships across generations.

Vision

Every Hasher leaves a mark.

Every friendship strengthens the community.

Every generation should be able to understand the one that came before it.

The Community Graph is the living historical network of the Hash.

Philosophy

History is built through people.

Communities become stronger when they remember their contributors.

Analytics should illuminate patterns, not judge individuals.

Guiding Principles

- Preserve relationships.
 - Celebrate contribution.
 - Respect privacy.
 - Explain every AI insight.
 - Favor stewardship over competition.
-

Analytics Categories

The Community Graph supports:

- Community Growth
 - Mentorship
 - Collaboration
 - Leadership
 - Visitor Exchange
 - Heritage
 - Legacy
 - Preservation
-

FR-COMMUNITY-031 — Community Growth

Visualize:

- Membership growth
- New member retention
- Mentorship participation
- Officer succession
- Visitor exchanges
- Cross-kennel collaboration

Analytics are available at:

- Global
 - Country
 - Kennel
 - Event
-

FR-COMMUNITY-032 — Mentorship Network

Display anonymized insights such as:

- Number of active mentors
- Average mentorship duration
- Mentor-to-member ratios
- Mentorship completion trends

Individual mentorship details remain subject to privacy controls.

FR-COMMUNITY-033 — Leadership History

Maintain a permanent record of leadership across kennels.

Examples:

- Grand Masters
- Religious Advisers
- Hash Cash
- Trail Masters
- On Sec

Each role includes verified service periods and links to related events.

FR-COMMUNITY-034 — Collaboration Network

Visualize long-term collaboration patterns, including:

- Co-Hares
- Co-Scribes
- Event organizers
- Heritage projects
- Charity initiatives

Users can explore how collaborations evolved over time.

FR-COMMUNITY-035 — Legacy Profiles

Members may designate trusted contacts to manage their profile if they become permanently inactive or pass away.

Legacy Profiles preserve:

- Trail history
- Run Capsules
- Stories
- Contributions
- Officer service
- Mentorship
- Community tributes

Legacy status is governed by documented policies.

FR-COMMUNITY-036 — Community Tributes

Kennels may publish tributes recognizing significant contributors.

Tributes may include:

- Written reflections
- Photos
- Audio recordings
- Video messages
- Historical achievements

Tributes become part of the permanent historical archive.

FR-COMMUNITY-037 — AI Heritage Assistant

AI may assist with:

- Summarizing decades of contributions
- Identifying preservation gaps
- Connecting related historical records
- Suggesting oral history interviews

Every AI-generated summary references supporting evidence.

FR-COMMUNITY-038 — Historical Network Explorer

Users may explore the Community Graph across time.

Examples:

- Officer succession by decade
- Growth of a kennel
- Expansion into new regions
- Mentorship generations
- Long-standing collaborations

The explorer integrates with the Global Hash Atlas.

FR-COMMUNITY-039 — Preservation Health

Each kennel receives a Preservation Health summary based on:

- Historical completeness
- Media preservation
- Run Capsule coverage
- Leadership history
- Oral history collection
- Community participation

This summary is intended to encourage preservation efforts rather than comparison.

FR-COMMUNITY-040 — Community Knowledge Base

The Community Graph supports a curated knowledge base of:

- Historic members
- Founding stories
- Traditions
- Landmark events
- Community terminology
- Heritage projects

Content is linked to primary historical sources whenever possible.

Business Principles

Communities thrive when they remember.

Recognition should preserve history.

Analytics should guide stewardship.

Legacy belongs to the entire community.

Completion Criteria

Complete when:

- Community analytics are documented.
 - Legacy Profiles are supported.
 - Historical exploration is defined.
 - AI heritage tools are transparent.
 - Preservation metrics are established.
-

Next Document

08J-05 — Business Rules, Permissions & Acceptance Criteria

Annex 08J — Community Graph

Part 6 — Business Rules, Permissions & Acceptance Criteria

Document ID: HCP-PB-08J-05

Parent: Annex 08J — Community Graph

Domain: Governance & Community Integrity

Status: Draft

Version: 1.0

Purpose

This document defines the governance, permissions, privacy model, audit requirements, and business rules governing the Community Graph.

The Community Graph preserves relationships created through participation while ensuring that individual privacy and community history remain appropriately balanced.

Vision

The Community Graph should become the trusted record of relationships within the worldwide Hash community.

It should preserve history without becoming a surveillance system.

Guiding Principles

- Relationships belong to people.
 - History should be preserved.
 - Privacy is fundamental.
 - Community memory matters.
 - Transparency builds trust.
-

Business Rule Categories

- Identity
 - Relationships
 - Privacy
 - Recognition
 - Governance
 - AI
 - Audit
 - Preservation
 - Portability
 - Accessibility
-

BR-COMMUNITY-001 — Evidence-Based Relationships

Relationships are created only from verifiable participation.

Examples include:

- Shared Run Sessions
- Officer service
- Trail collaborations
- Event participation
- Mentorship
- Hosted visitor exchanges

Relationships are never inferred solely from messaging, profile views, or proximity.

BR-COMMUNITY-002 — Explainable Connections

Every automatically generated relationship recommendation shall include:

- Why it exists
- Supporting events
- Shared Run Capsules
- Shared kennels
- Shared collaborations

Users may dismiss recommendations permanently.

BR-COMMUNITY-003 — Privacy Controls

Users control the visibility of:

- Relationship timeline
- Mentorship
- Visitor history
- Hosted guests
- Travel history
- Recognition roles

Private relationships remain excluded from public discovery.

BR-COMMUNITY-004 — Historical Preservation

Verified historical participation remains part of the permanent community record where appropriate.

Personal profile visibility changes do not silently alter verified event history.

Where privacy regulations require removal or anonymization, the historical record should preserve event continuity without exposing personal information.

BR-COMMUNITY-005 — Recognition Governance

Recognition titles:

- Require published criteria.
- Must reference supporting evidence.
- Are awarded by authorized community governance.
- May be reviewed or revoked through documented processes.

AI may recommend candidates but never grant recognition.

BR-COMMUNITY-006 — Legacy Profiles

Legacy Profiles require:

- Verified status.
- Appropriate authorization.
- Respectful presentation.
- Ongoing governance by designated custodians.

Legacy Profiles remain read-only except for approved memorial additions.

BR-COMMUNITY-007 — AI Transparency

AI-generated summaries, recommendations, or relationship insights must:

- Be clearly identified.
 - Cite supporting records.
 - Avoid speculation.
 - Respect visibility settings.
 - Be reviewable by users.
-

BR-COMMUNITY-008 — Audit Trail

The platform records:

- Relationship creation
- Visibility changes
- Recognition awards
- Mentorship updates
- Legacy status changes
- Administrative actions
- AI-generated summaries

Audit records are immutable.

BR-COMMUNITY-009 — Community Stewardship

Kennel officers may manage:

- Official leadership history
- Officer succession
- Heritage recognitions
- Community projects

Officer actions are fully auditable.

BR-COMMUNITY-010 — Portability

Users may export:

- Contribution history
- Mentorship history
- Recognition records
- Public relationship summaries
- Community timeline

Exports exclude information belonging to other users unless permission has been granted.

BR-COMMUNITY-011 — Accessibility

Community visualizations shall support:

- Keyboard navigation
- Screen readers
- High-contrast themes
- Reduced-motion mode
- Alternative text representations

Accessibility applies to all graph visualizations.

BR-COMMUNITY-012 — Future Expansion

The Community Graph architecture shall support future relationship types, including:

- Educational programs
- Regional councils
- International working groups
- Volunteer initiatives
- Heritage committees

New relationship types should extend the graph without requiring structural redesign.

Permission Matrix

Action	Visitor	Member	Officer	Kennel Admin	Platform Admin
View Public Profiles	✓	✓	✓	✓	✓
View Shared Relationship Timeline		✓*	✓	✓	✓
Manage Privacy Settings		✓	✓	✓	✓
Participate in Mentorship		✓	✓	✓	✓
Award Official Recognition			✓	✓	✓
Manage Officer History			✓	✓	✓
Manage Legacy Profiles				✓	✓
Global Community Administration					✓

* Subject to both users' privacy settings and relationship visibility.

Acceptance Criteria

The Community Graph is considered complete when:

- Relationship governance is documented.
 - Privacy controls are comprehensive.
 - AI recommendations are explainable.
 - Legacy Profiles are governed.
 - Recognition processes are transparent.
 - Audit logging is implemented.
-

Non-Functional Expectations

The Community Graph should support:

- Tens of millions of members.
 - Hundreds of millions of relationships.
 - Fast graph traversal.
 - Explainable recommendations.
 - Privacy-aware indexing.
 - Long-term historical preservation.
-

Future Enhancements

Potential future capabilities include:

- Interactive community constellations.
 - Mentor lineage visualization.
 - Global reunion planning.
 - Cross-community volunteer networks.
 - Heritage research workspaces.
 - Community impact studies.
-

Business Principles

Every Person.

Every Friendship.

Every Contribution.

One Community.

Completion Criteria

Annex 08J is complete when:

- Relationship model is finalized.
 - Recognition framework exists.
 - Discovery features are documented.
 - Legacy governance is complete.
 - Privacy and preservation are balanced.
-

Annex 08J Completion

The Community Graph domain consists of:

- 08J-00 — Vision & Domain Overview
- 08J-01 — Relationship Model, Shared Experiences & Community Connections
- 08J-02 — Reputation, Contributions & Community Recognition
- 08J-03 — Discovery, Collaboration & Community Intelligence
- 08J-04 — Community Analytics, Legacy & Historical Networks
- 08J-05 — Business Rules, Permissions & Acceptance Criteria

The Community Graph is the social fabric of the Hash Community Platform, preserving authentic relationships through shared experiences, service, and history.

Annex 08K — Event & Interhash Management

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08K-00

Parent: Chapter 8 — Functional Requirements

Domain: Event & Interhash Management

Status: Draft

Version: 1.0

Purpose

This domain manages every organized gathering within the Hash Community Platform, from weekly kennel runs to international multi-day events.

It provides the planning, registration, scheduling, logistics, operations, communications, and historical preservation required to deliver successful Hash events of any size.

Vision

Every Hash event should be manageable from a single platform.

Whether organizing:

- Weekly Runs
- Full Moon Runs
- Red Dress Runs
- Charity Runs
- Campouts
- Anniversary Weekends
- Nash Hash
- Interhash

HCP should provide the tools needed to plan, execute, and preserve the experience.

Philosophy

An event is more than a date.

It is a collection of people, places, trails, stories, logistics, traditions, and memories.

HCP should support the complete event lifecycle.

Guiding Principles

- Plan collaboratively.
 - Execute confidently.
 - Preserve automatically.
 - Minimize operational complexity.
 - Keep participants informed.
-

Event Categories

Supported event types include:

- Weekly Runs
- Full Moon Runs
- Pub Crawls
- Red Dress Runs
- Charity Events
- Family Hash
- Campouts
- Anniversary Celebrations
- Nash Hash
- Interhash
- Regional Gatherings
- Training Workshops
- Officer Retreats

Additional event types may be created by administrators.

Event Lifecycle

Every event progresses through defined stages:

1. Draft
2. Planning
3. Registration Open
4. Registration Closed
5. Preparation
6. Live Event
7. Completed
8. Archived

Each stage unlocks specific capabilities.

Core Objects

The Event domain includes:

- Events
 - Sessions
 - Activities
 - Registrations
 - Tickets
 - Participants
 - Venues
 - Trails
 - Volunteers
 - Committees
 - Sponsors
 - Merchandise
 - Run Capsules
-

Relationships

The Event domain integrates with:

- Passport
 - Global Hash Atlas
 - Trail Studio
 - Living Trail
 - Run Capsule
 - Community Graph
 - Scribe Studio
 - Kennel Management
 - Notification Center
 - Payments
-

Event Scope

The platform supports:

- Single-day events
 - Multi-day events
 - Parallel activities
 - Multi-city events
 - Hybrid physical/virtual events
 - Recurring events
-

Success Criteria

The domain succeeds when organizers can confidently manage events ranging from ten participants to several thousand using the same underlying architecture.

Business Principles

Every Event.

Every Volunteer.

Every Adventure.

One Platform.

Completion Criteria

This overview is complete when:

- Event scope is defined.
 - Lifecycle is documented.
 - Core objects are identified.
 - Platform integrations are established.
-

Next Document

08K-01 — Event Planning, Scheduling & Program Management

Annex 08K — Event & Interhash Management

Part 2 — Event Planning, Scheduling & Program Management

Document ID: HCP-PB-08K-01

Parent: Annex 08K — Event & Interhash Management

Domain: Planning & Scheduling

Status: Draft

Version: 1.0

Purpose

This document defines how events are created, planned, scheduled, coordinated, and managed throughout their lifecycle.

The planning system supports both simple weekly kennel runs and complex international events with multiple venues, activities, committees, and thousands of attendees.

Philosophy

Successful events begin with good planning.

Planning should be collaborative, transparent, and adaptable as circumstances change.

Every participant should understand where they need to be, when, and why.

Guiding Principles

- One source of truth.
 - Flexible scheduling.
 - Collaborative planning.
 - Real-time updates.
 - Historical traceability.
-

Event Structure

An event consists of one or more activities.

Example:

Interhash 2038

- Welcome Reception
- Registration Desk
- City Tour
- Day 1 Trail
- Beer Check
- Charity Auction
- AGM
- Red Dress Run
- Closing Ceremony

Each activity has its own schedule, venue, coordinators, and participants.

FR-EVENT-001 — Event Creation

Organizers can create events by specifying:

- Name
- Event type
- Host kennel
- Description
- Theme
- Start and end dates
- Registration window
- Capacity
- Visibility
- Public website
- Branding assets

Events receive a permanent identifier.

FR-EVENT-002 — Program Builder

Organizers build the official event programme using a drag-and-drop interface.

Activities may be:

- Sequential
- Parallel
- Optional
- Repeating

Dependencies between activities can be defined.

FR-EVENT-003 — Multi-Day Scheduling

Support scheduling across multiple days.

Each day may include:

- Morning activities
- Afternoon activities
- Evening activities
- Overnight activities

Time zone handling is built into the scheduling engine.

FR-EVENT-004 — Venue Assignment

Activities may be assigned to:

- Venues
- Parks
- Hotels
- Trailheads
- Meeting points
- Bus pickup locations

Venue capacity is validated automatically.

FR-EVENT-005 — Resource Allocation

Resources may include:

- Volunteers
- Buses
- Equipment
- Medical teams
- Sound systems
- Registration desks
- Merchandise booths

Resource conflicts are detected before publication.

FR-EVENT-006 — Committee Management

Organizers may create committees such as:

- Registration
- Trails
- Logistics
- Medical
- Entertainment
- Sponsorship
- Merchandise
- Hospitality

Each committee has defined members, responsibilities, and deadlines.

FR-EVENT-007 — Task Management

Tasks support:

- Assignees
- Priorities
- Due dates
- Checklists
- Attachments
- Status tracking
- Comments

Tasks may belong to committees or specific activities.

FR-EVENT-008 — Programme Publishing

Published programmes are available through:

- Mobile app
- Web portal
- Printable PDF
- Digital signage
- Public event page

Changes propagate automatically to all supported channels.

FR-EVENT-009 — Schedule Changes

When schedules change:

- Participants receive notifications.
- Timelines update automatically.
- Conflicts are recalculated.
- Audit logs record all revisions.

Historical schedules remain archived.

FR-EVENT-010 — Operational Dashboard

Organizers have access to a live operational dashboard displaying:

- Registration status
- Check-in counts
- Activity readiness
- Volunteer assignments
- Capacity alerts
- Weather alerts
- Incident reports
- Outstanding tasks

The dashboard updates in near real time.

Business Principles

Planning should reduce uncertainty.

Schedules should remain adaptable.

Every change should be transparent.

Completion Criteria

Complete when:

- Event creation is defined.
 - Scheduling workflows exist.
 - Resource management is supported.
 - Committee management is documented.
 - Live operational oversight is available.
-

Next Document

08K-02 — Registration, Ticketing & Participant Management

Annex 08K — Event & Interhash Management

Part 3 — Registration, Ticketing & Participant Management

Document ID: HCP-PB-08K-02

Parent: Annex 08K — Event & Interhash Management

Domain: Registration & Participant Management

Status: Draft

Version: 1.0

Purpose

This document defines the complete registration lifecycle for events hosted on the Hash Community Platform.

The registration system supports attendees, organizers, volunteers, vendors, sponsors, and invited guests while integrating seamlessly with payments, passports, accommodations, transportation, and event operations.

Vision

Registering for a Hash event should take minutes.

Managing thousands of registrations should feel effortless.

Every participant should have a single source of truth for their event journey.

Philosophy

Registration is the beginning of the event experience.

The process should be simple for attendees and powerful for organizers.

Every registration should flow naturally into event operations.

Guiding Principles

- Mobile-first.
 - Transparent pricing.
 - Flexible ticketing.
 - Self-service where possible.
 - Secure handling of participant information.
-

Registration Lifecycle

1. Registration Opens
 2. Participant Registers
 3. Payment (if required)
 4. Confirmation Issued
 5. Optional Profile Completion
 6. Event Preparation
 7. Check-in
 8. Attendance
 9. Completion
 10. Archive
-

FR-EVENT-011 — Registration Forms

Organizers may design custom registration forms.

Supported field types include:

- Name
- Hash Name
- Email
- Phone
- Emergency Contact
- Passport/Nationality (where legally appropriate)
- Home Kennel
- Dietary Requirements
- Medical Information (optional and privacy-controlled)
- T-shirt Size
- Transportation Needs
- Accommodation Preferences
- Waiver Acceptance
- Custom Questions

Conditional fields are supported.

FR-EVENT-012 — Ticket Types

Events may define multiple ticket categories, including:

- Standard
- Early Bird
- Late Registration
- Volunteer
- Organizer
- VIP
- Day Pass
- Guest
- Complimentary

Each ticket type supports:

- Capacity
 - Pricing
 - Sale period
 - Eligibility rules
 - Included benefits
-

FR-EVENT-013 — Waiting Lists

When an event reaches capacity:

- Participants may join a waiting list.
- Organizers may prioritize promotions manually or automatically.
- Invited participants have a configurable response window.
- Expired invitations are offered to the next eligible participant.

All waiting list actions are audited.

FR-EVENT-014 — Registration Management

Participants may:

- View registration status.
- Update permitted profile details.
- Change meal selections.
- Update emergency contacts.
- Download receipts.
- Access event information.

Changes respect organizer-defined deadlines.

FR-EVENT-015 — Ticket Transfers

Where enabled, organizers may allow ticket transfers.

Transfer workflow includes:

- Eligibility validation.
- Organizer approval (optional).
- Payment adjustments (if applicable).
- Audit logging.
- Updated attendee records.

The system preserves the history of ownership changes.

FR-EVENT-016 — Group Registrations

Support registrations for:

- Couples
- Families
- Kennel delegations
- Tour groups
- Volunteer teams

Group leaders may manage shared registrations while each participant maintains an individual event profile.

FR-EVENT-017 — Participant Dashboard

Each attendee receives a personalized event dashboard showing:

- Registration status
- Ticket information
- QR code or digital pass
- Event schedule
- Accommodation details
- Transportation assignments
- Merchandise orders
- Announcements
- Passport stamp eligibility

The dashboard becomes the participant's command center throughout the event.

FR-EVENT-018 — Check-In

Support multiple check-in methods:

- QR code
- NFC (future)
- Manual lookup
- Offline mode
- Badge scanning

Check-in timestamps are recorded and synchronized when connectivity is restored.

FR-EVENT-019 — Attendance Tracking

Organizers may record attendance for:

- Main event
- Individual activities
- Workshops
- Trails
- Ceremonies
- Meetings

Attendance data may contribute to Passport stamps and Community Graph relationships, subject to privacy settings.

FR-EVENT-020 — Registration Analytics

Organizers may monitor:

- Total registrations
- Ticket sales
- Capacity utilization
- Geographic distribution
- Kennel representation
- Dietary requirements
- Volunteer sign-ups
- Cancellation trends
- Waiting list growth

Analytics support operational planning and post-event review.

Business Principles

Registration should be effortless.

Participant data should be protected.

Organizers should spend time building experiences, not chasing spreadsheets.

Completion Criteria

Complete when:

- Flexible registration is supported.
 - Ticketing is configurable.
 - Check-in workflows exist.
 - Participant dashboards are defined.
 - Analytics support operational decisions.
-

Next Document

08K-03 — Logistics, Travel, Accommodation & Volunteer Operations

Annex 08K — Event & Interhash Management

Part 4 — Logistics, Travel, Accommodation & Volunteer Operations

Document ID: HCP-PB-08K-03

Parent: Annex 08K — Event & Interhash Management

Domain: Logistics & Operations

Status: Draft

Version: 1.0

Purpose

This document defines the operational capabilities required to coordinate transportation, accommodation, volunteers, equipment, medical support, and logistics for Hash events of any scale.

The goal is to provide organizers with a unified operational command system while giving participants a seamless event experience.

Vision

Every attendee should know where they need to be.

Every volunteer should know what they need to do.

Every organizer should know what still needs attention.

Philosophy

Successful events are built on invisible logistics.

The best logistics are those participants never notice because everything works.

Guiding Principles

- Operational clarity.
 - Real-time coordination.
 - Self-service where appropriate.
 - Offline resilience.
 - Continuous visibility.
-

Logistics Domains

The platform supports:

- Transportation
 - Accommodation
 - Volunteer Operations
 - Equipment
 - Medical Services
 - Hospitality
 - Incident Management
 - Lost & Found
 - Vendor Operations
-

FR-EVENT-021 — Transportation Management

Organizers may manage:

- Airport pickups
- Shuttle services
- Bus fleets
- Trail transport
- Driver assignments
- Vehicle capacities
- Departure schedules
- Return journeys

Vehicles support live occupancy tracking during the event.

FR-EVENT-022 — Participant Transportation

Participants may view:

- Pickup location
- Pickup time
- Assigned vehicle
- Driver contact (where appropriate)
- Route updates
- Return schedule

Changes trigger notifications automatically.

FR-EVENT-023 — Accommodation Management

Support accommodation assignments including:

- Hotels
- Guest houses
- Campgrounds
- Host families
- Shared rooms
- Premium upgrades

Accommodation records include:

- Check-in dates
 - Check-out dates
 - Room allocations
 - Accessibility requirements
 - Special requests
-

FR-EVENT-024 — Volunteer Management

Volunteers may:

- Apply for roles
- Select availability
- Receive assignments
- View schedules
- Check in for shifts
- Report task completion

Volunteer coordinators may monitor staffing levels in real time.

FR-EVENT-025 — Equipment Tracking

Manage event assets including:

- PA systems
- Generators
- Tents
- Water stations
- Medical kits
- Radios
- Tables
- Signage
- Merchandise stock

Equipment supports assignment, status tracking, and return verification.

FR-EVENT-026 — Medical Operations

Medical teams may manage:

- First aid stations
- Ambulance availability
- Medical volunteers
- Incident reports
- Emergency contacts
- Evacuation plans

Sensitive medical information is handled in accordance with applicable privacy laws.

FR-EVENT-027 — Hospitality Operations

Manage services such as:

- Welcome desks
- Information booths
- VIP reception
- Guest relations
- International delegations
- Lost visitor assistance

Hospitality teams have access only to the information required for their duties.

FR-EVENT-028 — Incident Management

Authorized users may record operational incidents.

Examples include:

- Transport delays
- Lost property
- Medical events
- Weather disruptions
- Venue issues
- Safety concerns

Incidents include:

- Timestamp
 - Location
 - Severity
 - Status
 - Assigned responders
 - Resolution notes
-

FR-EVENT-029 — Operations Dashboard

Organizers view a live dashboard showing:

- Volunteer coverage
- Vehicle status
- Hotel occupancy
- Incident queue
- Equipment availability
- Medical readiness
- Activity readiness

The dashboard highlights critical issues requiring attention.

FR-EVENT-030 — Offline Operations

Core operational functions continue working when internet connectivity is unavailable.

Supported offline capabilities include:

- Participant lookup
- Check-in
- Volunteer schedules
- Incident logging
- Equipment tracking

Data synchronizes automatically when connectivity returns.

Business Principles

Operations should be predictable.

Volunteers should be empowered.

Participants should experience confidence rather than confusion.

Completion Criteria

Complete when:

- Transportation is managed.
 - Accommodation workflows exist.
 - Volunteer operations are documented.
 - Medical coordination is supported.
 - Offline resilience is defined.
-

Next Document

08K-04 — Event Communications, Live Operations & Historical Preservation

Annex 08K — Event & Interhash Management

Part 5 — Event Communications, Live Operations & Historical Preservation

Document ID: HCP-PB-08K-04

Parent: Annex 08K — Event & Interhash Management

Domain: Communications, Live Operations & Historical Preservation

Status: Draft

Version: 1.0

Purpose

This document defines how HCP supports live event communications, operational awareness, participant engagement, and the transition from an active event into a permanent historical record.

The objective is to ensure that every event is well coordinated while preserving its legacy for future generations.

Vision

An event should not disappear when the closing circle ends.

Its stories, photos, trails, achievements, and community moments should become part of the living history of the Hash.

Philosophy

Communicate clearly.

Respond quickly.

Preserve automatically.

Celebrate together.

Guiding Principles

- One trusted communication channel.
 - Context-aware notifications.
 - Operational transparency.
 - Respectful communication.
 - Automatic historical preservation.
-

Communication Channels

Supported channels include:

- In-app announcements
- Push notifications
- Email
- SMS (optional)
- Digital noticeboards
- Public event pages
- Organizer broadcasts

Each event controls its own communication preferences.

FR-EVENT-031 — Event Announcements

Organizers may publish announcements targeted by:

- All attendees
- Volunteers
- Committee members
- Specific ticket types
- Activity participants
- Language
- Geographic location (where appropriate)

Announcements support scheduled publishing.

FR-EVENT-032 — Live Schedule Updates

Participants receive real-time updates when:

- Activities change location
- Start times shift
- Transportation changes
- Weather impacts plans
- Safety notices are issued
- Activities are cancelled or added

Updates include clear explanations and revised instructions.

FR-EVENT-033 — Context-Aware Notifications

The platform may notify participants about:

- Upcoming activities
- Boarding times
- Check-in reminders
- Merchandise collection
- Passport stamp opportunities
- Nearby information desks
- Closing deadlines

Notifications respect user preferences and quiet hours where appropriate.

FR-EVENT-034 — Live Operations Feed

Authorized organizers view a live operational feed containing:

- Incident updates
- Volunteer reports
- Venue status
- Transportation updates
- Medical notifications
- Weather advisories

Operational messages are prioritized by severity.

FR-EVENT-035 — Participant Activity Feed

Participants may view a chronological event feed including:

- Official announcements
- Schedule changes
- Trail openings
- Photo highlights
- Community milestones
- Award ceremonies
- Closing reminders

The feed focuses on useful event information rather than social engagement.

FR-EVENT-036 — Automatic Run Capsule Creation

When an event concludes, HCP initiates a Run Capsule workflow.

Suggested content includes:

- Official programme
- Trail maps
- Attendance summaries
- Photos
- Videos
- Trail Reports
- Award recipients
- Volunteer acknowledgements

Organizers review and publish the final Run Capsule collection.

FR-EVENT-037 — Event Timeline

Every event maintains a permanent timeline including:

- Planning milestones
- Registration phases
- Live updates
- Activities completed
- Incidents resolved
- Closing ceremony
- Publication of Run Capsules

The timeline becomes part of the historical archive.

FR-EVENT-038 — Community Contributions

Participants may contribute:

- Photos
- Videos
- Trail Reports
- Personal stories
- Oral history recordings
- Reflections

Contributions are moderated according to event governance.

FR-EVENT-039 — Event Analytics

After the event, organizers may review:

- Attendance
- Registration trends
- Check-in performance
- Volunteer participation
- Transportation performance
- Incident statistics
- Communication effectiveness
- Participant feedback

Analytics support continuous improvement.

FR-EVENT-040 — Event Archive

Every completed event becomes part of the HCP archive.

The archive includes:

- Official programme
- Run Capsule collection
- Trails
- Media
- Awards
- Historical summaries
- Passport integration
- Atlas references
- Community Graph updates

Archives remain searchable for future generations.

Business Principles

Communicate with purpose.

Operate with confidence.

Preserve with care.

Every event deserves to become part of community history.

Completion Criteria

Complete when:

- Live communications are documented.
 - Operational awareness is supported.
 - Run Capsule creation is automated.
 - Historical archives are defined.
 - Event analytics are available.
-

Next Document

08K-05 — Business Rules, Permissions & Acceptance Criteria

Annex 08K — Event & Interhash Management

Part 6 — Business Rules, Permissions & Acceptance Criteria

Document ID: HCP-PB-08K-05

Parent: Annex 08K — Event & Interhash Management

Domain: Governance & Event Integrity

Status: Draft

Version: 1.0

Purpose

This document defines the governance framework, permissions, business rules, privacy model, audit requirements, and acceptance criteria for Event & Interhash Management.

It ensures events remain secure, auditable, inclusive, and historically accurate while giving organizers the flexibility required to manage gatherings of all sizes.

Vision

Every event should be trustworthy.

Every participant should understand their role.

Every operational decision should be transparent and accountable.

Every completed event should become a reliable part of the historical record.

Guiding Principles

- Participant safety first.
 - Clear accountability.
 - Privacy by design.
 - Transparency in operations.
 - Historical preservation.
 - Inclusive participation.
-

Business Rule Categories

- Event Governance
 - Registration
 - Ticketing
 - Operations
 - Communications
 - Safety
 - Privacy
 - Historical Preservation
 - AI
 - Audit
 - Accessibility
-

BR-EVENT-001 — Event Ownership

Every event has a designated owner.

The owner may delegate responsibilities to:

- Event Director
- Registration Lead
- Trail Coordinator
- Volunteer Coordinator
- Medical Lead
- Logistics Lead
- Finance Lead
- Communications Lead

Delegated permissions remain fully auditable.

BR-EVENT-002 — Event Lifecycle

Every event progresses through approved lifecycle stages:

- Draft
- Planning
- Registration Open
- Registration Closed
- Live
- Completed
- Archived

Stage transitions may require mandatory completion checks.

BR-EVENT-003 — Registration Integrity

Registrations must maintain:

- Unique participant identity
- Payment status
- Audit history
- Waiver acceptance
- Eligibility validation

Organizer overrides require justification and audit logging.

BR-EVENT-004 — Ticket Governance

Ticket rules define:

- Capacity
- Pricing
- Refund eligibility
- Transfer permissions
- Upgrade paths
- Waiting list behavior

Policy changes after registrations begin are versioned for transparency.

BR-EVENT-005 — Volunteer Governance

Volunteer assignments:

- Require acceptance by the volunteer.
- May include qualification requirements.
- Support shift handovers.
- Track attendance and completion.

Volunteer performance metrics are intended for planning and recognition, not public ranking.

BR-EVENT-006 — Safety & Incident Governance

All incidents are classified by severity.

Incident records include:

- Reporter
- Timestamp
- Location
- Response actions
- Resolution status
- Follow-up requirements

Only authorized roles may access sensitive incident information.

BR-EVENT-007 — Communication Governance

Official announcements:

- Identify the issuing authority.
- Include timestamps.
- Preserve revision history.
- Support multilingual publication.

Participants may review past announcements throughout the event.

BR-EVENT-008 — Historical Preservation

Completed events preserve:

- Official programme
- Registration statistics (aggregated where appropriate)
- Run Capsule collection
- Trail references
- Awards
- Community contributions
- Volunteer acknowledgements

Historical records remain immutable except through documented archival procedures.

BR-EVENT-009 — AI Transparency

AI may assist with:

- Schedule optimization
- Resource allocation suggestions
- Translation
- Participant support
- Post-event summaries

AI shall never make irreversible operational decisions without human review.

BR-EVENT-010 — Privacy

Participant privacy controls apply to:

- Attendance visibility
- Travel information
- Accommodation details
- Emergency contacts
- Medical information
- Community Graph updates

Sensitive information is processed only for legitimate event purposes.

BR-EVENT-011 — Accessibility

Events should support inclusive participation through:

- Accessible registration
- Venue accessibility information
- Dietary accommodations
- Multilingual content
- Screen-reader compatible interfaces
- High-contrast and reduced-motion modes

Accessibility requirements are visible during planning.

BR-EVENT-012 — Audit Trail

The platform records:

- Event creation
- Programme changes
- Registration updates
- Ticket transfers
- Volunteer assignments
- Operational incidents
- Announcement publication
- AI-assisted recommendations
- Administrative actions

Audit records are immutable.

BR-EVENT-013 — Portability

Authorized organizers may export:

- Registration lists
- Attendance records
- Volunteer rosters
- Operational reports
- Financial summaries
- Event archives

Exports respect participant privacy and applicable legal requirements.

BR-EVENT-014 — Future Expansion

The event architecture shall support future capabilities including:

- Hybrid and virtual participation.
- Livestream integration.
- Badge printing systems.
- Smart access control.
- Sponsor engagement tools.
- Carbon footprint reporting.
- Public tourism partnerships.

Extensions should not require redesigning the core event model.

Permission Matrix

Action	Visitor	Participant	Volunteer	Organizer	Event Director	Platform Admin
View Public Event	✓	✓	✓	✓	✓	✓
Register	✓	✓	✓	✓	✓	✓
Manage Own Registration		✓	✓	✓	✓	✓
View Volunteer Schedule			✓	✓	✓	✓
Publish Announcements				✓	✓	✓
Manage Programme				✓	✓	✓
Manage Budget & Logistics					✓	✓
Archive Event					✓	✓
Global Event Administration						✓

Acceptance Criteria

The Event & Interhash Management domain is complete when:

- Event lifecycle is implemented.
 - Planning and scheduling are supported.
 - Registration and ticketing are configurable.
 - Logistics and volunteer operations are documented.
 - Communications and historical preservation are integrated.
 - Governance, privacy, and audit requirements are defined.
-

Non-Functional Expectations

The platform should support:

- Multi-day international events.
 - Tens of thousands of registrations.
 - Offline operational capability.
 - High availability during live events.
 - Secure payment integrations.
 - Long-term historical preservation.
-

Business Principles

Every Event.

Every Volunteer.

Every Journey.

One Global Community.

Completion Criteria

Annex 08K is complete when:

- Planning workflows are documented.
 - Registration lifecycle is complete.
 - Logistics are fully defined.
 - Live operations are supported.
 - Governance ensures trust and accountability.
-

Annex 08K Completion

The Event & Interhash Management domain consists of:

- 08K-00 — Vision & Domain Overview
- 08K-01 — Event Planning, Scheduling & Program Management
- 08K-02 — Registration, Ticketing & Participant Management
- 08K-03 — Logistics, Travel, Accommodation & Volunteer Operations
- 08K-04 — Event Communications, Live Operations & Historical Preservation
- 08K-05 — Business Rules, Permissions & Acceptance Criteria

The Event & Interhash Management domain transforms HCP into a complete event operating system, capable of supporting everything from weekly kennel runs to the world's largest international Hash gatherings while preserving every event as part of the community's living history.

Annex 08L — Governance & Kennel Administration

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08L-00

Parent: Chapter 8 — Functional Requirements

Domain: Governance & Kennel Administration

Status: Draft

Version: 1.0

Purpose

This domain provides the administrative and governance framework for kennels and higher-level Hash organizations operating within the Hash Community Platform (HCP).

It enables transparent leadership, structured membership management, institutional continuity, constitutional governance, and historical preservation.

The goal is to ensure that every kennel—from newly formed groups to decades-old institutions—can operate efficiently while preserving its unique traditions and governance.

Vision

Every kennel should have a digital home.

Not just a profile.

A complete operating environment where leaders manage members, preserve institutional knowledge, conduct elections, maintain official records, and pass leadership to future generations.

Philosophy

People come and go.

Kennels endure.

Governance should be transparent.

Leadership should be accountable.

History should never be lost.

Guiding Principles

- Community before hierarchy.
 - Transparency before authority.
 - Institutional continuity.
 - Respect for local traditions.
 - Democratic participation where applicable.
 - Preservation of governance history.
-

Governance Scope

This domain supports governance for:

- Local Kennels
- Regional Associations
- National Associations
- Continental Councils
- Interhash Committees
- Temporary Organizing Committees
- Heritage Committees
- Working Groups

The governance model is flexible enough to accommodate regional customs while maintaining a consistent platform architecture.

Core Objects

The Governance domain includes:

- Organizations
 - Kennels
 - Memberships
 - Officers
 - Committees
 - Constitutions
 - Policies
 - Elections
 - Motions
 - Votes
 - Meeting Minutes
 - Governance Documents
 - Audit Records
-

Governance Lifecycle

Every organization progresses through a governance lifecycle:

1. Formation
2. Recognition
3. Active Governance
4. Leadership Transition
5. Historical Preservation
6. Archival (if dissolved)

Historical governance records remain accessible according to organizational policy.

Relationships

This domain integrates with:

- Identity & Membership
 - Community Graph
 - Event Management
 - Passport
 - Global Hash Atlas
 - Run Capsules
 - Notification Center
 - Document Repository
 - Audit & Compliance
 - AI Knowledge Services
-

Success Criteria

The Governance domain succeeds when:

- Every kennel can manage its administration digitally.
 - Leadership transitions occur smoothly.
 - Institutional knowledge is preserved.
 - Governance actions are transparent and auditable.
 - Local autonomy is respected.
-

Business Principles

Every Kennel.

Every Officer.

Every Constitution.

One Trusted Platform.

Completion Criteria

This overview is complete when:

- Governance scope is defined.
 - Organizational hierarchy is documented.
 - Core governance objects are identified.
 - Integration points are established.
-

Next Document

08L-01 — Organization Structure, Membership & Officer Management

Annex 08L — Governance & Kennel Administration

Part 2 — Organization Structure, Membership & Officer Management

Document ID: HCP-PB-08L-01

Parent: Annex 08L — Governance & Kennel Administration

Domain: Organization Structure & Membership

Status: Draft

Version: 1.0

Purpose

This document defines how organizations, kennels, memberships, officers, and leadership structures are represented within HCP.

The goal is to provide a flexible governance model capable of supporting both informal local kennels and highly structured national or international organizations.

Vision

Every organization should have a clearly defined identity.

Every member should understand their role.

Every officer should have transparent responsibilities.

Every leadership transition should preserve institutional continuity.

Philosophy

Organizations are living communities.

Leadership is stewardship.

Membership is participation.

Authority exists to serve the community.

Guiding Principles

- Clear organizational structure.
 - Transparent membership lifecycle.
 - Accountable leadership.
 - Flexible governance models.
 - Long-term institutional continuity.
-

Organization Types

Supported organization types include:


- Local Kennel
- Regional Association
- National Association
- Continental Organization
- International Committee
- Working Group
- Heritage Foundation
- Temporary Event Committee

Organizations may define parent-child relationships where appropriate.

Organizational Hierarchy

Example:

Worldwide Hash



The hierarchy supports reporting, discovery, governance, and historical relationships.

FR-GOV-001 — Organization Profiles

Every organization maintains an official profile containing:

- Name
- Official abbreviation
- Founding date
- Founding members
- Geographic location
- Meeting schedule
- Home trail
- Contact information
- Branding assets
- Website
- Social links
- Constitution
- Status

Profiles may also include historical summaries and notable achievements.

FR-GOV-002 — Membership Lifecycle

Supported membership states include:

- Applicant
- Pending Review
- Active
- Visiting Member
- Honorary Member
- Inactive
- Suspended
- Archived

State transitions follow organization-defined governance rules.

FR-GOV-003 — Membership Applications

Organizations may configure application workflows including:

- Open applications
- Invitation-only membership
- Sponsor requirements
- Approval committees
- Interview process
- Trial participation
- Membership fees (optional)

All application decisions are recorded.

FR-GOV-004 — Officer Roles

Organizations define officer positions such as:

- Grand Master
- Religious Adviser
- On Sec
- Hash Cash
- Trail Master
- Scribe
- Beer Master
- Web Master
- Safety Officer
- Membership Officer

Organizations may create additional custom roles.

FR-GOV-005 — Officer Responsibilities

Each officer role includes:

- Description
- Responsibilities
- Permissions
- Term duration
- Appointment method
- Reporting relationships
- Required qualifications (optional)

Responsibilities are visible to all members.

FR-GOV-006 — Leadership Timeline

Every officer appointment creates a historical record including:

- Officer
- Position
- Start date
- End date
- Appointment method
- Successor
- Major initiatives

The timeline becomes part of the organization's permanent history.

FR-GOV-007 — Organizational Directory

Members may browse:

- Current officers
- Committee members
- Active volunteers
- Honorary members
- Founding members
- Past leaders

Visibility respects privacy settings and organizational policies.

FR-GOV-008 — Membership Directory

Organizations maintain a searchable member directory with support for:

- Hash name
- Home kennel
- Membership status
- Roles
- Join date
- Skills
- Languages
- Certifications (where applicable)

Advanced filters assist organizers in finding members for specific responsibilities.

FR-GOV-009 — Organizational Branding

Organizations may customize:

- Logo
- Banner
- Colors
- Motto
- Founding story
- Welcome message
- Public profile

Branding automatically appears across relevant HCP modules.

FR-GOV-010 — Institutional History

Organizations maintain a living historical record including:

- Founding documents
- Milestones
- Leadership succession
- Landmark events
- Awards
- Historical photographs
- Oral histories
- Run Capsule collections

Institutional history integrates with the Global Hash Atlas and Community Graph.

Business Principles

Organizations should remain understandable.

Leadership should remain accountable.

Institutional history should never depend on a single person's memory.

Completion Criteria

Complete when:

- Organizational hierarchy is defined.
 - Membership lifecycle is documented.
 - Officer management is complete.
 - Leadership history is preserved.
 - Institutional profiles are established.
-

Next Document

08L-02 — Constitutions, Policies, Committees & Governance Documents

Annex 08L — Governance & Kennel Administration

Part 3 — Constitutions, Policies, Committees & Governance Documents

Document ID: HCP-PB-08L-02

Parent: Annex 08L — Governance & Kennel Administration

Domain: Governance Documents & Institutional Knowledge

Status: Draft

Version: 1.0

Purpose

This document defines how constitutions, bylaws, policies, committee structures, governance records, and institutional documents are created, maintained, versioned, and preserved within HCP.

The objective is to provide every organization with a secure, transparent, and historically accurate governance repository.

Vision

Every governance decision should be traceable.

Every policy should have a history.

Every committee should have defined responsibilities.

Every constitutional amendment should remain permanently preserved.

Philosophy

Governance documents are living records.

They evolve through community consensus.

Nothing should be silently overwritten.

Institutional memory should outlive individual leaders.

Guiding Principles

- Version everything.
 - Preserve history.
 - Make governance transparent.
 - Respect organizational autonomy.
 - Support collaborative drafting.
-

Governance Document Types

Supported document categories include:

- Constitution
- Bylaws
- Standing Orders
- Code of Conduct
- Membership Policy
- Financial Policy
- Event Policy
- Safety Policy
- Election Rules
- Committee Charters
- Meeting Minutes
- Annual Reports
- Strategic Plans
- Historical Records

Organizations may define additional document types.

FR-GOV-011 — Constitution Management

Organizations maintain one active constitution while preserving all previous versions.

Each version records:

- Version number
- Publication date
- Effective date
- Authors
- Approvers
- Amendment summary
- Supporting vote
- Superseded version

Historical constitutions remain permanently accessible.

FR-GOV-012 — Article-Based Structure

Constitutions are organized into:

- Articles
- Sections
- Clauses
- Appendices

Individual clauses may be referenced throughout the platform.

Example:

Article IV

Section 2

Clause 4.3

Officer Eligibility

This structure enables precise linking from policies, elections, and governance workflows.

FR-GOV-013 — Version History

Every governance document maintains a complete revision history.

Each revision records:

- Editor
- Timestamp
- Summary of changes
- Review comments
- Approval status

Users may compare any two historical versions.

FR-GOV-014 — Amendment Workflow

Organizations may configure amendment workflows.

Typical process:

1. Proposal Submitted
2. Review Period
3. Community Discussion
4. Committee Recommendation
5. Vote
6. Ratification
7. Publication
8. Effective Date

Every stage is audited.

FR-GOV-015 — Committee Management

Organizations may create committees including:

- Executive Committee
- Finance Committee
- Events Committee
- Membership Committee
- Heritage Committee
- Safety Committee
- Disciplinary Committee
- Election Committee

Each committee records:

- Members
 - Chairperson
 - Responsibilities
 - Term
 - Meeting schedule
-

FR-GOV-016 — Committee Workspace

Committees receive dedicated workspaces containing:

- Tasks
- Documents
- Agendas
- Minutes
- Decisions
- Action items
- Calendar
- Shared files

Committee workspaces remain part of the institutional archive.

FR-GOV-017 — Governance Repository

Organizations maintain a searchable governance repository containing:

- Constitutions
- Policies
- Meeting minutes
- Reports
- Resolutions
- Committee records
- Historical documents

Advanced search supports filtering by document type, author, committee, date, and keyword.

FR-GOV-018 — Linked Governance

Governance documents may reference:

- Officer roles
- Events
- Policies
- Committees
- Membership rules
- Historical decisions

Cross-references improve discoverability and reduce duplication.

FR-GOV-019 — Annual Reporting

Organizations may publish annual reports containing:

- Membership statistics
- Officer reports
- Financial summaries
- Event highlights
- Strategic initiatives
- Community impact
- Heritage projects

Reports become permanent historical records.

FR-GOV-020 — Governance Dashboard

Officers access a dashboard summarizing:

- Pending amendments
- Committee activity
- Upcoming meetings
- Expiring officer terms
- Outstanding actions
- Recently published documents
- Governance health indicators

The dashboard acts as the operational center for organizational leadership.

Business Principles

Governance should be transparent.

Policies should evolve responsibly.

Institutional knowledge should never be fragmented.

Completion Criteria

Complete when:

- Constitution management is defined.
 - Version control exists.
 - Committee management is documented.
 - Governance repository is specified.
 - Annual reporting is supported.
-

Next Document

08L-03 — Elections, Voting, Meetings & Decision Management

Annex 08L — Governance & Kennel Administration

Part 4 — Elections, Voting, Meetings & Decision Management

Document ID: HCP-PB-08L-03

Parent: Annex 08L — Governance & Kennel Administration

Domain: Democratic Governance & Decision Management

Status: Draft

Version: 1.0

Purpose

This document defines how organizations conduct elections, meetings, motions, resolutions, voting, and governance decisions within HCP.

The objective is to ensure governance processes are transparent, configurable, auditable, and historically preserved while respecting each organization's constitution and traditions.

Vision

Every governance decision should be:

- Fair.
- Transparent.
- Documented.
- Auditable.
- Historically preserved.

The platform supports governance—it never replaces the organization's constitutional authority.

Philosophy

Good governance is not simply about voting.

It is about informed participation.

Every proposal has a history.

Every decision has context.

Every vote contributes to the organization's future.

Guiding Principles

- Constitution-first.
 - Democratic flexibility.
 - Transparent processes.
 - Privacy where required.
 - Permanent historical record.
-

Governance Activities

Supported governance activities include:

- Elections
- Appointments
- General Meetings
- Executive Meetings
- Extraordinary Meetings
- Motions
- Resolutions
- Constitutional Amendments
- Committee Decisions
- Advisory Polls

Organizations may define additional governance workflows.

FR-GOV-021 — Meeting Management

Organizations may schedule:

- Annual General Meetings (AGMs)
- Extraordinary General Meetings (EGMs)
- Executive Committee Meetings
- Committee Meetings
- Strategic Planning Sessions
- Officer Handover Meetings

Each meeting includes:

- Agenda
 - Supporting documents
 - Attendee list
 - Quorum requirements
 - Minutes
 - Action items
-

FR-GOV-022 — Agenda Builder

Meeting organizers may create structured agendas.

Agenda items support:

- Presenter
- Time allocation
- Background documents
- Discussion notes
- Motions
- Decisions
- Attachments

Agenda changes are versioned until the meeting begins.

FR-GOV-023 — Motion Management

Members may submit governance motions where permitted.

Each motion records:

- Title
- Description
- Sponsor
- Supporting documents
- Related constitutional clauses
- Discussion period
- Voting method
- Final outcome

Approved motions become part of the governance archive.

FR-GOV-024 — Election Management

Organizations may configure elections for:

- Individual officer positions
- Committee appointments
- Multi-seat elections
- Confirmations
- Recalls

Election workflows support constitutional variations.

FR-GOV-025 — Voting Methods

Supported voting methods include:

- Show of hands
- Secret ballot
- Anonymous digital ballot
- Ranked-choice voting
- Approval voting
- Weighted voting (where constitutionally permitted)
- Consensus confirmation

Voting methods are selected according to organizational rules.

FR-GOV-026 — Eligibility Validation

Before voting, HCP automatically validates:

- Membership status
- Voting eligibility
- Officer eligibility
- Conflict-of-interest restrictions
- Constitutional requirements

Ineligible participants receive a clear explanation.

FR-GOV-027 — Meeting Minutes

Minutes may include:

- Attendance
- Quorum confirmation
- Agenda discussions
- Decisions
- Votes
- Action items
- Assigned owners
- Deadlines

Minutes are versioned until formally approved.

FR-GOV-028 — Action Item Tracking

Governance decisions generate action items.

Each action item includes:

- Owner
- Due date
- Priority
- Related motion
- Status
- Completion history

Outstanding governance actions appear on leadership dashboards.

FR-GOV-029 — Decision Archive

Every governance decision becomes part of the permanent archive.

Archived records include:

- Proposal
- Discussion summary
- Vote
- Effective date
- Related policies
- Related constitutional amendments
- Historical impact

Decision archives support long-term institutional learning.

FR-GOV-030 — Governance Analytics

Organizations may review:

- Meeting attendance
- Voting participation
- Motion outcomes
- Committee effectiveness
- Officer turnover
- Governance workload
- Policy amendment trends

Analytics assist leaders without ranking individual members.

Business Principles

Decisions should be informed.

Voting should be trusted.

Governance history should remain accessible.

Leadership should always be accountable.

Completion Criteria

Complete when:

- Meetings are supported.
 - Elections are configurable.
 - Voting methods are flexible.
 - Decision archives are permanent.
 - Governance analytics are available.
-

Next Document

08L-04 — Governance Audit, Compliance, Permissions & Historical Preservation

Annex 08L — Governance & Kennel Administration

Part 5 — Governance Audit, Compliance, Permissions & Historical Preservation

Document ID: HCP-PB-08L-04

Parent: Annex 08L — Governance & Kennel Administration

Domain: Governance Integrity & Institutional Preservation

Status: Draft

Version: 1.0

Purpose

This document defines the governance integrity framework for HCP, including permissions, audit logging, compliance, historical preservation, access control, and organizational accountability.

The objective is to ensure governance actions remain transparent, secure, explainable, and historically reliable while respecting organizational autonomy.

Vision

Governance should be trusted.

Trust requires transparency.

Transparency requires evidence.

Evidence requires preservation.

Philosophy

No important governance action should ever become untraceable.

History belongs to the organization.

Permissions exist to protect communities rather than create unnecessary hierarchy.

Guiding Principles

- Least privilege.
 - Full accountability.
 - Explainable governance.
 - Long-term preservation.
 - Privacy by design.
 - Organization-first administration.
-

Governance Categories

This document governs:

- Permissions
 - Delegation
 - Audit
 - Compliance
 - Privacy
 - Evidence
 - Archiving
 - Disaster Recovery
 - AI Governance
-

FR-GOV-031 — Role-Based Access Control

Permissions are assigned through roles rather than individual users.

Default governance roles include:

- Member
- Officer
- Committee Chair
- Committee Member
- Grand Master
- Administrator
- Auditor
- Platform Administrator

Organizations may define custom governance roles.

FR-GOV-032 — Permission Profiles

Permissions may be granted for:

- Membership management
- Officer appointments
- Elections
- Committee management
- Event approval
- Constitution editing
- Financial reports
- Governance archives
- Historical preservation

Permission inheritance is configurable.

FR-GOV-033 — Delegation

Authorized officers may temporarily delegate responsibilities.

Delegation includes:

- Effective dates
- Expiration
- Scope
- Reason
- Audit record

Delegations never exceed the delegator's own authority.

FR-GOV-034 — Governance Audit Trail

Every governance action records:

- Actor
- Timestamp
- Organization
- Action
- Object
- Previous state
- New state
- Supporting evidence
- Device metadata (where appropriate)

Audit records are immutable.

FR-GOV-035 — Governance Evidence

Significant governance actions reference Evidence Records, including:

- Meeting minutes
- Vote results
- Constitutional clauses
- Committee recommendations
- Supporting documents
- Related correspondence

Evidence remains linked even if supporting documents are superseded.

FR-GOV-036 — Compliance Dashboard

Leadership may review governance health through indicators such as:

- Officer vacancies
- Expired terms
- Outstanding actions
- Pending policy reviews
- Committee inactivity
- Missing meeting minutes
- Unresolved audit findings

The dashboard highlights risks without exposing unnecessary personal information.

FR-GOV-037 — Historical Preservation

The Governance Archive permanently preserves:

- Constitutions
- Policies
- Elections
- Officer history
- Meeting minutes
- Committee records
- Annual reports
- Strategic plans
- Heritage projects

Archived records remain searchable.

FR-GOV-038 — Data Retention

Organizations may configure retention policies for operational records.

Historical governance records intended for institutional preservation are protected from routine deletion unless required by law.

Deletion requests are logged and processed according to applicable privacy regulations.

FR-GOV-039 — Disaster Recovery

Governance data shall support:

- Automated backups
- Version restoration
- Integrity verification
- Geographic redundancy
- Recovery testing
- Point-in-time recovery

Recovery procedures are periodically validated.

FR-GOV-040 — AI Governance Assistant

AI may assist officers by:

- Summarizing meeting minutes.
- Identifying governance inconsistencies.
- Suggesting constitutional references.
- Highlighting overdue actions.
- Explaining governance workflows.

AI recommendations remain advisory and always reference supporting evidence.

Permission Matrix

Action	Member	Officer	Committee Chair	Grand Master	Organization Admin	Platform Admin
View Constitution	✓	✓	✓	✓	✓	✓
Submit Motion	✓*	✓	✓	✓	✓	✓
Vote	✓*	✓	✓	✓	✓	✓
Manage Committee		✓	✓	✓	✓	✓
Publish Governance Documents			✓	✓	✓	✓
Approve Officer Appointments				✓	✓	✓
Manage Organization				✓	✓	✓
Global Administration						✓

* Subject to constitutional eligibility rules.

Acceptance Criteria

The governance integrity framework is complete when:

- RBAC is documented.
 - Audit logging is comprehensive.
 - Evidence Records are integrated.
 - Governance preservation is defined.
 - Disaster recovery expectations are established.
-

Non-Functional Expectations

The Governance subsystem shall provide:

- Immutable audit logging.
 - High availability.
 - Strong consistency.
 - Fine-grained permissions.
 - Secure document storage.
 - Long-term archival durability.
-

Business Principles

Protect trust.

Preserve history.

Document evidence.

Empower communities.

Completion Criteria

Complete when:

- Governance permissions are defined.
 - Audit capabilities are complete.
 - Compliance workflows are documented.
 - Historical preservation is finalized.
 - AI governance assistance is transparent.
-

Next Document

08L-05 — Business Rules, Acceptance Criteria & Governance Principles

Annex 08L — Governance & Kennel Administration

Part 6 — Business Rules, Acceptance Criteria & Governance Principles

Document ID: HCP-PB-08L-05

Parent: Annex 08L — Governance & Kennel Administration

Domain: Governance Principles & Business Rules

Status: Draft

Version: 1.0

Purpose

This document establishes the foundational governance principles, business rules, acceptance criteria, and operational standards for Governance & Kennel Administration within HCP.

It ensures that governance remains transparent, consistent, auditable, respectful of organizational autonomy, and aligned with the long-term preservation of institutional knowledge.

Vision

Good governance creates confidence.

Transparent governance creates trust.

Preserved governance creates continuity.

Philosophy

HCP provides governance tools.

Each organization retains authority over its own constitution, customs, bylaws, and leadership processes.

The platform enables governance—it does not govern the community.

Guiding Principles

- Organization autonomy.
 - Constitution-first governance.
 - Transparency.
 - Accountability.
 - Historical preservation.
 - Privacy by design.
 - Evidence-based administration.
-

Governance Business Rules

BR-GOV-001 — Organization Autonomy

Every organization owns and manages its own governance.

Platform defaults may be customized provided they do not compromise platform security or legal obligations.

BR-GOV-002 — Constitution Authority

Where governance workflows conflict with an organization's constitution, the constitution takes precedence.

HCP should allow configurable workflows that reflect local governance practices.

BR-GOV-003 — Transparency

Governance actions should be visible to the appropriate audience.

Visibility must balance:

- Transparency
 - Privacy
 - Organizational policy
 - Legal requirements
-

BR-GOV-004 — Accountability

Every significant governance action shall have:

- Responsible actor
- Timestamp

- Supporting evidence
- Audit record

No governance action should become anonymous after execution.

BR-GOV-005 — Leadership Stewardship

Officer roles represent stewardship responsibilities rather than permanent authority.

Leadership history remains part of the organization's institutional memory.

BR-GOV-006 — Democratic Participation

Voting systems shall support constitutional flexibility while preserving:

- Fairness
 - Eligibility
 - Ballot integrity
 - Verifiable outcomes
-

BR-GOV-007 — Committee Governance

Committees exist to distribute responsibility.

Committee membership, mandates, and decisions remain historically preserved.

BR-GOV-008 — Institutional Memory

Governance records should remain understandable decades after their creation.

Future leaders should be able to understand:

- What happened.

- Why it happened.
 - Who participated.
 - Which documents supported the decision.
-

BR-GOV-009 — Privacy

Personal information shall only be visible where legitimately required.

Historical records should preserve institutional continuity while respecting applicable privacy requirements.

BR-GOV-010 — AI Assistance

Artificial Intelligence may assist governance by:

- Summarizing.
- Searching.
- Explaining.
- Translating.
- Identifying inconsistencies.

AI shall never replace constitutional decision-making or exercise governance authority.

BR-GOV-011 — Historical Preservation

The Governance Archive permanently preserves:

- Constitutions
- Policies
- Elections
- Officer appointments
- Meeting minutes
- Motions

- Decisions
- Annual reports
- Heritage documents

Subject to applicable law, these records should remain accessible for future generations.

BR-GOV-012 — Platform Neutrality

HCP shall remain neutral regarding:

- Political opinions
- Internal organizational disagreements
- Election outcomes
- Constitutional interpretations

The platform records governance—it does not determine it.

Permission Principles

Permissions shall follow:

- Least privilege.
 - Separation of duties.
 - Delegated authority.
 - Time-limited elevation where appropriate.
 - Complete auditability.
-

Acceptance Criteria

The Governance domain is complete when:

- Organization structures are documented.
 - Membership lifecycle is defined.
 - Officer management is complete.
 - Constitutions are version-controlled.
 - Committees are supported.
 - Meetings and elections are configurable.
 - Voting is transparent and auditable.
 - Governance archives are preserved.
 - Permissions follow RBAC.
 - Evidence Records support governance decisions.
-

Non-Functional Expectations

The Governance subsystem shall provide:

- High availability.
 - Strong consistency.
 - Fine-grained authorization.
 - Immutable audit logging.
 - Secure document storage.
 - Disaster recovery.
 - Long-term archival durability.
 - Explainable AI assistance.
-

Governance Principles

Every Constitution.

Every Decision.

Every Officer.

Every Generation.

One Trusted Platform.

Completion Criteria

Annex 08L is complete when:

- Organizational administration is fully defined.
 - Governance documents are versioned.
 - Elections and meetings are supported.
 - Audit and compliance are comprehensive.
 - Governance principles protect institutional continuity.
-

Annex 08L Completion

The Governance & Kennel Administration domain consists of:

- 08L-00 — Vision & Domain Overview
- 08L-01 — Organization Structure, Membership & Officer Management
- 08L-02 — Constitutions, Policies, Committees & Governance Documents
- 08L-03 — Elections, Voting, Meetings & Decision Management
- 08L-04 — Governance Audit, Compliance, Permissions & Historical Preservation
- 08L-05 — Business Rules, Acceptance Criteria & Governance Principles

The Governance & Kennel Administration domain establishes HCP as a trusted digital home for the administration, continuity, and institutional memory of Hash organizations worldwide.

Annex 08M — Identity & Authentication

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08M-00

Parent: Chapter 8 — Core Platform Services

Domain: Identity & Authentication

Status: Draft

Version: 1.0

Purpose

This domain defines the identity model for every person, organization, service account, API client, and system process operating within the Hash Community Platform (HCP).

Rather than representing a login account, HCP Identity represents a person's long-term participation within the global Hash community.

Identity forms the foundation for authentication, authorization, governance, community relationships, events, passports, historical records, and future AI services.

Vision

One person.

One digital identity.

A lifetime of adventures.

Philosophy

People change.

Roles change.

Organizations change.

Passwords change.

Identity should not.

Identity is permanent.

Everything else is attached to it.

Guiding Principles

- Identity first.
 - Authentication second.
 - Authorization third.
 - Privacy by design.
 - Federation ready.
 - Lifetime continuity.
-

Scope

The Identity domain governs:

- User identities
 - Authentication
 - Authorization
 - Sessions
 - Devices
 - Organizations
 - Memberships
 - Roles
 - Permissions
 - API identities
 - Service accounts
 - Trust relationships
-

Identity Types

Supported identity categories include:

- Individual Member
- Guest
- Applicant
- Volunteer
- Officer
- Organization
- Committee
- API Client
- Service Account
- System Process

Future identity types may be added without redesigning the platform.

Core Objects

The domain manages:

- Identity
 - Profile
 - Credentials
 - Session
 - Device
 - Membership
 - Organization Link
 - Role Assignment
 - Permission Set
 - Authentication Factor
 - Recovery Method
 - Audit Record
-

Relationships

Identity integrates with:

- Passport
 - Community Graph
 - Event Management
 - Governance
 - Global Hash Atlas
 - Run Capsules
 - Scribe Studio
 - Notification Center
 - Evidence Record Service
 - AI Platform
-

Success Criteria

Identity succeeds when:

- Every person has one long-term identity.
 - Authentication is secure.
 - Authorization is flexible.
 - Privacy is respected.
 - Federation is supported.
 - Historical continuity is preserved.
-

Business Principles

One Identity.

Many Roles.

One Lifetime.

Completion Criteria

Complete when:

- Identity philosophy is established.
 - Core objects are defined.
 - Relationships are documented.
 - Integration points are complete.
-

Next Document

08M-01 — Identity Model, Profiles & Membership Architecture

Annex 08M — Identity & Authentication

Part 2 — Identity Model, Profiles & Membership Architecture

Document ID: HCP-PB-08M-01

Parent: Annex 08M — Identity & Authentication

Domain: Identity Model & Membership Architecture

Status: Draft

Version: 1.0

Purpose

This document defines the canonical identity model for the Hash Community Platform (HCP), including person records, digital identities, public profiles, memberships, affiliations, and the relationship between an individual and the organizations they participate in.

The identity model is designed to support a lifetime of participation while preserving privacy, historical continuity, and institutional relationships.

Vision

Every person has one identity.

That identity grows throughout their Hash journey.

Organizations come and go.

Roles change.

Experiences accumulate.

Identity remains continuous.

Philosophy

Identity is not created for an application.

The application exists to serve the identity.

A Hasher's digital identity should represent decades of participation rather than a temporary user account.

Guiding Principles

- Identity permanence.
 - Privacy by default.
 - Public profile by choice.
 - Historical continuity.
 - Multiple organizational affiliations.
 - Federation-ready architecture.
-

Core Identity Model

The identity domain consists of the following primary entities:

- Person
 - Identity
 - Public Profile
 - Private Profile
 - Membership
 - Organization Affiliation
 - Role Assignment
 - Identity Preferences
 - Identity Verification
 - Trust Level
-

FR-ID-001 — Person Record

The Person entity represents the human being behind the account.

Person records include:

- Legal name (optional)
- Preferred name
- Date of birth (optional)
- Country
- Languages
- Emergency contacts
- Privacy preferences

Personally identifiable information is never exposed publicly unless explicitly permitted.

FR-ID-002 — Identity Record

The Identity entity represents the permanent HCP identity.

Identity includes:

- Unique identifier (UUID)
- Public Hash name
- Join date
- Status
- Trust level
- Verification status
- Identity history
- Public profile reference

Identity identifiers are immutable.

FR-ID-003 — Hash Names

A person may have:

- One current primary Hash name.
- Historical Hash names.
- Nicknames.
- Local aliases where recognized.

Historical names remain searchable for historical accuracy.

FR-ID-004 — Public Profile

The public profile may include:

- Profile photograph
- Hash name
- Biography
- Home kennel
- Current roles
- Awards
- Passport summary
- Trail statistics
- Community highlights
- Public Run Capsules

Visibility respects privacy settings.

FR-ID-005 — Private Profile

Private information includes:

- Contact details
- Recovery methods
- Identity verification
- Medical information (where provided)
- Emergency contacts
- Security preferences

Private data is encrypted and accessible only to authorized workflows.

FR-ID-006 — Membership Architecture

A single identity may hold multiple memberships simultaneously.

Examples:

- Home Kennel
- Honorary Member
- Visiting Member
- Event Committee
- National Association
- Heritage Committee

Each membership records:

- Organization
 - Membership type
 - Start date
 - End date
 - Status
 - Sponsor (if applicable)
-

FR-ID-007 — Organization Affiliations

Affiliations extend beyond formal membership.

Examples include:

- Volunteer
- Advisor
- Event Organizer
- Former Officer
- Honorary Guest
- Partner Organization

Affiliations contribute to the individual's historical record.

FR-ID-008 — Role Assignments

Roles are attached to affiliations rather than directly to identities.

Example:

Identity ↓

Abuja H3 Membership ↓

Grand Master

Later:

Identity ↓

Interhash Committee ↓

Volunteer Coordinator

This allows independent role histories across organizations.

FR-ID-009 — Identity Timeline

Every identity maintains a chronological timeline including:

- Memberships
- Leadership roles
- Awards
- Passport milestones
- Events attended
- Trails created
- Community achievements

The timeline becomes the foundation for historical storytelling.

FR-ID-010 — Trust Levels

The platform supports configurable trust levels.

Example:

- Unverified
- Verified Email
- Verified Member
- Trusted Volunteer
- Officer Verified
- Organization Verified
- Platform Verified

Trust influences access to sensitive workflows.

FR-ID-011 — Identity Verification

Organizations may verify:

- Membership
- Officer appointments
- Event participation
- Awards
- Historical contributions

Verification records include:

- Verifier
 - Date
 - Supporting Evidence Record
 - Expiration (if applicable)
-

FR-ID-012 — Identity Preferences

Members may configure:

- Language
- Time zone
- Notification preferences
- Public visibility
- Community discovery
- AI personalization
- Accessibility preferences

Preferences apply consistently across all HCP services.

Business Principles

Identity belongs to the individual.

Membership belongs to the organization.

History belongs to the community.

Privacy belongs to the member.

Completion Criteria

Complete when:

- Identity model is defined.
 - Membership architecture is complete.
 - Public and private profiles are separated.
 - Identity timeline exists.
 - Trust model is established.
-

Next Document

08M-02 — Authentication, Security, Sessions & Device Management

Annex 08M — Identity & Authentication

Part 3 — Authentication, Security, Sessions & Device Management

Document ID: HCP-PB-08M-02

Parent: Annex 08M — Identity & Authentication

Domain: Authentication & Session Security

Status: Draft

Version: 1.0

Purpose

This document defines how users authenticate, establish trusted sessions, register devices, recover access, and secure their HCP identities.

The authentication architecture balances strong security with a seamless user experience, ensuring members can safely access HCP throughout a lifetime of participation.

Vision

Security should protect the community without becoming a barrier to participation.

Members should trust that their identities, contributions, and governance responsibilities are safeguarded by modern authentication practices.

Philosophy

Authentication proves who you are.

Authorization determines what you may do.

Trust evolves over time.

Security adapts to context.

Guiding Principles

- Passwordless-first architecture where practical.
 - Multi-factor authentication (MFA) support.
 - Device awareness.
 - Risk-based authentication.
 - Recovery without losing history.
 - Privacy by design.
-

Authentication Methods

Supported authentication methods include:

- Email and password
- Magic link
- Passkeys (WebAuthn)
- Authenticator applications (TOTP)
- SMS (optional and configurable)
- Social sign-in (optional)
- Enterprise identity providers (future federation)

Organizations may restrict or recommend specific methods for privileged roles.

FR-ID-013 — Account Registration

Registration supports:

- Email verification
- Optional invitation codes
- CAPTCHA or equivalent abuse protection
- Acceptance of platform terms
- Initial privacy configuration

Successful registration creates a permanent Identity record.

FR-ID-014 — Multi-Factor Authentication

Members may enable one or more MFA methods.

Privileged roles (such as Grand Masters or Platform Administrators) may require MFA before performing sensitive actions.

Supported factors include:

- Authenticator app
 - Passkey
 - Hardware security key (future)
 - Backup recovery codes
-

FR-ID-015 — Device Management

Members can view and manage trusted devices.

Each device records:

- Device name
- Platform
- Browser or app version
- First sign-in
- Last activity
- Trust status
- Approximate location (where available and lawful)

Members may revoke any device at any time.

FR-ID-016 — Session Management

The platform maintains secure sessions with support for:

- Session expiration
- Refresh tokens
- Concurrent sessions
- Device-specific sessions
- Session revocation
- "Log out from all devices"

Sensitive actions may require re-authentication.

FR-ID-017 — Risk-Based Authentication

HCP evaluates contextual signals such as:

- New device
- Unusual location
- Impossible travel patterns
- Repeated failed sign-ins
- Elevated governance actions

Based on assessed risk, additional verification may be requested.

FR-ID-018 — Account Recovery

Recovery options include:

- Verified email
- Backup recovery codes
- Trusted device confirmation
- Officer-assisted verification (where constitutionally appropriate)
- Platform support review

Recovery procedures preserve the original Identity and historical records.

FR-ID-019 — Credential Management

Members may:

- Change passwords
- Add or remove passkeys
- Rotate MFA methods
- Review security history
- Revoke compromised credentials

Credential changes are recorded in the security audit log.

FR-ID-020 — Security Activity Log

Members have access to a personal security log showing:

- Successful sign-ins
- Failed sign-in attempts
- Password changes
- MFA updates
- Device additions
- Device removals
- Recovery events
- Session revocations

Suspicious activity is highlighted for review.

FR-ID-021 — Service & API Authentication

HCP supports authentication for:

- Internal platform services
- Mobile applications
- Web clients
- Public APIs
- Partner integrations

Service identities are managed separately from human identities and follow least-privilege principles.

Business Principles

Security should build confidence.

Recovery should preserve continuity.

Authentication should adapt without becoming intrusive.

Completion Criteria

Complete when:

- Authentication methods are defined.
 - MFA is supported.
 - Session management is documented.
 - Device trust is established.
 - Recovery workflows preserve identity.
-

Next Document

08M-03 — Authorization, Roles, Permissions & Trust Framework

Annex 08M — Identity & Authentication

Part 4 — Authorization, Roles, Permissions & Trust Framework

Document ID: HCP-PB-08M-03

Parent: Annex 08M — Identity & Authentication

Domain: Authorization & Trust Framework

Status: Draft

Version: 1.0

Purpose

This document defines how HCP determines what an authenticated identity may do across organizations, events, governance, platform services, and community features.

Authorization is context-aware and combines role-based, relationship-based, and policy-based access control.

Vision

The same person may hold different responsibilities in different contexts.

Permissions should follow responsibility—not identity.

Philosophy

Authenticate once.

Authorize continuously.

Trust is contextual.

Authority is delegated.

Everything is auditable.

Guiding Principles

- Least privilege.
 - Context-aware authorization.
 - Delegated authority.
 - Time-limited elevation.
 - Evidence-backed decisions.
 - Full auditability.
-

Authorization Model

HCP combines multiple authorization strategies:

- RBAC (Role-Based Access Control)
- ABAC (Attribute-Based Access Control)
- ReBAC (Relationship-Based Access Control)
- PBAC (Policy-Based Access Control)

Each request may evaluate one or more strategies before granting access.

Why Hybrid Authorization?

RBAC answers:

"What role do you have?"

ABAC answers:

"What attributes apply right now?"

ReBAC answers:

"How are you related to this resource?"

PBAC answers:

"What organizational policy governs this action?"

Together they provide flexible, future-proof authorization.

Authorization Context

Every authorization request evaluates context such as:

- Identity
 - Organization
 - Membership
 - Officer role
 - Committee assignment
 - Event participation
 - Passport status (where relevant)
 - Trust level
 - Device trust
 - Session risk
 - Time
 - Location (where appropriate)
 - Organizational policy
-

FR-ID-022 — Role Assignment

Roles are granted through organizational affiliations.

Examples include:

- Grand Master
- Trail Master
- Beer Master
- Event Director
- Volunteer
- Committee Chair
- Moderator

Roles are scoped to a specific organization, event, or platform service.

FR-ID-023 — Permission Sets

Permissions are grouped into reusable permission sets.

Examples:

Event Organizer

- Create event
- Edit schedule
- Manage volunteers
- Publish announcements

Trail Master

- Publish trails
- Approve trail updates
- Archive trail reports

Governance Officer

- Manage motions
- Publish minutes
- Initiate elections

Permission sets reduce duplication and simplify administration.

FR-ID-024 — Delegated Authority

Officers may delegate specific responsibilities.

Delegations include:

- Delegate
- Scope
- Duration
- Reason
- Evidence Record
- Automatic expiration

Delegation never exceeds the delegator's authority.

FR-ID-025 — Temporary Privileges

Temporary elevation supports scenarios such as:

- Event weekend administration
- Emergency response
- Committee investigations
- Acting officer appointments

Temporary privileges expire automatically.

FR-ID-026 — Relationship-Based Authorization

Relationships influence permissions.

Examples:

- Trail author
- Event organizer
- Committee member
- Assigned volunteer
- Photographer
- Run Capsule contributor

Relationship-based permissions reduce unnecessary administrative roles.

FR-ID-027 — Policy Engine

Organizations may define policies governing:

- Membership approvals
- Voting eligibility
- Officer appointments
- Financial approvals
- Event publishing
- Committee visibility

Policies are version-controlled and auditable.

FR-ID-028 — Trust Framework

Authorization considers trust signals including:

- Identity verification
- Membership verification
- Officer verification
- Device trust
- Security history
- Community standing (without public scoring)

Trust supports—not replaces—organizational governance.

FR-ID-029 — Permission Evaluation

Before granting access, HCP evaluates:

Identity



Authentication Status



Session Trust



Organization Context



Role



Relationship



Policy



Evidence Requirements



Decision

Every decision may be recorded for audit purposes.

FR-ID-030 — Authorization Audit

Every privileged action records:

- Identity
- Permission evaluated
- Resource
- Decision
- Timestamp
- Context
- Supporting policy
- Evidence reference

Audit records remain immutable.

Business Principles

Authority follows responsibility.

Responsibility requires accountability.

Accountability requires evidence.

Completion Criteria

Complete when:

- Hybrid authorization is defined.
 - Delegation is supported.
 - Trust framework is documented.
 - Policy engine is specified.
 - Authorization auditing is complete.
-

Next Document

08M-04 — Federation, External Identity & Business Rules

Annex 08M — Identity & Authentication

Part 5 — Federation, External Identity & Business Rules

Document ID: HCP-PB-08M-04

Parent: Annex 08M — Identity & Authentication

Domain: Federation, External Identity & Business Rules

Status: Draft

Version: 1.0

Purpose

This document defines how HCP interoperates with external identity providers, partner organizations, future federated Hash systems, and establishes the business rules governing digital identity throughout the platform.

The objective is to ensure that identities remain portable, trustworthy, privacy-conscious, and resilient while allowing HCP to evolve into a globally connected platform.

Vision

One identity.

Many organizations.

Many devices.

Potentially many trusted systems.

A lifetime of continuity.

Philosophy

Identity belongs to the individual.

Membership belongs to organizations.

Trust is earned.

Evidence supports trust.

Federation expands participation without fragmenting identity.

Guiding Principles

- User ownership of identity.
 - Standards-based federation.
 - Minimal duplication.
 - Explainable trust.
 - Long-term portability.
 - Privacy by design.
-

Federation Scope

The platform is designed to support integration with:

- Trusted Hash organizations
- Regional Hash associations
- National federations
- Identity providers (OIDC/OAuth 2.1)
- Enterprise identity providers
- Future HCP federation nodes
- Partner community platforms

Federation is optional and governed by explicit trust relationships.

FR-ID-031 — External Identity Providers

Members may authenticate using approved providers such as:

- OpenID Connect (OIDC)
- OAuth 2.1 compatible providers
- Passkey ecosystems
- Enterprise SSO
- Future decentralized identity standards

External authentication never replaces the canonical HCP Identity.

FR-ID-032 — Identity Linking

Members may link multiple authentication methods to a single HCP Identity.

Examples include:

- Email and password
- Passkey
- Google
- Apple
- Microsoft
- GitHub
- Enterprise identity

Each linked method can be independently added or removed.

FR-ID-033 — Federation Trust Registry

HCP maintains a registry of trusted external organizations.

Each trusted organization records:

- Organization identifier
- Trust level
- Federation protocol
- Metadata
- Certificate information (where applicable)
- Status
- Audit history

Trust relationships may be suspended or revoked.

FR-ID-034 — Portable Identity

Members may export identity data including:

- Public profile
- Membership history
- Passport summary
- Awards
- Contributions
- Run Capsules
- Governance participation (subject to organizational policy)

Exports follow open formats where practical.

FR-ID-035 — Identity Import

Where appropriate, organizations may import verified historical participation into HCP.

Imported records include provenance metadata identifying:

- Source organization
- Import date
- Verification status
- Supporting Evidence Records

Imported history is distinguishable from native HCP records.

FR-ID-036 — Identity Continuity

Identity continuity shall survive:

- Password changes
- Authentication method changes
- Device replacement
- Legal name changes
- Hash name changes
- Membership changes
- Leadership transitions

Historical references always point to the same immutable Identity.

FR-ID-037 — Privacy Controls

Members control visibility of:

- Profile details
- Memberships
- Awards
- Passport information
- Community discovery
- Contact preferences
- Public activity

Organizations may define minimum visibility requirements for operational purposes.

FR-ID-038 — Identity Retention

Inactive identities are archived rather than deleted by default.

Where deletion is legally required, HCP removes personal data while preserving institutional records through anonymization or pseudonymization where permitted.

FR-ID-039 — AI Identity Services

AI may assist members by:

- Explaining profile settings.
- Recommending security improvements.
- Detecting duplicate accounts.
- Suggesting profile completion.
- Answering identity-related questions.

AI shall not modify identity information without explicit user approval.

FR-ID-040 — Identity Health Dashboard

Members may review an identity health summary including:

- Verification status
- MFA status
- Trusted devices
- Linked authentication methods
- Recovery readiness
- Privacy score
- Recent security activity

The dashboard highlights recommended improvements.

Business Rules

BR-ID-001

Every person shall have one canonical HCP Identity.

BR-ID-002

Authentication methods are replaceable.

Identity is permanent.

BR-ID-003

Memberships never own identities.

Organizations reference identities.

BR-ID-004

Historical records shall always reference immutable Identity identifiers.

BR-ID-005

Federation shall not create duplicate canonical identities.

BR-ID-006

Identity exports shall include provenance metadata where applicable.

BR-ID-007

Trust decisions shall remain explainable.

BR-ID-008

Security shall prioritize recovery without compromising continuity.

Acceptance Criteria

The Identity domain is complete when:

- Identity architecture is fully defined.
 - Authentication methods are documented.
 - Authorization framework is complete.
 - Federation model is specified.
 - Business rules ensure continuity and trust.
-

Non-Functional Expectations

The Identity subsystem shall provide:

- High availability.
 - Strong consistency.
 - Horizontal scalability.
 - Secure credential storage.
 - Standards-compliant federation.
 - Low-latency authorization decisions.
 - Comprehensive audit logging.
-

Identity Principles

One Person.

One Identity.

Many Adventures.

A Lifetime Preserved.

Completion Criteria

Annex 08M is complete when:

- Identity model is finalized.
 - Authentication is secure.
 - Authorization is contextual.
 - Federation is future-ready.
 - Business principles protect continuity.
-

Annex 08M Completion

The Identity & Authentication domain consists of:

- 08M-00 — Vision & Domain Overview
- 08M-01 — Identity Model, Profiles & Membership Architecture
- 08M-02 — Authentication, Security, Sessions & Device Management
- 08M-03 — Authorization, Roles, Permissions & Trust Framework
- 08M-04 — Federation, External Identity & Business Rules

The Identity & Authentication domain establishes HCP's canonical identity architecture, ensuring every member has a secure, portable, and enduring digital identity that supports participation across every feature and every stage of their Hash journey.

Annex 08N — Evidence Record Service

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08N-00

Parent: Chapter 8 — Core Platform Services

Domain: Evidence Record Service

Status: Draft

Version: 1.0

Purpose

The Evidence Record Service is the canonical source of supporting evidence throughout the Hash Community Platform (HCP).

Rather than storing isolated facts, HCP records the evidence that supports those facts, enabling explainability, auditability, historical preservation, governance integrity, AI transparency, and long-term trust.

Every major platform service may reference one or more Evidence Records.

Vision

Every important fact should answer one question:

"How do we know this?"

Philosophy

Facts create knowledge.

Evidence creates trust.

Trust creates communities.

Guiding Principles

- Evidence before assertion.
 - Explainability by default.
 - Immutable history.
 - Reusable references.
 - Provenance preservation.
 - Privacy-aware evidence.
 - AI transparency.
-

Scope

The Evidence Record Service supports:

- Identity verification
 - Passport stamps
 - Event attendance
 - Run Capsules
 - Trail Reports
 - Governance
 - Awards
 - Membership approvals
 - Officer appointments
 - Audit logs
 - AI explanations
 - Historical preservation
-

Core Objects

The service manages:

- Evidence Record
 - Evidence Source
 - Evidence Link
 - Provenance
 - Confidence Score
 - Verification Status
 - Supporting Artifact
 - Evidence Bundle
 - Citation
 - Chain of Custody
-

Relationships

Evidence integrates with:

- Identity
 - Passport
 - Community Graph
 - Governance
 - Events
 - Atlas
 - Run Capsules
 - Trail Studio
 - AI Platform
 - Audit Service
 - Notification Center
-

Evidence Categories

Supported categories include:

- Attendance
- Identity
- Membership
- Governance
- Financial
- Historical
- Geographical
- Media
- Awards
- Volunteer Service
- Trail Verification
- Administrative
- Imported Records

Additional categories may be introduced without redesigning the platform.

Evidence Sources

Evidence may originate from:

- QR check-ins
 - GPS data
 - Organizer confirmation
 - Committee approval
 - Uploaded documents
 - Photos
 - Videos
 - Passport scans
 - Historical archives
 - Trusted imports
 - External APIs
 - AI-assisted analysis (clearly labeled)
-

Success Criteria

The Evidence Record Service succeeds when:

- Every major platform decision can reference supporting evidence.
 - AI responses are explainable.
 - Governance is auditable.
 - Historical records are trustworthy.
 - Evidence is reusable across domains.
-

Business Principles

Evidence creates trust.

Trust preserves history.

History strengthens community.

Completion Criteria

Complete when:

- Evidence philosophy is established.
 - Core objects are defined.
 - Integration points are documented.
 - Platform scope is complete.
-

Next Document

08N-01 — Evidence Model, Provenance & Chain of Custody

Annex 08N — Evidence Record Service

Part 2 — Evidence Model, Provenance & Chain of Custody

Document ID: HCP-PB-08N-01

Parent: Annex 08N — Evidence Record Service

Domain: Evidence Model & Provenance

Status: Draft

Version: 1.0

Purpose

This document defines the canonical data model for Evidence Records, including provenance, verification, chain of custody, evidence relationships, and confidence assessment.

The objective is to ensure every Evidence Record can be traced back to its origin, evaluated for trustworthiness, and preserved as part of the platform's historical memory.

Vision

Every Evidence Record should answer:

- Where did this come from?
 - Who created it?
 - When was it created?
 - Has it been verified?
 - Can it be trusted?
-

Philosophy

Evidence is strongest when its origin is known.

Evidence becomes trustworthy when its history is preserved.

Guiding Principles

- Immutable provenance.
 - Transparent verification.
 - Reusable evidence.
 - Explainable confidence.
 - Privacy-aware references.
 - Long-term preservation.
-

Core Evidence Model

The Evidence Record consists of:

- Evidence ID
- Evidence Type
- Title
- Description
- Evidence References
- Source Metadata
- Provenance
- Verification Status
- Confidence Score
- Chain of Custody
- Access Policy
- Retention Policy

Evidence Records reference supporting artifacts rather than duplicating them.

FR-EV-001 — Evidence Identifier

Every Evidence Record receives:

- Immutable UUID
- Creation timestamp
- Owning service
- Version number
- Status

Identifiers never change, even if supporting artifacts evolve.

FR-EV-002 — Evidence References

Evidence may reference one or more supporting artifacts, including:

- Documents
- Images
- Videos
- GPX files
- GPS coordinates
- QR check-ins
- Event registrations
- Meeting minutes
- Identity verifications
- External imports
- Audit records

References remain valid even if artifacts are superseded by newer versions.

FR-EV-003 — Provenance

Each Evidence Record stores provenance information:

- Originating service
- Original creator
- Organization
- Timestamp
- Import source (if applicable)
- Collection method
- Processing history

Provenance remains immutable.

FR-EV-004 — Verification Status

Evidence may have one of the following states:

- Unverified
- Pending Review
- Verified
- Disputed
- Superseded
- Archived

Verification history is permanently retained.

FR-EV-005 — Chain of Custody

Every modification affecting an Evidence Record is logged, including:

- Actor
- Timestamp
- Action
- Previous state
- New state
- Reason
- Related audit entry

The chain of custody is append-only.

FR-EV-006 — Confidence Score

Evidence may include a calculated confidence score based on factors such as:

- Number of independent sources
- Source reliability
- Verification status
- Consistency with related evidence
- Historical trust of the originating source

Confidence scores assist decision-making but never replace human judgment.

FR-EV-007 — Evidence Relationships

Evidence Records may relate to one another through relationships such as:

- Supports
- Contradicts
- Supersedes
- Derived From
- Cites
- Part Of
- Verified By

Relationships create an interconnected evidence graph.

FR-EV-008 — Evidence Bundles

Multiple Evidence Records may be grouped into an Evidence Bundle.

Examples:

- Award nomination package
- Event attendance dossier
- Governance proposal archive
- Historical restoration project

Bundles simplify review while preserving individual evidence integrity.

FR-EV-009 — Retention & Preservation

Retention policies may vary by evidence type.

Examples:

- Operational logs
- Governance records
- Historical archives
- Legal documentation
- Temporary uploads

Records designated as heritage evidence receive enhanced preservation protections.

FR-EV-010 — Privacy & Access

Evidence access is governed by:

- Identity
- Organization
- Role
- Relationship
- Legal obligations
- Privacy settings

Sensitive evidence is never exposed outside authorized workflows.

Business Principles

Evidence should be reusable.

Provenance should be permanent.

Verification should be transparent.

History should remain understandable.

Completion Criteria

Complete when:

- Evidence model is defined.
 - Provenance is immutable.
 - Chain of custody is documented.
 - Evidence relationships are supported.
 - Confidence framework is established.
-

Next Document

08N-02 — Verification Workflows, Evidence Graph & AI Explainability

Annex 08N — Evidence Record Service

Part 3 — Verification Workflows, Evidence Graph & AI Explainability

Document ID: HCP-PB-08N-02

Parent: Annex 08N — Evidence Record Service

Domain: Verification, Evidence Graph & AI Explainability

Status: Draft

Version: 1.0

Purpose

This document defines how Evidence Records are verified, connected into an Evidence Graph, and used to provide explainable AI throughout the Hash Community Platform (HCP).

The objective is to ensure platform decisions and AI-generated insights remain transparent, verifiable, and supported by evidence rather than unsupported assertions.

Vision

Every important claim should be traceable.

Every AI answer should be explainable.

Every decision should cite its evidence.

Philosophy

Artificial Intelligence should assist understanding.

Evidence should establish trust.

People remain responsible for decisions.

Guiding Principles

- Human-verifiable AI.
 - Evidence-backed automation.
 - Transparent verification.
 - Explainability by design.
 - Continuous trust.
 - Reusable evidence.
-

FR-EV-011 — Verification Workflows

Evidence may be verified through one or more methods:

- Organizer confirmation
- Committee approval
- Officer verification
- Trusted member validation
- Automated system verification
- Imported trusted records
- Multi-source corroboration

Verification workflows are configurable by evidence type.

FR-EV-012 — Verification States

Evidence progresses through defined lifecycle states:

- Draft
- Submitted
- Pending Verification
- Verified
- Disputed
- Superseded
- Archived

Every state transition is permanently recorded.

FR-EV-013 — Multi-Source Corroboration

Evidence confidence increases when multiple independent sources support the same claim.

Examples:

Attendance

- Event registration
- QR check-in
- GPS arrival
- Organizer confirmation
- Group photograph
- Run Capsule participation

Governance

- Meeting minutes
- Quorum confirmation
- Ballot results
- Officer certification

Historical Import

- Archive documents
 - Multiple witnesses
 - Historical publications
 - National association records
-

FR-EV-014 — Evidence Graph

Every Evidence Record may connect to related records.

Relationship types include:

- Supports
- Confirms
- Contradicts
- Derived From
- References
- Part Of
- Verified By
- Related To

The graph supports traversal, search, and AI reasoning.

FR-EV-015 — Explainable Objects

Every major HCP object may expose an explanation view.

Supported objects include:

- Passport stamps
- Awards
- Memberships
- Officer appointments
- Events
- Run Capsules
- Trail Reports
- Community achievements
- AI recommendations

The explanation references supporting Evidence Records.

FR-EV-016 — AI Evidence Citations

AI-generated responses referencing platform data shall include:

- Supporting Evidence Records
- Confidence indicator
- Source summaries
- Verification status
- Date of latest supporting evidence

Users may inspect supporting evidence directly.

FR-EV-017 — Evidence Conflict Resolution

Where evidence conflicts, HCP records:

- Conflicting sources
- Verification history
- Review status
- Responsible reviewers
- Resolution outcome

AI must acknowledge unresolved conflicts rather than presenting uncertain information as fact.

FR-EV-018 — Human Review

Sensitive evidence categories require human oversight before reaching a Verified state.

Examples include:

- Governance disputes
- Officer appointments
- Lifetime awards
- Constitutional amendments
- Historical restoration projects

Human review decisions become Evidence Records themselves.

FR-EV-019 — Explainability API

Platform services may request structured explanations through a shared Explainability API.

Responses include:

- Evidence summary
- Supporting citations
- Confidence assessment
- Verification history
- Related evidence

The API provides a consistent explanation model across HCP.

FR-EV-020 — AI Transparency

Whenever AI generates recommendations or summaries, the platform shall clearly distinguish:

- Verified evidence
- AI interpretation
- User-generated content
- External information

Users should never confuse AI inference with verified historical fact.

Business Principles

Verification builds trust.

Explanation builds confidence.

Transparency builds community.

Completion Criteria

Complete when:

- Verification workflows are defined.
 - Evidence Graph relationships are documented.
 - Explainability API is specified.
 - AI citation model is complete.
 - Conflict resolution is supported.
-

Next Document

08N-03 — Governance Integration, Audit, Business Rules & Preservation

Annex 08N — Evidence Record Service

Part 4 — Governance Integration, Audit, Business Rules & Preservation

Document ID: HCP-PB-08N-03

Parent: Annex 08N — Evidence Record Service

Domain: Evidence Governance & Preservation

Status: Draft

Version: 1.0

Purpose

This document establishes the governance model, business rules, audit requirements, preservation principles, and long-term stewardship expectations for the Evidence Record Service.

The Evidence Record Service underpins trust across every domain of HCP. Its governance therefore requires stronger guarantees than ordinary application data.

Vision

Evidence should outlive software.

Trust should outlive people.

History should outlive generations.

Philosophy

Evidence is a community asset.

No single feature owns it.

Every platform service contributes to it.

Every future generation benefits from it.

Guiding Principles

- Evidence is immutable.
 - Provenance is permanent.
 - Verification is transparent.
 - Preservation is intentional.
 - Privacy is respected.
 - AI is explainable.
 - Governance is auditable.
-

Governance Responsibilities

The Evidence Record Service supports:

- Identity
- Passport
- Events
- Governance
- Community Graph
- Trail Studio
- Run Capsules
- Awards
- AI Platform
- Audit Services
- Historical Archives

No individual feature may bypass Evidence governance policies.

FR-EV-021 — Evidence Governance

Platform governance defines:

- Evidence standards
- Verification policies
- Trust models
- Preservation policies
- Retention schedules
- Access controls
- Compliance requirements

Governance changes are version-controlled and auditable.

FR-EV-022 — Immutable Audit

Every action affecting an Evidence Record is recorded, including:

- Creation
- Verification
- Dispute
- Supersession
- Access to sensitive evidence
- Policy changes

Audit logs are append-only and tamper-evident.

FR-EV-023 — Preservation Strategy

Evidence designated as historical or institutional shall support:

- Redundant storage
- Geographic replication
- Integrity verification
- Periodic restoration testing
- Format migration
- Metadata preservation

The goal is preservation across decades, not application versions.

FR-EV-024 — Legal & Privacy Compliance

Evidence handling shall comply with applicable laws and organizational obligations, including:

- Privacy legislation
- Data retention requirements
- Right to access
- Right to correction
- Lawful deletion where required
- Archival exemptions where legally permitted

Compliance actions are themselves auditable.

FR-EV-025 — Cross-Domain Integrity

Every domain referencing Evidence Records shall:

- Store references rather than duplicate evidence.
- Respect access policies.
- Preserve provenance.
- Surface verification status.
- Support explainability.

This ensures consistency across the platform.

FR-EV-026 — Historical Preservation

Evidence identified as heritage material may receive enhanced protection.

Examples include:

- Founding documents
- Historic trail maps
- Legacy photographs
- Oral histories
- Constitutional milestones
- Landmark Run Capsules
- Anniversary publications

These records may be curated as part of the HCP Heritage Archive.

FR-EV-027 — Explainability Obligations

Platform services using AI or automated decision-making shall expose supporting evidence where practical.

If supporting evidence is unavailable, the system must clearly communicate this to the user.

FR-EV-028 — Evidence Stewardship

Evidence stewardship responsibilities include:

- Quality assurance
- Metadata consistency
- Periodic review
- Preservation planning
- Historical curation
- Community collaboration

Stewardship is a shared responsibility between platform administrators and participating organizations.

Business Rules

BR-EV-001

Evidence Records are immutable once created.

Subsequent changes create new states or linked records rather than overwriting history.

BR-EV-002

Evidence ownership remains with the originating contributor or organization, subject to applicable platform terms and legal requirements.

BR-EV-003

Evidence references shall remain stable throughout the lifetime of the platform.

BR-EV-004

Every verified claim should reference supporting Evidence Records wherever feasible.

BR-EV-005

AI-generated statements referencing platform data should provide supporting citations or explicitly acknowledge uncertainty.

BR-EV-006

Historical preservation takes precedence over convenience where institutional memory would otherwise be lost.

BR-EV-007

Sensitive evidence shall only be accessible to authorized identities within approved contexts.

BR-EV-008

Evidence governance policies are version-controlled and permanently archived.

Acceptance Criteria

The Evidence Record Service is complete when:

- Evidence governance is defined.
 - Audit requirements are documented.
 - Preservation strategy is established.
 - Cross-domain integration rules are complete.
 - Business principles protect long-term trust.
-

Non-Functional Expectations

The Evidence Record Service shall provide:

- High durability.
 - Strong consistency.
 - Tamper-evident audit logs.
 - Long-term archival integrity.
 - High availability.
 - Horizontal scalability.
 - Efficient evidence graph traversal.
 - Explainability support.
-

Evidence Principles

Every Claim.

Every Citation.

Every Generation.

One Trusted History.

Completion Criteria

Annex 08N is complete when:

- Evidence philosophy is finalized.
 - Evidence model is complete.
 - Verification workflows are documented.
 - Governance principles are established.
 - Preservation strategy protects long-term historical continuity.
-

Annex 08N Completion

The Evidence Record Service domain consists of:

- 08N-00 — Vision & Domain Overview
- 08N-01 — Evidence Model, Provenance & Chain of Custody
- 08N-02 — Verification Workflows, Evidence Graph & AI Explainability
- 08N-03 — Governance Integration, Audit, Business Rules & Preservation

The Evidence Record Service establishes the trust architecture of HCP, ensuring every significant fact, decision, achievement, and historical record can be understood, verified, and preserved through evidence-backed relationships.

Annex 08O — Communication Hub

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08O-00

Parent: Chapter 8 — Core Platform Services

Domain: Communication Hub

Status: Draft

Version: 1.0

Purpose

The Communication Hub provides the unified communication infrastructure for the Hash Community Platform (HCP).

Rather than creating isolated messaging systems for each feature, HCP provides a shared communication service that supports conversations across events, organizations, governance, passports, trails, Run Capsules, committees, and future platform services.

The Communication Hub ensures every conversation remains contextual, searchable, secure, and historically meaningful.

Vision

Every conversation belongs somewhere.

Every discussion has context.

Every memory deserves to be preserved.

Philosophy

Communication is more than messaging.

It is collaboration.

It is storytelling.

It is decision-making.

It is community.

Guiding Principles

- Context before conversation.
 - One communication platform.
 - Privacy by design.
 - Explainable history.
 - Searchable knowledge.
 - Cross-platform consistency.
 - Federation ready.
-

Scope

The Communication Hub supports:

- Direct messaging
 - Group conversations
 - Event discussions
 - Trail discussions
 - Run Capsule collaboration
 - Governance conversations
 - Committee workspaces
 - Organization announcements
 - AI-assisted conversations
 - Voice and video (future)
 - Broadcast channels
-

Core Objects

The Communication Hub manages:

- Conversation
 - Channel
 - Message
 - Thread
 - Participant
 - Mention
 - Attachment
 - Reaction
 - Poll
 - Announcement
 - Read Receipt
 - Presence
 - Conversation Context
-

Relationships

The Communication Hub integrates with:

- Identity
 - Community Graph
 - Passport
 - Events
 - Governance
 - Trail Studio
 - Run Capsules
 - Evidence Record Service
 - Notification Center
 - AI Platform
-

Conversation Types

Supported conversation types include:

- Private Chat
- Group Chat
- Organization Channel
- Event Channel
- Committee Workspace
- Governance Discussion
- Trail Planning
- Run Capsule Collaboration
- Announcement Feed
- AI Conversation

Future conversation types may be added without redesigning the platform.

Success Criteria

The Communication Hub succeeds when:

- Every conversation has context.
 - Discussions remain discoverable.
 - Collaboration is seamless.
 - Privacy is respected.
 - Communication scales globally.
-

Business Principles

Conversations build friendships.

Discussions build communities.

Stories build history.

Completion Criteria

Complete when:

- Communication philosophy is established.
 - Core objects are defined.
 - Integration points are documented.
 - Platform scope is complete.
-

Next Document

08O-01 — Conversation Model, Channels & Collaboration

Annex 08O — Communication Hub

Part 2 — Conversation Model, Channels & Collaboration

Document ID: HCP-PB-08O-01

Parent: Annex 08O — Communication Hub

Domain: Conversation Architecture & Collaboration

Status: Draft

Version: 1.0

Purpose

This document defines the conversation architecture for the Hash Community Platform (HCP), including channels, threads, collaboration spaces, participation models, and contextual communication.

Every conversation exists within a defined context and contributes to the platform's living knowledge base.

Vision

Every conversation belongs to something.

Context gives conversations meaning.

History gives conversations value.

Philosophy

People don't wake up wanting to chat.

They wake up wanting to organize events, plan trails, preserve stories, solve problems, and strengthen friendships.

Communication simply enables those goals.

Guiding Principles

- Context-first communication.
 - Persistent collaboration.
 - Searchable conversations.
 - Threaded discussions.
 - Inclusive participation.
 - AI-assisted understanding.
-

FR-COM-001 — Conversation Context

Every conversation must belong to a context.

Supported contexts include:

- Organization
- Event
- Trail
- Run Capsule
- Governance Motion
- Committee
- Passport Journey
- Heritage Project
- Identity
- AI Workspace

Standalone conversations are supported only for direct messaging.

FR-COM-002 — Channel Types

The platform supports reusable channel types such as:

- Announcements
- General Discussion
- Planning
- Logistics
- Documents
- Media
- Volunteers
- Finance
- Governance
- Archive
- Questions & Answers
- Social

Organizations may define custom channel templates.

FR-COM-003 — Automatic Channel Provisioning

When a supported object is created, HCP automatically provisions its default communication channels.

Examples:

Event

- Announcements
- General Discussion
- Volunteers
- Transport
- Accommodation
- Organizers (Private)

Committee

- General
- Decisions
- Documents
- Meetings
- Archive

Run Capsule

- Draft Discussion
- Fact Verification
- Media Review
- Publication

Administrators may customize templates before activation.

FR-COM-004 — Threads

Every message may contain threaded discussions.

Threads preserve conversation flow without disrupting the primary channel.

Thread history remains searchable.

FR-COM-005 — Rich Messages

Messages may include:

- Text
- Images
- Videos
- Voice notes
- Documents
- Maps
- Polls
- Checklists
- Code blocks
- Hyperlinks
- Evidence references
- AI summaries

Attachments are managed through the shared attachment service.

FR-COM-006 — Collaboration Objects

Conversations may embed platform objects directly, including:

- Events
- Trail maps
- Passport entries
- Evidence Records
- Governance motions
- Meeting agendas
- Awards
- Run Capsules

Embedded objects remain live and synchronized.

FR-COM-007 — Mentions & Presence

The platform supports:

- Member mentions
- Role mentions
- Committee mentions
- Organization mentions
- Online presence
- Typing indicators
- Availability status

Presence visibility respects privacy settings.

FR-COM-008 — Reactions & Feedback

Participants may interact using:

- Emoji reactions
- Approval acknowledgements
- Decision markers
- Quick voting
- Read confirmations

These interactions may contribute to engagement analytics where appropriate.

FR-COM-009 — Collaborative Editing

Supported conversations may include collaborative editing of:

- Meeting notes
- Trail reports
- Run Capsules
- Governance drafts
- Historical documents

Version history is preserved through the Evidence Record Service.

FR-COM-010 — Conversation Lifecycle

Conversations may transition through states:

- Active
- Archived
- Locked
- Read-only
- Heritage Archive

Archived conversations remain searchable according to access policies.

Business Principles

Conversations should remain understandable.

Knowledge should remain discoverable.

History should remain preserved.

Completion Criteria

Complete when:

- Conversation model is defined.
 - Channel architecture is documented.
 - Collaboration workflows are specified.
 - Context-first communication is established.
-

Next Document

08O-02 — Messaging, Announcements, Broadcasts & AI Communication

Annex 08O — Communication Hub

Part 3 — Messaging, Announcements, Broadcasts & AI Communication

Document ID: HCP-PB-08O-02

Parent: Annex 08O — Communication Hub

Domain: Messaging, Broadcasts & AI Communication

Status: Draft

Version: 1.0

Purpose

This document defines person-to-person messaging, organizational announcements, broadcast communication, intelligent communication workflows, and AI-assisted messaging within the Hash Community Platform (HCP).

The objective is to ensure that every communication reaches the right audience, through the right channel, with the appropriate level of visibility and permanence.

Vision

Every message has an audience.

Every announcement has a purpose.

Every broadcast has accountability.

Philosophy

Not all communication is conversation.

Some communication informs.

Some coordinates.

Some celebrates.

Some preserves history.

Guiding Principles

- Audience-aware communication.
 - Context-sensitive delivery.
 - Respect attention.
 - Minimize noise.
 - Preserve important information.
 - AI should assist, not overwhelm.
-

FR-COM-011 — Direct Messaging

Members may initiate direct conversations with other members, subject to privacy settings.

Supported capabilities include:

- One-to-one messaging
- Group messaging
- Media sharing
- Voice notes
- Location sharing
- Event sharing
- Trail sharing
- Passport references
- Evidence references

Blocked members cannot initiate new conversations.

FR-COM-012 — Announcements

Organizations, committees, and event organizers may publish announcements.

Announcement attributes include:

- Title
- Audience
- Priority
- Effective period
- Attachments
- Related objects
- Expiration date

Announcements may be pinned within relevant workspaces.

FR-COM-013 — Broadcast Channels

Broadcast channels support one-to-many communication.

Examples:

- Global HCP Updates
- National Association News
- Kennel Announcements
- Event Bulletins
- Safety Alerts
- Heritage Publications

Broadcast permissions are role-controlled.

FR-COM-014 — Communication Targeting

Messages and broadcasts may target audiences using filters such as:

- Organization membership
- Event registration
- Volunteer role
- Geographic region
- Language
- Passport achievements
- Committee membership
- Notification preferences

Targeting rules are auditable.

FR-COM-015 — Scheduled Communication

Authorized users may schedule:

- Announcements
- Reminder messages
- Event countdowns
- Governance notices
- Membership renewals
- Anniversary celebrations

Scheduled communications support preview and approval workflows.

FR-COM-016 — AI Communication Assistant

AI may assist with:

- Drafting announcements
- Summarizing discussions
- Translating messages
- Improving clarity
- Suggesting recipients
- Detecting duplicate announcements
- Identifying unanswered questions

Human approval is required before publishing organizational communications.

FR-COM-017 — Communication Analytics

Communication metrics may include:

- Delivery status
- Read rate
- Engagement
- Reaction summaries
- Click-through rate
- Participation trends

Analytics support organizational improvement rather than member surveillance.

FR-COM-018 — Emergency Communication

Authorized organizations may issue emergency broadcasts.

Examples include:

- Trail safety alerts
- Weather advisories
- Venue changes
- Medical incidents
- Event cancellations

Emergency broadcasts may override standard notification preferences where appropriate and lawful.

FR-COM-019 — Communication Retention

Retention policies vary by communication type.

Examples:

- Direct messages
- Governance discussions
- Event announcements
- Historical publications
- Heritage communications

Retention respects legal obligations and organizational policies.

FR-COM-020 — AI Conversation Summaries

AI may generate summaries for:

- Long discussions
- Event planning channels
- Committee meetings
- Governance debates
- Volunteer coordination
- Trail planning

Summaries include links to original conversations and indicate whether they are AI-generated.

Business Principles

Communicate intentionally.

Inform responsibly.

Preserve what matters.

Completion Criteria

Complete when:

- Messaging model is complete.
 - Broadcast workflows are defined.
 - AI communication support is specified.
 - Audience targeting is documented.
-

Next Document

08O-03 — Knowledge Preservation, Federation & Business Rules

Annex 08O — Communication Hub

Part 4 — Knowledge Preservation, Federation & Business Rules

Document ID: HCP-PB-08O-03

Parent: Annex 08O — Communication Hub

Domain: Knowledge Preservation, Federation & Business Rules

Status: Draft

Version: 1.0

Purpose

This document defines how communication is preserved as organizational knowledge, federated across trusted communities, governed through business rules, and protected for future generations.

The Communication Hub is not merely a messaging platform—it is a long-term knowledge infrastructure for the Hash Community.

Vision

Today's conversations become tomorrow's guidance.

Today's decisions become tomorrow's history.

Today's friendships become tomorrow's stories.

Philosophy

Messages are temporary.

Knowledge is enduring.

History is priceless.

Guiding Principles

- Preserve knowledge, not noise.
 - Respect privacy.
 - Archive intentionally.
 - Share responsibly.
 - Learn continuously.
 - Protect community memory.
-

FR-COM-021 — Knowledge Promotion

Authorized users may promote conversations into structured knowledge assets.

Examples include:

- Event playbooks
- Trail planning guides
- Volunteer manuals
- Governance FAQs
- Committee procedures
- Safety guidance
- Heritage stories

Promoted knowledge links back to the originating conversations and Evidence Records.

FR-COM-022 — Knowledge Lifecycle

Knowledge assets progress through lifecycle stages:

- Draft
- Under Review
- Approved
- Published
- Archived
- Heritage Collection

Version history is permanently preserved.

FR-COM-023 — Communication Federation

Trusted organizations may federate selected communication spaces.

Examples include:

- National announcements
- Interhash coordination
- Regional committees
- Heritage collaborations
- Joint event planning

Federation respects access controls and organizational boundaries.

FR-COM-024 — Heritage Conversations

Organizations may designate conversations as heritage material.

Examples include:

- Founding discussions
- Constitutional debates
- Landmark event planning
- Anniversary reflections
- Oral history interviews
- Legacy member conversations

Heritage conversations receive enhanced preservation and curation.

FR-COM-025 — AI Knowledge Extraction

AI may assist by identifying:

- Frequently asked questions
- Repeated solutions
- Best practices
- Lessons learned
- Common workflows
- Emerging themes

Extracted knowledge requires human approval before publication.

FR-COM-026 — Conversation Governance

Organizations define policies for:

- Channel creation
- Retention periods
- Moderation
- Archiving
- Knowledge promotion
- Federation
- AI participation

Policies are version-controlled and auditable.

FR-COM-027 — Communication Audit

Audit records include:

- Channel creation
- Membership changes
- Moderation actions
- Announcement publication
- Knowledge promotion
- Policy updates

Audit records integrate with the Evidence Record Service.

FR-COM-028 — Business Continuity

The Communication Hub shall support:

- Backup and restoration
- Geographic replication
- Disaster recovery
- Long-term archival
- Search index rebuilding
- Integrity verification

Critical communications remain recoverable across decades.

Business Rules

BR-COM-001

Every communication belongs to a defined context.

BR-COM-002

Knowledge assets reference their originating conversations.

BR-COM-003

AI-generated knowledge must be clearly identified and human-approved before publication.

BR-COM-004

Heritage conversations receive enhanced preservation.

BR-COM-005

Communication policies are organization-specific but follow platform governance standards.

BR-COM-006

Federated communication never bypasses local authorization policies.

BR-COM-007

Important conversations remain searchable according to access permissions.

BR-COM-008

Institutional knowledge should remain accessible across leadership transitions.

Acceptance Criteria

The Communication Hub is complete when:

- Conversation architecture is finalized.
 - Messaging and broadcast capabilities are defined.
 - Knowledge preservation is established.
 - Federation model is documented.
 - Business rules ensure long-term continuity.
-

Non-Functional Expectations

The Communication Hub shall provide:

- High availability.
 - Low-latency messaging.
 - Horizontal scalability.
 - Full-text search.
 - Offline synchronization for supported clients.
 - Secure end-to-end transport.
 - Long-term archival integrity.
-

Communication Principles

Every Conversation.

Every Lesson.

Every Generation.

One Living Community Memory.

Completion Criteria

Annex 08O is complete when:

- Communication philosophy is established.
 - Collaboration architecture is complete.
 - Broadcast capabilities are documented.
 - Knowledge preservation is operational.
 - Long-term governance is defined.
-

Annex 08O Completion

The Communication Hub domain consists of:

- 08O-00 — Vision & Domain Overview
- 08O-01 — Conversation Model, Channels & Collaboration
- 08O-02 — Messaging, Announcements, Broadcasts & AI Communication
- 08O-03 — Knowledge Preservation, Federation & Business Rules

The Communication Hub establishes a unified communication architecture where conversations remain contextual, searchable, explainable, and capable of evolving into institutional knowledge that strengthens the community over time.

Annex 08P — Notification Center

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08P-00

Parent: Chapter 8 — Core Platform Services

Domain: Notification Center

Status: Draft

Version: 1.0

Purpose

The Notification Center provides the unified attention management infrastructure for the Hash Community Platform (HCP).

Rather than allowing every platform service to deliver notifications independently, all communication requiring member attention is coordinated through a shared Notification Center that intelligently prioritizes, schedules, groups, and delivers notifications.

The Notification Center ensures members remain informed without becoming overwhelmed.

Vision

Every notification deserves attention.

No notification should compete unfairly for it.

Philosophy

Attention is limited.

Trust is earned.

Silence is sometimes the best notification.

Guiding Principles

- User-first attention management.
 - Relevance over volume.
 - Context-aware delivery.
 - Respect quiet time.
 - Explainable prioritization.
 - Cross-platform consistency.
 - Intelligent batching.
-

Scope

The Notification Center supports:

- Push notifications
 - Email notifications
 - SMS notifications
 - In-app notifications
 - Digest notifications
 - Broadcast alerts
 - Reminder workflows
 - Escalation workflows
 - AI-generated reminders
 - Future delivery channels
-

Core Objects

The Notification Center manages:

- Notification
 - Notification Rule
 - Delivery Channel
 - Delivery Attempt
 - Notification Preference
 - Notification Group
 - Digest
 - Reminder
 - Escalation
 - Quiet Hours
 - Attention Budget
-

Relationships

The Notification Center integrates with:

- Identity
 - Communication Hub
 - Events
 - Passport
 - Governance
 - Community Graph
 - AI Platform
 - Evidence Record Service
 - Analytics
 - Search
-

Notification Categories

Supported categories include:

- Personal
- Social
- Event
- Governance
- Organization
- Volunteer
- Safety
- Achievement
- Reminder
- Emergency
- Administrative
- AI Recommendation

Categories determine default delivery behavior.

Success Criteria

The Notification Center succeeds when:

- Members receive fewer but more meaningful notifications.
 - Critical information is never missed.
 - Routine updates are intelligently grouped.
 - User preferences are respected.
 - Notification fatigue is minimized.
-

Business Principles

Notify with purpose.

Respect attention.

Earn trust.

Completion Criteria

Complete when:

- Notification philosophy is established.
 - Core objects are defined.
 - Integration points are documented.
 - Platform scope is complete.
-

Next Document

08P-01 — Notification Model, Delivery Channels & Attention Intelligence

Annex 08P — Notification Center

Part 2 — Notification Model, Delivery Channels & Attention Intelligence

Document ID: HCP-PB-08P-01

Parent: Annex 08P — Notification Center

Domain: Notification Model, Delivery & Attention Intelligence

Status: Draft

Version: 1.0

Purpose

This document defines the notification model, delivery architecture, member preferences, intelligent prioritization, and attention management capabilities for the Hash Community Platform (HCP).

The objective is to deliver the right information to the right member, at the right time, through the most appropriate channel while minimizing interruption and notification fatigue.

Vision

Attention is valuable.

Notifications should compete for it responsibly.

Philosophy

Every notification represents an interruption.

Interrupt only when the value exceeds the cost.

Guiding Principles

- Context-aware delivery.
 - Intelligent prioritization.
 - User-controlled preferences.
 - Respect for time zones.
 - Channel optimization.
 - Explainable delivery decisions.
 - Accessibility by default.
-

FR-NOT-001 — Notification Model

Every notification includes:

- Notification ID
- Category
- Priority
- Context Object
- Recipient(s)
- Delivery Channels
- Delivery Policy
- Expiration Time
- Related Evidence
- Status

Notifications are immutable once delivered.

FR-NOT-002 — Delivery Channels

Supported delivery channels include:

- In-app notifications
- Push notifications
- Email
- SMS
- Browser notifications
- Webhooks (future)
- Partner integrations (future)

Members may enable or disable channels according to preference and organizational policy.

FR-NOT-003 — Priority Levels

Notifications are classified as:

- Critical
- High
- Normal
- Low
- Informational

Priority influences scheduling, batching, escalation, and interruption behavior.

FR-NOT-004 — Attention Intelligence

Before delivering a notification, the platform evaluates:

- Member preferences
- Current attention budget
- Existing unread notifications
- Active session status
- Time of day
- Time zone
- Notification priority
- Related notifications
- Quiet hours
- Emergency override rules

Delivery decisions are explainable.

FR-NOT-005 — Intelligent Grouping

Related notifications may be grouped automatically.

Examples:

Instead of:

- Volunteer assigned
- Volunteer reassigned
- Volunteer confirmed

Deliver:

Volunteer Assignment Updated

Or instead of:

- 17 photo uploads

Deliver:

17 New Event Photos Available

Grouping rules remain configurable.

FR-NOT-006 — Quiet Hours

Members may configure:

- Sleep schedule
- Working hours
- Preferred communication windows
- Weekend preferences
- Vacation mode

Critical safety notifications may override quiet hours where permitted.

FR-NOT-007 — Digest Delivery

Digest schedules may include:

- Hourly
- Morning
- Evening
- Daily
- Weekly
- Event-specific
- Organization-specific

Members choose digest preferences independently for different notification categories.

FR-NOT-008 — Delivery Policies

Notifications may follow policies such as:

- Immediate
- Batch
- Digest
- Scheduled
- Escalated
- Manual approval
- Silent update

Policies are selected automatically unless overridden.

FR-NOT-009 — Notification Preferences

Preferences may be configured by:

- Category
- Organization
- Event
- Committee
- Delivery channel
- Priority
- Language
- Device

Preference inheritance simplifies configuration.

FR-NOT-010 — Explainable Notifications

Members may inspect why they received a notification.

The explanation includes:

- Triggering event
- Delivery policy
- Priority
- Channel selection
- Applicable preferences
- Related context

This supports transparency and trust.

Business Principles

Deliver intentionally.

Interrupt responsibly.

Always explain.

Completion Criteria

Complete when:

- Notification model is defined.
 - Delivery channels are documented.
 - Attention intelligence is specified.
 - Preference management is complete.
-

Next Document

08P-02 — Reminders, Escalations, Automation & AI Notification Services

Annex 08P — Notification Center

Part 3 — Reminders, Escalations, Automation & AI Notification Services

Document ID: HCP-PB-08P-02

Parent: Annex 08P — Notification Center

Domain: Reminders, Escalations, Automation & AI

Status: Draft

Version: 1.0

Purpose

This document defines reminder workflows, notification escalations, automation rules, recurring notification services, and AI-assisted notification management for the Hash Community Platform (HCP).

The objective is to help members and organizations complete important tasks while minimizing unnecessary interruptions.

Vision

Notifications should lead to action.

Automation should reduce effort.

AI should improve timing—not increase noise.

Philosophy

Remind thoughtfully.

Escalate sparingly.

Automate responsibly.

Guiding Principles

- Action-oriented reminders.
 - Configurable escalation.
 - Human oversight.
 - Predictable automation.
 - AI-assisted prioritization.
 - Respect for member preferences.
-

FR-NOT-011 — Reminder Service

The Reminder Service supports reminders for:

- Event registration deadlines
- Upcoming trails
- Volunteer shifts
- Committee meetings
- Governance voting
- Membership renewals
- Passport submissions
- Award nominations
- Task due dates

Reminders may be one-time or recurring.

FR-NOT-012 — Recurring Schedules

Recurring reminders support patterns including:

- Daily
- Weekly
- Monthly
- Annual
- Custom recurrence rules

Schedules respect member time zones and daylight saving adjustments where applicable.

FR-NOT-013 — Escalation Policies

Organizations may define escalation rules for critical workflows.

Examples:

- Unconfirmed volunteer assignments
- Safety acknowledgements
- Governance deadlines
- Financial approvals
- Event organizer tasks

Escalation may include additional recipients based on organizational policy.

FR-NOT-014 — Automation Rules

Organizations may configure rules such as:

- Send reminder if RSVP is pending.
- Notify organizers when volunteer capacity falls below threshold.
- Alert committee chairs when quorum has not been reached.
- Remind award reviewers of outstanding evaluations.

Automation rules are version-controlled and auditable.

FR-NOT-015 — AI Reminder Assistant

AI may assist by:

- Suggesting reminder schedules.
- Detecting duplicate reminders.
- Identifying overdue tasks.
- Recommending better delivery times.
- Predicting reminder fatigue.
- Suggesting digest instead of interruption.

AI recommendations require human confirmation for organizational workflows.

FR-NOT-016 — Smart Escalation

Escalation considers:

- Notification priority
- Outstanding duration
- Member availability
- Organizational role
- Previous reminder history
- Emergency policies

Escalation should never become harassment.

FR-NOT-017 — Actionable Notifications

Notifications may include embedded actions such as:

- Accept
- Decline
- RSVP
- Approve
- Reject
- Mark Complete
- Upload Evidence
- Contact Organizer

Actions synchronize directly with the originating platform object.

FR-NOT-018 — Follow-up Detection

The platform may detect unresolved activities requiring follow-up.

Examples:

- Meeting without published minutes
- Event without Run Capsule
- Award without committee decision
- Governance proposal without closure

AI may recommend reminders but shall not publish them automatically.

FR-NOT-019 — Automation Transparency

Every automated reminder includes:

- Trigger
- Automation rule
- Creation timestamp
- Related workflow
- Responsible organization

Members may inspect why automation occurred.

FR-NOT-020 — Reminder Completion

When a reminder is satisfied, the system automatically:

- Marks it complete.
- Cancels redundant reminders.
- Updates related workflows.
- Records completion history.

Completion history supports analytics and process improvement.

Business Principles

Automate repetitive work.

Respect human judgment.

Celebrate completed actions.

Completion Criteria

Complete when:

- Reminder workflows are defined.
 - Escalation policies are documented.
 - Automation rules are specified.
 - AI notification assistance is complete.
-

Next Document

08P-03 — Notification Governance, Analytics, Federation & Business Rules

Annex 08P — Notification Center

Part 4 — Notification Governance, Analytics, Federation & Business Rules

Document ID: HCP-PB-08P-03

Parent: Annex 08P — Notification Center

Domain: Notification Governance & Operations

Status: Draft

Version: 1.0

Purpose

This document establishes governance policies, analytics capabilities, federation support, business rules, and operational standards for the Notification Center.

The Notification Center protects member attention while ensuring important information reaches the appropriate audience through transparent, explainable, and configurable delivery.

Vision

Attention is a shared community resource.

Use it wisely.

Philosophy

Notifications should strengthen participation.

They should never become background noise.

Guiding Principles

- Trust through restraint.
 - Transparent automation.
 - Member control.
 - Organizational flexibility.
 - Platform consistency.
 - Continuous improvement.
-

FR-NOT-021 — Notification Governance

Organizations define policies governing:

- Delivery channels
- Default priorities
- Reminder schedules
- Escalation rules
- Emergency overrides
- Digest frequency
- Quiet hours

Policies are version-controlled and auditable.

FR-NOT-022 — Notification Analytics

Analytics may include:

- Delivery success
- Read rates
- Action completion
- Reminder effectiveness
- Escalation frequency
- Digest engagement
- Notification fatigue indicators

Analytics are used to improve communication rather than monitor individuals.

FR-NOT-023 — Notification Federation

Trusted organizations may coordinate notification policies for shared initiatives.

Examples include:

- Interhash announcements
- National association updates
- Regional emergency alerts
- Joint event coordination

Federated notifications respect local member preferences unless overridden by approved emergency policies.

FR-NOT-024 — Emergency Notification Framework

Emergency notifications support:

- Immediate delivery
- Multi-channel broadcasting
- Delivery confirmation
- Retry policies
- Escalation chains
- Incident tracking

Emergency events are auditable and time-stamped.

FR-NOT-025 — AI Notification Governance

Organizations control AI capabilities including:

- Draft reminders
- Suggested delivery times
- Digest generation
- Notification grouping
- Escalation recommendations
- Attention optimization

AI recommendations remain explainable and configurable.

FR-NOT-026 — Notification Auditing

Audit records include:

- Notification creation
- Delivery attempts
- Preference changes
- Automation triggers
- Escalation actions
- Policy modifications

Audit records integrate with the Evidence Record Service.

FR-NOT-027 — Business Continuity

The Notification Center supports:

- Queue persistence
- Retry mechanisms
- Geographic redundancy
- Disaster recovery
- Delivery replay
- Failover routing

Critical notifications remain reliable during infrastructure failures.

FR-NOT-028 — Notification Lifecycle

Notifications progress through lifecycle stages:

- Created
- Scheduled
- Queued
- Delivered
- Acknowledged
- Completed
- Expired
- Archived

Lifecycle history remains permanently auditable.

Business Rules

BR-NOT-001

Every notification must reference a valid platform object or workflow.

BR-NOT-002

Notification priorities must follow platform-wide standards.

BR-NOT-003

Members retain ultimate control over non-emergency notification preferences.

BR-NOT-004

AI-generated notifications require explainable reasoning.

BR-NOT-005

Emergency notifications may override preferences only under approved organizational policies.

BR-NOT-006

Notification grouping should be preferred whenever it reduces interruption without increasing risk.

BR-NOT-007

Attention optimization must never suppress critical safety, governance, or legal notifications.

BR-NOT-008

Notification policies are version-controlled and historically preserved.

Acceptance Criteria

The Notification Center is complete when:

- Governance policies are documented.
 - Analytics framework is defined.
 - Federation model is established.
 - Business rules protect member attention.
 - Operational continuity is specified.
-

Non-Functional Expectations

The Notification Center shall provide:

- High availability.
 - Reliable delivery guarantees.
 - Horizontal scalability.
 - Multi-channel redundancy.
 - Low-latency processing.
 - Auditable delivery history.
 - Explainable automation.
-

Notification Principles

Every Alert.

Every Reminder.

Every Decision.

One Respectful Attention Model.

Completion Criteria

Annex 08P is complete when:

- Notification philosophy is established.
 - Attention intelligence is documented.
 - Reminder and automation services are complete.
 - Governance and analytics are finalized.
 - Long-term operational standards are defined.
-

Annex 08P Completion

The Notification Center domain consists of:

- 08P-00 — Vision & Domain Overview
- 08P-01 — Notification Model, Delivery Channels & Attention Intelligence
- 08P-02 — Reminders, Escalations, Automation & AI Notification Services
- 08P-03 — Notification Governance, Analytics, Federation & Business Rules

The Notification Center establishes a unified, explainable, and intelligent attention management system that delivers timely information while respecting members' focus, preferences, and organizational responsibilities.

Annex 08Q — Search & Discovery

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08Q-00

Parent: Chapter 8 — Core Platform Services

Domain: Search & Discovery

Status: Draft

Version: 1.0

Purpose

The Search & Discovery Service provides the unified discovery infrastructure for the Hash Community Platform (HCP).

Rather than simply retrieving matching records, the platform enables members to discover people, places, events, knowledge, relationships, evidence, and history through intelligent, context-aware exploration.

The service connects every domain within HCP into a single searchable knowledge network.

Vision

Every question deserves an answer.

Every answer should reveal deeper connections.

Philosophy

Search retrieves.

Discovery reveals.

Knowledge connects.

Guiding Principles

- Search across the entire platform.
 - Context-aware discovery.
 - Permission-aware results.
 - Explainable ranking.
 - AI-assisted exploration.
 - Historical preservation.
 - Fast and intuitive experience.
-

Scope

The Search & Discovery Service supports:

- Global search
 - Contextual search
 - Semantic search
 - Relationship discovery
 - Knowledge exploration
 - Historical search
 - Geographic search
 - AI-assisted search
 - Saved searches
 - Personalized discovery
-

Core Objects

The service indexes:

- Members
 - Organizations
 - Events
 - Trails
 - Run Capsules
 - Passport Entries
 - Awards
 - Governance Records
 - Evidence Records
 - Conversations
 - Knowledge Articles
 - Media
 - Locations
 - AI-generated summaries
-

Relationships

The Search & Discovery Service integrates with:

- Identity
 - Community Graph
 - Passport
 - Events
 - Governance
 - Trail Studio
 - Run Capsules
 - Evidence Record Service
 - Communication Hub
 - Notification Center
 - AI Platform
 - Analytics
-

Search Modes

Supported search experiences include:

- Keyword Search
 - Natural Language Search
 - Filtered Search
 - Map Search
 - Timeline Search
 - Relationship Search
 - Similarity Search
 - AI Discovery
 - Voice Search (future)
-

Success Criteria

The Search & Discovery Service succeeds when:

- Members find answers quickly.
 - Discovery encourages exploration.
 - Search respects permissions.
 - AI explanations build trust.
 - Historical knowledge becomes accessible.
-

Business Principles

Find intentionally.

Discover naturally.

Connect meaningfully.

Completion Criteria

Complete when:

- Search philosophy is established.
 - Discovery model is defined.
 - Integration points are documented.
 - Platform scope is complete.
-

Next Document

08Q-01 — Search Model, Indexing & Query Architecture

Annex 08Q — Search & Discovery

Part 2 — Search Model, Indexing & Query Architecture

Document ID: HCP-PB-08Q-01

Parent: Annex 08Q — Search & Discovery

Domain: Search Model & Indexing

Status: Draft

Version: 1.0

Purpose

This document defines the unified indexing architecture, query model, ranking strategies, and search execution engine for the Hash Community Platform (HCP).

The Search & Discovery Service provides a single discovery layer across all platform domains while respecting permissions, context, explainability, and historical preservation.

Vision

One platform.

One search engine.

Unlimited discovery.

Philosophy

Members should never need to know where information is stored.

They simply ask.

The platform discovers.

Guiding Principles

- Universal indexing.
 - Permission-aware execution.
 - Near real-time updates.
 - Explainable ranking.
 - Semantic understanding.
 - Relationship-first discovery.
 - Horizontal scalability.
-

FR-SRCH-001 — Unified Search Index

Every searchable object contributes to the Unified Search Index.

Supported object types include:

- Members
- Organizations
- Kennels
- Events
- Trails
- Trail Segments
- Run Capsules
- Passport Entries
- Awards
- Governance Records
- Evidence Records
- Conversations
- Knowledge Articles
- Photos
- Videos
- Documents
- Locations
- AI Summaries

Each indexed object includes metadata describing its origin, permissions, relationships, and freshness.

FR-SRCH-002 — Incremental Indexing

Search indexes update automatically when:

- Objects are created
- Objects are modified
- Permissions change
- Evidence is verified
- AI summaries are generated
- Knowledge assets are published

Incremental indexing minimizes latency while preserving consistency.

FR-SRCH-003 — Query Types

Supported query types include:

- Keyword queries
- Natural language queries
- Semantic similarity
- Phrase matching
- Fuzzy matching
- Geographic search
- Timeline search
- Graph traversal
- Object-specific search
- Hybrid search

Multiple query strategies may execute simultaneously.

FR-SRCH-004 — Ranking Signals

Ranking considers:

- Text relevance
- Relationship proximity
- Evidence confidence
- Recency
- Historical significance
- Community popularity
- User context
- Geographic relevance
- Personal history
- AI confidence

Ranking remains explainable.

FR-SRCH-005 — Permission-Aware Search

Search never exposes inaccessible information.

Ranking occurs only after permission evaluation.

Hidden content contributes neither metadata nor snippets.

FR-SRCH-006 — Search Facets

Results may be refined using facets including:

- Organization
- Country
- Region
- Event
- Year
- Passport Achievement
- Trail Difficulty
- Evidence Status
- Media Type
- Language
- Member Role

Organizations may define additional custom facets.

FR-SRCH-007 — Saved Searches

Members may save:

- Queries
- Filters
- Maps
- Timelines
- Discovery views

Saved searches synchronize across devices.

FR-SRCH-008 — Related Results

Every search result may expose:

- Related members
- Related trails
- Related events
- Related conversations
- Supporting evidence
- AI summaries
- Similar objects

Discovery extends beyond the original query.

FR-SRCH-009 — Explainable Search

Members may inspect:

- Why a result appeared
- Ranking factors
- Matching evidence
- Relationship path
- Applied permissions

Search decisions remain transparent.

FR-SRCH-010 — Index Health

The platform continuously monitors:

- Index freshness
- Replication status
- Query latency
- Missing documents
- Ranking anomalies
- Rebuild progress

Operational metrics support proactive maintenance.

Business Principles

Index once.

Search everywhere.

Explain every result.

Completion Criteria

Complete when:

- Search model is documented.
 - Indexing strategy is defined.
 - Ranking architecture is specified.
 - Explainability is complete.
-

Next Document

08Q-02 — Discovery Engine, AI Search & Community Knowledge Graph

Annex 08Q — Search & Discovery

Part 3 — Discovery Engine, AI Search & Living Community Graph

Document ID: HCP-PB-08Q-02

Parent: Annex 08Q — Search & Discovery

Domain: Discovery Engine & AI Search

Status: Draft

Version: 1.0

Purpose

This document defines the Discovery Engine, AI-assisted search capabilities, relationship exploration, and the Living Community Graph that powers intelligent discovery across the Hash Community Platform (HCP).

The objective is to transform search from retrieving records into exploring the collective memory, relationships, and history of the community.

Vision

Search should answer questions.

Discovery should inspire new ones.

Philosophy

Every object tells a story.

Every relationship adds meaning.

Every generation enriches the graph.

Guiding Principles

- Relationship-first discovery.
 - Explainable AI.
 - Context-aware exploration.
 - Permission-respecting intelligence.
 - Human-centered recommendations.
 - Continuous enrichment.
-

FR-SRCH-011 — Living Community Graph

The Living Community Graph models relationships among:

- Members
- Organizations
- Events
- Trails
- Passport Journeys
- Awards
- Conversations
- Evidence
- Knowledge Articles
- Locations
- Media
- Historical Archives

Relationships evolve continuously as community activity grows.

FR-SRCH-012 — AI Discovery Assistant

Members may ask natural-language questions such as:

- Who have I hashed with the most?
- Which trails have I never completed?
- Show me every Interhash I've attended.
- Which members became Grand Masters after joining my kennel?
- Which events produced the most Run Capsules?

AI translates questions into explainable discovery workflows.

FR-SRCH-013 — Relationship Explorer

Members may navigate relationship paths including:

- Member → Event
- Event → Trail
- Trail → Run Capsule
- Run Capsule → Evidence
- Evidence → Governance
- Governance → Organization

Relationship paths are visual and interactive.

FR-SRCH-014 — Historical Discovery

The platform supports exploration by:

- Time
- Era
- Leadership period
- Anniversary
- Historical milestone
- Geographic expansion

Historical narratives link related community events.

FR-SRCH-015 — AI Story Builder

AI may generate contextual narratives such as:

- The history of a kennel.
- A member's hashing journey.
- The evolution of an annual event.
- How a tradition began.
- The development of trail styles over time.

Narratives include citations to supporting Evidence Records.

FR-SRCH-016 — Serendipitous Discovery

The platform may recommend unexpected but relevant discoveries including:

- Members with similar journeys.
- Forgotten historical photographs.
- Related Run Capsules.
- Parallel governance decisions.
- Anniversary milestones.

Recommendations remain optional.

FR-SRCH-017 — Discovery Collections

Members may save collections including:

- Historic trails.
- Favorite events.
- Heritage stories.
- Member biographies.
- Research projects.

Collections may be shared with others.

FR-SRCH-018 — Community Insights

AI may generate aggregate insights such as:

- Growth trends.
- Event participation.
- Geographic expansion.
- Volunteer engagement.
- Historical patterns.

Insights never expose private information.

FR-SRCH-019 — Explainable AI Discovery

Every AI-generated insight includes:

- Supporting Evidence Records.
- Confidence indicators.
- Related objects.
- Discovery pathway.
- Data freshness.

Members may inspect how conclusions were reached.

FR-SRCH-020 — Continuous Graph Enrichment

Every verified platform activity enriches the Living Community Graph including:

- New relationships.
- Verified evidence.
- Community knowledge.
- Historical narratives.
- AI-generated summaries.
- Organizational memory.

The graph continuously grows throughout the lifetime of HCP.

Business Principles

Explore respectfully.

Learn continuously.

Preserve collectively.

Completion Criteria

Complete when:

- Living Community Graph is defined.
 - AI discovery workflows are documented.
 - Relationship exploration is complete.
 - Historical discovery is established.
-

Next Document

08Q-03 — Governance, Analytics, Federation & Business Rules

Annex 08Q — Search & Discovery

Part 4 — Governance, Analytics, Federation & Business Rules

Document ID: HCP-PB-08Q-03

Parent: Annex 08Q — Search & Discovery

Domain: Search Governance & Operations

Status: Draft

Version: 1.0

Purpose

This document establishes governance, operational policies, analytics, federation capabilities, and business rules for the Search & Discovery Service.

The objective is to ensure that search remains accurate, transparent, permission-aware, performant, and trustworthy throughout the lifetime of the Hash Community Platform (HCP).

Vision

Search should inspire confidence.

Discovery should strengthen the community.

Knowledge should remain accessible across generations.

Philosophy

Trustworthy discovery depends on trustworthy governance.

Guiding Principles

- Privacy before convenience.
 - Explainability before automation.
 - Relevance before popularity.
 - Knowledge before information.
 - Long-term preservation.
-

FR-SRCH-021 — Search Governance

Organizations define policies governing:

- Search visibility
- Searchable object types
- AI discovery permissions
- Historical archive visibility
- Federated search participation
- Knowledge publication

Policies are version-controlled and auditable.

FR-SRCH-022 — Search Analytics

Analytics include:

- Query volume
- Zero-result searches
- Successful discoveries
- Search latency
- Click-through rate
- Saved searches
- AI-assisted discovery usage
- Knowledge reuse

Analytics improve platform usability rather than monitor individuals.

FR-SRCH-023 — Federated Search

Authorized organizations may participate in federated discovery.

Examples include:

- National associations
- Regional councils
- Interhash committees
- Heritage archives
- Research initiatives

Federation respects organizational boundaries and access permissions.

FR-SRCH-024 — Search Auditing

Audit records include:

- Search policy changes
- Index rebuilds
- AI ranking updates
- Permission model changes
- Discovery collection sharing

Audit history integrates with the Evidence Record Service.

FR-SRCH-025 — AI Governance

Organizations define policies for:

- AI summaries
- AI recommendations
- Story generation
- Semantic search
- Discovery assistance

AI-generated content clearly identifies supporting evidence and confidence levels.

FR-SRCH-026 — Search Reliability

The service supports:

- Distributed indexing
- Multi-region replication
- Incremental rebuilding
- Snapshot restoration
- Consistency validation
- Automatic failover

Search remains available during infrastructure disruptions.

FR-SRCH-027 — Search Lifecycle

Indexed objects transition through:

- Created
- Indexed
- Updated
- Archived
- Heritage Indexed
- Retired

Lifecycle changes preserve historical discoverability where permitted.

FR-SRCH-028 — Knowledge Preservation

Search shall prioritize the long-term discoverability of:

- Heritage materials
- Constitutional records
- Historical Run Capsules
- Significant governance decisions
- Landmark events
- Legacy member biographies

Preservation policies balance accessibility with privacy obligations.

Business Rules

BR-SRCH-001

Every indexed object must have a canonical identity.

BR-SRCH-002

Search shall never expose inaccessible information.

BR-SRCH-003

Every AI-generated answer shall reference supporting evidence.

BR-SRCH-004

Ranking decisions should remain explainable.

BR-SRCH-005

Federated search shall respect local organizational policies.

BR-SRCH-006

Historical records shall remain discoverable according to preservation policies.

BR-SRCH-007

Search indexes shall preserve referential integrity across the Living Community Graph.

BR-SRCH-008

Search quality improvements shall never compromise evidence integrity or member privacy.

Acceptance Criteria

The Search & Discovery Service is complete when:

- Governance policies are documented.
 - Analytics framework is defined.
 - Federation model is complete.
 - Business rules ensure trustworthy discovery.
 - Long-term operational standards are established.
-

Non-Functional Expectations

The Search & Discovery Service shall provide:

- High availability.
 - Sub-second common query response.
 - Horizontal scalability.
 - Explainable ranking.
 - Distributed indexing.
 - Strong permission enforcement.
 - Long-term archival support.
-

Search Principles

Every Question.

Every Connection.

Every Discovery.

One Living Community Graph.

Completion Criteria

Annex 08Q is complete when:

- Search philosophy is established.
 - Indexing architecture is documented.
 - AI discovery capabilities are defined.
 - Governance and analytics are complete.
 - Long-term discoverability is ensured.
-

Annex 08Q Completion

The Search & Discovery domain consists of:

- 08Q-00 — Vision & Domain Overview
- 08Q-01 — Search Model, Indexing & Query Architecture
- 08Q-02 — Discovery Engine, AI Search & Living Community Graph
- 08Q-03 — Governance, Analytics, Federation & Business Rules

The Search & Discovery Service transforms HCP into a platform where every verified activity, relationship, conversation, and historical record contributes to a continuously evolving Living Community Graph that enables intelligent, explainable, and enduring discovery.

Annex 08R — Integration & API Platform

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08R-00

Parent: Chapter 8 — Core Platform Services

Domain: Integration & API Platform

Status: Draft

Version: 1.0

Purpose

The Integration & API Platform enables secure, reliable, and scalable communication between HCP, internal platform services, external applications, and future extensions.

It establishes a unified integration architecture that allows the platform to evolve without tightly coupling components.

Vision

Everything connects.

Nothing is tightly coupled.

Every capability is reusable.

Philosophy

A healthy platform is an ecosystem.

Integrations should feel native.

Extensions should respect platform standards.

Guiding Principles

- API-first architecture.
 - Event-driven communication.
 - Loose coupling.
 - Secure by default.
 - Version everything.
 - Backward compatibility.
 - Developer-friendly design.
-

Scope

The Integration Platform supports:

- Internal APIs
 - Public APIs
 - Webhooks
 - Event Bus
 - Service Contracts
 - OAuth integrations
 - API Keys
 - GraphQL gateway
 - REST endpoints
 - Import/Export services
 - Plugin framework
 - SDKs
 - Automation hooks
-

Core Objects

The Integration Platform manages:

- API Client
 - API Key
 - OAuth Application
 - Webhook
 - Event
 - Event Subscription
 - Integration
 - Service Contract
 - API Version
 - Plugin
 - Extension
 - Rate Limit Policy
-

Relationships

The Integration Platform integrates with:

- Identity
 - Permissions
 - Audit Log
 - Notifications
 - Evidence
 - Communication
 - AI Platform
 - Search
 - Analytics
 - Every Domain Service
-

Supported Integration Types

- Internal service communication
 - Mobile application APIs
 - Administrative APIs
 - Third-party integrations
 - Automation platforms
 - Community partner systems
 - Future developer ecosystem
-

Success Criteria

The platform succeeds when:

- Services remain loosely coupled.
 - APIs remain stable across releases.
 - Integrations are secure.
 - External developers can build confidently.
 - New capabilities can be introduced without modifying existing services.
-

Business Principles

Connect intentionally.

Version responsibly.

Protect the platform.

Completion Criteria

Complete when:

- Integration philosophy is established.
 - API ecosystem is defined.
 - Core objects are documented.
 - Platform scope is complete.
-

Next Document

08R-01 — API Architecture, Service Contracts & Event Bus

Annex 08R — Integration & API Platform

Part 2 — API Architecture, Service Contracts & Event Bus

Document ID: HCP-PB-08R-01

Parent: Annex 08R — Integration & API Platform

Domain: API Architecture & Event-Driven Communication

Status: Draft

Version: 1.0

Purpose

This document defines the API architecture, service communication model, event bus, service contracts, and versioning strategy for the Hash Community Platform (HCP).

The objective is to enable independent evolution of services while maintaining reliable communication across the platform.

Vision

Services should collaborate.

Not depend on each other.

Philosophy

Publish facts.

Consume events.

Remain independent.

Guiding Principles

- API-first development.
 - Event-driven architecture.
 - Stable service contracts.
 - Backward compatibility.
 - Loose coupling.
 - Observable communication.
 - Resilient integration.
-

FR-INT-001 — Internal API Standards

Every platform service exposes documented APIs.

Supported interfaces include:

- REST
- GraphQL Gateway
- Internal RPC (where appropriate)
- Event publishing
- Event subscriptions

APIs follow consistent naming, authentication, pagination, filtering, and error standards.

FR-INT-002 — Service Contracts

Each service publishes a formal contract describing:

- Available operations
- Event schemas
- Request validation
- Response models
- Error codes
- Version history
- Deprecation policy

Contracts are version-controlled.

FR-INT-003 — Event Bus

Platform services communicate asynchronously through the Event Bus.

Examples:

- MemberCreated
- EventPublished
- TrailVerified
- PassportUpdated
- AwardGranted
- ConversationArchived
- NotificationDelivered
- EvidenceVerified

Events are immutable.

FR-INT-004 — Event Subscribers

Services subscribe only to events they require.

Examples:

Search Service:

- TrailPublished
- EventUpdated
- KnowledgePublished

Notification Center:

- GovernanceVoteOpened
- VolunteerAssigned
- MembershipExpiring

Analytics:

- Every verified business event.
-

FR-INT-005 — Event Schema Registry

The platform maintains a registry containing:

- Event definitions
- Payload schemas
- Version history
- Producers
- Consumers
- Deprecation status

Schema evolution is managed without breaking existing consumers.

FR-INT-006 — Idempotent Processing

Event consumers shall safely process duplicate events.

Repeated event delivery shall never produce inconsistent state.

FR-INT-007 — Event Replay

Authorized administrators may replay historical events for:

- Search rebuilding
- Analytics reconstruction
- AI retraining
- Disaster recovery
- New service onboarding

Replay preserves chronological order.

FR-INT-008 — API Versioning

Public APIs support:

- Version identifiers
- Deprecation notices
- Migration guides
- Compatibility periods

Breaking changes require a new API version.

FR-INT-009 — API Documentation

Documentation includes:

- Authentication
- Examples
- SDK references
- Rate limits
- Error responses
- Event subscriptions
- Webhook examples

Documentation is generated automatically where possible.

FR-INT-010 — Observability

Every API request and event supports:

- Correlation ID
- Trace ID
- Request metadata
- Timing metrics
- Error diagnostics

Observability integrates with platform monitoring.

Business Principles

Publish once.

Consume independently.

Version forever.

Completion Criteria

Complete when:

- API standards are documented.
 - Service contracts are defined.
 - Event architecture is complete.
 - Versioning strategy is established.
-

Next Document

08R-02 — Developer Platform, SDKs, Webhooks & External Integrations

Annex 08R — Integration & API Platform

Part 3 — Developer Platform, SDKs, Webhooks & External Integrations

Document ID: HCP-PB-08R-02

Parent: Annex 08R — Integration & API Platform

Domain: Developer Platform & External Integrations

Status: Draft

Version: 1.0

Purpose

This document defines the developer platform, SDKs, webhook infrastructure, authentication mechanisms, and external integration framework for the Hash Community Platform (HCP).

The objective is to enable secure, stable, and developer-friendly integrations while maintaining platform integrity and long-term compatibility.

Vision

Building on HCP should feel natural.

Integrations should behave like first-class citizens.

Philosophy

A good API is easy to use.

A great API is difficult to misuse.

Guiding Principles

- Developer-first documentation.
 - Stable contracts.
 - Secure integrations.
 - Predictable behavior.
 - Excellent tooling.
 - Long-term compatibility.
 - Minimal onboarding friction.
-

FR-INT-011 — Developer Portal

The platform provides a Developer Portal including:

- API documentation
 - SDK downloads
 - Authentication guides
 - Webhook documentation
 - Event catalog
 - Sample applications
 - Tutorials
 - Changelog
 - Deprecation notices
-

FR-INT-012 — Official SDKs

Official SDKs may be provided for:

- TypeScript
- JavaScript
- Kotlin
- Swift
- Python
- Go

SDKs abstract authentication, pagination, retries, and error handling.

FR-INT-013 — Authentication

Supported authentication mechanisms include:

- OAuth 2.1
- OpenID Connect
- API Keys
- Service Accounts
- Personal Access Tokens

Authentication policies integrate with the Identity Platform.

FR-INT-014 — Webhooks

Organizations may subscribe to webhook events including:

- Event published
- Run completed
- Passport updated
- Award granted
- Volunteer assigned
- Member joined
- Governance vote opened
- Evidence verified

Webhook delivery includes retries, signatures, timestamps, and event identifiers.

FR-INT-015 — Webhook Security

Webhook security includes:

- Signed payloads
- Replay protection
- Delivery timestamps
- Secret rotation
- Retry limits
- Delivery history

Webhook authenticity is verifiable.

FR-INT-016 — Import Services

The platform supports importing:

- Members
- Organizations
- Historical events
- Passport records
- Awards
- Media
- Governance documents

Import processes are validated before execution.

FR-INT-017 — Export Services

Authorized users may export:

- Structured data
- Evidence packages
- Analytics reports
- Historical archives
- Knowledge collections
- Media metadata

Exports respect organizational permissions.

FR-INT-018 — Integration Directory

Administrators may manage:

- Connected applications
 - Installed integrations
 - API clients
 - OAuth applications
 - Active webhooks
 - Permissions granted
 - Usage statistics
-

FR-INT-019 — Rate Limiting

The platform supports configurable limits based on:

- Client type
- Organization
- Endpoint
- Authentication level
- Subscription tier (future)

Limits are transparent to developers.

FR-INT-020 — Developer Experience

Developer tooling includes:

- Interactive API explorer
- Request tracing
- Sandbox environment
- Mock servers
- SDK examples
- Error diagnostics
- Migration assistants

The platform prioritizes a consistent developer experience.

Business Principles

Document clearly.

Secure everything.

Respect developers' time.

Completion Criteria

Complete when:

- Developer platform is defined.
 - SDK strategy is documented.
 - Webhook infrastructure is complete.
 - External integration framework is established.
-

Next Document

08R-03 — Plugin Framework, Governance & Business Rules

Annex 08R — Integration & API Platform

Part 4 — Extension Framework, Governance & Business Rules

Document ID: HCP-PB-08R-03

Parent: Annex 08R — Integration & API Platform

Domain: Extension Framework & Governance

Status: Draft

Version: 1.0

Purpose

This document defines the governance model, extension framework, operational standards, analytics, and business rules for integrations within the Hash Community Platform (HCP).

The objective is to ensure every integration, extension, and external application remains secure, predictable, observable, and aligned with platform principles.

Vision

Every extension should feel like part of HCP.

Every integration should strengthen the ecosystem.

Philosophy

Extend responsibly.

Integrate transparently.

Evolve sustainably.

Guiding Principles

- Platform consistency.
 - Security by default.
 - Transparent governance.
 - Stable extension contracts.
 - Long-term compatibility.
 - Explainable integrations.
-

FR-INT-021 — Extension Framework

Extensions may contribute:

- New workflows
- New reports
- New dashboards
- New importers
- New exporters
- New automation rules
- New AI assistants
- New visualizations

Extensions operate through published platform contracts.

FR-INT-022 — Extension Lifecycle

Extensions progress through lifecycle stages:

- Draft
- Installed
- Enabled
- Disabled
- Deprecated
- Removed

Lifecycle events are audited.

FR-INT-023 — Extension Permissions

Extensions explicitly declare required capabilities including:

- Read Members
- Read Events
- Create Notifications
- Access Evidence
- Search Objects
- AI Services
- Export Data

Administrators approve permissions before activation.

FR-INT-024 — Integration Governance

Organizations manage:

- Installed integrations
- Permission grants
- API usage
- OAuth clients
- Webhook subscriptions
- Security policies

Governance actions are version-controlled.

FR-INT-025 — Extension Analytics

Analytics include:

- Installation count
- Usage frequency
- Error rate
- API consumption
- Performance impact
- Member adoption
- Organization adoption

Analytics improve ecosystem quality.

FR-INT-026 — Security Review

Extensions may undergo automated and manual review including:

- Dependency analysis
- Permission review
- API usage validation
- Security scanning
- Privacy assessment

Organizations may restrict installation based on trust policies.

FR-INT-027 — Operational Reliability

The platform supports:

- Extension isolation
- Failure containment
- Graceful degradation
- Timeout protection
- Resource quotas
- Health monitoring

An extension failure shall not compromise core platform stability.

FR-INT-028 — Extension Auditing

Audit records include:

- Installation
- Updates
- Permission changes
- API consumption
- Configuration changes
- Removal

Audit records integrate with the Evidence Record Service.

Business Rules

BR-INT-001

Extensions shall interact only through published platform contracts.

BR-INT-002

Extensions shall never bypass platform permission enforcement.

BR-INT-003

Extensions shall identify every platform object they create or modify.

BR-INT-004

Extension failures shall remain isolated from core platform services.

BR-INT-005

Every extension shall publish a compatibility declaration.

BR-INT-006

Extensions shall participate in platform auditing where applicable.

BR-INT-007

Deprecated contracts remain supported throughout their published compatibility window.

BR-INT-008

Platform governance supersedes extension behavior.

Acceptance Criteria

The Integration & API Platform is complete when:

- Extension framework is documented.
 - Governance model is established.
 - Operational standards are defined.
 - Business rules ensure ecosystem stability.
-

Non-Functional Expectations

The Integration Platform shall provide:

- High availability.
 - Secure extension isolation.
 - Horizontal scalability.
 - Stable contracts.
 - Observable execution.
 - Reliable API performance.
 - Long-term compatibility.
-

Integration Principles

Every Contract.

Every Event.

Every Extension.

One Connected Platform.

Completion Criteria

Annex 08R is complete when:

- Integration philosophy is established.
 - API architecture is documented.
 - Developer platform is complete.
 - Extension governance is finalized.
 - Long-term operational standards are defined.
-

Annex 08R Completion

The Integration & API Platform consists of:

- 08R-00 — Vision & Domain Overview
- 08R-01 — API Architecture, Service Contracts & Event Bus
- 08R-02 — Developer Platform, SDKs, Webhooks & External Integrations
- 08R-03 — Extension Framework, Governance & Business Rules

The Integration & API Platform provides the foundation for secure, event-driven, and extensible communication across HCP while preserving platform consistency, long-term maintainability, and developer confidence.

Annex 08S — Platform Operations & Observability

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08S-00

Parent: Chapter 8 — Core Platform Services

Domain: Platform Operations & Observability

Status: Draft

Version: 1.0

Purpose

The Platform Operations & Observability Service provides the operational foundation required to monitor, manage, troubleshoot, and continuously improve the Hash Community Platform (HCP).

The platform observes infrastructure, applications, business processes, and member experience to ensure long-term reliability.

Vision

Healthy systems create healthy communities.

Observe everything.

Understand what matters.

Philosophy

Monitoring detects problems.

Observability explains them.

Operations prevent them from happening again.

Guiding Principles

- Business-first monitoring.
 - End-to-end visibility.
 - Explainable incidents.
 - Continuous improvement.
 - Automation where appropriate.
 - Human-centered operations.
 - Operational resilience.
-

Scope

The Platform Operations Service supports:

- Infrastructure monitoring
 - Service monitoring
 - Business monitoring
 - Distributed tracing
 - Centralized logging
 - Metrics
 - Alerting
 - Incident management
 - Configuration management
 - Release management
 - Capacity planning
 - Operational dashboards
-

Core Objects

The platform manages:

- Service
 - Incident
 - Alert
 - Metric
 - Trace
 - Log Entry
 - Health Check
 - Dashboard
 - Deployment
 - Feature Flag
 - Operational Policy
-

Relationships

Operations integrates with:

- Every Platform Service
 - Every Business Module
 - Analytics
 - Notification Center
 - Identity
 - AI Platform
 - Evidence Record Service
-

Success Criteria

Operations succeeds when:

- Problems are detected quickly.
 - Root causes are explainable.
 - Recovery is predictable.
 - Business disruption is minimized.
 - Operational knowledge improves continuously.
-

Business Principles

Observe continuously.

Respond intelligently.

Improve relentlessly.

Completion Criteria

Complete when:

- Operational philosophy is established.
 - Platform scope is defined.
 - Core operational objects are documented.
 - Integration points are complete.
-

Next Document

08S-01 — Monitoring, Logging, Metrics & Distributed Tracing

Annex 08S — Platform Operations & Observability

Part 2 — Monitoring, Logging, Metrics & Distributed Tracing

Document ID: HCP-PB-08S-01

Parent: Annex 08S — Platform Operations & Observability

Domain: Monitoring & Diagnostics

Status: Draft

Version: 1.0

Purpose

This document defines monitoring, centralized logging, distributed tracing, metrics collection, health checks, and operational diagnostics for the Hash Community Platform (HCP).

The objective is to provide complete operational visibility across infrastructure, platform services, and business workflows.

Vision

Every request tells a story.

Every failure leaves evidence.

Every metric guides improvement.

Philosophy

Collect once.

Correlate everywhere.

Explain every incident.

Guiding Principles

- End-to-end observability.
 - Structured diagnostics.
 - Business-aware monitoring.
 - Low operational overhead.
 - Explainable incidents.
 - Continuous measurement.
-

FR-OPS-001 — Service Health Checks

Every platform service exposes health endpoints including:

- Liveness
- Readiness
- Dependency health
- Version information
- Configuration checksum

Health endpoints support automated orchestration.

FR-OPS-002 — Centralized Logging

All services produce structured logs containing:

- Timestamp
- Service
- Environment
- Correlation ID
- Trace ID
- Severity
- Event type
- Message
- Context metadata

Sensitive information shall never be written to logs.

FR-OPS-003 — Metrics Collection

Metrics include:

Infrastructure

- CPU
- Memory
- Disk
- Network

Application

- Request rate
- Error rate
- Latency
- Queue depth

Business

- Event publication
 - Passport issuance
 - Evidence verification
 - Run completion
 - Notification delivery
 - Governance participation
-

FR-OPS-004 — Distributed Tracing

Every cross-service request receives:

- Trace ID
- Parent Span
- Child Spans
- Service timing
- Dependency timing

Tracing supports root-cause analysis.

FR-OPS-005 — Correlation IDs

Every member action generates a Correlation ID linking:

- API requests
- Events
- Notifications
- AI processing
- Evidence generation
- Search indexing
- Audit records

This enables complete workflow reconstruction.

FR-OPS-006 — Operational Dashboards

Dashboards include:

Infrastructure Health

Platform Health

Community Health

AI Health

Integration Health

Security Health

Business Health

Dashboards update in near real time.

FR-OPS-007 — Alerting

Alerts may trigger based on:

- Error thresholds
- Latency
- Service failures
- Queue growth
- Business anomalies
- Security events

Alerts support routing, escalation, and acknowledgement.

FR-OPS-008 — Log Retention

Retention policies define:

- Operational logs
- Audit logs
- Security logs
- AI diagnostics
- Event history

Retention complies with organizational and legal requirements.

FR-OPS-009 — Root Cause Analysis

Incident tooling supports:

- Timeline reconstruction
 - Dependency visualization
 - Event replay
 - Correlated logs
 - Trace visualization
 - Business impact analysis
-

FR-OPS-010 — Performance Baselines

The platform continuously tracks:

- Normal request latency
- Typical event throughput
- Search response times
- AI execution duration
- Notification delivery performance

Baselines help identify gradual degradation.

Business Principles

Observe objectively.

Diagnose systematically.

Learn continuously.

Completion Criteria

Complete when:

- Monitoring standards are defined.
 - Logging strategy is documented.
 - Tracing model is complete.
 - Metrics framework is established.
-

Next Document

08S-02 — Incident Management, Releases, Feature Flags & Resilience

Annex 08S — Platform Operations & Observability

Part 3 — Incident Management, Releases, Feature Flags & Resilience

Document ID: HCP-PB-08S-02

Parent: Annex 08S — Platform Operations & Observability

Domain: Incident Response & Operational Resilience

Status: Draft

Version: 1.0

Purpose

This document defines incident response, deployment strategies, release management, feature flag governance, resilience engineering, disaster recovery, and operational continuity for the Hash Community Platform (HCP).

The objective is to minimize service disruption while enabling continuous delivery and long-term platform stability.

Vision

Deploy confidently.

Recover gracefully.

Improve continuously.

Philosophy

Every deployment should be reversible.

Every incident should be understandable.

Every recovery should strengthen the platform.

Guiding Principles

- Reliability over speed.
 - Automation with oversight.
 - Safe experimentation.
 - Progressive delivery.
 - Resilient architecture.
 - Continuous learning.
-

FR-OPS-011 — Incident Management

Incidents progress through:

- Detected
- Acknowledged
- Investigating
- Mitigating
- Monitoring
- Resolved
- Reviewed
- Archived

Each incident includes:

- Timeline
 - Severity
 - Impact assessment
 - Root cause
 - Recovery actions
 - Lessons learned
-

FR-OPS-012 — Severity Classification

Severity levels include:

P0 — Platform unavailable

P1 — Critical business workflow unavailable

P2 — Major degradation

P3 — Minor degradation

P4 — Cosmetic or informational

Escalation policies vary by severity.

FR-OPS-013 — Feature Flags

Feature Flags support:

- Gradual rollout
- Organization-specific rollout
- Country rollout
- Beta testing
- Emergency disable
- A/B experiments (where appropriate)

Flags are independently auditable.

FR-OPS-014 — Progressive Deployment

Deployment strategies include:

- Blue/Green
- Canary
- Rolling
- Phased regional rollout

Deployments automatically monitor health before expansion.

FR-OPS-015 — Rollback Strategy

Every deployment supports:

- Immediate rollback
- Automated rollback triggers
- Database compatibility verification
- Configuration rollback
- Dependency rollback

Rollback procedures are tested regularly.

FR-OPS-016 — Business Continuity

Business continuity includes:

- Multi-region deployment
- Automated failover
- Backup validation
- Event replay
- Queue persistence
- Read-only emergency mode

Critical community workflows remain available whenever possible.

FR-OPS-017 — Chaos Engineering

Controlled resilience testing may include:

- Service failure simulation
- Database failover testing
- Network latency injection
- Queue saturation
- API dependency failure

Testing occurs only within approved operational windows.

FR-OPS-018 — Configuration Management

Configuration includes:

- Version control
- Environment separation
- Secret management
- Validation
- Audit history
- Rollback support

Configuration changes follow governance policies.

FR-OPS-019 — Capacity Planning

The platform continuously evaluates:

- Service growth
- Database growth
- Storage requirements
- Search index expansion
- Event throughput
- AI workload growth

Capacity planning informs future infrastructure investment.

FR-OPS-020 — Post-Incident Review

Every major incident includes:

- Technical summary
- Timeline
- Contributing factors
- Root cause
- Corrective actions
- Preventive actions
- Knowledge Base publication

Reviews focus on learning rather than blame.

Business Principles

Recover quickly.

Learn permanently.

Deploy responsibly.

Completion Criteria

Complete when:

- Incident lifecycle is documented.
 - Deployment strategy is defined.
 - Resilience mechanisms are complete.
 - Operational continuity is established.
-

Next Document

08S-03 — Operations Governance, Analytics & Business Rules

Annex 08S — Platform Operations & Observability

Part 4 — Operations Governance, Analytics & Business Rules

Document ID: HCP-PB-08S-03

Parent: Annex 08S — Platform Operations & Observability

Domain: Operations Governance

Status: Draft

Version: 1.0

Purpose

This document establishes governance, analytics, operational policies, and business rules for operating the Hash Community Platform (HCP).

Its objective is to ensure that operational practices remain transparent, measurable, repeatable, and continuously improving throughout the platform's lifetime.

Vision

Reliable systems are governed systems.

Philosophy

Observe.

Measure.

Learn.

Improve.

Repeat.

Guiding Principles

- Operational transparency.
 - Measurable reliability.
 - Continuous improvement.
 - Explainable automation.
 - Responsible change management.
 - Knowledge preservation.
-

FR-OPS-021 — Operational Governance

Platform administrators define policies for:

- Alert routing
- Escalation policies
- Incident ownership
- Maintenance windows
- Deployment approval
- Feature flag approval
- Disaster recovery testing

Policies are version-controlled and auditable.

FR-OPS-022 — Operational Analytics

Analytics include:

Reliability

- Service availability
- Mean Time To Detect (MTTD)
- Mean Time To Acknowledge (MTTA)
- Mean Time To Recover (MTTR)

Performance

- Deployment frequency
- Change failure rate
- Rollback frequency
- Queue performance

Business

- Workflow completion
 - Community health indicators
 - Operational confidence
 - Platform adoption
-

FR-OPS-023 — Service Level Objectives (SLOs)

Every critical platform capability defines:

- Availability objective
- Latency objective
- Error budget
- Recovery objective

Examples:

Search

99.95%

Passport

99.99%

Evidence

99.99%

Notifications

99.9%

Objectives guide engineering priorities.

FR-OPS-024 — Operational Reviews

Regular reviews include:

- Weekly operational review
- Monthly reliability review
- Quarterly resilience assessment
- Annual disaster recovery exercise

Findings become operational knowledge.

FR-OPS-025 — Automation Governance

Automation policies define:

- Auto-remediation
- Alert suppression
- AI operational recommendations
- Recovery workflows
- Escalation automation

Human override remains available.

FR-OPS-026 — Operational Knowledge Base

The platform maintains versioned operational knowledge including:

- Runbooks
- Recovery guides
- Deployment guides
- Architecture decisions
- Incident lessons
- Capacity planning reports

Knowledge remains searchable.

FR-OPS-027 — Disaster Recovery Governance

Recovery governance includes:

- Backup verification
- Recovery testing
- Failover exercises
- Restoration validation
- Business continuity audits

Recovery readiness is measured continuously.

FR-OPS-028 — Continuous Improvement

Operations continuously evaluate:

- Alert quality
- Monitoring coverage
- Incident trends
- Reliability improvements
- Engineering productivity

Improvements are tracked over time.

Business Rules

BR-OPS-001

Every production incident shall produce a documented review.

BR-OPS-002

Operational automation shall remain explainable.

BR-OPS-003

Operational knowledge shall be preserved.

BR-OPS-004

Feature flags shall have defined retirement dates.

BR-OPS-005

Reliability objectives shall be measurable.

BR-OPS-006

Recovery procedures shall be tested regularly.

BR-OPS-007

Operational metrics shall prioritize business continuity over infrastructure statistics alone.

BR-OPS-008

Every improvement initiative shall reference measurable outcomes.

Acceptance Criteria

The Platform Operations Service is complete when:

- Governance policies are documented.
 - Reliability metrics are established.
 - Operational knowledge management is complete.
 - Continuous improvement processes are defined.
-

Non-Functional Expectations

The Platform Operations Service shall provide:

- High observability.
 - Strong reliability.
 - Continuous measurement.
 - Explainable automation.
 - Operational transparency.
 - Long-term knowledge preservation.
-

Operations Principles

Every Incident.

Every Lesson.

Every Improvement.

One More Reliable Platform.

Completion Criteria

Annex 08S is complete when:

- Operational philosophy is established.
 - Monitoring framework is documented.
 - Resilience strategy is complete.
 - Governance and analytics are finalized.
 - Long-term operational standards are defined.
-

Annex 08S Completion

The Platform Operations & Observability domain consists of:

- 08S-00 — Vision & Domain Overview
- 08S-01 — Monitoring, Logging, Metrics & Distributed Tracing
- 08S-02 — Incident Management, Releases, Feature Flags & Resilience
- 08S-03 — Operations Governance, Analytics & Business Rules

The Platform Operations & Observability Service provides HCP with a resilient, measurable, and continuously improving operational foundation that preserves both system reliability and institutional engineering knowledge.

Annex 08T — Security, Privacy & Trust Platform

Part 1 — Vision & Domain Overview

Document ID: HCP-PB-08T-00

Parent: Chapter 8 — Core Platform Services

Domain: Security, Privacy & Trust Platform

Status: Draft

Version: 1.0

Purpose

The Security, Privacy & Trust Platform safeguards the confidentiality, integrity, availability, authenticity, and responsible stewardship of information within the Hash Community Platform (HCP).

Its mission extends beyond cybersecurity to preserving member confidence, institutional trust, and the long-term integrity of community history.

Vision

Protect trust.

Protect people.

Protect history.

Philosophy

Security is not an obstacle.

Security enables confidence.

Privacy demonstrates respect.

Trust is earned continuously.

Guiding Principles

- Zero Trust Architecture.
 - Privacy by Design.
 - Least Privilege.
 - Defense in Depth.
 - Secure by Default.
 - Transparency.
 - Explainability.
 - Continuous Verification.
-

Scope

The Security Platform supports:

- Authentication
 - Authorization
 - Identity Assurance
 - Device Trust
 - Risk Assessment
 - Encryption
 - Secrets Management
 - Consent Management
 - Privacy Controls
 - Security Monitoring
 - Threat Detection
 - Incident Response
 - Fraud Prevention
 - Compliance
 - Data Governance
-

Core Objects

The platform manages:

- Identity Credential
 - Authentication Session
 - Access Policy
 - Consent Record
 - Security Event
 - Risk Assessment
 - Device Registration
 - Encryption Key
 - Secret
 - Security Incident
 - Privacy Preference
 - Data Classification
-

Relationships

Security integrates with:

- Identity Platform
 - Evidence Record Service
 - Audit Log
 - AI Platform
 - Search
 - Notifications
 - Operations
 - Governance
 - Every Business Module
-

Success Criteria

The platform succeeds when:

- Members trust the platform.
 - Security is transparent.
 - Privacy is respected.
 - Incidents are explainable.
 - Access remains appropriate.
 - Sensitive information remains protected.
-

Business Principles

Trust intentionally.

Protect continuously.

Respect always.

Completion Criteria

Complete when:

- Security philosophy is established.
 - Platform scope is defined.
 - Core security objects are documented.
 - Integration points are complete.
-

Next Document

08T-01 — Authentication, Authorization & Identity Assurance

Annex 08T — Security, Privacy & Trust Platform

Part 2 — Authentication, Authorization & Identity Assurance

Document ID: HCP-PB-08T-01

Parent: Annex 08T — Security, Privacy & Trust Platform

Domain: Identity Assurance

Status: Draft

Version: 1.0

Purpose

This document defines authentication, authorization, identity assurance, access control, device trust, and session management for the Hash Community Platform (HCP).

Its objective is to ensure that every platform action is performed by appropriately authenticated and authorized identities with an assurance level proportional to the sensitivity of the action.

Vision

Know who is acting.

Know what they may do.

Know how confident we are.

Philosophy

Identity is established.

Trust is earned.

Authorization is verified continuously.

Guiding Principles

- Zero Trust Architecture.
 - Least Privilege.
 - Risk-based authentication.
 - Continuous verification.
 - Explainable authorization.
 - Session security.
 - Privacy preservation.
-

FR-SEC-001 — Authentication

Supported authentication methods include:

- Email and password
- Passkeys (WebAuthn)
- Multi-Factor Authentication (MFA)
- OAuth providers
- Enterprise Single Sign-On (future)

Authentication methods may evolve without changing platform authorization.

FR-SEC-002 — Multi-Factor Authentication

The platform supports:

- TOTP applications
- Hardware security keys
- Passkeys
- Backup recovery codes

MFA may be mandatory for privileged roles.

FR-SEC-003 — Session Management

Sessions include:

- Session identifier
- Device identifier
- Creation time
- Last activity
- Risk score
- Authentication method
- Expiration policy

Sessions may be revoked immediately.

FR-SEC-004 — Device Trust

Trusted devices maintain:

- Registration history
- Last verification
- Risk assessment
- Device reputation
- Session history

Organizations may require trusted devices for sensitive actions.

FR-SEC-005 — Authorization

Authorization evaluates:

- Role
- Organization
- Resource ownership
- Context
- Risk score
- Business rules
- Temporary delegations

Authorization decisions are explainable and auditable.

FR-SEC-006 — Fine-Grained Permissions

Permissions support:

- Object-level access
 - Field-level restrictions
 - Organization boundaries
 - Time-limited permissions
 - Temporary elevation
 - Delegated authority
-

FR-SEC-007 — Identity Assurance Levels

Assurance Levels include:

Level 1

Basic authenticated member

Level 2

Verified contact information

Level 3

Verified organizational identity

Level 4

High-assurance identity

Platform workflows may require minimum assurance levels.

FR-SEC-008 — Continuous Verification

Authentication confidence may be re-evaluated based on:

- Device changes
- Geographic anomalies
- Privileged actions
- Session duration
- Risk signals

Additional verification may be requested dynamically.

FR-SEC-009 — Session Visibility

Members may view:

- Active sessions
- Devices
- Login history
- Authentication methods
- Security events

Members may revoke sessions independently.

FR-SEC-010 — Identity Audit

Authentication and authorization events integrate with:

- Audit Log
- Evidence Record Service
- Operations
- Security Monitoring

Identity events become part of the platform's security history.

Business Principles

Authenticate responsibly.

Authorize precisely.

Verify continuously.

Completion Criteria

Complete when:

- Authentication model is documented.
 - Authorization framework is complete.
 - Identity assurance levels are established.
 - Session governance is defined.
-

Next Document

08T-02 — Encryption, Secrets Management & Data Protection

Annex 08T — Security, Privacy & Trust Platform

Part 3 — Encryption, Secrets Management & Data Protection

Document ID: HCP-PB-08T-02

Parent: Annex 08T — Security, Privacy & Trust Platform

Domain: Encryption & Data Protection

Status: Draft

Version: 1.0

Purpose

This document defines encryption standards, secrets management, key lifecycle governance, data classification, and protection mechanisms for the Hash Community Platform (HCP).

Its objective is to ensure that sensitive information remains confidential, authentic, and protected throughout its lifecycle while supporting long-term maintainability and regulatory compliance.

Vision

Protect every secret.

Encrypt every sensitive asset.

Manage keys deliberately.

Philosophy

Data has value.

Protection must match that value.

Security should be consistent across the platform.

Guiding Principles

- Encryption by default.
 - Centralized key management.
 - Defense in depth.
 - Data minimization.
 - Secure key rotation.
 - Tamper resistance.
 - Explainable protection.
-

FR-SEC-011 — Encryption at Rest

Sensitive platform data shall be encrypted at rest.

Examples include:

- Credentials
- Personal information
- Evidence packages
- Governance records
- Private communications
- Security logs
- Secrets

Encryption standards remain centrally governed.

FR-SEC-012 — Encryption in Transit

All communication shall use encrypted transport.

Includes:

- Browser connections
- Mobile APIs
- Service-to-service traffic
- Webhooks
- Administrative interfaces

Unencrypted transport is prohibited in production.

FR-SEC-013 — Secrets Management

Secrets include:

- API keys
- Database credentials
- OAuth client secrets
- Signing keys
- Service credentials
- Encryption keys

Secrets are centrally managed and never embedded in source code.

FR-SEC-014 — Key Management

The platform manages:

- Key creation
- Key rotation
- Key expiration
- Key revocation
- Key archival
- Usage auditing

Key lifecycle events are recorded.

FR-SEC-015 — Data Classification

Platform information is classified as:

- Public
- Internal
- Confidential
- Restricted

Classification influences:

- Storage
 - Encryption
 - Access
 - Retention
 - Export policies
-

FR-SEC-016 — Data Integrity

Sensitive records support integrity verification through:

- Digital signatures (where appropriate)
- Checksums
- Version history
- Immutable audit references

Integrity failures generate security events.

FR-SEC-017 — Backup Protection

Encrypted backups include:

- Key separation
- Integrity validation
- Restoration testing
- Retention governance

Backup access is tightly controlled.

FR-SEC-018 — Secure Deletion

Deletion procedures include:

- Cryptographic erasure where applicable
- Retention policy validation
- Audit recording
- Legal hold verification

Deletion is explainable and traceable.

FR-SEC-019 — Data Protection Monitoring

Security monitoring observes:

- Unauthorized access
- Encryption failures
- Key misuse
- Secret exposure
- Integrity violations

Security events integrate with Operations.

FR-SEC-020 — Platform Security Standards

Security standards define:

- Approved algorithms
- Key lengths
- Rotation intervals
- Certificate policies
- Secret handling procedures

Standards evolve independently of application code.

Business Principles

Protect consistently.

Encrypt responsibly.

Manage secrets professionally.

Completion Criteria

Complete when:

- Encryption standards are defined.
 - Key lifecycle is documented.
 - Data classification is established.
 - Secrets governance is complete.
-

Next Document

08T-03 — Privacy, Consent Management & Compliance

Annex 08T — Security, Privacy & Trust Platform

Part 4 — Privacy, Consent Management & Compliance

Document ID: HCP-PB-08T-03

Parent: Annex 08T — Security, Privacy & Trust Platform

Domain: Privacy & Compliance

Status: Draft

Version: 1.0

Purpose

This document defines privacy controls, consent management, data governance, member rights, regulatory compliance, and organizational accountability within the Hash Community Platform (HCP).

Its objective is to ensure that personal information is handled transparently, respectfully, and in accordance with applicable legal and organizational requirements while preserving member trust.

Vision

Respect every member.

Protect every choice.

Honor every right.

Philosophy

Privacy is respect in action.

Consent should be informed.

Transparency should be the default.

Guiding Principles

- Privacy by Design.
 - Data minimization.
 - Explicit consent.
 - Member control.
 - Transparency.
 - Accountability.
 - Regulatory adaptability.
-

FR-SEC-021 — Privacy Preferences

Members may control:

- Profile visibility
- Activity visibility
- Contact preferences
- Search discoverability
- Photo permissions
- AI participation (where applicable)
- Notification preferences

Preferences are respected across all platform modules.

FR-SEC-022 — Consent Management

Consent records include:

- Purpose
- Scope
- Timestamp
- Version of consent text
- Method of collection
- Withdrawal history

Consent may be withdrawn where legally and operationally appropriate.

FR-SEC-023 — Member Data Rights

Members may request:

- Access to personal information
- Correction of inaccurate information
- Export of eligible personal data
- Deletion where permitted
- Restriction of processing
- Consent review history

Requests are processed through auditable workflows.

FR-SEC-024 — Data Retention

Retention policies define:

- Operational records
- Historical archives
- Evidence records
- Governance records
- Audit logs
- Media assets

Retention balances legal obligations with community history preservation.

FR-SEC-025 — Privacy Dashboard

Members have access to a Privacy Dashboard displaying:

- Data collected
- Purpose of collection
- Active consents
- Connected applications
- Active sessions
- Export history
- Deletion requests

The dashboard promotes transparency and self-service.

FR-SEC-026 — Compliance Framework

The platform supports alignment with applicable privacy and security regulations through configurable organizational policies.

Compliance features include:

- Audit reporting
 - Consent records
 - Data export
 - Retention controls
 - Access history
 - Policy versioning
-

FR-SEC-027 — Cross-Border Data Governance

Organizations may define policies governing:

- Data residency
- Cross-border transfers
- Regional storage requirements
- Jurisdiction-specific controls

Policy enforcement is configurable.

FR-SEC-028 — Privacy Auditing

Privacy-related events include:

- Consent granted
- Consent withdrawn
- Data export
- Data deletion
- Access requests
- Policy changes

Privacy events integrate with the Audit and Evidence platforms.

Business Rules

BR-SEC-001

Personal information shall be collected only for defined purposes.

BR-SEC-002

Consent shall be specific, informed, and recorded.

BR-SEC-003

Privacy preferences shall be honored consistently across the platform.

BR-SEC-004

Data retention policies shall be transparent and reviewable.

BR-SEC-005

Privacy-related actions shall be auditable.

BR-SEC-006

Compliance policies shall be configurable by organization where permitted.

BR-SEC-007

Historical preservation requirements shall be balanced with individual privacy rights in accordance with applicable law and governance policy.

BR-SEC-008

Privacy controls shall remain understandable to ordinary members.

Acceptance Criteria

The Privacy Platform is complete when:

- Privacy controls are documented.
 - Consent lifecycle is defined.
 - Member rights are established.
 - Compliance framework is documented.
-

Non-Functional Expectations

The Privacy Platform shall provide:

- Transparency.
 - Explainability.
 - Configurability.
 - Regulatory adaptability.
 - Strong auditing.
 - Member self-service.
-

Privacy Principles

Collect intentionally.

Explain clearly.

Respect continuously.

Completion Criteria

Annex 08T is complete when:

- Security philosophy is established.
 - Identity assurance is documented.
 - Data protection standards are complete.
 - Privacy governance is finalized.
-

Annex 08T Completion

The Security, Privacy & Trust Platform consists of:

- 08T-00 — Vision & Domain Overview
- 08T-01 — Authentication, Authorization & Identity Assurance
- 08T-02 — Encryption, Secrets Management & Data Protection
- 08T-03 — Privacy, Consent Management & Compliance

The Security, Privacy & Trust Platform provides HCP with a comprehensive trust foundation that protects identities, information, institutional memory, and member confidence while supporting long-term governance and regulatory adaptability.

Chapter 9 — Community Experience Platform

Part 1 — Vision & Experience Philosophy

Document ID: HCP-PB-09-00

Parent: Product Bible

Domain: Community Experience

Status: Draft

Version: 1.0

Purpose

The Community Experience Platform defines how members, leaders, volunteers, and organizations experience the Hash Community Platform (HCP).

It establishes the interaction philosophy, experience principles, navigation model, engagement patterns, and human-centered design approach that guide every user-facing feature.

Vision

Every interaction should strengthen belonging.

Every screen should encourage contribution.

Every journey should preserve community.

Philosophy

Communities are built by people.

Software should help people connect, contribute, celebrate, and remember.

The platform should disappear behind the experience.

Experience Principles

EP-001

Clarity over complexity.

EP-002

Belonging over transactions.

EP-003

Celebrate contribution.

EP-004

Reduce cognitive load.

EP-005

Surface what matters now.

EP-006

Preserve context.

EP-007

Reward participation.

EP-008

Teach through interaction.

EP-009

Accessibility is foundational.

EP-010

Every interaction should feel respectful.

Experience Goals

Members should feel:

- Welcome
 - Confident
 - Connected
 - Recognized
 - Trusted
 - Inspired
 - Included
 - Empowered
-

Core Experience Domains

The chapter defines:

- Personal Experience
 - Organization Experience
 - Community Discovery
 - Recognition
 - Collaboration
 - Social Interaction
 - Personalization
 - Accessibility
 - Internationalization
 - Mobile Experience
 - Offline Experience
-

Primary Personas

The platform serves:

- New Members
 - Returning Members
 - Volunteers
 - Event Organizers
 - Committee Members
 - Executives
 - Administrators
 - Guests
-

Platform Promise

HCP helps every member answer:

- What is happening?
 - Where can I help?
 - What have I achieved?
 - Who can I connect with?
 - What matters to my community today?
-

Success Criteria

The experience succeeds when:

- Members quickly understand the platform.
 - Important actions require minimal effort.
 - Contributions are visible.
 - Community participation increases.
 - Institutional memory becomes discoverable.
-

Business Principles

Design for humans.

Support communities.

Celebrate contribution.

Completion Criteria

Complete when:

- Experience philosophy is established.
 - Core experience domains are defined.
 - Human-centered principles are documented.
-

Next Document

09-01 — Personal Dashboard & Home Experience

Chapter 9 — Community Experience Platform

Part 2 — Personal Dashboard & Home Experience

Document ID: HCP-PB-09-01

Parent: Chapter 9 — Community Experience Platform

Domain: Personal Home Experience

Status: Draft

Version: 1.0

Purpose

The Personal Dashboard (Community Home) provides every member with a personalized, contextual, and action-oriented view of their community life.

Rather than presenting raw information, it helps members understand where they are, what is happening, what deserves attention, and how they can contribute.

Vision

One screen.

One community.

Everything that matters.

Philosophy

Show less.

Mean more.

Help members act with confidence.

Experience Principles

- Context over clutter.
 - Personal relevance.
 - Community awareness.
 - Progressive disclosure.
 - Recognition of contribution.
 - Action before information.
 - Delight through simplicity.
-

Core Sections

Welcome

Displays:

- Personalized greeting
 - Current organization
 - Upcoming events
 - Community highlights
-

Today

Shows:

- Events happening today
 - RSVP reminders
 - Volunteer commitments
 - Governance deadlines
 - Tasks requiring attention
-

Your Journey

Displays:

- Passport progress
 - Recent activities
 - Awards
 - Streaks
 - Contribution milestones
-

Community Activity

Shows:

- New Run Capsules
 - Club announcements
 - Recent photos
 - Recognition
 - New members
 - Leadership updates
-

Opportunities

Suggests:

- Volunteer roles
 - Upcoming events
 - Committees
 - Mentorship
 - Community needs
-

AI Assistant

Provides:

- Personalized summaries
 - Suggested actions
 - Event recommendations
 - Historical reminders
 - Organizational insights
-

Quick Actions

Supports:

- Check in
 - Create event
 - Upload photos
 - Record evidence
 - Search
 - Invite members
 - View passport
-

Personalization

The Home adapts based on:

- Role
 - Organization
 - Participation history
 - Upcoming commitments
 - Interests
 - Time zone
 - Device
 - Accessibility preferences
-

Business Rules

BR-CXP-001

Important community events take precedence over promotional content.

BR-CXP-002

Community contribution should be celebrated naturally without excessive gamification.

BR-CXP-003

Urgent tasks appear before informational content.

BR-CXP-004

Historical memories should strengthen community identity.

BR-CXP-005

The Home should adapt continuously without becoming unpredictable.

Acceptance Criteria

The Community Home succeeds when members can immediately answer:

- What is happening?
 - What needs my attention?
 - What have I accomplished?
 - How can I help?
 - What should I do next?
-

Completion Criteria

Complete when:

- Home experience is defined.
 - Personalization rules are documented.
 - Navigation priorities are established.
-

Next Document

09-02 — Member Timeline, Passport & Life Story

Chapter 9 — Community Experience Platform

Part 3 — Member Timeline, Passport & Life Story

Document ID: HCP-PB-09-02

Parent: Chapter 9 — Community Experience Platform

Domain: Member Journey

Status: Draft

Version: 1.0

Purpose

The Member Timeline and Passport experience preserves a member's journey through the Hash Community Platform (HCP), combining verified achievements with meaningful moments to create a rich, trustworthy, and inspiring record of participation.

The Timeline emphasizes personal narrative, while the Passport provides official community records.

Vision

Every contribution matters.

Every memory belongs somewhere.

Every journey deserves to be remembered.

Philosophy

The platform should help members see not only what they have done, but how they have grown within the community.

Experience Principles

- Celebrate milestones.
 - Preserve memories.
 - Separate official records from personal reflections.
 - Encourage storytelling.
 - Highlight contribution.
 - Respect privacy.
 - Inspire future participation.
-

Timeline

The Timeline includes:

- Joined community
- First run
- Volunteer activities
- Leadership appointments
- Awards
- Photos
- Videos
- Run Capsules
- Governance participation
- Historical memories
- AI-generated highlights
- Personal reflections (optional)

Timeline entries may combine verified and personal content with clear visual distinction.

Passport

The Passport contains official records including:

- Membership history
- Verified runs
- Official stamps
- Awards
- Offices held
- Certifications
- Verified volunteer service
- International participation

Passport entries are evidence-backed and immutable except through authorized correction workflows.

Memory Collections

Members may organize memories into collections such as:

- First Experiences
- Favorite Trails
- International Events
- Volunteer Highlights
- Leadership Journey
- Historic Moments
- Personal Albums

Collections support photos, videos, documents, and narrative text.

AI Storytelling

AI may generate:

- Annual summaries
- Milestone retrospectives
- Leadership highlights
- Volunteer impact summaries
- Travel history
- Community contribution reports

Members control whether AI-generated stories appear publicly.

Reflection

Members may privately record:

- Lessons learned
- Personal goals
- Community reflections
- Event notes

Reflections remain private unless intentionally shared.

Privacy

Members control visibility of:

- Timeline entries
- Photos
- Albums
- Reflections
- Awards
- Passport elements

Visibility integrates with platform privacy settings.

Business Rules

BR-CXP-006

Official Passport records remain distinct from personal storytelling.

BR-CXP-007

Verified activities display supporting evidence where appropriate.

BR-CXP-008

AI-generated narratives clearly indicate automated authorship.

BR-CXP-009

Historical memories shall preserve original context.

BR-CXP-010

Members remain owners of their personal narrative.

Acceptance Criteria

The experience succeeds when members can:

- Revisit meaningful moments.
 - Verify official achievements.
 - Share selected memories.
 - Reflect on personal growth.
 - Preserve community history.
-

Completion Criteria

Complete when:

- Timeline model is documented.
 - Passport relationship is defined.
 - Storytelling experience is established.
-

Next Document

09-03 — Community Feed, Discovery & Social Interaction

Chapter 9 — Community Experience Platform

Part 4 — Community Feed, Discovery & Social Interaction

Document ID: HCP-PB-09-03

Parent: Chapter 9 — Community Experience Platform

Domain: Community Discovery & Social Experience

Status: Draft

Version: 1.0

Purpose

The Community Feed provides members with timely, relevant, and meaningful updates from across their organizations and the wider Hash community.

Unlike traditional social feeds, the Community Feed prioritizes participation, recognition, discovery, and institutional memory over passive engagement.

Vision

Keep members connected.

Celebrate participation.

Encourage contribution.

Philosophy

Attention is valuable.

Trust is more valuable.

The platform should never manipulate attention for engagement.

Experience Principles

- Relevance over recency.
 - Community before popularity.
 - Encourage participation.
 - Reduce information overload.
 - Celebrate achievements.
 - Explain recommendations.
 - Respect member preferences.
-

Feed Content

The feed may include:

- New Run Capsules
 - Upcoming events
 - Volunteer opportunities
 - Leadership announcements
 - Recognition
 - Historical memories
 - Community milestones
 - New members
 - Governance updates
 - Safety notices
 - Chapter anniversaries
-

Discovery

Members discover:

- Nearby chapters
- Upcoming events
- International events
- Historic Run Capsules
- Volunteer opportunities
- New organizations
- Interest groups

Discovery adapts to member preferences.

Social Interaction

Members may:

- React
- Comment
- Thank volunteers
- Welcome new members
- Share memories
- Recommend events
- Save posts
- Follow organizations

Interactions emphasize encouragement rather than competition.

Intelligent Ranking

Ranking considers:

- Relevance
- Community relationship
- Upcoming commitments
- Organization membership
- Participation history
- Freshness
- Member preferences

Popularity alone shall never determine visibility.

Historical Discovery

The platform may surface:

- "On this day"
- Historic anniversaries
- Classic Run Capsules
- Legacy members
- Organization milestones

Historical content strengthens institutional memory.

AI Assistance

AI may:

- Summarize busy periods
- Highlight important updates
- Recommend events
- Identify community trends
- Suggest members to reconnect with

AI recommendations remain explainable.

Business Rules

BR-CXP-011

Emergency and safety information supersedes routine feed content.

BR-CXP-012

Algorithms shall prioritize meaningful participation over engagement metrics.

BR-CXP-013

Recommendations shall remain explainable.

BR-CXP-014

Members retain meaningful control over feed preferences.

BR-CXP-015

Historical preservation shall remain a core feed objective.

Acceptance Criteria

The Community Feed succeeds when members can:

- Stay informed.
 - Feel connected.
 - Discover opportunities.
 - Celebrate others.
 - Reconnect with community history.
-

Completion Criteria

Complete when:

- Feed philosophy is documented.
 - Discovery model is defined.
 - Social interaction principles are established.
-

Next Document

09-04 — Recognition, Achievements & Community Appreciation

Chapter 9 — Community Experience Platform

Part 5 — Recognition, Achievements & Community Appreciation

Document ID: HCP-PB-09-04

Parent: Chapter 9 — Community Experience Platform

Domain: Recognition & Appreciation

Status: Draft

Version: 1.0

Purpose

The Recognition & Appreciation Platform celebrates meaningful contributions made by members while preserving authenticity, fairness, and the values of the Hash community.

Recognition exists to strengthen belonging, encourage participation, and preserve the stories behind community service.

Vision

Celebrate people.

Honor service.

Preserve legacy.

Philosophy

Recognition is gratitude made visible.

Achievements represent contribution—not status.

Every member should have the opportunity to be appreciated.

Experience Principles

- Celebrate contribution.
 - Avoid unhealthy competition.
 - Preserve authenticity.
 - Encourage gratitude.
 - Recognize service at every level.
 - Value consistency over popularity.
 - Tell the story behind recognition.
-

Recognition Types

The platform supports:

- Thank You messages
 - Volunteer recognition
 - Event appreciation
 - Leadership recognition
 - Milestone celebrations
 - Community service awards
 - Historical preservation awards
 - Mentorship recognition
 - International participation
 - Lifetime achievements
-

Achievements

Achievements may recognize:

- First Run
- Volunteer milestones
- Organizer milestones
- Trail Master milestones
- International events
- Years of membership
- Historical contributions
- Community education
- Evidence verification
- Mentorship

Achievements emphasize contribution rather than accumulation.

Appreciation

Members may:

- Thank another member
- Recognize volunteers
- Celebrate organizers
- Highlight mentors
- Share stories of kindness
- Recommend awards

Appreciation remains personal and sincere.

Award Narratives

Every major award includes:

- Why it was awarded
- Supporting evidence
- Community impact
- Related events
- Photos
- Stories
- Historical context

Awards become lasting historical records.

AI Assistance

AI may assist by:

- Suggesting overlooked contributors
- Identifying volunteer impact
- Drafting appreciation messages
- Summarizing years of service
- Recommending award candidates

AI never grants awards autonomously.

Business Rules

BR-CXP-016

Recognition shall never be based solely on activity volume.

BR-CXP-017

Major awards require human governance.

BR-CXP-018

Recognition shall remain explainable and evidence-backed.

BR-CXP-019

Members may decline public recognition where appropriate.

BR-CXP-020

Recognition should encourage future contribution.

Acceptance Criteria

Recognition succeeds when members feel:

- Appreciated.
 - Encouraged.
 - Connected.
 - Inspired.
 - Respected.
-

Completion Criteria

Complete when:

- Recognition framework is documented.
 - Achievement philosophy is defined.
 - Appreciation experience is established.
-

Next Document

09-05 — Organization Experience, Collaboration & Leadership

Chapter 9 — Community Experience Platform

Part 6 — Organization Experience, Collaboration & Leadership

Document ID: HCP-PB-09-05

Parent: Chapter 9 — Community Experience Platform

Domain: Organization Experience

Status: Draft

Version: 1.0

Purpose

The Organization Experience provides clubs, chapters, kennels, regional bodies, committees, and international organizations with collaborative workspaces that support leadership, coordination, institutional memory, and community growth.

Organizations are treated as living communities with evolving histories rather than static administrative entities.

Vision

Empower leaders.

Connect members.

Preserve organizations.

Philosophy

Healthy organizations create healthy communities.

Leadership should be supported, not burdened.

Institutional memory should survive leadership transitions.

Experience Principles

- Shared ownership.
 - Transparent leadership.
 - Collaborative planning.
 - Knowledge continuity.
 - Respect for tradition.
 - Inclusive participation.
 - Context-aware experiences.
-

Organization Home

Each organization includes:

- Welcome banner
 - Upcoming events
 - Community Pulse
 - Announcements
 - Leadership team
 - Recent Run Capsules
 - Volunteer opportunities
 - Historical highlights
 - Current initiatives
-

Leadership Workspace

Leaders access:

- Operational dashboard
- Pending approvals
- Event planning
- Volunteer coordination
- Membership insights
- Governance actions
- Organization health
- AI assistance

Leadership tools adapt to assigned responsibilities.

Collaboration

Organizations support:

- Working groups
- Committees
- Shared documents
- Planning boards
- Task coordination
- Meeting records
- Decision tracking
- Evidence collection

Collaboration preserves organizational knowledge.

Community Health

Organizations view indicators including:

- Member participation
- Volunteer engagement
- Event cadence
- Leadership continuity
- Membership growth
- Historical preservation
- Recognition activity

Health indicators guide improvement rather than competition.

Leadership Continuity

The platform preserves:

- Handover notes
- Strategic plans
- Historical decisions
- Lessons learned
- Committee archives
- Annual reports

Leadership transitions retain institutional memory.

AI Assistance

AI may assist by:

- Summarizing meetings
- Drafting announcements
- Identifying volunteer gaps
- Suggesting recognition
- Highlighting governance deadlines
- Recommending historical references

Human leaders remain responsible for decisions.

Business Rules

BR-CXP-021

Organizations retain ownership of their institutional history.

BR-CXP-022

Leadership transitions shall preserve operational continuity.

BR-CXP-023

Community health indicators shall encourage improvement rather than ranking.

BR-CXP-024

Collaboration records become part of organizational memory where appropriate.

BR-CXP-025

Leadership tools shall remain understandable for volunteers, not just technical administrators.

Acceptance Criteria

The Organization Experience succeeds when leaders can:

- Coordinate effectively.
 - Preserve knowledge.
 - Welcome new volunteers.
 - Plan confidently.
 - Sustain community growth.
-

Completion Criteria

Complete when:

- Organization workspace is defined.
 - Collaboration model is documented.
 - Leadership experience is established.
-

Next Document

09-06 — Accessibility, Internationalization & Inclusive Experience

Chapter 9 — Community Experience Platform

Part 7 — Accessibility, Internationalization & Inclusive Experience

Document ID: HCP-PB-09-06

Parent: Chapter 9 — Community Experience Platform

Domain: Inclusive Experience

Status: Draft

Version: 1.0

Purpose

This document establishes accessibility, internationalization, localization, cultural adaptability, and inclusive design principles for the Hash Community Platform (HCP).

Its objective is to ensure that every member can participate confidently regardless of language, ability, location, device, or cultural background.

Vision

Every member belongs.

Every culture is respected.

Every interaction is inclusive.

Philosophy

Accessibility is a requirement.

Localization is respect.

Inclusion is intentional.

Experience Principles

- Design for everyone.
 - Accessibility by default.
 - Mobile-first experience.
 - Progressive enhancement.
 - Cultural neutrality where appropriate.
 - Local relevance where valuable.
 - Human dignity above convenience.
-

Accessibility

The platform supports:

- Keyboard navigation
- Screen readers
- High-contrast themes
- Adjustable text sizes
- Reduced motion
- Accessible media alternatives
- Focus indicators
- Semantic navigation

Accessibility is integrated into every feature rather than added later.

Internationalization

The platform supports:

- Multiple languages
- Multiple scripts
- Locale-aware formatting
- Right-to-left languages
- Time zone awareness
- Regional calendars (where applicable)
- Currency formatting (where relevant)

Platform text remains translatable.

Localization

Organizations may customize:

- Terminology
- Event naming
- Local traditions
- Date formats
- Regional preferences
- Volunteer terminology
- Recognition wording

Localization preserves local identity.

Inclusive Design

Design considers:

- New members
- Long-term members
- Elder members
- Members with disabilities
- Volunteers
- Leaders
- International visitors

Interfaces remain understandable across experience levels.

Offline Experience

Where feasible, members may:

- View downloaded Run Capsules
- Access Passport records
- Review event details
- Capture evidence for later synchronization
- Read organizational history

Connectivity should not unnecessarily prevent participation.

Business Rules

BR-CXP-026

Accessibility shall be considered during initial feature design.

BR-CXP-027

Localization shall preserve organizational traditions.

BR-CXP-028

Language preferences shall remain member-controlled.

BR-CXP-029

Offline functionality shall prioritize high-value community interactions.

BR-CXP-030

Inclusive design shall remain measurable throughout product development.

Acceptance Criteria

The Inclusive Experience succeeds when members can participate confidently regardless of:

- Ability
 - Language
 - Culture
 - Geography
 - Device
 - Connectivity
-

Completion Criteria

Complete when:

- Accessibility standards are documented.
 - Internationalization strategy is defined.
 - Inclusive design principles are established.
-

Next Document

09-07 — Mobile Experience, Offline Behaviors & Future Interfaces

Chapter 9 — Community Experience Platform

Part 8 — Mobile Experience, Offline Behaviors & Future Interfaces

Document ID: HCP-PB-09-07

Parent: Chapter 9 — Community Experience Platform

Domain: Mobile Experience

Status: Draft

Version: 1.0

Purpose

This document defines the mobile-first interaction model, offline capabilities, synchronization strategy, and future interaction paradigms for the Hash Community Platform (HCP).

The objective is to ensure that members can participate naturally wherever community life happens.

Vision

Carry the community everywhere.

Participate anywhere.

Reconnect automatically.

Philosophy

The platform should adapt to the realities of community life.

Connectivity is beneficial, but participation should not depend on it.

Experience Principles

- Mobile-first.
 - Offline-capable.
 - Fast by default.
 - Battery-conscious.
 - Context-aware.
 - Seamless synchronization.
 - Future-ready interaction models.
-

Mobile Experience

The platform prioritizes:

- Thumb-friendly navigation
 - One-handed interaction
 - Minimal typing
 - Camera-first workflows
 - Fast startup
 - Responsive layouts
 - Native device capabilities
-

Offline Capabilities

Members may:

- View downloaded Run Capsules
- Access Passport summaries
- View event information
- Capture photos
- Record GPS trails
- Draft reflections
- Prepare volunteer checklists
- Queue evidence for upload

Changes synchronize automatically when connectivity returns.

Synchronization

Synchronization shall provide:

- Background uploads
- Conflict detection
- Conflict resolution guidance
- Incremental synchronization
- Retry mechanisms
- Synchronization history

Members remain informed of synchronization status.

Device Integration

The platform may integrate with:

- Camera
- GPS
- Calendar
- Contacts (with permission)
- Biometric authentication
- Health platforms (future)
- Wearable devices (future)

Integrations remain optional and permission-based.

Future Interfaces

The architecture should support future interaction methods including:

- Voice assistance
- Wearables
- Smart glasses
- Ambient notifications
- AI companions
- Spatial computing
- Emerging interaction technologies

Core business logic remains independent of interface technology.

Business Rules

BR-CXP-031

Critical community workflows shall remain usable offline where feasible.

BR-CXP-032

Synchronization shall preserve data integrity.

BR-CXP-033

Device permissions shall remain transparent and revocable.

BR-CXP-034

Future interfaces shall reuse core platform capabilities rather than duplicate business logic.

BR-CXP-035

Mobile interactions shall prioritize speed and simplicity.

Acceptance Criteria

The Mobile Experience succeeds when members can:

- Participate during events.
 - Continue working offline.
 - Synchronize confidently.
 - Trust device integrations.
 - Transition smoothly across devices.
-

Completion Criteria

Complete when:

- Mobile-first philosophy is established.
 - Offline behavior is documented.
 - Synchronization strategy is defined.
 - Future interaction model is articulated.
-

Chapter 9 Completion

The Community Experience Platform consists of:

- 09-00 — Vision & Experience Philosophy
- 09-01 — Personal Dashboard & Home Experience
- 09-02 — Member Timeline, Passport & Life Story
- 09-03 — Community Feed, Discovery & Social Interaction
- 09-04 — Recognition, Achievements & Community Appreciation
- 09-05 — Organization Experience, Collaboration & Leadership
- 09-06 — Accessibility, Internationalization & Inclusive Experience
- 09-07 — Mobile Experience, Offline Behaviors & Future Interfaces

Together, these documents define a community experience that is welcoming, contextual, inclusive, mobile-first, and centered on meaningful participation rather than passive consumption.

Chapter 10 — AI-Native Community Intelligence

Part 1 — Vision & AI Philosophy

Document ID: HCP-PB-10-00

Parent: Product Bible

Domain: AI-Native Community Intelligence

Status: Draft

Version: 1.0

Purpose

The AI-Native Community Intelligence Platform provides intelligent assistance across the Hash Community Platform (HCP) while preserving trust, transparency, human oversight, and institutional knowledge.

Its purpose is to reduce administrative burden, improve discoverability, strengthen historical preservation, and help communities make better-informed decisions.

AI is an assistant—not an authority.

Vision

Help every member.

Support every leader.

Preserve every generation of knowledge.

Philosophy

AI should amplify people.

AI should preserve context.

AI should remain accountable.

Humans remain responsible for important decisions.

Guiding Principles

- Human-in-the-loop.
 - Explainable AI.
 - Evidence-aware reasoning.
 - Privacy-respecting intelligence.
 - Trust before automation.
 - Bias awareness.
 - Continuous improvement.
-

Scope

The AI Platform supports:

- Member assistance
 - Leadership assistance
 - Knowledge discovery
 - Search enhancement
 - Historical storytelling
 - Event planning assistance
 - Operational recommendations
 - Governance assistance
 - Volunteer recommendations
 - Community analytics
-

AI Capabilities

The platform may:

- Summarize
- Explain
- Recommend
- Organize
- Translate
- Draft
- Classify
- Discover patterns
- Surface historical connections

AI shall not independently exercise governance authority.

Human Oversight

Human review is required for:

- Awards
- Governance decisions
- Constitutional changes
- Financial approvals
- Member sanctions
- Historical corrections
- Organizational policy

AI recommendations remain advisory.

Explainability

Every significant AI recommendation should answer:

- Why was this suggested?
 - Which information was considered?
 - How confident is the recommendation?
 - What evidence supports it?
 - What assumptions were made?
-

Trust

AI interactions integrate with:

- Evidence Records
- Audit Platform
- Operations
- Security
- Privacy
- Knowledge Platform

Trust remains measurable.

Success Criteria

The AI Platform succeeds when:

- Members save time.
 - Leaders make better decisions.
 - Community knowledge becomes easier to discover.
 - Institutional memory grows stronger.
 - Human judgment remains central.
-

Business Principles

Assist responsibly.

Explain clearly.

Respect human judgment.

Completion Criteria

Complete when:

- AI philosophy is documented.
 - Human oversight is defined.
 - Explainability requirements are established.
-

Next Document

10-01 — Member AI Assistant & Personal Intelligence

Chapter 10 — AI-Native Community Intelligence

Part 2 — Member AI Assistant & Personal Intelligence

Document ID: HCP-PB-10-01

Parent: Chapter 10 — AI-Native Community Intelligence

Domain: Member AI Assistant

Status: Draft

Version: 1.0

Purpose

The Member AI Assistant provides personalized, context-aware assistance that helps members navigate community life, discover opportunities, preserve memories, and contribute more effectively.

The assistant enhances participation while respecting member autonomy, privacy, and organizational governance.

Vision

Know the member.

Understand the context.

Support meaningful participation.

Philosophy

Assist without distracting.

Recommend without manipulating.

Remember with permission.

Experience Principles

- Context-aware assistance.
 - Explainable recommendations.
 - Respect for privacy.
 - Minimal interruption.
 - Encourage real-world participation.
 - Preserve member agency.
 - Learn responsibly.
-

Core Capabilities

The assistant may:

- Answer community questions
- Explain governance processes
- Recommend events
- Suggest volunteer opportunities
- Find historical records
- Draft announcements
- Summarize discussions
- Translate community content
- Assist with onboarding

Recommendations remain advisory.

Personal Intelligence

The assistant may understand:

- Membership history
- Current organization
- Upcoming commitments
- Passport milestones
- Volunteer interests
- Preferred communication style
- Accessibility preferences
- Language preferences

Personalization occurs only within approved privacy settings.

Community Guidance

The assistant may suggest:

- Members to welcome
- Events to attend
- Committees seeking volunteers
- Historical content of interest
- Mentorship opportunities
- Recognition candidates

Suggestions prioritize community benefit.

Memory Assistance

With member permission, the assistant may:

- Surface past memories
- Organize albums
- Draft yearly reflections
- Suggest timeline entries
- Identify missing historical information
- Prepare annual summaries

Members remain in control of personal memories.

Explainability

Recommendations should explain:

- Why this suggestion was made
 - Which information influenced it
 - Whether AI confidence is high, medium, or low
 - Available supporting evidence
-

Privacy

Members control:

- Personalization level
- Memory usage
- AI learning preferences
- Recommendation categories
- Data retention for AI features

Controls are available at any time.

Business Rules

BR-AI-001

The assistant shall prioritize community participation over prolonged AI interaction.

BR-AI-002

Personal recommendations shall remain explainable.

BR-AI-003

Members may disable personalization without losing core platform functionality.

BR-AI-004

AI shall not impersonate community leaders or members.

BR-AI-005

AI-generated content shall be identifiable where appropriate.

Acceptance Criteria

The Member AI Assistant succeeds when members can:

- Find information quickly.
 - Participate more confidently.
 - Discover meaningful opportunities.
 - Preserve personal memories.
 - Understand community processes.
-

Completion Criteria

Complete when:

- Assistant capabilities are defined.
 - Personal intelligence model is documented.
 - Privacy controls are established.
-

Next Document

10-02 — Leadership AI, Organizational Intelligence & Decision Support

Chapter 10 — AI-Native Community Intelligence

Part 3 — Leadership AI, Organizational Intelligence & Decision Support

Document ID: HCP-PB-10-02

Parent: Chapter 10 — AI-Native Community Intelligence

Domain: Leadership Intelligence

Status: Draft

Version: 1.0

Purpose

The Leadership AI platform assists community leaders by reducing administrative workload, surfacing organizational insights, improving continuity, and supporting informed decision-making.

AI augments leadership without replacing human responsibility or governance.

Vision

Support leaders.

Strengthen organizations.

Preserve institutional wisdom.

Philosophy

Leaders should spend more time with people than paperwork.

AI handles preparation.

Humans make decisions.

Experience Principles

- Decision support.
 - Explainable recommendations.
 - Operational clarity.
 - Respect volunteer time.
 - Institutional continuity.
 - Evidence-first reasoning.
 - Human accountability.
-

Leadership Assistance

The platform may assist with:

- Meeting preparation
 - Agenda generation
 - Action item tracking
 - Volunteer coordination
 - Event planning
 - Membership summaries
 - Governance reminders
 - Organization health reports
-

Organizational Intelligence

AI may analyze:

- Participation trends
- Volunteer engagement
- Event attendance
- Leadership continuity
- Committee activity
- Recognition patterns
- Historical participation
- Knowledge gaps

Analysis supports discussion rather than automatic action.

Decision Support

AI may recommend:

- Volunteers for open roles
- Potential mentors
- Recognition candidates
- Event scheduling improvements
- Committee staffing
- Training opportunities

Recommendations remain advisory and explainable.

Leadership Continuity

AI assists by:

- Summarizing outgoing leadership activities
 - Preparing transition briefings
 - Highlighting unfinished initiatives
 - Preserving institutional knowledge
 - Identifying historical precedents
-

Risk Awareness

The platform may identify:

- Declining volunteer participation
- Event planning risks
- Governance deadlines
- Documentation gaps
- Historical preservation needs
- Organizational bottlenecks

Alerts remain informational.

Explainability

Every recommendation explains:

- Why it was generated
 - Supporting evidence
 - Confidence level
 - Alternative interpretations
 - Relevant historical examples
-

Business Rules

BR-AI-006

Leadership recommendations remain advisory.

BR-AI-007

AI shall not replace constitutional governance processes.

BR-AI-008

Recommendations shall remain evidence-backed.

BR-AI-009

Leaders remain accountable for organizational decisions.

BR-AI-010

Organizational intelligence shall prioritize long-term health over short-term optimization.

Acceptance Criteria

Leadership AI succeeds when leaders can:

- Prepare faster.
 - Coordinate volunteers more effectively.
 - Understand organizational trends.
 - Preserve continuity.
 - Make more informed decisions.
-

Completion Criteria

Complete when:

- Leadership assistance is defined.
 - Organizational intelligence is documented.
 - Decision-support philosophy is established.
-

Next Document

10-03 — Knowledge Intelligence, Search & Community Memory

Chapter 10 — AI-Native Community Intelligence

Part 4 — Knowledge Intelligence, Search & Community Memory

Document ID: HCP-PB-10-03

Parent: Chapter 10 — AI-Native Community Intelligence

Domain: Knowledge Intelligence

Status: Draft

Version: 1.0

Purpose

The Knowledge Intelligence Platform transforms community knowledge into a searchable, explainable, and continuously growing institutional memory.

Its purpose is to help members rediscover information, connect historical knowledge, and preserve organizational wisdom across generations.

Vision

Never lose knowledge.

Never repeat avoidable mistakes.

Always learn from history.

Philosophy

Knowledge grows through contribution.

Wisdom grows through rediscovery.

Experience Principles

- Search by meaning.
 - Preserve historical context.
 - Connect related knowledge.
 - Explain discoveries.
 - Respect evidence.
 - Encourage contribution.
 - Keep knowledge alive.
-

Knowledge Sources

Knowledge may originate from:

- Run Capsules
 - Event reports
 - Meeting minutes
 - Constitutions
 - Governance decisions
 - Volunteer documentation
 - Community discussions
 - Historical archives
 - Photos
 - Videos
 - Oral histories
 - Recognition records
 - Training materials
-

Semantic Search

Members may search using natural language.

Examples:

- "When did our chapter first host Interhash?"
- "Show flood relief events."
- "Find Trail Master training."
- "Who organized the 2015 anniversary?"
- "How have we welcomed first-time Hashers?"

Search understands concepts, not just keywords.

Knowledge Graph

The platform connects:

- People
- Events
- Organizations
- Places
- Documents
- Awards
- Committees
- Historical milestones

Relationships become discoverable.

AI Knowledge Assistance

AI may:

- Summarize long documents
 - Explain historical context
 - Connect related materials
 - Identify missing knowledge
 - Recommend further reading
 - Suggest archival improvements
-

Knowledge Confidence

Results indicate:

- Source documents
- Evidence quality
- Historical confidence
- Verification status
- Last review date

Confidence remains transparent.

Business Rules

BR-AI-011

Knowledge discoveries shall remain traceable to original sources.

BR-AI-012

Historical uncertainty shall be clearly communicated.

BR-AI-013

Community knowledge shall remain attributable.

BR-AI-014

Knowledge relationships shall remain explainable.

BR-AI-015

Historical preservation shall remain a continuous process.

Acceptance Criteria

Knowledge Intelligence succeeds when members can:

- Find information naturally.
 - Understand historical context.
 - Discover related knowledge.
 - Trust search results.
 - Build upon previous generations.
-

Completion Criteria

Complete when:

- Knowledge architecture is documented.
 - Semantic search philosophy is defined.
 - Community memory model is established.
-

Next Document

10-04 — Historical Intelligence & Narrative Generation

Chapter 10 — AI-Native Community Intelligence

Part 5 — Historical Intelligence & Narrative Generation

Document ID: HCP-PB-10-04

Parent: Chapter 10 — AI-Native Community Intelligence

Domain: Historical Intelligence

Status: Draft

Version: 1.0

Purpose

The Historical Intelligence Platform transforms verified community history into meaningful narratives that educate, inspire, and preserve institutional identity.

AI assists in organizing, connecting, and presenting history while respecting evidence, uncertainty, and human editorial oversight.

Vision

Preserve every generation.

Connect every story.

Keep community history alive.

Philosophy

History is more than dates.

History is people, places, traditions, challenges, and shared experiences.

AI helps communities rediscover their own story.

Experience Principles

- Preserve authenticity.
 - Respect evidence.
 - Explain uncertainty.
 - Connect generations.
 - Celebrate community identity.
 - Encourage historical contribution.
 - Keep humans in editorial control.
-

Historical Narratives

AI may generate:

- Chapter histories
- Anniversary retrospectives
- Leadership timelines
- Event stories
- Volunteer histories
- Tradition histories
- Organization biographies
- Community milestone summaries

Generated narratives remain editable.

Historical Connections

The platform identifies relationships between:

- Events
- Leaders
- Organizations
- Places
- Traditions
- Photos
- Awards
- Run Capsules
- Oral histories

Connections help reveal historical patterns.

Narrative Evidence

Each narrative links to:

- Source documents
- Photos
- Videos
- Passport records
- Governance documents
- Community contributions
- Confidence indicators

Narratives remain traceable.

Historical Uncertainty

Where evidence conflicts, the platform:

- Explains differing accounts
- Identifies missing evidence
- Highlights confidence levels
- Invites community review

Historical honesty strengthens trust.

AI Assistance

AI may assist by:

- Drafting anniversary books
- Summarizing decades of activity
- Creating exhibit timelines
- Suggesting preservation priorities
- Connecting forgotten stories
- Identifying historical gaps

Editorial approval remains human.

Business Rules

BR-AI-016

Historical narratives shall remain evidence-backed.

BR-AI-017

AI-generated history shall remain distinguishable from verified historical documents.

BR-AI-018

Conflicting evidence shall remain visible rather than hidden.

BR-AI-019

Communities retain editorial ownership of their history.

BR-AI-020

Narrative generation shall encourage additional preservation efforts.

Acceptance Criteria

Historical Intelligence succeeds when members can:

- Understand community history.
 - Explore historical relationships.
 - Verify narrative sources.
 - Discover forgotten stories.
 - Contribute to preservation.
-

Completion Criteria

Complete when:

- Historical narrative philosophy is documented.
 - Narrative generation model is defined.
 - Editorial governance is established.
-

Next Document

10-05 — Predictive Community Intelligence & Community Health

Chapter 10 — AI-Native Community Intelligence

Part 6 — Predictive Community Intelligence & Community Health

Document ID: HCP-PB-10-05

Parent: Chapter 10 — AI-Native Community Intelligence

Domain: Predictive Intelligence

Status: Draft

Version: 1.0

Purpose

Predictive Community Intelligence assists leaders by identifying emerging patterns, potential risks, and future opportunities based on historical evidence and current community activity.

Predictions support planning and preparedness while remaining transparent, explainable, and advisory.

Vision

Notice early.

Prepare thoughtfully.

Strengthen communities.

Philosophy

Predictions inform decisions.

They do not make decisions.

Human judgment remains essential.

Experience Principles

- Explain every prediction.
 - Respect uncertainty.
 - Prioritize prevention.
 - Surface opportunities.
 - Preserve trust.
 - Encourage action.
 - Learn continuously.
-

Predictive Insights

AI may identify trends relating to:

- Volunteer participation
 - Membership growth
 - Event attendance
 - Leadership succession
 - Committee activity
 - Recognition frequency
 - Historical preservation
 - Organizational resilience
-

Community Health Indicators

Indicators may include:

- Participation consistency
- Volunteer sustainability
- Leadership continuity
- Member retention
- Onboarding effectiveness
- Knowledge preservation
- Community engagement
- Event readiness

Indicators are directional rather than absolute.

Opportunity Detection

AI may recommend:

- Mentor recruitment
- Volunteer appreciation campaigns
- Historical digitization projects
- Leadership development
- Cross-chapter collaboration
- Community outreach initiatives

Recommendations remain advisory.

Risk Awareness

Potential risks include:

- Leadership burnout
- Volunteer shortages
- Declining participation
- Documentation gaps
- Organizational dependency on key individuals
- Event planning bottlenecks

Alerts provide supporting evidence.

Explainability

Every prediction explains:

- Supporting observations
 - Historical comparisons
 - Confidence level
 - Contributing factors
 - Alternative explanations
-

Business Rules

BR-AI-021

Predictions shall remain advisory.

BR-AI-022

Prediction confidence shall be visible.

BR-AI-023

Historical evidence shall accompany predictive insights.

BR-AI-024

Predictions shall never replace governance processes.

BR-AI-025

Community health shall emphasize resilience rather than competition.

Acceptance Criteria

Predictive Intelligence succeeds when leaders can:

- Recognize trends early.
 - Understand supporting evidence.
 - Prepare appropriate responses.
 - Strengthen organizational resilience.
 - Improve long-term planning.
-

Completion Criteria

Complete when:

- Predictive model is documented.
 - Community health philosophy is defined.
 - Risk-awareness framework is established.
-

Next Document

10-06 — AI Governance, Ethics & Responsible Intelligence

Chapter 10 — AI-Native Community Intelligence

Part 7 — AI Governance, Ethics & Responsible Intelligence

Document ID: HCP-PB-10-06

Parent: Chapter 10 — AI-Native Community Intelligence

Domain: AI Governance & Ethics

Status: Draft

Version: 1.0

Purpose

This document establishes the ethical framework, governance model, accountability requirements, and operational safeguards governing all AI capabilities within the Hash Community Platform (HCP).

Its purpose is to ensure AI remains transparent, trustworthy, accountable, and aligned with the community's values.

Vision

Build trust.

Protect people.

Strengthen communities.

Philosophy

AI serves the community.

The community does not serve the AI.

Trust is earned continuously through transparency, accountability, and responsible behavior.

Core Principles

- Human authority.
 - Explainability.
 - Transparency.
 - Privacy.
 - Fairness.
 - Accountability.
 - Safety.
 - Continuous oversight.
-

Human Authority

AI shall not independently:

- Elect leaders
- Grant awards
- Suspend members
- Amend constitutions
- Approve finances
- Modify governance records
- Override human decisions

AI recommendations remain advisory.

Transparency

Members shall know:

- When AI was involved
- What AI generated
- Why recommendations were made
- Which evidence informed responses
- What confidence level applies

AI participation remains visible.

Accountability

Every significant AI interaction records:

- Timestamp
- Model version
- Source evidence
- Confidence
- Human reviewer (where applicable)
- Final outcome

AI actions remain auditable.

Fairness

The platform continuously evaluates:

- Recommendation bias
- Geographic bias
- Language bias
- Participation bias
- Historical bias
- Data quality limitations

Potential bias is documented and reviewed.

Privacy

AI respects:

- Member consent
- Data minimization
- Access controls
- Organizational boundaries
- Applicable legal requirements

Privacy remains foundational.

Safety

The platform shall include safeguards for:

- Harmful recommendations
- Hallucination detection
- Evidence verification
- Abuse prevention
- Prompt injection resistance
- Unauthorized automation

Safety evolves continuously.

Appeals & Review

Members may:

- Question AI recommendations
- Report incorrect information
- Request human review
- Correct historical inaccuracies
- Appeal AI-assisted decisions

Human review remains available.

Continuous Improvement

The platform regularly evaluates:

- Recommendation quality
- User trust
- False positives
- False negatives
- Community feedback
- Governance compliance

Improvement remains evidence-driven.

Business Rules

BR-AI-026

AI shall remain subordinate to community governance.

BR-AI-027

Every significant recommendation shall be explainable.

BR-AI-028

AI-generated content shall be identifiable.

BR-AI-029

Human review shall remain available for consequential outcomes.

BR-AI-030

Community trust shall take precedence over automation.

Acceptance Criteria

Responsible Intelligence succeeds when members:

- Trust AI assistance.
 - Understand recommendations.
 - Can challenge outcomes.
 - Retain meaningful control.
 - Benefit from transparent automation.
-

Completion Criteria

Complete when:

- Ethical framework is documented.
 - Governance model is defined.
 - Accountability requirements are established.
-

Next Document

10-07 — AI Platform Architecture & Future Evolution

Chapter 10 — AI-Native Community Intelligence

Part 8 — AI Platform Architecture & Future Evolution

Document ID: HCP-PB-10-07

Parent: Chapter 10 — AI-Native Community Intelligence

Domain: AI Platform Architecture

Status: Draft

Version: 1.0

Purpose

This document defines the architectural principles that enable HCP's AI capabilities to evolve independently of underlying models, vendors, and technologies while preserving community knowledge, governance, and trust.

Vision

Future-ready intelligence.

Stable foundations.

Community knowledge first.

Philosophy

Community knowledge is permanent.

AI implementations are temporary.

Architecture should separate the two.

Architectural Principles

- Model independence.
 - Vendor neutrality.
 - Knowledge portability.
 - Explainability by design.
 - Observable intelligence.
 - Modular capabilities.
 - Graceful evolution.
-

AI Platform Layers

The AI Platform consists of:

Community Knowledge Layer

- Documents
 - Run Capsules
 - Governance records
 - Historical archives
 - Evidence
 - Community graph
 - Organizational memory
-

Intelligence Layer

- Retrieval
 - Semantic search
 - Recommendation engine
 - Narrative generation
 - Prediction engine
 - Planning assistance
 - Translation
 - Classification
-

Model Layer

Supports multiple AI providers and models.

Capabilities may include:

- Large Language Models

- Small Language Models
- Vision Models
- Speech Models
- Embedding Models
- Future AI paradigms

Models remain interchangeable.

Governance Layer

Responsible for:

- Explainability
 - Audit logging
 - Permissions
 - Privacy
 - Trust scoring
 - Human review
 - Policy enforcement
-

Experience Layer

Delivers AI assistance through:

- Member Assistant
 - Leadership Assistant
 - Search
 - Dashboards
 - Mobile
 - APIs
 - Future interfaces
-

Multi-Model Strategy

Different AI models may specialize in:

- Search
- Translation
- Summarization
- Image understanding
- Historical analysis
- Planning assistance

The platform routes tasks to the most appropriate capability.

Vendor Independence

No single AI provider becomes a permanent dependency.

The platform shall support:

- Provider replacement
 - Model comparison
 - Controlled experimentation
 - Incremental upgrades
 - Hybrid deployments
-

Continuous Evaluation

The platform continuously measures:

- Recommendation quality
- Hallucination rate
- Evidence alignment
- User satisfaction
- Fairness
- Latency
- Cost efficiency

Evaluation informs platform evolution.

Business Rules

BR-AI-031

Community knowledge remains independent of AI providers.

BR-AI-032

AI capabilities shall evolve without disrupting community workflows.

BR-AI-033

Platform architecture shall support multiple intelligence providers.

BR-AI-034

Trust metrics shall remain observable.

BR-AI-035

Future AI capabilities shall inherit existing governance controls.

Acceptance Criteria

The AI Platform succeeds when:

- Models can evolve independently.
 - Community knowledge remains portable.
 - Governance remains consistent.
 - New capabilities integrate safely.
 - Users experience continuous improvement.
-

Completion Criteria

Complete when:

- AI architecture is documented.
 - Future evolution strategy is defined.
 - Vendor independence is established.
-

Chapter 10 Completion

The AI-Native Community Intelligence chapter consists of:

- 10-00 — Vision & AI Philosophy
- 10-01 — Member AI Assistant
- 10-02 — Leadership AI & Organizational Intelligence
- 10-03 — Knowledge Intelligence & Community Memory
- 10-04 — Historical Intelligence & Narrative Generation
- 10-05 — Predictive Community Intelligence
- 10-06 — AI Governance, Ethics & Responsible Intelligence
- 10-07 — AI Platform Architecture & Future Evolution

Together, these documents establish an AI platform that is explainable, evidence-aware, human-centered, governance-aligned, and capable of evolving alongside the communities it serves.

Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Part 1 — Platform Vision & Ecosystem Philosophy

Document ID: HCP-PB-11-00

Parent: Product Bible

Domain: Platform Ecosystem

Status: Draft

Version: 1.0

Purpose

This document establishes the philosophy, principles, and long-term vision for the HCP Platform Ecosystem.

The ecosystem enables organizations, developers, partners, researchers, and future products to safely extend HCP while preserving governance, security, interoperability, and community trust.

Vision

One platform.

Many communities.

Infinite possibilities.

Philosophy

The platform should be open enough to encourage innovation and structured enough to preserve consistency.

Extensions should enrich the community rather than fragment it.

Guiding Principles

- Platform before product.
 - API-first thinking.
 - Secure by default.
 - Extensible by design.
 - Governance-aware integrations.
 - Vendor neutrality.
 - Community ownership.
-

Ecosystem Participants

The platform supports:

- Members
 - Organizations
 - Developers
 - Community historians
 - Researchers
 - Event partners
 - Sponsors
 - Volunteers
 - Approved third-party providers
 - Future Bubble Barrel products
-

Platform Objectives

Enable:

- Custom applications
- Automation
- Integrations
- Plugins
- Community extensions
- Analytics
- Data portability
- Cross-platform collaboration

Without compromising:

- Privacy
 - Security
 - Governance
 - Trust
 - Community identity
-

Extensibility Model

The ecosystem shall support:

- Public APIs
 - Internal APIs
 - Event-driven integrations
 - Plugins
 - Webhooks
 - SDKs
 - Import/export services
 - Future extension mechanisms
-

Governance

Every extension operates within:

- Permission boundaries
 - Organizational policies
 - Security controls
 - Audit requirements
 - Privacy protections
 - Version compatibility
-

Business Principles

Innovation should strengthen the community.

Platform evolution should remain backwards compatible where practical.

Community ownership takes precedence over vendor dependency.

Completion Criteria

Complete when:

- Platform philosophy is documented.
 - Ecosystem participants are defined.
 - Extensibility principles are established.
-

Next Document

11-01 — Public APIs & Developer Platform

Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Part 2 — Public APIs & Developer Platform

Document ID: HCP-PB-11-01

Parent: Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Domain: Developer Platform

Status: Draft

Version: 1.0

Purpose

The Developer Platform provides secure, well-governed APIs, SDKs, tooling, and documentation that enable developers to extend HCP while preserving platform integrity, community trust, and long-term compatibility.

Vision

Build once.

Integrate safely.

Innovate together.

Philosophy

APIs expose business capabilities rather than implementation details.

The platform evolves internally without unnecessarily breaking developer integrations.

Experience Principles

- API-first architecture.
 - Stable contracts.
 - Secure by default.
 - Versioned evolution.
 - Excellent documentation.
 - Developer-friendly tooling.
 - Governance-aware access.
-

Platform APIs

Public APIs may provide access to:

- Members
- Organizations
- Events
- Run Capsules
- Passport records
- Recognition
- Community history
- Media
- Search
- Notifications
- Knowledge services

Access remains permission-aware.

Authentication

Supported mechanisms may include:

- OAuth 2.1
- OpenID Connect
- Personal access tokens
- Service accounts
- Organization-scoped credentials

Authentication follows least-privilege principles.

Authorization

Permissions respect:

- Member roles
- Organizational roles
- Regional governance
- Platform policies
- Extension scopes

No API bypasses governance.

API Standards

The platform shall support:

- REST APIs
- Event APIs
- Webhooks
- GraphQL (where appropriate)
- Bulk import/export APIs
- SDKs for major languages

Consistency remains a priority.

Versioning

API evolution follows:

- Explicit versioning
- Backward compatibility where practical
- Published deprecation schedules
- Migration guides
- Change logs

Developers receive advance notice of breaking changes.

Developer Experience

Provide:

- Interactive documentation
- Sandbox environments
- Test credentials
- Sample applications
- SDKs
- CLI tooling
- API explorer

Developer onboarding should be straightforward.

Business Rules

BR-PE-001

Public APIs shall remain governance-aware.

BR-PE-002

Breaking changes require a managed deprecation process.

BR-PE-003

API access shall remain auditable.

BR-PE-004

Permissions shall reflect organizational governance.

BR-PE-005

Documentation shall evolve alongside platform capabilities.

Acceptance Criteria

The Developer Platform succeeds when developers can:

- Authenticate securely.
 - Discover APIs easily.
 - Build reliable integrations.
 - Understand governance requirements.
 - Upgrade with confidence.
-

Completion Criteria

Complete when:

- API philosophy is documented.
 - Authentication model is defined.
 - Developer experience is established.
-

Next Document

11-02 — Event Bus, Webhooks & Automation Platform

Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Part 3 — Event Bus, Webhooks & Automation Platform

Document ID: HCP-PB-11-02

Parent: Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Domain: Automation & Event Platform

Status: Draft

Version: 1.0

Purpose

The Event Platform enables HCP and approved external systems to respond to significant community activities through secure event streams, webhooks, and automation workflows.

It provides the foundation for integrations, intelligent workflows, and future platform extensibility.

Vision

Every important event.

One trusted stream.

Unlimited possibilities.

Philosophy

Community activities generate events.

Events enable intelligent systems.

Automation follows governance.

Experience Principles

- Event-first architecture.
 - Reliable delivery.
 - Observable systems.
 - Secure integrations.
 - Replayable history.
 - Permission-aware automation.
 - Human oversight.
-

Event Categories

Platform events may include:

- Member registered
 - Event created
 - Event completed
 - Volunteer assigned
 - Leadership transferred
 - Recognition granted
 - Run Capsule published
 - Passport updated
 - Governance decision approved
 - Historical archive added
-

Event Bus

The Event Bus supports:

- Internal services
- Approved plugins
- AI services
- Analytics
- Notification systems
- External integrations

Consumers subscribe only to authorized events.

Webhooks

Organizations may subscribe to approved webhook topics.

Examples:

- Event lifecycle
- Membership changes
- Volunteer activities
- Recognition updates
- Historical preservation
- Governance milestones

Webhook delivery is authenticated and signed.

Automation

Automation workflows may:

- Send notifications
- Update external systems
- Trigger approval flows
- Generate reports
- Archive documents
- Initiate AI processing
- Synchronize calendars

Automations remain auditable.

Reliability

The platform provides:

- Retry mechanisms
- Dead-letter queues
- Delivery status
- Replay capabilities
- Ordering guarantees where required

Operational transparency is prioritized.

Business Rules

BR-PE-006

Automation shall respect governance and permissions.

BR-PE-007

Webhook deliveries shall be authenticated.

BR-PE-008

Event history shall remain replayable where practical.

BR-PE-009

Automation actions shall remain auditable.

BR-PE-010

Platform events shall be versioned.

Acceptance Criteria

The Event Platform succeeds when:

- Integrations respond reliably.
 - Automations remain transparent.
 - Event history supports replay.
 - Governance boundaries are enforced.
 - Developers trust event delivery.
-

Completion Criteria

Complete when:

- Event architecture is documented.
 - Automation philosophy is established.
 - Webhook strategy is defined.
-

Next Document

11-03 — Plugin Architecture & Community Extensions

Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Part 4 — Plugin Architecture & Community Extensions

Document ID: HCP-PB-11-03

Parent: Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Domain: Plugin Platform

Status: Draft

Version: 1.0

Purpose

The Plugin Platform enables approved extensions to safely add functionality, integrations, workflows, and user experiences to HCP without modifying the core platform.

Plugins expand community capabilities while preserving governance, security, stability, and upgrade compatibility.

Vision

Stable core.

Extensible ecosystem.

Community innovation.

Philosophy

The platform defines trusted extension points.

Plugins innovate within those boundaries.

The core remains predictable.

Experience Principles

- Secure by default.
 - Least-privilege access.
 - Stable extension contracts.
 - Backward-compatible evolution where practical.
 - Transparent permissions.
 - Auditable execution.
 - Community-first innovation.
-

Plugin Categories

Plugins may provide:

- Event management enhancements
 - Volunteer management tools
 - Historical preservation utilities
 - Accessibility improvements
 - Language packs
 - Reporting dashboards
 - Mapping providers
 - Payment integrations
 - AI capabilities
 - Media processing
 - Organization-specific workflows
-

Extension Points

Plugins may integrate with:

- User interface
- Event lifecycle
- Community timelines
- Notifications
- AI capability routing
- Search indexing
- Reporting
- Automation workflows
- Import/export pipelines

Only published extension points are supported.

Plugin Lifecycle

Plugins progress through:

- Development
- Testing
- Submission
- Security review
- Governance review
- Publication
- Installation
- Updates
- Retirement

Lifecycle events remain auditable.

Permission Model

Plugins explicitly request permissions such as:

- Read events
- Read members
- Create reports
- Send notifications
- Access media
- Trigger automations

Permissions require administrator approval.

Compatibility

Plugins declare:

- Supported HCP versions
- Required APIs
- Required capabilities
- Known limitations
- Upgrade compatibility

Compatibility is validated before installation.

Sandboxing

Plugins execute within controlled environments.

The platform enforces:

- Resource limits
- Permission boundaries
- Secure communication
- Failure isolation

Plugin failures shall not compromise the core platform.

Business Rules

BR-PE-011

Plugins shall operate only through approved extension points.

BR-PE-012

Plugins shall declare required permissions before installation.

BR-PE-013

Administrators retain control over plugin activation.

BR-PE-014

Plugin execution shall remain auditable.

BR-PE-015

Core platform upgrades shall preserve compatibility where practical.

Acceptance Criteria

The Plugin Platform succeeds when:

- Developers can safely extend HCP.
 - Administrators understand plugin permissions.
 - Plugins remain isolated.
 - Platform upgrades remain manageable.
 - Community innovation flourishes without compromising trust.
-

Completion Criteria

Complete when:

- Plugin architecture is defined.
 - Extension model is documented.
 - Governance process is established.
-

Next Document

11-04 — Marketplace, Certification & Extension Governance

Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Part 5 — Marketplace, Certification & Extension Governance

Document ID: HCP-PB-11-04

Parent: Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Domain: Extension Marketplace & Governance

Status: Draft

Version: 1.0

Purpose

This document defines the governance framework for the HCP Extension Marketplace, including certification, review processes, trust levels, lifecycle management, and ongoing compliance for community extensions.

Its purpose is to foster innovation while protecting community security, privacy, and trust.

Vision

Open innovation.

Responsible governance.

Trusted extensions.

Philosophy

Marketplace participation is a privilege earned through transparency, quality, and ongoing accountability.

Marketplace Objectives

Provide:

- Discoverability
 - Certification
 - Trust indicators
 - Compatibility information
 - Security reviews
 - Governance oversight
 - Continuous monitoring
-

Extension Categories

Marketplace extensions may include:

- Official HCP extensions
- Bubble Barrel extensions
- Community-developed extensions
- Commercial partner extensions
- Academic and research tools
- Regional organization packages

Each category follows appropriate governance requirements.

Certification Levels

Extensions may achieve:

COMMUNITY VERIFIED

Basic quality and compatibility checks.

SECURITY REVIEWED

Passed technical security review.

GOVERNANCE APPROVED

Complies with organizational governance standards.

HERITAGE CERTIFIED

Approved for historical preservation workflows.

ENTERPRISE READY

Supports large-scale organizational deployment.

Certification status remains visible.

Marketplace Information

Each extension displays:

- Publisher
- Version
- Permissions
- Compatibility
- Certification level
- Changelog
- Security review date
- Privacy declaration
- Community feedback
- Installation count

Transparency supports informed decisions.

Continuous Compliance

The platform regularly evaluates:

- Security vulnerabilities
- Compatibility
- Policy compliance
- User feedback
- Performance
- Stability

Certification may change over time.

Lifecycle Management

Extensions may be:

- Published
- Updated
- Deprecated
- Suspended
- Archived
- Retired

Lifecycle events remain auditable.

Business Rules

BR-PE-016

Marketplace listings shall disclose requested permissions.

BR-PE-017

Certification status shall remain publicly visible.

BR-PE-018

Extensions may be suspended for significant security or governance concerns.

BR-PE-019

Marketplace information shall remain transparent.

BR-PE-020

Continuous compliance reviews shall be supported.

Acceptance Criteria

The Marketplace succeeds when:

- Administrators understand extension trustworthiness.
 - Developers understand certification expectations.
 - Communities install extensions confidently.
 - Governance remains effective.
 - Innovation continues responsibly.
-

Completion Criteria

Complete when:

- Marketplace governance is documented.
 - Certification framework is established.
 - Continuous compliance model is defined.
-

Next Document

11-05 — Identity Federation, Single Sign-On & Cross-Community Access

Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Part 6 — Identity Federation, Single Sign-On & Cross-Community Access

Document ID: HCP-PB-11-05

Parent: Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Domain: Identity Platform

Status: Draft

Version: 1.0

Purpose

The Identity Platform provides secure authentication, identity federation, and cross-community access while preserving a member's lifelong community identity, governance roles, and participation history.

Vision

One identity.

Many communities.

One continuous journey.

Philosophy

A member's identity belongs to the individual.

Organizations steward roles and permissions.

The platform connects both without conflating them.

Experience Principles

- Identity portability.
 - Secure authentication.
 - Federation by design.
 - Privacy first.
 - Governance-aware authorization.
 - Minimal friction.
 - Lifelong continuity.
-

Identity Model

Each member possesses:

- Global Member Identity
- Community Passport
- Membership history
- Leadership history
- Recognition history
- Verified participation record

Identity persists across organizational changes.

Authentication

Supported authentication methods may include:

- Email & password
- Passkeys (WebAuthn)
- OAuth providers
- Enterprise identity providers
- Multi-factor authentication
- Future authentication standards

Authentication mechanisms may evolve independently of identity.

Federation

The platform supports identity federation with:

- Approved community organizations
- Enterprise identity providers
- Educational institutions
- Future federation partners

Federation respects governance boundaries.

Authorization

Access decisions consider:

- Member role
- Organizational role
- Chapter membership
- Regional permissions
- Committee assignments
- Temporary delegations
- Historical governance rules

Permissions remain contextual.

Cross-Community Participation

Members may:

- Join multiple organizations.
- Participate in international events.
- Hold roles in multiple chapters where permitted.
- Preserve one continuous participation history.

Identity remains unified.

Privacy

Members control:

- Public profile visibility.
- Discoverability.
- Shared identity attributes.
- Federation preferences.
- Linked accounts.

Privacy controls remain transparent.

Business Rules

BR-PE-021

Identity remains independent of organizational membership.

BR-PE-022

Authentication providers shall remain replaceable.

BR-PE-023

Authorization decisions shall respect governance structures.

BR-PE-024

Cross-community participation shall preserve a unified identity.

BR-PE-025

Identity history shall remain portable.

Acceptance Criteria

The Identity Platform succeeds when members can:

- Authenticate securely.
 - Move between communities seamlessly.
 - Retain lifelong participation history.
 - Control identity sharing.
 - Trust access controls.
-

Completion Criteria

Complete when:

- Identity architecture is documented.
 - Federation model is defined.
 - Authorization philosophy is established.
-

Next Document

11-06 — Data Portability, Import/Export & Open Standards

Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Part 7 — Data Portability, Import/Export & Open Standards

Document ID: HCP-PB-11-06

Parent: Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Domain: Data Portability

Status: Draft

Version: 1.0

Purpose

The Data Portability Platform ensures that communities can import, export, preserve, and migrate their data using transparent, documented, and interoperable standards.

Its purpose is to protect long-term community ownership while supporting platform evolution, disaster recovery, historical preservation, and interoperability.

Vision

Community-owned data.

Portable knowledge.

Open futures.

Philosophy

The platform earns loyalty through value, not through data lock-in.

Communities retain ownership of their records.

Experience Principles

- Open standards.
 - Transparent exports.
 - Reliable imports.
 - Preservation-first.
 - Metadata retention.
 - Explainable migrations.
 - Future compatibility.
-

Supported Data Domains

Import and export may include:

- Members
 - Organizations
 - Events
 - Community Passports
 - Run Capsules
 - Historical archives
 - Media metadata
 - Recognition records
 - Governance records
 - Knowledge graphs
 - AI-generated content (clearly identified)
 - Audit logs (where appropriate)
-

Export Formats

Supported formats may include:

- JSON
- CSV
- PDF reports
- Markdown
- XML
- Media archives
- Future standardized community packages

Formats remain documented.

Import Services

The platform supports importing from:

- Legacy HCP versions
- Spreadsheets
- Approved third-party systems
- Community archives
- Digitized historical collections
- Standardized interchange packages

Imports preserve provenance where possible.

Metadata Preservation

Exports retain:

- Timestamps
- Attribution
- Version history
- Evidence links
- Relationships
- Verification status
- Governance context

Context is preserved alongside content.

Open Standards

The platform promotes:

- Documented schemas
- Versioned formats
- Published specifications
- Backward compatibility where practical
- Community review of standards

Interoperability is encouraged.

Business Rules

BR-PE-026

Communities shall be able to export their authorized data.

BR-PE-027

Exports shall preserve metadata where possible.

BR-PE-028

AI-generated content shall remain distinguishable.

BR-PE-029

Import processes shall preserve provenance when available.

BR-PE-030

Published data formats shall remain documented.

Acceptance Criteria

The Data Portability Platform succeeds when communities can:

- Move their data confidently.
 - Preserve historical context.
 - Restore archived information.
 - Integrate with external systems.
 - Trust long-term ownership.
-

Completion Criteria

Complete when:

- Data portability philosophy is documented.
 - Import/export strategy is defined.
 - Open standards approach is established.
-

Next Document

11-07 — Platform Observability, Reliability & Operational Excellence

Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Part 8 — Platform Observability, Reliability & Operational Excellence

Document ID: HCP-PB-11-07

Parent: Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Domain: Platform Operations

Status: Draft

Version: 1.0

Purpose

This document defines the operational principles, observability standards, reliability objectives, and continuous improvement practices that ensure HCP remains dependable, resilient, and maintainable throughout its lifecycle.

Vision

Reliable communities.

Observable systems.

Continuous excellence.

Philosophy

Operational excellence is not an emergency response.

It is a daily practice.

The platform continuously measures, learns, and improves.

Experience Principles

- Reliability first.
 - Observe everything meaningful.
 - Detect issues early.
 - Recover gracefully.
 - Learn continuously.
 - Automate responsibly.
 - Measure outcomes.
-

Observability

The platform continuously monitors:

- System health
- API performance
- Plugin execution
- AI services
- Event processing
- Search performance
- Background jobs
- Security events
- Data synchronization
- Infrastructure resources

Monitoring supports proactive operations.

Reliability Objectives

The platform defines objectives for:

- Availability
- Response times
- Error rates
- Recovery time
- Recovery point
- Data durability
- Service continuity

Objectives are reviewed periodically.

Incident Management

Operational capabilities include:

- Incident detection
- Alerting
- Classification
- Escalation
- Communication
- Resolution tracking
- Root cause analysis
- Post-incident reviews

Learning follows every incident.

Operational Metrics

The platform tracks:

- Service health
- User experience
- Automation reliability
- AI quality
- Plugin stability
- Infrastructure utilization
- Deployment success
- Backup integrity

Metrics support continuous improvement.

Disaster Recovery

The platform maintains:

- Verified backups
- Recovery procedures
- Failover strategies
- Restoration testing
- Data validation
- Continuity planning

Preparedness is continuously verified.

Business Rules

BR-PE-031

Operational health shall remain observable.

BR-PE-032

Incidents shall receive documented post-incident reviews.

BR-PE-033

Recovery procedures shall be tested regularly.

BR-PE-034

Operational metrics shall inform platform improvements.

BR-PE-035

Reliability objectives shall evolve with platform maturity.

Acceptance Criteria

Operational Excellence succeeds when:

- Issues are detected early.
 - Recovery is reliable.
 - Platform health remains measurable.
 - Learning follows incidents.
 - Community trust is maintained.
-

Completion Criteria

Complete when:

- Operational philosophy is documented.
 - Reliability framework is defined.
 - Observability model is established.
-

Next Document

11-08 — Platform Roadmap, Evolution Strategy & Long-Term Stewardship

Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Part 9 — Platform Roadmap, Evolution Strategy & Long-Term Stewardship

Document ID: HCP-PB-11-08

Parent: Chapter 11 — Platform Ecosystem, Extensibility & Integrations

Domain: Platform Evolution

Status: Draft

Version: 1.0

Purpose

This document establishes the long-term evolution strategy for HCP, ensuring the platform remains adaptable, trustworthy, and sustainable while preserving compatibility, community identity, and institutional knowledge.

Vision

Build for decades.

Evolve with purpose.

Preserve what matters.

Philosophy

Every platform changes.

The challenge is changing without losing identity.

Evolution should strengthen the platform while respecting community trust and historical continuity.

Evolution Principles

- Community-first decisions.
 - Backward compatibility where practical.
 - Incremental modernization.
 - Stable foundations.
 - Transparent communication.
 - Evidence-based improvements.
 - Long-term stewardship.
-

Strategic Horizons

Horizon 1 — Foundation

Focus on:

- Core community workflows
 - Governance
 - Historical preservation
 - Reliability
 - Identity
 - AI foundations
-

Horizon 2 — Expansion

Focus on:

- Marketplace growth
 - Developer ecosystem
 - Cross-community collaboration
 - Advanced analytics
 - Community Intelligence
-

Horizon 3 — Maturity

Focus on:

- Global federation
- Research partnerships
- Preservation initiatives
- Digital heritage programs
- AI evolution

- Community ecosystem growth
-

Horizon 4 — Legacy

Focus on:

- Multi-generational preservation
 - Open standards leadership
 - Long-term archives
 - Institutional continuity
 - Knowledge transfer
 - Community resilience
-

Stewardship Responsibilities

Platform stewards continuously evaluate:

- User feedback
 - Governance effectiveness
 - Reliability
 - Security
 - AI quality
 - Accessibility
 - Ecosystem health
 - Community satisfaction
-

Innovation Process

New capabilities should:

- Solve real community needs.
- Respect governance.
- Preserve trust.
- Minimize disruption.
- Remain observable.
- Support long-term maintenance.

Innovation remains disciplined.

Platform Sustainability

Long-term sustainability considers:

- Financial viability
 - Technical maintainability
 - Community adoption
 - Operational resilience
 - Documentation
 - Knowledge preservation
-

Business Rules

BR-PE-036

Platform evolution shall prioritize community continuity.

BR-PE-037

Major architectural changes require migration strategies.

BR-PE-038

Stewardship shall remain continuous.

BR-PE-039

Innovation shall respect governance and trust.

BR-PE-040

Long-term preservation remains a strategic objective.

Acceptance Criteria

The Evolution Strategy succeeds when:

- The platform adapts responsibly.
 - Communities trust change.
 - Historical continuity is preserved.
 - Innovation remains sustainable.
 - Future generations inherit a healthy platform.
-

Completion Criteria

Complete when:

- Long-term vision is documented.
 - Evolution principles are established.
 - Stewardship responsibilities are defined.
-

Chapter 11 Completion

The Platform Ecosystem chapter consists of:

- 11-00 — Platform Vision & Ecosystem Philosophy
- 11-01 — Public APIs & Developer Platform
- 11-02 — Event Bus, Webhooks & Automation Platform
- 11-03 — Plugin Architecture & Community Extensions
- 11-04 — Marketplace, Certification & Extension Governance
- 11-05 — Identity Federation, Single Sign-On & Cross-Community Access
- 11-06 — Data Portability, Import/Export & Open Standards
- 11-07 — Platform Observability, Reliability & Operational Excellence
- 11-08 — Platform Roadmap, Evolution Strategy & Long-Term Stewardship

Together, these documents establish HCP as an extensible, interoperable, resilient, and future-ready platform capable of serving communities for generations.

Chapter 12 — Community Success, Adoption & Change Management

Part 1 — Community Success Vision & Adoption Philosophy

Document ID: HCP-PB-12-00

Parent: Product Bible

Domain: Community Success

Status: Draft

Version: 1.0

Purpose

This document establishes the philosophy, principles, and long-term vision for helping communities successfully adopt, sustain, and continuously benefit from the Hash Community Platform (HCP).

Community success extends beyond software deployment.

It includes organizational readiness, cultural adoption, leadership engagement, volunteer empowerment, and long-term stewardship.

Vision

Successful communities.

Confident leaders.

Lasting impact.

Philosophy

Technology does not create strong communities.

People do.

The platform exists to remove friction, preserve knowledge, and strengthen collaboration.

Success is measured by healthier communities, not higher software usage.

Community Success Principles

- Community before technology.
 - Adoption through value.
 - Leadership enablement.
 - Volunteer empowerment.
 - Continuous learning.
 - Incremental change.
 - Long-term partnership.
-

Objectives

Enable communities to:

- Adopt confidently.
 - Learn progressively.
 - Preserve traditions.
 - Modernize responsibly.
 - Engage volunteers.
 - Strengthen leadership.
 - Measure meaningful outcomes.
-

Stakeholders

Community Success serves:

- Members
 - Chapter leaders
 - Regional leaders
 - Historians
 - Volunteers
 - Event organizers
 - Administrators
 - Trainers
 - Support teams
 - Bubble Barrel Success Team
-

Success Philosophy

Platform success is achieved when:

- Members enjoy participating.
 - Leaders save time.
 - Volunteers feel empowered.
 - History is preserved.
 - Governance becomes easier.
 - Communities become more resilient.
-

Community Partnership

Bubble Barrel acts as:

- Technology partner
- Knowledge partner
- Training partner
- Preservation partner
- Innovation partner

The relationship extends beyond software.

Business Rules

BR-CS-001

Community outcomes take precedence over feature adoption.

BR-CS-002

Training shall accompany major capabilities.

BR-CS-003

Success shall be measured using community-focused indicators.

BR-CS-004

Adoption strategies shall respect organizational culture.

BR-CS-005

Community feedback shall continuously influence platform evolution.

Acceptance Criteria

Community Success succeeds when:

- Communities adopt HCP confidently.
 - Leaders experience measurable improvements.
 - Members perceive ongoing value.
 - Historical continuity is strengthened.
 - Long-term engagement increases.
-

Completion Criteria

Complete when:

- Community Success philosophy is documented.
 - Stakeholders are defined.
 - Success principles are established.
-

Next Document

12-01 — Community Onboarding & First 90 Days

Chapter 12 — Community Success, Adoption & Change Management

Part 2 — Community Onboarding & First 90 Days

Document ID: HCP-PB-12-01

Parent: Chapter 12 — Community Success, Adoption & Change Management

Domain: Community Onboarding

Status: Draft

Version: 1.0

Purpose

This document defines the onboarding framework that guides new communities from initial setup to confident, sustainable use of the Hash Community Platform (HCP).

The objective is not merely software deployment, but successful organizational adoption.

Vision

Confident beginnings.

Supported journeys.

Thriving communities.

Philosophy

Communities should never feel overwhelmed.

The platform introduces capabilities progressively, helping leaders build confidence through meaningful accomplishments rather than exhaustive training.

Onboarding Principles

- Start simple.
 - Deliver quick wins.
 - Learn by doing.
 - Respect community culture.
 - Celebrate progress.
 - Encourage collaboration.
 - Build long-term confidence.
-

Success Outcomes

At the end of onboarding, communities should:

- Understand core workflows.
 - Successfully organize events.
 - Preserve historical content.
 - Empower volunteers.
 - Establish governance.
 - Feel confident using AI assistance.
 - Identify future opportunities.
-

The First 90 Days

Phase 1 — Foundation (Days 1–30)

Objectives:

- Configure organization
 - Invite leadership
 - Define governance
 - Import members
 - Publish first event
 - Complete administrator orientation
-

Phase 2 — Participation (Days 31–60)

Objectives:

- Member profile completion
 - Community Passport adoption
 - Volunteer management
 - First Run Capsule
 - Recognition workflow
 - AI introduction
-

Phase 3 — Momentum (Days 61–90)

Objectives:

- Historical preservation
- Leadership reporting
- Community health review
- Workflow refinement

- Celebration of milestones
 - Long-term planning
-

Onboarding Support

Communities receive:

- Interactive setup guides
 - Checklists
 - Sample data
 - Video tutorials
 - AI assistance
 - Community Success resources
 - Bubble Barrel guidance (where applicable)
-

Business Rules

BR-CS-006

Onboarding shall prioritize achievable milestones over feature exposure.

BR-CS-007

Communities may progress at their own pace.

BR-CS-008

Training shall remain contextual.

BR-CS-009

Onboarding progress shall remain visible.

BR-CS-010

Completion shall celebrate community achievement.

Acceptance Criteria

Onboarding succeeds when:

- Leaders gain confidence.
 - Members participate.
 - Governance is operational.
 - Historical preservation begins.
 - Communities feel prepared for long-term success.
-

Completion Criteria

Complete when:

- 90-day framework is documented.
 - Success milestones are defined.
 - Support model is established.
-

Next Document

12-02 — Training, Certification & Leadership Development

Chapter 12 — Community Success, Adoption & Change Management

Part 3 — Training, Certification & Leadership Development

Document ID: HCP-PB-12-02

Parent: Chapter 12 — Community Success, Adoption & Change Management

Domain: Training & Leadership Development

Status: Draft

Version: 1.0

Purpose

This document defines the framework for developing capable leaders, confident volunteers, and knowledgeable community members through structured learning, certifications, mentorship, and continuous development within HCP.

Training is viewed as an ongoing journey rather than a one-time event.

Vision

Empowered members.

Confident leaders.

Stronger communities.

Philosophy

Communities thrive when knowledge is shared, leadership is developed, and experience is passed from one generation to the next.

The platform supports lifelong learning.

Learning Principles

- Learn by participating.
 - Teach through experience.
 - Encourage mentorship.
 - Recognize achievement.
 - Support continuous improvement.
 - Preserve institutional knowledge.
 - Make learning accessible.
-

Learning Paths

Learning journeys may include:

- New Member Orientation
 - Volunteer Essentials
 - Event Coordination
 - Chapter Administration
 - Community History & Preservation
 - Leadership Development
 - Governance Fundamentals
 - AI Literacy
 - Platform Administration
 - Trainer Certification
-

Certification Framework

Certifications may include:

- Participant
- Volunteer
- Coordinator
- Historian
- Chapter Administrator
- Leadership
- Trainer
- Community Steward

Certifications remain verifiable.

Learning Resources

The platform supports:

- Interactive lessons
- Video learning
- Practical exercises
- Knowledge assessments
- Community discussions
- AI coaching
- Resource libraries
- Live workshops

Learning remains flexible.

Mentorship

Members may:

- Request mentors.
- Offer mentorship.
- Track mentorship goals.
- Record mentoring milestones.
- Celebrate mentoring achievements.

Mentorship strengthens the community.

Business Rules

BR-CS-011

Learning opportunities shall remain accessible.

BR-CS-012

Certifications shall reflect demonstrated capability.

BR-CS-013

Mentorship shall remain voluntary.

BR-CS-014

Learning progress shall remain visible to the learner.

BR-CS-015

Training content shall evolve with community needs.

Acceptance Criteria

Training succeeds when:

- Members grow confidently.
 - Leaders feel prepared.
 - Knowledge transfers effectively.
 - Mentorship flourishes.
 - Communities develop future leaders.
-

Completion Criteria

Complete when:

- Learning framework is documented.
 - Certification model is defined.
 - Leadership development philosophy is established.
-

Next Document

12-03 — Community Champions & Regional Adoption Network

Chapter 12 — Community Success, Adoption & Change Management

Part 4 — Community Champions & Regional Adoption Network

Document ID: HCP-PB-12-03

Parent: Chapter 12 — Community Success, Adoption & Change Management

Domain: Community Adoption Network

Status: Draft

Version: 1.0

Purpose

This document defines the Community Champion program and Regional Adoption Network that help communities learn from one another, accelerate adoption, and build long-term confidence in HCP.

The program recognizes that sustainable change is driven by trusted people within communities.

Vision

Communities helping communities.

Leaders empowering leaders.

Success shared globally.

Philosophy

The strongest advocates for HCP are community members who have experienced its value firsthand.

The platform should amplify their knowledge and encourage peer-to-peer support.

Community Champion Principles

- Lead by example.
 - Share practical experience.
 - Encourage participation.
 - Mentor with humility.
 - Celebrate community success.
 - Build trust through service.
-

Community Champion Roles

Champions may:

- Welcome new communities.
 - Share implementation experiences.
 - Mentor chapter leaders.
 - Host learning sessions.
 - Recommend best practices.
 - Provide peer guidance.
 - Surface community feedback.
 - Encourage continuous improvement.
-

Regional Adoption Network

The Regional Adoption Network supports:

- Regional coordinators.
- Community champions.
- Experienced administrators.
- Volunteer trainers.
- Preservation advocates.
- Accessibility ambassadors.
- Technical mentors.

Regional collaboration is encouraged.

Recognition

Champions may receive recognition for:

- Mentoring communities.
- Training leaders.
- Preserving knowledge.
- Supporting successful adoption.
- Contributing educational resources.
- Strengthening regional collaboration.

Recognition emphasizes service.

Business Rules

BR-CS-016

Community Champions shall remain volunteers unless otherwise designated.

BR-CS-017

Participation shall remain open and inclusive.

BR-CS-018

Regional collaboration shall respect organizational governance.

BR-CS-019

Recognition shall emphasize contribution over status.

BR-CS-020

Champion feedback shall inform platform evolution.

Acceptance Criteria

The Champion Program succeeds when:

- New communities receive peer support.
 - Regional collaboration increases.
 - Adoption accelerates through shared experience.
 - Leadership confidence grows.
 - Communities actively help one another.
-

Completion Criteria

Complete when:

- Champion framework is documented.
 - Regional network is defined.
 - Recognition philosophy is established.
-

Next Document

12-04 — Community Health Metrics & Success Analytics

Chapter 12 — Community Success, Adoption & Change Management

Part 5 — Community Health Metrics & Success Analytics

Document ID: HCP-PB-12-04

Parent: Chapter 12 — Community Success, Adoption & Change Management

Domain: Community Analytics

Status: Draft

Version: 1.0

Purpose

This document defines the principles, metrics, dashboards, and analytical frameworks used to evaluate community health, organizational resilience, adoption success, and long-term impact.

The objective is to provide meaningful insights that help communities improve rather than simply report activity.

Vision

Meaningful insights.

Healthier communities.

Better decisions.

Philosophy

Analytics exist to support community growth.

Measurements should encourage learning, reflection, and improvement rather than competition or surveillance.

Measurement Principles

- Measure outcomes over activity.
 - Respect privacy.
 - Explain every metric.
 - Encourage improvement.
 - Avoid vanity metrics.
 - Preserve historical context.
 - Support evidence-based decisions.
-

Community Health Domains

The platform evaluates:

- Participation
- Volunteer engagement
- Leadership continuity
- Historical preservation
- Governance effectiveness
- Member retention
- Knowledge sharing
- Community satisfaction
- Event quality
- Inclusion & accessibility

No single metric defines community health.

Success Dashboards

Dashboards may include:

- Leadership health
- Volunteer trends
- Event outcomes
- Historical archive growth
- Passport participation
- Recognition activity
- AI adoption
- Learning progress
- Governance performance
- Community resilience

Insights remain contextual.

Recommendations

Analytics may recommend:

- Leadership mentoring
- Volunteer recognition
- Historical preservation opportunities
- Governance reviews
- Training resources
- Accessibility improvements
- Community engagement initiatives

Recommendations support decision-making.

Business Rules

BR-CS-021

Metrics shall prioritize community wellbeing.

BR-CS-022

Community analytics shall remain explainable.

BR-CS-023

Privacy shall be protected.

BR-CS-024

Historical comparisons shall remain available.

BR-CS-025

Recommendations shall remain advisory.

Acceptance Criteria

Community Analytics succeeds when leaders can:

- Understand community trends.
 - Identify opportunities.
 - Make informed decisions.
 - Preserve historical context.
 - Strengthen community resilience.
-

Completion Criteria

Complete when:

- Community health model is documented.
 - Dashboard philosophy is established.
 - Success metrics are defined.
-

Next Document

12-05 — Migration, Legacy Systems & Organizational Change

Chapter 12 — Community Success, Adoption & Change Management

Part 6 — Migration, Legacy Systems & Organizational Change

Document ID: HCP-PB-12-05

Parent: Chapter 12 — Community Success, Adoption & Change Management

Domain: Migration & Organizational Change

Status: Draft

Version: 1.0

Purpose

This document defines the principles, processes, and support mechanisms for migrating communities from legacy systems to HCP while preserving institutional knowledge, minimizing disruption, and supporting organizational change.

Migration is treated as both a technical and human process.

Vision

Smooth transitions.

Preserved history.

Confident communities.

Philosophy

Communities should never feel that adopting HCP requires abandoning their history or disrupting the relationships and traditions that define them.

Migration should preserve continuity while enabling future growth.

Migration Principles

- Preserve before transforming.
 - Validate before replacing.
 - Progress incrementally.
 - Minimize disruption.
 - Respect community traditions.
 - Support human change.
 - Maintain transparency.
-

Legacy Sources

Migration may support:

- Spreadsheet imports
- Legacy databases
- Membership software
- Document repositories
- Email archives
- Photo collections
- Physical records (digitized)
- Cloud storage platforms

Historical provenance should be retained where possible.

Migration Workflow

Typical migration includes:

1. Community assessment
 2. Data inventory
 3. Backup creation
 4. Data mapping
 5. Validation
 6. Pilot migration
 7. Community review
 8. Production migration
 9. Post-migration verification
 10. Continuous refinement
-

Organizational Change

Successful adoption includes:

- Leadership alignment
- Communication plans
- Volunteer engagement
- Role clarification
- Training
- Feedback collection
- Celebration of milestones

Technology alone is insufficient.

Migration Support

The platform provides:

- Import tools
 - Validation reports
 - AI-assisted mapping
 - Duplicate detection
 - Migration checklists
 - Progress tracking
 - Rollback guidance
 - Community Success support
-

Business Rules

BR-CS-026

Original data shall remain recoverable until migration is confirmed.

BR-CS-027

Migration reports shall remain transparent.

BR-CS-028

Historical attribution shall be preserved where available.

BR-CS-029

Migration shall include organizational readiness activities.

BR-CS-030

Communities determine migration pace.

Acceptance Criteria

Migration succeeds when:

- Historical information is preserved.
 - Community confidence increases.
 - Legacy systems are retired responsibly.
 - Leaders understand the process.
 - Operational continuity is maintained.
-

Completion Criteria

Complete when:

- Migration methodology is documented.
 - Change management approach is defined.
 - Legacy preservation strategy is established.
-

Next Document

12-06 — Long-Term Community Partnership & Continuous Success

Chapter 12 — Community Success, Adoption & Change Management

Part 7 — Long-Term Community Partnership & Continuous Success

Document ID: HCP-PB-12-06

Parent: Chapter 12 — Community Success, Adoption & Change Management

Domain: Long-Term Community Success

Status: Draft

Version: 1.0

Purpose

This document defines how Bubble Barrel and HCP maintain long-term partnerships with communities, ensuring continuous improvement, sustained engagement, organizational resilience, and preservation of institutional knowledge over many years.

Vision

Communities that continue to grow.

Partnerships that endure.

Legacies that last.

Philosophy

The end of onboarding marks the beginning of stewardship.

The platform continually supports communities as they evolve through leadership changes, new members, organizational growth, and historical preservation.

Long-Term Partnership Principles

- Listen continuously.
 - Improve collaboratively.
 - Preserve community history.
 - Strengthen future leaders.
 - Respect organizational independence.
 - Encourage innovation.
 - Celebrate community achievements.
-

Continuous Success Activities

Communities may receive:

- Periodic health reviews
- AI-generated recommendations
- Governance assessments
- Historical preservation reminders
- Leadership transition guidance
- Training updates
- Accessibility reviews
- Platform optimization suggestions

Support remains proactive.

Partnership Touchpoints

Long-term engagement includes:

- Quarterly reflection reports
- Annual community reviews
- Leadership transition assistance
- Major milestone planning
- Preservation campaigns
- Product feedback sessions
- Regional collaboration opportunities

Relationships remain active.

Community Feedback

The platform continuously gathers:

- Feature suggestions
- Adoption feedback
- Training needs
- Governance observations
- Accessibility insights
- Community innovations

Feedback informs future evolution.

Success Reviews

Communities periodically evaluate:

- Leadership confidence
- Volunteer engagement
- Historical preservation
- Governance maturity
- Member satisfaction
- Community resilience
- Knowledge transfer

Reflection supports improvement.

Business Rules

BR-CS-031

Community success shall remain a long-term objective.

BR-CS-032

Recommendations shall remain advisory.

BR-CS-033

Communities retain decision-making authority.

BR-CS-034

Long-term historical preservation remains a strategic priority.

BR-CS-035

Community feedback shall influence platform evolution.

Acceptance Criteria

Long-Term Partnership succeeds when:

- Communities continue improving.
 - Leadership transitions remain smooth.
 - Historical knowledge accumulates.
 - Members remain engaged.
 - Communities trust the platform.
-

Completion Criteria

Complete when:

- Long-term partnership philosophy is documented.
 - Continuous success framework is defined.
 - Reflection model is established.
-

Chapter 12 Completion

The Community Success chapter consists of:

- 12-00 — Community Success Vision & Adoption Philosophy
- 12-01 — Community Onboarding & First 90 Days
- 12-02 — Training, Certification & Leadership Development
- 12-03 — Community Champions & Regional Adoption Network
- 12-04 — Community Health Metrics & Success Analytics
- 12-05 — Migration, Legacy Systems & Organizational Change
- 12-06 — Long-Term Community Partnership & Continuous Success

Together, these documents establish HCP's philosophy for helping communities adopt, sustain, and continuously benefit from the platform throughout their entire lifecycle.

Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Part 1 — Trust Vision & Ethical Foundations

Document ID: HCP-PB-13-00

Parent: Product Bible

Domain: Trust & Ethics

Status: Draft

Version: 1.0

Purpose

This document establishes the ethical foundations that guide the design, development, deployment, operation, and evolution of the Hash Community Platform (HCP).

It defines the values that shape every technical and organizational decision.

Trust is considered a strategic asset that must be earned continuously.

Vision

Trusted communities.

Responsible technology.

Human-centered stewardship.

Philosophy

Technology should strengthen communities without compromising dignity, autonomy, transparency, or historical integrity.

Every capability should reinforce trust rather than merely increase functionality.

Core Ethical Principles

The platform is guided by:

- Respect for people.
 - Respect for communities.
 - Transparency.
 - Accountability.
 - Fairness.
 - Privacy.
 - Accessibility.
 - Inclusion.
 - Stewardship.
 - Long-term responsibility.
-

Human-Centered Design

Technology exists to assist people.

It shall not:

- Replace community relationships.
- Undermine leadership.
- Manipulate participation.
- Encourage unhealthy behaviors.
- Prioritize engagement over wellbeing.

The platform supports people rather than directing them.

Trust Principles

Trust is built through:

- Honest communication.
- Predictable behavior.
- Explainable systems.
- Reliable operation.
- Evidence-based decisions.
- Respect for community governance.

Trust requires consistency over time.

Ethical Decision Framework

When evaluating new capabilities, teams should ask:

1. Does this strengthen communities?
 2. Does it respect individual dignity?
 3. Is it transparent?
 4. Is it fair?
 5. Can it be explained?
 6. Can communities control it?
 7. Will future stewards understand why it exists?
-

Business Rules

BR-TE-001

Trust shall take precedence over short-term optimization.

BR-TE-002

Platform capabilities shall respect community autonomy.

BR-TE-003

Ethical considerations shall be documented for significant capabilities.

BR-TE-004

Technology shall augment rather than replace human judgment.

BR-TE-005

Responsible stewardship shall remain a continuous obligation.

Acceptance Criteria

The ethical framework succeeds when:

- Teams understand guiding values.
 - Product decisions remain consistent.
 - Communities experience trustworthy behavior.
 - Ethical trade-offs become visible.
 - Long-term trust increases.
-

Completion Criteria

Complete when:

- Ethical philosophy is documented.
 - Decision framework is established.
 - Trust principles are defined.
-

Next Document

13-01 — Privacy by Design & Consent Management

Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Part 2 — Privacy by Design & Consent Management

Document ID: HCP-PB-13-01

Parent: Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Domain: Privacy & Consent

Status: Draft

Version: 1.0

Purpose

This document defines the privacy philosophy, consent framework, and privacy-by-design principles that govern the collection, processing, storage, sharing, and retention of personal information within the Hash Community Platform (HCP).

Privacy is treated as a core product capability rather than a legal afterthought.

Vision

Transparent privacy.

Meaningful consent.

Respectful technology.

Philosophy

Members should always understand:

- what information is collected,
- why it is collected,
- who can access it,
- how long it is retained,
- and how they can control it.

Privacy supports trust through clarity and choice.

Privacy by Design Principles

The platform shall:

- Minimize unnecessary data collection.
- Use the least privileged access.
- Protect information by default.
- Explain data usage clearly.
- Respect user preferences.
- Support secure deletion where appropriate.
- Preserve legitimate historical records responsibly.

Privacy is considered during design, not after implementation.

Consent Principles

Consent should be:

- Explicit where required.
- Easy to understand.
- Granular where practical.
- Easy to review.
- Easy to withdraw.
- Recorded transparently.

Consent should never rely on ambiguity.

Data Categories

Examples include:

- Identity information
- Membership records
- Community participation
- Historical contributions
- Media
- AI interactions
- Learning records
- Governance activities
- Audit information

Each category follows documented handling rules.

Privacy Controls

Members may control:

- Public profile visibility
- Search discoverability
- Contact preferences
- Media permissions
- AI personalization
- Notification preferences
- Linked accounts
- Data exports

Controls remain understandable.

Organizational Responsibilities

Communities are responsible for:

- Respecting member privacy.
 - Managing authorized access.
 - Honoring consent decisions.
 - Following applicable legal obligations.
 - Protecting historical information responsibly.
-

Business Rules

BR-TE-006

Privacy shall be enabled by default wherever practical.

BR-TE-007

Consent records shall remain auditable.

BR-TE-008

Members shall be able to review their privacy settings.

BR-TE-009

Data collection shall remain proportionate to community needs.

BR-TE-010

Privacy controls shall remain understandable by non-technical users.

Acceptance Criteria

Privacy succeeds when:

- Members understand how information is used.
 - Communities manage data responsibly.
 - Consent remains transparent.
 - Privacy settings are easy to control.
 - Trust increases through predictable behavior.
-

Completion Criteria

Complete when:

- Privacy principles are documented.
 - Consent framework is defined.
 - User control model is established.
-

Next Document

13-02 — Responsible AI, Transparency & Human Oversight

Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Part 3 — Responsible AI, Transparency & Human Oversight

Document ID: HCP-PB-13-02

Parent: Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Domain: Responsible AI

Status: Draft

Version: 1.0

Purpose

This document defines the ethical principles, governance framework, transparency requirements, and human oversight mechanisms for all artificial intelligence capabilities within the Hash Community Platform (HCP).

AI is positioned as an assistive technology that strengthens communities while respecting human autonomy, governance, and accountability.

Vision

Responsible intelligence.

Transparent assistance.

Human-centered decisions.

Philosophy

Artificial intelligence supports community members and leaders by providing insights, recommendations, automation, and knowledge assistance.

Final authority remains with appropriately authorized people.

AI Principles

AI within HCP shall:

- Explain recommendations.
 - Respect community governance.
 - Preserve human autonomy.
 - Minimize bias.
 - Support accessibility.
 - Protect privacy.
 - Encourage learning.
 - Remain accountable.
-

Human Oversight

AI shall not independently make governance decisions such as:

- Leadership appointments.
- Member disciplinary actions.
- Voting outcomes.
- Membership termination.
- Policy approval.
- Recognition awards requiring human judgment.

AI may assist but not decide.

Transparency

The platform clearly indicates:

- When AI is involved.
- Why recommendations were made.
- Confidence where appropriate.
- Available alternatives.
- Supporting evidence.
- Human review requirements.

AI behavior remains understandable.

AI Roles

Examples include:

- Knowledge assistant
- Historical research
- Meeting summaries
- Event planning
- Volunteer recommendations
- Learning assistance
- Preservation support
- Community analytics

AI remains advisory.

Continuous Evaluation

AI systems are periodically evaluated for:

- Accuracy
- Fairness
- Bias
- Explainability
- Reliability
- User satisfaction
- Governance alignment

Continuous improvement is expected.

Business Rules

BR-TE-011

AI recommendations shall remain distinguishable from human decisions.

BR-TE-012

Human review shall remain available for significant actions.

BR-TE-013

AI explanations shall accompany meaningful recommendations.

BR-TE-014

AI shall respect documented governance policies.

BR-TE-015

Responsible AI practices shall evolve over time.

Acceptance Criteria

Responsible AI succeeds when:

- Members understand AI involvement.
 - Leaders retain authority.
 - Recommendations remain explainable.
 - Trust in AI increases responsibly.
 - Communities benefit without losing autonomy.
-

Completion Criteria

Complete when:

- Responsible AI framework is documented.
 - Human oversight model is defined.
 - Transparency requirements are established.
-

Next Document

13-03 — Fairness, Bias Mitigation & Inclusive Decision Support

Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Part 4 — Fairness, Bias Mitigation & Inclusive Decision Support

Document ID: HCP-PB-13-03

Parent: Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Domain: Fairness & Inclusion

Status: Draft

Version: 1.0

Purpose

This document establishes the principles and safeguards that promote fairness, reduce bias, and encourage inclusive decision support throughout the Hash Community Platform (HCP), particularly where artificial intelligence and analytics are involved.

The objective is to help communities make better-informed decisions while preserving dignity, equity, and organizational trust.

Vision

Fair recommendations.

Inclusive participation.

Trusted outcomes.

Philosophy

Communities are strengthened when every member has a fair opportunity to contribute, participate, and be recognized.

Technology should reduce barriers rather than reinforce them.

Fairness Principles

The platform shall:

- Encourage equitable participation.
- Surface diverse perspectives.
- Avoid unnecessary exclusion.
- Explain recommendations.
- Continuously evaluate outcomes.
- Respect community governance.
- Support accessibility.

Fairness is an ongoing practice.

Bias Mitigation

The platform evaluates potential sources of bias including:

- Incomplete historical data.
- Uneven participation records.
- Over-representation of highly active members.
- Historical leadership patterns.
- Language limitations.
- Data quality issues.

Bias reviews support continuous improvement.

Inclusive Decision Support

Recommendations should:

- Present supporting evidence.
- Offer alternative viewpoints where appropriate.
- Encourage human review.
- Highlight uncertainty.
- Avoid presenting probabilistic outcomes as facts.

Decision support remains advisory.

Accessibility & Inclusion

Fairness also includes:

- Accessible interfaces.
- Multilingual support.
- Flexible learning resources.
- Respect for varying digital literacy.
- Inclusive communication.

Participation should remain attainable.

Continuous Evaluation

Fairness reviews consider:

- Recommendation outcomes.
- Community feedback.
- Reported concerns.
- Emerging risks.
- Changes in community demographics.
- AI performance.

Evaluation remains continuous.

Business Rules

BR-TE-016

AI recommendations shall support equitable participation.

BR-TE-017

Potentially sensitive recommendations shall include human review.

BR-TE-018

Bias mitigation efforts shall remain documented.

BR-TE-019

Communities shall retain final decision-making authority.

BR-TE-020

Fairness evaluations shall inform future platform improvements.

Acceptance Criteria

Fairness succeeds when:

- Recommendations remain understandable.
 - Communities perceive processes as fair.
 - Participation opportunities broaden.
 - Bias is actively monitored.
 - Trust continues to grow.
-

Completion Criteria

Complete when:

- Fairness principles are documented.
 - Bias mitigation strategy is defined.
 - Inclusive decision support framework is established.
-

Next Document

13-04 — Digital Legacy, Historical Stewardship & Community Memory

Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Part 5 — Digital Legacy, Historical Stewardship & Community Memory

Document ID: HCP-PB-13-04

Parent: Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Domain: Digital Legacy

Status: Draft

Version: 1.0

Purpose

This document defines the principles, responsibilities, and governance practices for preserving community history, institutional knowledge, and digital legacies within the Hash Community Platform (HCP).

Historical preservation is treated as an ethical responsibility that extends across generations.

Vision

Preserved memories.

Living history.

Enduring communities.

Philosophy

Technology should help communities remember.

Historical records are not simply archives; they are expressions of identity, culture, service, and shared experience.

Preservation should protect authenticity while ensuring future generations can discover, understand, and learn from the past.

Stewardship Principles

Historical stewardship shall:

- Preserve authenticity.
- Respect provenance.
- Document context.
- Protect integrity.
- Encourage contribution.
- Enable discovery.
- Support future generations.

Preservation extends beyond technology.

Community Memory

The platform supports preservation of:

- Historical photographs.
- Oral histories.
- Community publications.
- Leadership histories.
- Event narratives.
- Meeting records.
- Milestone celebrations.
- Recognition histories.
- Volunteer stories.
- Cultural traditions.

Community memory is broader than structured data.

Digital Legacy

Communities may establish policies governing:

- Historical archives.
- Long-term preservation.
- Successor stewardship.
- Public exhibitions.
- Anniversary collections.
- Memorial tributes.
- Preservation priorities.

Policies remain community-controlled.

Preservation Responsibilities

The platform shall:

- Preserve provenance.
- Record attribution.
- Protect historical integrity.
- Maintain version history.
- Support archival exports.
- Encourage metadata quality.

Stewardship remains collaborative.

Business Rules

BR-TE-021

Historical authenticity shall be protected.

BR-TE-022

Community provenance shall remain traceable.

BR-TE-023

Historical records shall preserve contextual information wherever possible.

BR-TE-024

Communities determine archival policies.

BR-TE-025

Digital preservation shall support long-term accessibility.

Acceptance Criteria

Digital Legacy succeeds when:

- Community history remains discoverable.
 - Future leaders understand past decisions.
 - Historical authenticity is preserved.
 - Members contribute confidently.
 - Communities strengthen their collective identity.
-

Completion Criteria

Complete when:

- Digital legacy philosophy is documented.
 - Stewardship model is established.
 - Historical preservation framework is defined.
-

Next Document

13-05 — Transparency, Accountability & Community Trust

Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Part 6 — Transparency, Accountability & Community Trust

Document ID: HCP-PB-13-05

Parent: Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Domain: Transparency & Accountability

Status: Draft

Version: 1.0

Purpose

This document defines the transparency, accountability, and governance practices that help communities understand how the Hash Community Platform (HCP) operates, how decisions are made, and how responsibilities are assigned.

Transparency strengthens confidence by making significant actions understandable and reviewable.

Vision

Transparent systems.

Accountable stewardship.

Trusted communities.

Philosophy

Communities should never have to guess:

- why something happened,
- who approved it,
- what changed,
- or how decisions can be reviewed.

Responsible technology communicates openly.

Transparency Principles

The platform shall:

- Explain important actions.
- Record meaningful decisions.
- Distinguish automation from human judgment.
- Preserve audit history.
- Encourage review.
- Support responsible governance.
- Promote organizational learning.

Transparency exists to increase understanding, not complexity.

Accountability Model

Responsibilities remain identifiable for:

- Governance decisions
- Administrative actions
- AI recommendations
- Data changes
- Plugin activity
- Security events
- Historical preservation

Authority remains traceable.

Explainability

Where appropriate, the platform explains:

- Why a recommendation was made.
- Why access was granted or denied.
- Why a workflow changed.
- Why notifications were sent.
- Why policies apply.

Explanations remain understandable.

Review Mechanisms

Communities may review:

- Governance history
- AI-assisted actions
- Audit trails
- Policy changes
- Historical revisions
- Administrative activities

Review supports trust.

Business Rules

BR-TE-026

Significant platform actions shall remain explainable.

BR-TE-027

Human decisions and AI recommendations shall remain distinguishable.

BR-TE-028

Audit records shall preserve accountability.

BR-TE-029

Communities retain authority over governance decisions.

BR-TE-030

Transparency shall balance openness with privacy and security.

Acceptance Criteria

Transparency succeeds when:

- Communities understand important decisions.
 - Accountability remains visible.
 - Audit history supports learning.
 - Trust increases through clarity.
 - Governance becomes more understandable.
-

Completion Criteria

Complete when:

- Transparency principles are documented.
 - Accountability framework is defined.
 - Explainability model is established.
-

Next Document

13-06 — Responsible Innovation, Future Technologies & Ethical Evolution

Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Part 7 — Responsible Innovation, Future Technologies & Ethical Evolution

Document ID: HCP-PB-13-06

Parent: Chapter 13 — Trust, Ethics, Privacy & Responsible Technology

Domain: Responsible Innovation

Status: Draft

Version: 1.0

Purpose

This document defines how the Hash Community Platform (HCP) evaluates, adopts, governs, and evolves emerging technologies while preserving the ethical principles, community trust, and long-term stewardship established throughout the platform.

Innovation is treated as a responsibility rather than an objective in itself.

Vision

Responsible innovation.

Ethical evolution.

Communities prepared for tomorrow.

Philosophy

Technology will continue to evolve.

The platform should embrace innovation thoughtfully, ensuring that every meaningful advancement strengthens communities without compromising privacy, autonomy, transparency, accessibility, or trust.

Innovation must remain aligned with human values.

Innovation Principles

Future capabilities should:

- Strengthen communities.
- Respect human dignity.
- Preserve transparency.
- Protect privacy.
- Increase accessibility.
- Improve sustainability.
- Enhance long-term stewardship.
- Encourage learning.

Innovation serves people.

Emerging Technologies

Future evaluations may include:

- Advanced AI systems
- Digital preservation technologies
- Immersive experiences
- Language technologies
- Accessibility innovations
- Identity technologies
- Archival standards
- Collaboration tools
- Security improvements

Evaluation remains continuous.

Innovation Governance

Significant innovations should include:

- Ethical assessment
- Technical review
- Community consultation
- Accessibility review
- Privacy review
- Security review
- Trust Impact Assessment
- Pilot evaluation

Innovation remains accountable.

Community Participation

Communities may contribute through:

- Advisory councils
- Pilot programs
- Feedback initiatives
- Open discussions
- Research collaborations
- Volunteer testing
- Regional innovation forums

Innovation remains collaborative.

Continuous Ethical Evolution

The ethical framework itself shall be periodically reviewed to ensure it remains:

- Relevant
- Practical
- Transparent
- Inclusive
- Technically informed
- Community-centered

Values remain stable while practices evolve.

Business Rules

BR-TE-031

Innovation shall strengthen rather than weaken trust.

BR-TE-032

Emerging technologies shall undergo ethical evaluation.

BR-TE-033

Community perspectives shall inform significant innovation.

BR-TE-034

Responsible experimentation shall be encouraged.

BR-TE-035

Ethical guidance shall evolve responsibly over time.

Acceptance Criteria

Responsible Innovation succeeds when:

- New capabilities improve community outcomes.
 - Ethical reviews remain meaningful.
 - Communities trust technological evolution.
 - Innovation remains transparent.
 - Human values remain central.
-

Completion Criteria

Complete when:

- Responsible innovation framework is documented.
 - Future technology governance is established.
 - Ethical evolution model is defined.
-

Chapter 13 Completion

The Trust, Ethics, Privacy & Responsible Technology chapter consists of:

- 13-00 — Trust Vision & Ethical Foundations
- 13-01 — Privacy by Design & Consent Management
- 13-02 — Responsible AI, Transparency & Human Oversight
- 13-03 — Fairness, Bias Mitigation & Inclusive Decision Support
- 13-04 — Digital Legacy, Historical Stewardship & Community Memory
- 13-05 — Transparency, Accountability & Community Trust
- 13-06 — Responsible Innovation, Future Technologies & Ethical Evolution

Together, these documents establish HCP's long-term ethical framework, ensuring that innovation consistently strengthens trust, protects communities, and supports responsible stewardship.

Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Part 1 — Ecosystem Vision & Platform Philosophy

Document ID: HCP-PB-14-00

Parent: Product Bible

Domain: Platform Ecosystem

Status: Draft

Version: 1.0

Purpose

This document defines the long-term vision, philosophy, and strategic principles for evolving the Hash Community Platform (HCP) into a sustainable ecosystem that encourages responsible innovation, extensibility, collaboration, and community participation.

The platform is viewed as an evolving foundation rather than a fixed product.

Vision

An ecosystem where communities, developers, historians, educators, volunteers, and partners collaborate to expand the capabilities and impact of HCP while preserving its core values.

Philosophy

The platform should solve common problems exceptionally well.

Specialized needs should be addressed through an ecosystem of trusted extensions, integrations, and community innovation.

The ecosystem grows through openness, responsibility, and shared stewardship.

Ecosystem Principles

The ecosystem shall:

- Encourage responsible innovation.
- Preserve interoperability.
- Respect community autonomy.
- Maintain trust.
- Support extensibility.
- Promote collaboration.
- Protect long-term compatibility.

The ecosystem should remain healthy rather than merely large.

Strategic Objectives

Enable:

- Third-party integrations.
 - Plugin development.
 - Community-developed extensions.
 - Academic collaboration.
 - Historical preservation partnerships.
 - Regional innovation.
 - Open standards.
 - Sustainable platform evolution.
-

Platform Responsibilities

The platform shall provide:

- Stable APIs.
- Extension frameworks.
- Clear documentation.
- Security guidelines.
- Ethical governance.
- Developer support.
- Version stability.

The core remains dependable.

Business Rules

BR-PE-001

The core platform shall remain intentionally focused.

BR-PE-002

Extension points shall remain well documented.

BR-PE-003

Ecosystem growth shall preserve trust.

BR-PE-004

Community innovation shall be encouraged responsibly.

BR-PE-005

Platform evolution shall remain backward compatible wherever practical.

Acceptance Criteria

The ecosystem succeeds when:

- Communities extend HCP safely.
 - Developers innovate confidently.
 - Integrations remain stable.
 - Platform trust is preserved.
 - Innovation compounds over time.
-

Completion Criteria

Complete when:

- Ecosystem philosophy is documented.
 - Strategic objectives are defined.
 - Platform responsibilities are established.
-

Next Document

14-01 — Extension Framework, Plugin Architecture & Marketplace

Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Part 2 — Extension Framework, Plugin Architecture & Marketplace

Document ID: HCP-PB-14-01

Parent: Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Domain: Extension Framework

Status: Draft

Version: 1.0

Purpose

This document defines the extension architecture, plugin framework, marketplace governance, security principles, and lifecycle management for third-party capabilities within the Hash Community Platform (HCP).

Extensions expand platform functionality while preserving stability, trust, and long-term compatibility.

Vision

A secure, thriving ecosystem where communities can confidently discover, install, manage, and build trusted extensions.

Philosophy

The core platform remains intentionally focused.

Extensions enable specialization without increasing unnecessary complexity for every community.

Every extension should uphold the ethical and technical standards of HCP.

Extension Principles

Extensions shall:

- Be isolated from the core platform.
 - Use documented APIs.
 - Request only necessary permissions.
 - Respect community privacy.
 - Remain version-aware.
 - Support graceful failure.
 - Be removable without damaging community data.
-

Plugin Categories

Examples include:

- Community Operations
- Historical Preservation
- Education & Learning
- Accessibility
- Communications
- Regional Integrations
- Analytics
- AI Assistants
- Finance
- Volunteer Management
- Cultural Programs
- Research Tools

Categories evolve responsibly.

Marketplace Principles

The marketplace shall:

- Encourage quality.
- Promote transparency.
- Support discoverability.
- Clearly display permissions.
- Explain data access.
- Surface compatibility.
- Enable community reviews.

Trust remains central.

Extension Lifecycle

Lifecycle stages include:

1. Development
2. Validation
3. Security Review
4. Marketplace Publication
5. Updates
6. Monitoring
7. Deprecation
8. Retirement

Lifecycle management remains transparent.

Business Rules

BR-PE-006

Extensions shall operate within documented permission boundaries.

BR-PE-007

Marketplace listings shall disclose requested capabilities.

BR-PE-008

Communities retain control over installed extensions.

BR-PE-009

Core platform upgrades shall minimize extension disruption.

BR-PE-010

Marketplace governance shall prioritize community trust.

Acceptance Criteria

The extension framework succeeds when:

- Developers innovate confidently.
 - Communities install safely.
 - Platform stability remains high.
 - Trust is preserved.
 - Marketplace quality improves over time.
-

Completion Criteria

Complete when:

- Plugin framework is documented.
 - Marketplace governance is defined.
 - Extension lifecycle is established.
-

Next Document

14-02 — Public APIs, SDKs & Developer Experience

Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Part 3 — Public APIs, SDKs & Developer Experience

Document ID: HCP-PB-14-02

Parent: Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Domain: Developer Platform

Status: Draft

Version: 1.0

Purpose

This document defines the public API strategy, SDK ecosystem, developer tooling, documentation standards, and overall developer experience (DX) for the Hash Community Platform (HCP).

The objective is to empower developers to build secure, reliable, and innovative solutions while preserving platform integrity and community trust.

Vision

Open possibilities.

Reliable integrations.

Developers empowered.

Philosophy

Every published interface is a long-term promise.

APIs should remain stable, understandable, well-documented, and designed for longevity.

Developer trust is earned through consistency.

API Principles

Public APIs shall:

- Be versioned.
- Follow consistent conventions.
- Minimize breaking changes.
- Support discoverability.
- Encourage secure usage.
- Return meaningful errors.
- Provide comprehensive documentation.

Interfaces should remain predictable.

SDK Strategy

Official SDKs may include:

- JavaScript / TypeScript
- Node.js
- Python
- Java
- C#
- Go
- PHP
- Swift
- Kotlin

SDKs should feel idiomatic to each language.

Developer Experience

The platform provides:

- Interactive API documentation.
- Sandbox environments.
- Sample projects.
- CLI tools.
- API explorers.
- Testing utilities.
- Mock servers.
- Migration guides.

Learning remains approachable.

Authentication

Supported approaches may include:

- OAuth 2.1
- Service accounts
- API keys (limited use)
- Personal access tokens
- Scoped permissions

Security remains foundational.

Documentation Standards

Documentation shall include:

- Quick starts.
- Tutorials.
- Reference documentation.
- Architecture guides.
- Best practices.
- Security guidance.
- Example applications.
- Changelog history.

Documentation evolves with the platform.

Business Rules

BR-PE-011

Public APIs shall remain versioned.

BR-PE-012

Breaking changes require documented migration paths.

BR-PE-013

Official SDKs shall remain actively maintained.

BR-PE-014

Documentation shall evolve alongside released features.

BR-PE-015

Developer tooling shall support responsible platform usage.

Acceptance Criteria

Developer Experience succeeds when:

- Developers onboard quickly.
 - Integrations remain reliable.
 - Documentation answers common questions.
 - SDKs reduce implementation effort.
 - Community innovation accelerates.
-

Completion Criteria

Complete when:

- API strategy is documented.
 - SDK roadmap is defined.
 - Developer experience philosophy is established.
-

Next Document

14-03 — Open Standards, Interoperability & Data Portability

Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Part 4 — Open Standards, Interoperability & Data Portability

Document ID: HCP-PB-14-03

Parent: Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Domain: Interoperability

Status: Draft

Version: 1.0

Purpose

This document defines the principles, standards, and technical strategies that enable interoperability between HCP and external systems while ensuring communities retain long-term ownership and portability of their information.

Interoperability strengthens trust by preventing unnecessary vendor dependency and encouraging sustainable collaboration.

Vision

Connected systems.

Open standards.

Communities in control.

Philosophy

Communities should never lose access to their own information because of technology choices.

The platform should communicate effectively with other systems while preserving historical integrity and data quality.

Interoperability Principles

The platform shall:

- Support open standards where practical.
- Encourage structured data exchange.
- Preserve metadata.
- Minimize proprietary dependencies.
- Enable long-term archival formats.
- Maintain semantic consistency.
- Promote responsible integration.

Interoperability enables longevity.

Supported Exchange Formats

Examples include:

- JSON
- CSV
- XML
- PDF/A (archival documents)
- Markdown
- OpenDocument formats
- Standard image metadata
- Standard calendar formats (iCalendar)
- Standard contact formats (vCard)

Additional formats may be adopted over time.

Data Portability

Communities may:

- Export member records.
- Export governance records.
- Export historical archives.
- Export event histories.
- Export media metadata.
- Export audit information (subject to permissions).
- Export AI-generated knowledge where appropriate.

Exports remain understandable.

Integration Strategy

The platform supports:

- REST APIs
- Event webhooks
- Import/export pipelines
- Scheduled synchronization
- Identity federation
- Third-party connectors

Integration remains secure.

Long-Term Preservation

Archival exports should:

- Preserve provenance.
- Preserve relationships.
- Preserve metadata.
- Include documentation.
- Remain usable without proprietary software.

Longevity remains a design objective.

Business Rules

BR-PE-016

Communities retain ownership of their information.

BR-PE-017

Export capabilities shall remain documented.

BR-PE-018

Open standards shall be preferred where appropriate.

BR-PE-019

Interoperability shall preserve historical context.

BR-PE-020

Data portability shall not compromise privacy or security.

Acceptance Criteria

Interoperability succeeds when:

- Communities exchange information reliably.
 - Data exports remain usable.
 - Historical integrity is preserved.
 - Integrations remain sustainable.
 - Platform trust increases.
-

Completion Criteria

Complete when:

- Interoperability strategy is documented.
 - Data portability framework is defined.
 - Open standards policy is established.
-

Next Document

14-04 — Versioning, Compatibility & Evolution Strategy

Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Part 5 — Versioning, Compatibility & Evolution Strategy

Document ID: HCP-PB-14-04

Parent: Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Domain: Platform Evolution

Status: Draft

Version: 1.0

Purpose

This document defines the versioning strategy, compatibility guarantees, release lifecycle, migration philosophy, and long-term evolution practices for the Hash Community Platform (HCP).

The goal is to enable continuous innovation while minimizing disruption for communities, developers, and ecosystem partners.

Vision

Stable evolution.

Predictable upgrades.

Confident adoption.

Philosophy

Every release should improve the platform without unnecessarily disrupting existing communities or integrations.

Compatibility is treated as a strategic commitment rather than a technical convenience.

Versioning Principles

The platform shall:

- Use semantic versioning.
- Clearly communicate breaking changes.
- Provide migration guidance.
- Maintain support windows.
- Preserve compatibility where practical.
- Publish release notes.
- Encourage gradual adoption.

Stability builds confidence.

Release Channels

Supported channels include:

- Experimental
- Preview
- Stable
- Long-Term Support (LTS)

Communities choose the release cadence that matches their operational needs.

Compatibility Strategy

The platform shall:

- Minimize breaking API changes.
- Support overlapping API versions.
- Preserve extension compatibility where practical.
- Provide compatibility reports.
- Offer automated upgrade checks.

Backward compatibility remains a design goal.

Deprecation Policy

Deprecation shall include:

- Public announcement.
- Documentation updates.
- Migration guidance.
- Automated warnings.
- Defined support timelines.
- Community communication.

Deprecation is a managed transition.

Migration Support

The platform provides:

- Upgrade assistants.
- Compatibility analyzers.
- API migration tools.
- Extension validation.
- Rollback guidance.
- Release checklists.

Migration remains predictable.

Business Rules

BR-PE-021

Breaking changes shall require documented migration paths.

BR-PE-022

Communities shall receive advance notice of deprecations.

BR-PE-023

Supported versions shall have published lifecycle policies.

BR-PE-024

Compatibility shall remain a strategic objective.

BR-PE-025

Release quality shall take precedence over release frequency.

Acceptance Criteria

Versioning succeeds when:

- Communities upgrade confidently.
 - Developers maintain compatibility.
 - Platform evolution remains predictable.
 - Release quality remains high.
 - Trust in upgrades increases.
-

Completion Criteria

Complete when:

- Versioning strategy is documented.
 - Compatibility framework is defined.
 - Evolution policy is established.
-

Next Document

14-05 — Ecosystem Governance, Partner Program & Community Innovation

Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Part 6 — Ecosystem Governance, Partner Program & Community Innovation

Document ID: HCP-PB-14-05

Parent: Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Domain: Ecosystem Governance

Status: Draft

Version: 1.0

Purpose

This document defines the governance structures, partnership models, innovation programs, and collaboration mechanisms that guide the long-term growth of the Hash Community Platform (HCP) ecosystem.

The objective is to foster responsible innovation while ensuring that ecosystem growth remains aligned with the platform's values, technical standards, and stewardship principles.

Vision

A collaborative ecosystem where communities, developers, educators, historians, researchers, nonprofit organizations, and technology partners collectively strengthen the HCP platform.

Philosophy

Innovation flourishes when diverse contributors share responsibility for the platform's future.

Bubble Barrel serves as the steward of the ecosystem while encouraging broad participation.

Ecosystem Principles

The ecosystem shall:

- Encourage openness.
- Reward contribution.
- Maintain quality.
- Promote inclusion.
- Preserve trust.
- Support regional innovation.
- Encourage knowledge sharing.

Healthy ecosystems balance freedom with responsibility.

Partnership Programs

The ecosystem may include:

- Certified Solution Partners
- Certified Integration Partners
- Certified Training Partners
- Academic Partners
- Historical Preservation Partners
- Accessibility Partners
- Regional Innovation Partners
- Community Champions
- Open Source Contributors

Partnerships strengthen the ecosystem.

Community Innovation

Innovation may occur through:

- Community proposals
- Public roadmaps
- Hackathons
- Innovation grants
- Pilot communities
- Developer challenges
- Research collaborations
- Accessibility initiatives

Ideas are evaluated transparently.

Governance Structure

The ecosystem shall establish:

- Technical Advisory Council
- Community Advisory Council
- Accessibility Advisory Group
- Historical Preservation Council
- AI Ethics Council
- Developer Advisory Board

Advisory groups provide recommendations rather than replacing Bubble Barrel's accountability.

Recognition

The platform may recognize:

- Outstanding extensions
- Community innovations
- Research contributions
- Historical preservation efforts
- Accessibility leadership
- Educational excellence

Recognition encourages stewardship.

Business Rules

BR-PE-026

Community participation shall inform ecosystem evolution.

BR-PE-027

Partnership programs shall maintain published standards.

BR-PE-028

Innovation proposals shall receive transparent evaluation.

BR-PE-029

Advisory councils shall represent diverse perspectives.

BR-PE-030

Bubble Barrel retains ultimate responsibility for platform integrity.

Acceptance Criteria

Ecosystem governance succeeds when:

- Communities actively participate.
 - Partners contribute responsibly.
 - Innovation accelerates.
 - Platform quality remains high.
 - Trust continues to grow.
-

Completion Criteria

Complete when:

- Ecosystem governance is documented.
 - Partnership framework is defined.
 - Community innovation model is established.
-

Next Document

14-06 — Financial Sustainability, Long-Term Stewardship & Platform Continuity

Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Part 7 — Financial Sustainability, Long-Term Stewardship & Platform Continuity

Document ID: HCP-PB-14-06

Parent: Chapter 14 — Platform Evolution, Sustainability & Ecosystem Strategy

Domain: Long-Term Sustainability

Status: Draft

Version: 1.0

Purpose

This document defines the long-term financial, operational, governance, and continuity strategies that ensure the Hash Community Platform (HCP) remains sustainable, dependable, and capable of serving communities across generations.

Platform continuity is considered a strategic obligation.

Vision

Financial resilience.

Institutional stewardship.

Generational continuity.

Philosophy

Communities should be able to invest in HCP with confidence that the platform will remain supported, portable, and responsibly governed over the long term.

Business sustainability and community trust reinforce one another.

Sustainability Principles

The platform shall:

- Operate responsibly.
- Maintain financial discipline.
- Diversify revenue.
- Invest in platform quality.
- Preserve community trust.
- Plan for succession.
- Encourage ecosystem participation.

Long-term thinking guides strategic decisions.

Financial Sustainability

Potential revenue sources include:

- Subscription plans
- Enterprise licensing
- Certified partner programs
- Marketplace commissions
- Professional services
- Training and certification
- Premium support
- Hosted infrastructure
- Sponsored research initiatives

Revenue diversity reduces organizational risk.

Platform Continuity

Continuity planning includes:

- Disaster recovery.
- Operational resilience.
- Leadership succession.
- Knowledge preservation.
- Source code governance.
- Documentation continuity.
- Infrastructure redundancy.

Continuity is continuously maintained.

Stewardship Responsibilities

Bubble Barrel commits to:

- Transparent communication.
- Responsible product evolution.
- Long-term support.
- Ethical governance.
- Community consultation.
- Sustainable growth.

Stewardship extends beyond software.

Business Rules

BR-PE-031

Financial sustainability shall support long-term platform health.

BR-PE-032

Continuity planning shall remain documented and periodically reviewed.

BR-PE-033

Critical platform knowledge shall not depend on individual contributors.

BR-PE-034

Communities shall retain ownership of their information.

BR-PE-035

Long-term stewardship shall guide strategic decisions.

Acceptance Criteria

Long-term stewardship succeeds when:

- Communities trust the platform's future.
 - Financial sustainability remains healthy.
 - Knowledge is preserved.
 - Leadership transitions remain smooth.
 - Platform continuity remains resilient.
-

Completion Criteria

Complete when:

- Sustainability strategy is documented.
 - Continuity framework is established.
 - Stewardship commitments are defined.
-

Chapter 14 Completion

The Platform Evolution, Sustainability & Ecosystem Strategy chapter consists of:

- 14-00 — Ecosystem Vision & Platform Philosophy
- 14-01 — Extension Framework, Plugin Architecture & Marketplace
- 14-02 — Public APIs, SDKs & Developer Experience
- 14-03 — Open Standards, Interoperability & Data Portability
- 14-04 — Versioning, Compatibility & Evolution Strategy
- 14-05 — Ecosystem Governance, Partner Program & Community Innovation
- 14-06 — Financial Sustainability, Long-Term Stewardship & Platform Continuity

Together, these documents define how HCP evolves responsibly, empowers an ecosystem of contributors, and remains dependable for communities over the long term.

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 1 — Operational Vision, Service Philosophy & Reliability Principles

Document ID: HCP-PB-15-00

Parent: Product Bible

Domain: Operational Excellence

Status: Draft

Version: 1.0

Purpose

This document establishes the operational philosophy, service principles, reliability objectives, and continuous improvement mindset that guide the day-to-day operation of the Hash Community Platform (HCP).

Operational excellence ensures that platform quality remains consistent as the ecosystem grows.

Vision

Reliable services.

Exceptional operations.

Communities served with confidence.

Philosophy

Operational excellence is achieved through disciplined processes, measurable outcomes, continuous learning, and proactive stewardship.

Reliability is designed—not hoped for.

Operational Principles

Operations shall:

- Prioritize community trust.
- Detect issues early.
- Resolve incidents quickly.
- Learn from failures.
- Automate repetitive work.
- Measure service quality.
- Improve continuously.

Operations remain transparent and accountable.

Reliability Principles

The platform shall:

- Maximize availability.
- Minimize recovery time.
- Reduce operational risk.
- Prevent recurring issues.
- Preserve data integrity.
- Maintain security.
- Support graceful degradation.

Reliability is a continuous investment.

Operational Objectives

The platform seeks to:

- Deliver consistent service.
- Reduce operational complexity.
- Increase automation.
- Improve observability.
- Strengthen resilience.
- Empower support teams.
- Enable informed decision-making.

Operational maturity grows over time.

Continuous Improvement

Improvement shall be driven by:

- Operational metrics.
- Community feedback.
- Incident reviews.
- Support trends.
- Security assessments.
- Accessibility evaluations.
- Performance analysis.

Every improvement should be measurable.

Business Rules

BR-OE-001

Operational decisions shall prioritize community impact.

BR-OE-002

Reliability shall be continuously measured.

BR-OE-003

Operational improvements shall be evidence-based.

BR-OE-004

Automation shall reduce operational risk.

BR-OE-005

Every significant operational event shall produce organizational learning.

Acceptance Criteria

Operational Excellence succeeds when:

- Communities experience dependable service.
 - Reliability improves over time.
 - Operational risk decreases.
 - Teams resolve issues efficiently.
 - Continuous improvement becomes routine.
-

Completion Criteria

Complete when:

- Operational philosophy is documented.
 - Reliability principles are established.
 - Improvement framework is defined.
-

Next Document

15-01 — Incident Management & Major Event Response

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 2 — Incident Management & Major Event Response

Document ID: HCP-PB-15-01

Parent: Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Domain: Incident Management

Status: Draft

Version: 1.0

Purpose

This document establishes the framework for identifying, responding to, communicating about, resolving, and learning from operational incidents affecting the Hash Community Platform (HCP).

The goal is to minimize community impact while continuously improving operational resilience.

Vision

Fast detection.

Coordinated response.

Continuous learning.

Philosophy

Incidents are managed through preparation, communication, disciplined execution, and post-incident learning.

The objective is not to eliminate all failures but to respond consistently and responsibly.

Incident Lifecycle

The standard lifecycle includes:

1. Detection
2. Assessment
3. Classification
4. Response
5. Communication
6. Resolution
7. Recovery
8. Post-Incident Review
9. Improvement Actions

Every incident follows a documented process.

Severity Levels

Examples include:

SEV-1

Critical platform outage.

Major community impact.

Immediate executive response.

SEV-2

Major feature unavailable.

Significant operational disruption.

Rapid response required.

SEV-3

Limited service degradation.

Workarounds available.

Normal operational response.

SEV-4

Minor defects.

Minimal community impact.

Scheduled resolution.

Response Principles

Response teams shall:

- Prioritize safety.
 - Protect community data.
 - Restore critical services first.
 - Communicate regularly.
 - Escalate appropriately.
 - Record decisions.
 - Coordinate transparently.
-

Communication

During significant incidents the platform provides:

- Status updates.
- Estimated impact.
- Current mitigation efforts.
- Recovery progress.
- Resolution confirmation.
- Post-incident summary.

Communication remains factual and timely.

Post-Incident Reviews

Every significant incident shall include:

- Timeline.
- Root cause analysis.
- Contributing factors.
- Successful actions.
- Improvement opportunities.
- Assigned follow-up actions.
- Verification of completion.

Learning is mandatory.

Business Rules

BR-OE-006

Incident severity shall determine response procedures.

BR-OE-007

Community communication shall remain timely and accurate.

BR-OE-008

Major incidents require documented post-incident reviews.

BR-OE-009

Improvement actions shall be tracked to completion.

BR-OE-010

Operational learning shall be shared across relevant teams.

Acceptance Criteria

Incident Management succeeds when:

- Detection improves.
 - Recovery becomes faster.
 - Communication remains trusted.
 - Recurring incidents decrease.
 - Communities maintain confidence.
-

Completion Criteria

Complete when:

- Incident framework is documented.
 - Severity model is established.
 - Post-incident review process is defined.
-

Next Document

15-02 — Problem Management, Root Cause Analysis & Preventive Engineering

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 3 — Problem Management, Root Cause Analysis & Preventive Engineering

Document ID: HCP-PB-15-02

Parent: Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Domain: Problem Management

Status: Draft

Version: 1.0

Purpose

This document defines the framework for identifying recurring operational problems, performing root cause analysis, implementing preventive engineering measures, and continuously reducing operational risk across the Hash Community Platform (HCP).

The objective is to transform operational experience into long-term platform resilience.

Vision

Fewer recurring incidents.

Better engineering.

Continuous learning.

Philosophy

Problems differ from incidents.

Incidents interrupt service.

Problems explain why incidents occur.

The goal is to eliminate root causes rather than repeatedly treating symptoms.

Problem Lifecycle

Problems follow a structured lifecycle:

1. Identification
2. Investigation
3. Root Cause Analysis
4. Risk Assessment
5. Corrective Actions
6. Preventive Actions
7. Verification
8. Knowledge Capture
9. Closure

Each stage produces actionable outcomes.

Root Cause Analysis

Analysis should consider:

- Technical factors
- Human factors
- Process gaps
- Documentation quality
- Monitoring effectiveness
- Training needs
- Environmental conditions

Root cause analysis seeks understanding, not blame.

Preventive Engineering

Preventive improvements may include:

- Automation
- Improved monitoring
- Better testing
- Stronger validation
- Architecture improvements
- Documentation updates
- Operational training
- Simplified workflows

Engineering reduces future risk.

Knowledge Management

Lessons learned shall be documented through:

- Knowledge base articles
- Engineering standards
- Runbook updates
- Design guidelines
- Training materials
- Architecture reviews

Learning becomes organizational knowledge.

Business Rules

BR-OE-011

Significant recurring incidents shall generate formal problem records.

BR-OE-012

Root cause analysis shall avoid assigning personal blame.

BR-OE-013

Corrective and preventive actions shall be tracked to completion.

BR-OE-014

Operational learning shall update documentation.

BR-OE-015

Preventive engineering shall be prioritized according to risk.

Acceptance Criteria

Problem Management succeeds when:

- Recurring incidents decline.
 - Root causes are understood.
 - Preventive actions are implemented.
 - Documentation improves.
 - Engineering maturity increases.
-

Completion Criteria

Complete when:

- Problem management framework is documented.
 - Root cause methodology is established.
 - Preventive engineering strategy is defined.
-

Next Document

15-03 — Change Management, Release Governance & Deployment Safety

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 4 — Change Management, Release Governance & Deployment Safety

Document ID: HCP-PB-15-03

Parent: Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Domain: Change Management

Status: Draft

Version: 1.0

Purpose

This document defines the governance, approval processes, deployment strategies, and operational safeguards that ensure changes to the Hash Community Platform (HCP) are introduced safely, predictably, and with minimal disruption to communities.

The objective is to enable continuous delivery without compromising reliability.

Vision

Safe changes.

Confident releases.

Continuous delivery with stability.

Philosophy

Every change carries risk.

Risk should be understood, minimized, monitored, and managed through disciplined engineering practices rather than avoided entirely.

Change Principles

Changes shall:

- Be documented.
- Be reviewed.
- Be tested.
- Be observable.
- Be reversible.
- Be communicated.
- Be measurable.

Deployment is only one stage of change.

Change Categories

Examples include:

Standard Changes

Routine, low-risk, pre-approved.

Examples:

- Documentation updates
 - Configuration changes with automation
 - Routine dependency updates
-

Normal Changes

Require review and risk assessment.

Examples:

- New platform features
 - Database schema changes
 - API enhancements
-

Emergency Changes

Required to restore service or address critical risks.

Examples:

- Security patches
- Critical production fixes
- Incident mitigations

Emergency changes require retrospective review.

Release Governance

Every release should include:

- Scope definition
- Risk assessment
- Rollback strategy
- Monitoring plan
- Communication plan
- Success criteria
- Verification checklist

Releases remain deliberate.

Deployment Safety

Deployment strategies may include:

- Blue/Green deployments
- Rolling deployments
- Canary releases
- Feature flags
- Progressive rollouts
- Automatic rollback triggers

Deployment strategy matches deployment risk.

Release Validation

Validation shall confirm:

- Platform health
- Performance
- Data integrity
- API compatibility
- Authentication
- Community workflows
- Monitoring coverage

Validation extends beyond deployment completion.

Business Rules

BR-OE-016

Every production deployment shall include a rollback strategy.

BR-OE-017

High-risk changes require documented risk assessment.

BR-OE-018

Emergency changes require post-change review.

BR-OE-019

Release validation shall confirm community-facing functionality.

BR-OE-020

Deployment success shall be verified through operational metrics.

Acceptance Criteria

Change Management succeeds when:

- Deployment failures decrease.
 - Rollbacks remain effective.
 - Releases become predictable.
 - Communities experience minimal disruption.
 - Operational confidence increases.
-

Completion Criteria

Complete when:

- Change governance is documented.
 - Release framework is defined.
 - Deployment safety practices are established.
-

Next Document

15-04 — Observability, Monitoring & Operational Intelligence

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 5 — Observability, Monitoring & Operational Intelligence

Document ID: HCP-PB-15-04

Parent: Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Domain: Observability

Status: Draft

Version: 1.0

Purpose

This document defines the observability strategy, monitoring framework, telemetry standards, and operational intelligence practices for the Hash Community Platform (HCP).

The objective is to enable proactive operations through comprehensive visibility into platform health, performance, reliability, and community experience.

Vision

Observe everything that matters.

Detect problems early.

Understand community impact.

Philosophy

Monitoring answers whether systems are healthy.

Observability explains why they are not.

Operational intelligence transforms data into actionable decisions.

Observability Pillars

The platform shall collect and correlate:

- Metrics
- Logs
- Traces
- Events
- Audit records
- Community experience indicators

These signals provide a holistic operational view.

Monitoring Categories

The platform monitors:

- Infrastructure health
- Application performance
- Database performance
- API availability
- Authentication services
- AI services
- Background jobs
- Notification systems
- Storage health
- Security events

Monitoring remains continuous.

Community Experience Monitoring

Operational intelligence shall include:

- Login success rates
- Event check-in completion
- Governance workflow completion
- Archive search performance
- Volunteer onboarding success
- AI response latency
- Accessibility interaction metrics

Communities remain the primary operational focus.

Alerting Principles

Alerts shall be:

- Actionable
- Prioritized
- Context-rich
- Routed appropriately
- Deduplicated
- Continuously refined

Alert fatigue shall be minimized.

Operational Dashboards

Dashboards provide visibility into:

- Platform health
- Community health
- Reliability trends
- Service dependencies
- Incident timelines
- Deployment health
- Capacity forecasts

Dashboards support informed decisions.

Business Rules

BR-OE-021

Critical services shall maintain continuous monitoring.

BR-OE-022

Monitoring shall include community-facing workflows.

BR-OE-023

Alerts shall provide sufficient context for rapid response.

BR-OE-024

Observability data shall support incident investigation.

BR-OE-025

Operational dashboards shall remain continuously available.

Acceptance Criteria

Observability succeeds when:

- Issues are detected rapidly.
 - Root causes are easier to identify.
 - Community impact is measurable.
 - Alert quality improves.
 - Operational decisions become data-driven.
-

Completion Criteria

Complete when:

- Observability strategy is documented.
 - Monitoring framework is established.
 - Operational intelligence model is defined.
-

Next Document

15-05 — Site Reliability Engineering (SRE), Service Levels & Error Budgets

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 6 — Site Reliability Engineering (SRE), Service Levels & Error Budgets

Document ID: HCP-PB-15-05

Parent: Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Domain: Site Reliability Engineering

Status: Draft

Version: 1.0

Purpose

This document defines the Site Reliability Engineering (SRE) practices, Service Level Indicators (SLIs), Service Level Objectives (SLOs), Service Level Agreements (SLAs), and Error Budget framework for the Hash Community Platform (HCP).

The objective is to balance platform reliability with continuous innovation through measurable operational goals.

Vision

Reliable services.

Measured performance.

Continuous improvement.

Philosophy

Reliability is a product feature.

Engineering teams should make operational decisions using measurable objectives rather than assumptions.

SRE Principles

The platform shall:

- Define measurable objectives.
- Monitor user experience.
- Automate operational tasks.
- Reduce manual toil.
- Balance change with stability.
- Learn continuously.
- Improve incrementally.

Reliability remains an engineering discipline.

Service Level Indicators (SLIs)

Representative indicators include:

- Availability
- Request latency
- Error rate
- Login success rate
- Event completion rate
- API success rate
- Archive retrieval success
- Notification delivery success

Indicators measure community experience.

Service Level Objectives (SLOs)

Example objectives:

- Platform availability $\geq 99.95\%$
- Authentication success $\geq 99.9\%$
- API success $\geq 99.95\%$
- Archive search latency $\leq$ defined thresholds
- Governance workflow completion $\geq$ defined targets

Objectives remain measurable and periodically reviewed.

Service Level Agreements (SLAs)

Where contractual commitments exist, SLAs shall define:

- Service commitments
- Support response targets
- Escalation procedures
- Maintenance expectations
- Reporting obligations

SLAs formalize operational commitments.

Error Budgets

Each critical service maintains an error budget.

When the budget is consumed:

- New feature releases may pause.
- Reliability work receives priority.
- Risk assessments increase.
- Operational reviews occur.

Error budgets guide decision-making.

Toil Reduction

Engineering shall continuously reduce:

- Manual deployments
- Repetitive operational tasks
- Manual recovery steps
- Excessive alert handling
- Operational bottlenecks

Automation improves reliability.

Business Rules

BR-OE-026

Critical services shall define measurable SLOs.

BR-OE-027

Reliability shall be reviewed regularly.

BR-OE-028

Consumed error budgets shall influence release decisions.

BR-OE-029

Operational toil shall be continuously reduced.

BR-OE-030

Community experience shall remain the primary reliability metric.

Acceptance Criteria

SRE succeeds when:

- Reliability improves.
 - Operational toil decreases.
 - Service objectives remain measurable.
 - Error budgets inform decisions.
 - Community confidence increases.
-

Completion Criteria

Complete when:

- SRE practices are documented.
 - Service levels are defined.
 - Error budget framework is established.
-

Next Document

15-06 — Customer Success, Support Operations & Community Care

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 7 — Customer Success, Support Operations & Community Care

Document ID: HCP-PB-15-06

Parent: Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Domain: Customer Success

Status: Draft

Version: 1.0

Purpose

This document defines the customer success strategy, support operations, communication principles, and community care framework for the Hash Community Platform (HCP).

The objective is to ensure that every interaction with Bubble Barrel reinforces trust, enables success, and strengthens long-term community relationships.

Vision

Responsive support.

Successful communities.

Trusted partnerships.

Philosophy

Support is more than problem resolution.

Customer success proactively helps communities achieve their goals while support provides timely assistance when challenges arise.

Together they create lasting trust.

Community Care Principles

Community Care shall:

- Listen actively.
- Respond respectfully.
- Communicate clearly.
- Resolve efficiently.
- Educate continuously.
- Follow through consistently.
- Learn from every interaction.

Every conversation matters.

Support Channels

Communities may receive assistance through:

- Knowledge base
- AI Assistant
- Community forums
- Email support
- Live chat
- Scheduled consultation
- Enterprise success managers
- Emergency support

Support remains accessible.

Support Priorities

Support teams prioritize:

- Community impact
- Issue severity
- Time sensitivity
- Accessibility needs
- Security implications
- Service commitments

Prioritization remains transparent.

Customer Success

Customer Success focuses on:

- Community onboarding
- Adoption guidance
- Best practices
- Training
- Health reviews
- Strategic planning
- Success metrics
- Long-term partnerships

Success extends beyond support tickets.

Knowledge Management

Every resolved issue should contribute to:

- Documentation improvements
- FAQ updates
- AI knowledge
- Training materials
- Product improvements
- Community education

Knowledge compounds over time.

Business Rules

BR-OE-031

Community communication shall remain respectful and timely.

BR-OE-032

Support interactions shall be documented.

BR-OE-033

Resolved issues shall contribute to organizational knowledge.

BR-OE-034

Customer success initiatives shall prioritize long-term community outcomes.

BR-OE-035

Accessibility shall remain integral to all support channels.

Acceptance Criteria

Community Care succeeds when:

- Communities receive timely assistance.
 - Support satisfaction improves.
 - Community adoption increases.
 - Documentation quality improves.
 - Long-term trust grows.
-

Completion Criteria

Complete when:

- Customer success strategy is documented.
 - Support framework is established.
 - Community care philosophy is defined.
-

Next Document

15-07 — Quality Engineering, Testing Strategy & Continuous Verification

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 8 — Quality Engineering, Testing Strategy & Continuous Verification

Document ID: HCP-PB-15-07

Parent: Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Domain: Quality Engineering

Status: Draft

Version: 1.0

Purpose

This document defines the quality engineering philosophy, testing strategy, verification practices, and continuous quality framework for the Hash Community Platform (HCP).

The objective is to ensure quality is designed, validated, and continuously improved throughout the software lifecycle.

Vision

Quality by design.

Verification through evidence.

Continuous confidence.

Philosophy

Quality is the shared responsibility of every discipline involved in delivering HCP.

Testing provides confidence that quality objectives have been achieved.

Quality Principles

Quality engineering shall:

- Begin during design.
- Continue through development.
- Include accessibility.
- Include security.
- Include performance.
- Include usability.
- Include maintainability.

Quality spans the entire lifecycle.

Testing Strategy

The testing strategy includes:

- Unit testing
- Integration testing
- End-to-end testing
- API testing
- Performance testing
- Security testing
- Accessibility testing
- Regression testing
- Exploratory testing
- User acceptance testing

Testing remains risk-based.

Continuous Verification

Verification occurs through:

- Automated pipelines
- Static analysis
- Dependency scanning
- Code review
- Deployment validation
- Production monitoring
- Community feedback

Verification continues after release.

Test Data Management

Testing environments shall provide:

- Representative datasets
- Privacy-safe data
- Repeatable scenarios
- Automated provisioning
- Version-controlled fixtures

Reliable tests require reliable data.

Defect Management

Defects shall be:

- Prioritized by impact
- Categorized consistently
- Tracked transparently
- Verified after resolution
- Analyzed for trends

Defect learning improves quality.

Business Rules

BR-OE-036

Critical workflows shall maintain automated test coverage.

BR-OE-037

Accessibility verification shall be included in quality assurance.

BR-OE-038

Quality gates shall precede production deployments.

BR-OE-039

Production verification shall complement pre-release testing.

BR-OE-040

Quality metrics shall guide continuous improvement.

Acceptance Criteria

Quality Engineering succeeds when:

- Defect escape rates decline.
 - Test confidence improves.
 - Deployment quality increases.
 - Accessibility compliance improves.
 - Community satisfaction increases.
-

Completion Criteria

Complete when:

- Quality strategy is documented.
 - Testing framework is established.
 - Continuous verification model is defined.
-

Next Document

15-08 — Business Continuity, Disaster Recovery & Operational Resilience

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 9 — Business Continuity, Disaster Recovery & Operational Resilience

Document ID: HCP-PB-15-08

Parent: Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Domain: Operational Resilience

Status: Draft

Version: 1.0

Purpose

This document defines the business continuity, disaster recovery (DR), and operational resilience framework for the Hash Community Platform (HCP).

The objective is to ensure that critical services can continue operating, recover quickly from disruptive events, and preserve community trust under adverse conditions.

Vision

Prepared organizations.

Resilient systems.

Confident communities.

Philosophy

Operational resilience is achieved through preparation, redundancy, regular testing, and continuous improvement.

Recovery capabilities shall be verified rather than assumed.

Business Continuity Objectives

The platform shall:

- Maintain critical services.
- Protect community data.
- Minimize operational disruption.
- Support alternative operating procedures.
- Enable coordinated recovery.
- Communicate clearly during disruptions.

Continuity planning extends beyond technology.

Disaster Recovery Strategy

Recovery planning shall address:

- Infrastructure failures
- Database failures
- Cloud provider outages
- Network disruptions
- Cybersecurity incidents
- Human error
- Third-party service failures
- Regional disasters

Recovery plans remain documented and tested.

Recovery Objectives

Critical services shall define:

- Recovery Time Objective (RTO)
- Recovery Point Objective (RPO)
- Recovery priority
- Recovery dependencies
- Recovery owners
- Verification procedures

Objectives guide recovery planning.

Backup Strategy

Backups shall be:

- Automated
- Encrypted
- Versioned
- Geographically separated
- Regularly verified
- Periodically restored for testing

Successful restoration matters more than successful backup creation.

Resilience Engineering

Operational resilience includes:

- Redundancy
- Failover
- Graceful degradation
- Capacity reserves
- Chaos testing
- Recovery automation
- Cross-training
- Runbooks

Resilience is continuously strengthened.

Business Rules

BR-OE-041

Critical services shall define recovery objectives.

BR-OE-042

Backups shall be tested regularly through restoration exercises.

BR-OE-043

Disaster recovery plans shall be reviewed periodically.

BR-OE-044

Recovery exercises shall produce documented lessons learned.

BR-OE-045

Community communication shall remain active during recovery events.

Acceptance Criteria

Operational Resilience succeeds when:

- Recovery objectives are consistently met.
 - Backup restoration succeeds.
 - Communities remain informed.
 - Recovery exercises improve preparedness.
 - Operational confidence increases.
-

Completion Criteria

Complete when:

- Business continuity framework is documented.
 - Disaster recovery strategy is established.
 - Recovery objectives are defined.
-

Next Document

15-09 — Operational Governance, Performance Metrics & Continuous Improvement

Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Part 10 — Operational Governance, Performance Metrics & Continuous Improvement

Document ID: HCP-PB-15-09

Parent: Chapter 15 — Operational Excellence, Service Management & Continuous Improvement

Domain: Operational Governance

Status: Draft

Version: 1.0

Purpose

This document defines the governance framework, operational performance metrics, review cadence, and continuous improvement processes for the Hash Community Platform (HCP).

The objective is to ensure operational excellence remains measurable, transparent, and continuously evolving as the platform grows.

Vision

Govern with clarity.

Measure what matters.

Improve continuously.

Philosophy

Operational governance aligns people, processes, technology, and data around shared objectives.

Performance metrics should drive learning and improvement rather than compliance alone.

Governance Principles

Operational governance shall:

- Define accountability.
- Establish review cadences.
- Promote transparency.
- Encourage evidence-based decisions.
- Support continuous improvement.
- Align operational objectives with community outcomes.

Governance enables consistency.

Operational Metrics

Representative metrics include:

Reliability

- Availability
 - Error budget consumption
 - SLO compliance
 - Mean Time to Detect (MTTD)
 - Mean Time to Restore (MTTR)
-

Quality

- Defect escape rate
 - Regression success
 - Release confidence
 - Test effectiveness
-

Community Success

- Community satisfaction
 - Support response time
 - Support resolution time
 - Community health score
 - Adoption metrics
-

Operational Efficiency

- Deployment frequency
- Change success rate

- Automation coverage
 - Toil reduction
 - Knowledge base utilization
-

Security

- Security incident rate
 - Vulnerability remediation time
 - Compliance status
 - Audit completion
-

Review Cadence

Operational reviews occur:

- Daily operational review
- Weekly engineering review
- Monthly reliability review
- Quarterly governance review
- Annual operational strategy review

Each review has defined objectives and outputs.

Continuous Improvement

Improvement initiatives may originate from:

- Operational metrics
- Community feedback
- Incident reviews
- Quality reviews
- Security assessments
- Accessibility reviews
- Engineering retrospectives

Every improvement shall be measurable.

Business Rules

BR-OE-046

Operational metrics shall remain transparent to appropriate stakeholders.

BR-OE-047

Review cadences shall be consistently maintained.

BR-OE-048

Improvement initiatives shall define measurable outcomes.

BR-OE-049

Governance decisions shall be evidence-based.

BR-OE-050

Operational governance shall evolve with organizational maturity.

Acceptance Criteria

Operational Governance succeeds when:

- Operational performance improves.
 - Decisions become data-informed.
 - Accountability remains clear.
 - Community outcomes improve.
 - Continuous improvement becomes organizational culture.
-

Completion Criteria

Complete when:

- Governance framework is documented.
 - Operational metrics are defined.
 - Review cadence is established.
-

End of Chapter 15

Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Part 1 — AI Vision, Principles & Strategic Philosophy

Document ID: HCP-PB-16-01

Parent: Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Domain: Artificial Intelligence

Status: Draft

Version: 1.0

Purpose

This document establishes the strategic vision, guiding principles, ethical foundation, and long-term philosophy governing the use of Artificial Intelligence throughout the Hash Community Platform (HCP).

The objective is to ensure that AI consistently enhances community effectiveness while preserving human agency, transparency, and trust.

Vision

Create the world's most intelligent community platform where AI helps every organization accomplish more while keeping humans responsible for important decisions.

Philosophy

Artificial Intelligence exists to augment people—not replace them.

HCP treats AI as a trusted assistant that accelerates knowledge, reduces administrative burden, improves decision-making, and increases organizational effectiveness.

Communities remain in control.

Long-Term Vision

Over time, every community on HCP should gain access to intelligent capabilities that:

- Reduce repetitive work.
- Surface organizational knowledge.
- Improve participation.
- Assist leadership.
- Preserve institutional memory.
- Increase accessibility.
- Support strategic planning.
- Enable better decisions.

AI becomes part of the platform's operating fabric.

Guiding Principles

Artificial Intelligence within HCP shall:

- Respect human autonomy.
- Explain important recommendations.
- Preserve privacy.
- Operate transparently.
- Avoid unnecessary bias.
- Support accessibility.
- Learn responsibly.
- Remain accountable.
- Protect community trust.

Technology serves people.

Human Authority

AI may:

- Recommend
- Draft
- Summarize
- Analyze
- Organize
- Predict
- Prioritize
- Explain

AI shall not independently make governance decisions reserved for authorized community members unless explicitly configured and approved.

Human authority remains paramount.

Strategic Objectives

HCP uses AI to:

- Increase operational efficiency.
- Improve member engagement.
- Reduce administrative effort.
- Enhance decision quality.
- Accelerate onboarding.
- Improve knowledge discovery.
- Personalize experiences.
- Support accessibility.

Every objective must create measurable value.

AI Success Criteria

AI initiatives should demonstrate improvements in:

- Community satisfaction.
- Time savings.
- Knowledge accessibility.
- Operational efficiency.
- Decision support.
- Member engagement.
- Administrative workload.

Success remains measurable.

Business Rules

BR-AI-001

AI shall operate in accordance with documented governance policies.

BR-AI-002

Humans retain authority over governance-critical decisions.

BR-AI-003

AI recommendations shall be distinguishable from human decisions.

BR-AI-004

Communities shall maintain appropriate control over AI capabilities.

BR-AI-005

AI implementations shall prioritize community benefit over automation for its own sake.

Acceptance Criteria

The AI vision succeeds when:

- Communities trust AI capabilities.
 - Administrative effort decreases.
 - Decision support improves.
 - Accessibility expands.
 - Human oversight remains effective.
-

Completion Criteria

Complete when:

- AI philosophy is documented.
 - Strategic principles are defined.
 - Governance objectives are established.
-

Next Document

16-02 — AI Governance, Ethics, Risk Management & Responsible AI

Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Part 2 — AI Governance, Ethics, Risk Management & Responsible AI

Document ID: HCP-PB-16-02

Parent: Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Domain: AI Governance

Status: Draft

Version: 1.0

Purpose

This document establishes the governance framework, ethical principles, risk management strategy, and responsible AI requirements for all Artificial Intelligence capabilities within the Hash Community Platform (HCP).

The objective is to ensure AI remains trustworthy, transparent, accountable, secure, and aligned with the mission of strengthening communities.

Vision

Responsible intelligence.

Transparent decisions.

Trusted communities.

Philosophy

AI should earn trust through predictable behavior, transparency, accountability, and respect for human authority.

Every AI capability should improve the community without compromising privacy, fairness, or safety.

Governance Objectives

The AI Governance framework shall:

- Define accountability.
- Protect community data.
- Ensure ethical operation.
- Reduce operational risk.
- Enable human oversight.
- Support regulatory compliance.
- Maintain public trust.

Governance enables responsible innovation.

Core Ethical Principles

Artificial Intelligence within HCP shall:

- Respect human dignity.
- Preserve community autonomy.
- Avoid unnecessary bias.
- Explain important recommendations.
- Protect confidential information.
- Minimize harm.
- Support accessibility.
- Operate within defined authority.

Ethics remain operational requirements.

AI Risk Categories

AI risks include:

- Hallucinations
- Incorrect recommendations
- Bias
- Privacy leakage
- Security misuse
- Automation errors
- Model drift
- Prompt injection
- Data poisoning
- Unauthorized access

Each risk shall have documented mitigation strategies.

Human Oversight

AI actions shall be classified according to required oversight.

INFORMATIONAL

AI provides information only.

No approval required.

Examples:

- Summaries
 - Search
 - Explanations
-

ADVISORY

AI provides recommendations.

Humans approve decisions.

Examples:

- Volunteer recommendations
 - Event planning
 - Policy suggestions
-

ASSISTED EXECUTION

AI performs actions after explicit authorization.

Examples:

- Drafting announcements
- Scheduling meetings
- Sending reminders

RESTRICTED

AI shall never independently perform:

- Governance voting
- Financial approvals
- Membership termination
- Legal decisions
- Compliance certification
- Security authorization

Human authority remains mandatory.

Transparency

Communities should know:

- When AI generated content.
- Which assistant responded.
- What information sources were used (where appropriate).
- Confidence level (when meaningful).
- Whether human review occurred.

Transparency strengthens trust.

Accountability

Every AI capability shall define:

- Owner
- Purpose
- Approved datasets
- Risk level
- Review frequency
- Escalation path

No AI capability operates without ownership.

Business Rules

BR-AI-006

AI-generated content shall be distinguishable from human-authored content where appropriate.

BR-AI-007

Restricted actions require human authorization.

BR-AI-008

High-risk AI capabilities require periodic governance review.

BR-AI-009

AI decisions shall be auditable.

BR-AI-010

Communities shall retain control over AI configuration.

Acceptance Criteria

Responsible AI succeeds when:

- Communities trust AI.
 - Risks remain manageable.
 - Human oversight is effective.
 - Transparency is maintained.
 - Governance evolves with technology.
-

Completion Criteria

Complete when:

- AI governance framework is documented.
 - Ethical principles are established.
 - Risk management strategy is defined.
-

Next Document

16-03 — AI Architecture, Models, Agent Framework & Orchestration

Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Part 3 — AI Architecture, Models, Agent Framework & Orchestration

Document ID: HCP-PB-16-03

Parent: Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Domain: AI Architecture

Status: Draft

Version: 1.0

Purpose

This document defines the architecture, model abstraction strategy, agent framework, orchestration layer, and execution model for Artificial Intelligence capabilities within the Hash Community Platform (HCP).

The objective is to create a scalable, secure, vendor-neutral AI platform that supports multiple intelligent assistants while maintaining governance, observability, and operational flexibility.

Vision

Composable intelligence.

Interoperable models.

Coordinated AI agents.

Philosophy

Artificial Intelligence should be treated as platform infrastructure rather than isolated product features.

The intelligence layer should evolve independently of application features and model providers.

Architectural Principles

The AI architecture shall:

- Be model-agnostic.
- Support multiple providers.
- Separate orchestration from model execution.
- Enable reusable AI capabilities.
- Support human oversight.
- Provide complete observability.
- Remain resilient to provider changes.

Architecture protects long-term flexibility.

High-Level Components

The AI platform consists of:

- AI Gateway
- Model Router
- Prompt Management Service
- Agent Registry
- Orchestrator
- Memory Service
- Knowledge Retrieval Service
- Tool Execution Engine
- Policy Engine
- Audit Service
- Telemetry Pipeline

Each component has a defined responsibility.

Model Abstraction Layer

The platform shall support:

- Hosted foundation models
- Open-source models
- Domain-specific models
- Embedding models
- Multimodal models
- Fine-tuned models

Applications interact with the abstraction layer rather than directly with model providers.

Agent Framework

Each AI agent defines:

- Name
- Purpose
- Allowed tools
- Approved datasets
- Permission scope
- Memory requirements
- Risk classification
- Human oversight level

Agents remain specialized.

Orchestration

The orchestrator manages:

- Request routing
- Agent selection
- Tool invocation
- Workflow coordination
- Retry strategies
- Context assembly
- Human approval checkpoints
- Result aggregation

The orchestrator coordinates rather than reasons.

Tool Execution

Agents may invoke approved tools such as:

- Calendar
- Search
- Knowledge retrieval
- Document generation
- Notification services
- Workflow automation
- Reporting
- Analytics

Tool access follows least-privilege principles.

Memory

Memory may include:

- Conversation context
- Community preferences
- Organizational knowledge
- Session state
- Long-term approved memory

Memory governance remains configurable.

Business Rules

BR-AI-011

Applications shall access AI services through the platform abstraction layer.

BR-AI-012

Agents shall operate only within approved permission scopes.

BR-AI-013

Tool execution shall be policy-controlled.

BR-AI-014

Model providers shall be replaceable without application redesign.

BR-AI-015

AI orchestration shall produce auditable execution records.

Acceptance Criteria

The AI architecture succeeds when:

- New models integrate easily.
 - Agents remain reusable.
 - Governance is enforceable.
 - Performance scales.
 - Vendor dependence is minimized.
-

Completion Criteria

Complete when:

- AI architecture is documented.
 - Agent framework is defined.
 - Orchestration model is established.
-

Next Document

16-04 — Knowledge Graph, RAG, Semantic Search & Organizational Memory

Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Part 4 — Knowledge Graph, RAG, Semantic Search & Organizational Memory

Document ID: HCP-PB-16-04

Parent: Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Domain: Knowledge Intelligence

Status: Draft

Version: 1.0

Purpose

This document defines the knowledge architecture, Retrieval-Augmented Generation (RAG) framework, semantic search capabilities, knowledge graph strategy, and organizational memory model for the Hash Community Platform (HCP).

The objective is to transform community information into trusted, searchable, explainable, and continuously evolving organizational intelligence.

Vision

Every document.

Every decision.

Every policy.

Every event.

Instantly understandable.

Philosophy

Knowledge should never become inaccessible because of time, personnel changes, or document volume.

Artificial Intelligence should help communities discover knowledge—not invent it.

Knowledge Sources

The knowledge platform may index:

- Constitutions
- Bylaws
- Policies
- Meeting minutes
- Financial reports
- Newsletters
- Historical archives
- Events
- Committees
- Member roles
- Training materials
- Help documentation
- Uploaded documents
- Knowledge articles

Knowledge grows continuously.

Retrieval-Augmented Generation (RAG)

AI responses shall prioritize retrieved organizational knowledge before relying on model knowledge.

The retrieval pipeline includes:

- Query understanding
- Semantic retrieval
- Permission filtering
- Context assembly
- Citation generation
- Response generation

Retrieval precedes generation.

Semantic Search

Search shall support:

- Natural language
- Similar concepts
- Synonyms
- Related topics
- Historical references
- Cross-document relationships
- Multilingual retrieval

Search should understand meaning rather than keywords alone.

Knowledge Graph

The knowledge graph represents relationships between:

- Members
- Communities
- Events
- Committees
- Documents
- Policies
- Decisions
- Projects
- Historical milestones

Relationships improve discovery.

Organizational Memory

Organizational memory preserves:

- Historical decisions
- Institutional practices
- Leadership transitions
- Community traditions
- Lessons learned
- Strategic initiatives

Knowledge survives leadership change.

Knowledge Quality

Knowledge shall include:

- Source attribution
- Version history
- Confidence indicators
- Freshness metadata
- Approval status
- Access permissions

Trust requires provenance.

Business Rules

BR-AI-016

AI responses shall prioritize authorized organizational knowledge where available.

BR-AI-017

Knowledge retrieval shall respect existing permissions.

BR-AI-018

Retrieved sources shall be attributable.

BR-AI-019

Knowledge freshness shall be monitored.

BR-AI-020

Organizational memory shall remain versioned and auditable.

Acceptance Criteria

Knowledge Intelligence succeeds when:

- Members locate information quickly.
 - AI responses reference trusted sources.
 - Institutional knowledge is preserved.
 - Search quality improves.
 - Community confidence increases.
-

Completion Criteria

Complete when:

- Knowledge architecture is documented.
 - RAG strategy is established.
 - Organizational memory framework is defined.
-

Next Document

16-05 — AI Memory, Personalization, Context Management & Adaptive Experiences

Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Part 5 — AI Memory, Personalization, Context Management & Adaptive Experiences

Document ID: HCP-PB-16-05

Parent: Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Domain: AI Memory & Personalization

Status: Draft

Version: 1.0

Purpose

This document defines the memory architecture, personalization framework, context management strategy, and adaptive experience model for Artificial Intelligence capabilities within the Hash Community Platform (HCP).

The objective is to deliver relevant, context-aware assistance while preserving user privacy, transparency, and control.

Vision

Relevant assistance.

Respectful memory.

Personalized experiences.

Philosophy

AI should remember information that meaningfully improves user experience while remaining transparent, configurable, and respectful of privacy.

Memory exists to assist—not to surveil.

Memory Types

The platform supports multiple memory scopes:

Session Memory

Short-lived context for the current interaction.

Examples:

- Current conversation
- Active workflow
- Temporary selections

Automatically expires.

User Memory

Longer-term preferences approved by the user.

Examples:

- Preferred language
- Accessibility preferences
- Notification preferences
- Frequently used workflows

User-controlled.

Community Memory

Shared organizational context.

Examples:

- Community policies
- Governance practices
- Common terminology
- Organizational traditions
- Shared knowledge

Governed by community permissions.

Organizational Memory

Long-term institutional knowledge preserved through the Knowledge Platform.

Examples:

- Historical decisions
- Archives
- Meeting records
- Strategic plans

Managed independently of individual users.

Context Management

Context assembly may include:

- Current task
- Authorized documents
- Previous workflow state
- Applicable policies
- Community configuration
- User preferences

Only relevant context should be provided.

Personalization

Personalization may adapt:

- Dashboard recommendations
- Learning resources
- Search ranking
- AI responses
- Onboarding guidance
- Notification timing
- Workflow suggestions

Personalization remains explainable.

Transparency

Users should be able to:

- View stored preferences.
- Understand why recommendations appear.
- Reset personalization.
- Disable optional memory.
- Review AI context sources.

Control builds trust.

Memory Governance

Every memory record defines:

- Owner
- Purpose
- Retention policy
- Permission scope
- Review requirements

Memory remains accountable.

Business Rules

BR-AI-021

Users shall control optional long-term memory.

BR-AI-022

Personalization shall remain explainable.

BR-AI-023

Context shall respect authorization boundaries.

BR-AI-024

Memory shall define retention policies.

BR-AI-025

Communities shall configure shared AI memory according to governance requirements.

Acceptance Criteria

AI Memory succeeds when:

- Assistance becomes more relevant.
 - Privacy remains protected.
 - Users understand personalization.
 - Context improves task completion.
 - Trust increases.
-

Completion Criteria

Complete when:

- Memory architecture is documented.
 - Personalization strategy is established.
 - Context management framework is defined.
-

Next Document

16-06 — AI Automation, Intelligent Workflows & Human-in-the-Loop Operations

Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Part 6 — AI Automation, Intelligent Workflows & Human-in-the-Loop Operations

Document ID: HCP-PB-16-06

Parent: Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Domain: AI Automation

Status: Draft

Version: 1.0

Purpose

This document defines the automation framework, intelligent workflow architecture, approval mechanisms, and Human-in-the-Loop (HITL) operating model for Artificial Intelligence capabilities within the Hash Community Platform (HCP).

The objective is to automate routine work responsibly while preserving human oversight for decisions requiring judgment, accountability, or governance.

Vision

Automate routine work.

Support human judgment.

Increase organizational capacity.

Philosophy

Artificial Intelligence should automate repetitive, predictable, and low-risk tasks while enabling humans to make informed decisions for activities with greater impact.

Automation should reduce administrative burden without diminishing human responsibility.

Automation Principles

AI automation shall:

- Be transparent.
- Be reversible where practical.
- Respect permissions.
- Operate within approved policies.
- Produce audit records.
- Escalate uncertainty.
- Require approval for high-impact actions.

Automation serves people.

Workflow Categories

Informational

Provides information only.

Examples:

- Search
- Summaries
- Status reports

No approval required.

Assistive

Produces drafts and recommendations.

Examples:

- Meeting agendas
- Newsletters
- Event plans
- Volunteer schedules

User review before execution.

Guided Automation

Executes approved workflows after explicit authorization.

Examples:

- Send approved announcements.
- Schedule approved meetings.

- Generate recurring reports.
- Update approved calendars.

Authorization required.

Supervised Automation

Performs repetitive operational tasks within predefined rules.

Examples:

- Reminder notifications.
- Routine document classification.
- Metadata enrichment.
- Knowledge indexing.

Subject to governance policies.

Restricted Automation

AI shall never independently:

- Approve governance resolutions.
- Conduct elections.
- Remove community members.
- Override security controls.
- Commit financial transactions.
- Modify governing documents.

Human authority remains mandatory.

Human-in-the-Loop (HITL)

The HITL framework defines:

- Approval checkpoints.
- Escalation rules.
- Confidence thresholds.
- Override mechanisms.
- Audit logging.
- Exception handling.

Human oversight remains integral.

Workflow Engine

The automation engine coordinates:

- AI agents
- Business workflows
- Approval requests
- Notifications
- External integrations
- Task execution
- Rollback procedures

Automation follows defined workflows.

Automation Metrics

Representative metrics include:

- Automation success rate
- Approval rate
- Human override frequency
- Time saved
- Error reduction
- User satisfaction
- Workflow completion rate

Metrics drive improvement.

Business Rules

BR-AI-026

High-impact workflows require human approval.

BR-AI-027

Automated actions shall be auditable.

BR-AI-028

Automation shall operate within approved policy boundaries.

BR-AI-029

Users shall retain authority to interrupt or cancel eligible automated workflows.

BR-AI-030

Automation effectiveness shall be measured continuously.

Acceptance Criteria

AI Automation succeeds when:

- Administrative effort decreases.
 - Human oversight remains effective.
 - Workflow completion accelerates.
 - Errors decline.
 - Communities retain confidence.
-

Completion Criteria

Complete when:

- Automation framework is documented.
 - HITL model is established.
 - Workflow governance is defined.
-

Next Document

16-07 — Predictive Intelligence, Decision Support & Operational Analytics

Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Part 7 — Predictive Intelligence, Decision Support & Operational Analytics

Document ID: HCP-PB-16-07

Parent: Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Domain: Predictive Intelligence

Status: Draft

Version: 1.0

Purpose

This document defines the predictive analytics, decision support framework, operational intelligence capabilities, and forecasting strategy for the Hash Community Platform (HCP).

The objective is to transform historical and real-time organizational data into actionable insights that help communities anticipate risks, identify opportunities, and make informed decisions.

Vision

Understand today.

Anticipate tomorrow.

Decide with confidence.

Philosophy

Artificial Intelligence should provide evidence-based predictions and recommendations while leaving strategic decisions under human control.

Predictions support leadership—they do not replace it.

Predictive Intelligence Objectives

The platform shall:

- Detect emerging trends.
- Forecast operational outcomes.
- Identify organizational risks.
- Recommend preventive actions.
- Improve planning.
- Increase decision confidence.
- Surface hidden patterns.

Insights should be timely and actionable.

Prediction Domains

Representative prediction domains include:

- Member growth
- Member retention
- Volunteer participation
- Event attendance
- Budget variance
- Committee activity
- Document usage
- Community engagement
- Training completion
- Operational workload

Each domain may evolve independently.

Decision Support

AI may assist leaders by:

- Highlighting trends.
- Explaining contributing factors.
- Comparing historical outcomes.
- Simulating scenarios.
- Recommending options.
- Estimating confidence.
- Identifying uncertainties.

Recommendations remain advisory.

Scenario Analysis

The platform should support:

- Best-case projections.
- Expected outcomes.
- Worst-case projections.
- What-if simulations.
- Resource planning.
- Capacity forecasting.

Planning improves resilience.

Explainability

Predictive recommendations should include:

- Confidence estimates.
- Supporting evidence.
- Relevant historical trends.
- Influencing factors.
- Applicable assumptions.

Leaders should understand why recommendations are made.

Business Rules

BR-AI-031

Predictions shall include confidence indicators where appropriate.

BR-AI-032

Decision support shall distinguish observations from recommendations.

BR-AI-033

Predictions shall not override community governance.

BR-AI-034

Forecast models shall be monitored for performance.

BR-AI-035

Communities may configure predictive capabilities according to governance policies.

Acceptance Criteria

Predictive Intelligence succeeds when:

- Decision quality improves.
 - Risks are identified earlier.
 - Planning becomes more effective.
 - Community leaders trust recommendations.
 - Forecast accuracy improves over time.
-

Completion Criteria

Complete when:

- Predictive framework is documented.
 - Decision support model is established.
 - Forecasting principles are defined.
-

Next Document

16-08 — AI Observability, Evaluation, Continuous Learning & Model Operations (LLMOps)

Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Part 8 — AI Observability, Evaluation, Continuous Learning & Model Operations (LLMOps)

Document ID: HCP-PB-16-08

Parent: Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Domain: AI Operations

Status: Draft

Version: 1.0

Purpose

This document defines the operational framework for monitoring, evaluating, maintaining, and continuously improving Artificial Intelligence capabilities within the Hash Community Platform (HCP).

The objective is to ensure AI systems remain reliable, observable, measurable, and trustworthy throughout their lifecycle.

Vision

Reliable intelligence.

Measured performance.

Continuous improvement.

Philosophy

AI capabilities require the same operational discipline as any other critical platform service.

Observability, evaluation, and governance are continuous responsibilities.

AI Observability

The platform shall monitor:

- Request volume
- Response latency
- Model availability
- Token consumption
- Tool execution
- Retrieval quality
- Error rates
- User feedback
- Human overrides
- Policy violations

Operational visibility supports trust.

Evaluation Framework

Evaluation shall include:

- Answer quality
- Citation accuracy
- Hallucination rate
- Task completion
- Recommendation usefulness
- Workflow success
- User satisfaction
- Accessibility compliance

Evaluation is continuous.

Model Lifecycle

The platform shall support:

- Candidate evaluation
- Controlled rollout
- A/B testing
- Canary deployment
- Rollback
- Retirement
- Replacement

Model evolution remains controlled.

Continuous Learning

Continuous improvement may originate from:

- User feedback
- Human corrections
- Governance reviews
- Operational metrics
- Knowledge updates
- Workflow outcomes
- Incident analysis

Learning improves future performance.

Prompt Management

Prompt assets shall define:

- Owner
- Purpose
- Version
- Test coverage
- Approval history
- Supported models

Prompts are managed assets.

AI Operations

Operational responsibilities include:

- Monitoring
- Capacity planning
- Cost optimization
- Incident response
- Vendor management
- Evaluation scheduling
- Governance reporting

AI operations remain measurable.

Business Rules

BR-AI-036

AI quality shall be evaluated continuously.

BR-AI-037

Model changes shall follow controlled deployment processes.

BR-AI-038

Prompt assets shall be version controlled.

BR-AI-039

Operational metrics shall guide AI improvements.

BR-AI-040

AI incidents shall follow documented response procedures.

Acceptance Criteria

AI Operations succeeds when:

- Quality remains stable.
 - Hallucinations decrease.
 - Retrieval quality improves.
 - Costs remain predictable.
 - Community confidence increases.
-

Completion Criteria

Complete when:

- AI operational framework is documented.
 - Evaluation strategy is established.
 - Continuous improvement process is defined.
-

Next Document

16-09 — AI Platform Governance, Future Evolution & Strategic Roadmap

Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Part 9 — AI Platform Governance, Future Evolution & Strategic Roadmap

Document ID: HCP-PB-16-09

Parent: Chapter 16 — Platform Intelligence, Artificial Intelligence & Autonomous Operations

Domain: AI Strategy

Status: Draft

Version: 1.0

Purpose

This document defines the long-term governance model, strategic roadmap, evolution principles, and future direction for Artificial Intelligence capabilities across the Hash Community Platform (HCP).

The objective is to ensure AI remains aligned with organizational values, technological evolution, regulatory expectations, and the needs of communities over time.

Vision

Intelligence that evolves responsibly.

Communities that remain in control.

Innovation guided by stewardship.

Philosophy

AI is a long-term platform capability rather than a short-term product feature.

The platform should continuously evolve while preserving trust, transparency, governance, and human authority.

Strategic Objectives

The long-term AI strategy shall:

- Expand community intelligence.
- Improve operational effectiveness.
- Preserve institutional knowledge.
- Increase accessibility.
- Strengthen governance.
- Enhance member engagement.
- Support responsible innovation.

Technology serves enduring community goals.

AI Governance Evolution

The governance framework shall evolve through:

- Periodic policy reviews.
- Regulatory monitoring.
- Community feedback.
- Risk assessments.
- Technology evaluations.
- Security reviews.
- Ethics reviews.

Governance adapts over time.

Strategic Roadmap

Near-Term (1–2 Years)

- AI assistants
 - RAG implementation
 - Knowledge platform
 - Workflow automation
 - Leadership dashboards
 - AI governance framework
-

Mid-Term (3–5 Years)

- Advanced orchestration
 - Cross-community insights
 - Predictive planning
 - Digital twins
 - Multimodal intelligence
 - Intelligent workflow optimization
-

Long-Term (5–10 Years)

- Federated community intelligence
- Autonomous operational recommendations
- Adaptive governance support
- Personalized learning ecosystems
- AI collaboration across organizations
- Continuous strategic planning support

Human oversight remains constant.

Innovation Principles

Future AI capabilities should:

- Solve meaningful problems.
- Be measurable.
- Respect privacy.
- Preserve explainability.
- Maintain interoperability.
- Support accessibility.
- Remain vendor-neutral.

Innovation requires discipline.

Platform Evolution

The AI platform should remain:

- Modular.
- Composable.
- Observable.
- Governable.
- Replaceable.
- Extensible.
- Continuously improving.

Architecture enables longevity.

Business Rules

BR-AI-041

Strategic AI initiatives shall align with organizational objectives.

BR-AI-042

Governance frameworks shall evolve alongside technology.

BR-AI-043

AI platform architecture shall preserve vendor independence.

BR-AI-044

Long-term AI planning shall prioritize sustainability over novelty.

BR-AI-045

Communities shall retain meaningful control over AI evolution.

Acceptance Criteria

AI Strategy succeeds when:

- Innovation remains responsible.
 - Communities trust AI evolution.
 - Governance scales.
 - Platform flexibility is preserved.
 - Long-term objectives remain achievable.
-

Completion Criteria

Complete when:

- Strategic roadmap is documented.
 - Governance evolution is defined.
 - Future AI direction is established.
-

End of Chapter 16

Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Part 1 — Platform Vision, API-First Strategy & Extensibility Principles

Document ID: HCP-PB-17-01

Parent: Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Domain: Platform Architecture

Status: Draft

Version: 1.0

Purpose

This document establishes the API-first philosophy, platform extensibility principles, ecosystem strategy, and architectural foundation for integrations within the Hash Community Platform (HCP).

The objective is to enable secure, scalable, and governed interoperability between HCP, third-party systems, partners, and future Bubble Barrel products.

Vision

An open platform.

A trusted ecosystem.

Extensible communities.

Philosophy

Every platform capability should be designed with interoperability in mind.

Features are valuable.

Capabilities become transformational when others can build upon them.

Strategic Objectives

The integration platform shall:

- Enable external innovation.
- Support internal platform reuse.
- Encourage ecosystem growth.
- Simplify integrations.
- Preserve security.
- Maintain governance.
- Reduce vendor lock-in.

Open architecture supports long-term growth.

API-First Philosophy

Platform capabilities should be exposed through well-defined APIs before being consumed by user interfaces.

Applications become clients of platform services.

Benefits include:

- Consistency
- Reusability
- Automation
- Partner integrations
- Faster development
- Easier testing

The API becomes the platform contract.

Extensibility Principles

The platform shall support:

- Public APIs
- Internal APIs
- Partner APIs
- Event subscriptions
- Plugins
- Extensions
- SDKs
- Automation interfaces

Extensibility remains intentional.

Platform Layers

The integration platform consists of:

- Identity
- API Gateway
- Service APIs
- Event Bus
- Plugin Runtime
- SDK Layer
- Developer Portal
- Marketplace

Each layer has independent governance.

Ecosystem Strategy

The ecosystem shall support:

- Technology partners
- Community developers
- Enterprise customers
- Internal engineering teams
- Marketplace publishers
- Solution integrators

Innovation expands beyond Bubble Barrel.

Business Rules

BR-INT-001

Platform capabilities shall expose documented APIs where appropriate.

BR-INT-002

Internal applications shall prefer platform APIs over direct service coupling.

BR-INT-003

Platform extensions shall operate within defined security boundaries.

BR-INT-004

Public interfaces shall remain versioned.

BR-INT-005

Platform evolution shall preserve backward compatibility whenever practical.

Acceptance Criteria

The Integration Platform succeeds when:

- External integrations become straightforward.
 - Internal reuse increases.
 - Ecosystem participation grows.
 - APIs remain stable.
 - Governance scales.
-

Completion Criteria

Complete when:

- Platform philosophy is documented.
 - API-first strategy is established.
 - Extensibility principles are defined.
-

Next Document

17-02 — API Architecture, Design Standards & Lifecycle Management

Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Part 2 — API Architecture, Design Standards & Lifecycle Management

Document ID: HCP-PB-17-02

Parent: Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Domain: API Architecture

Status: Draft

Version: 1.0

Purpose

This document defines the architectural standards, design conventions, lifecycle policies, and governance requirements for all APIs within the Hash Community Platform (HCP).

The objective is to ensure APIs remain consistent, secure, discoverable, maintainable, and easy to consume across internal teams, partners, and third-party developers.

Vision

Consistent APIs.

Predictable behavior.

Long-term compatibility.

Philosophy

APIs are long-lived platform contracts.

Breaking changes should be exceptional rather than routine.

Consistency improves developer productivity and platform reliability.

API Design Principles

Every API shall be:

- Consistent.
- Resource-oriented.
- Versioned.
- Secure.
- Observable.
- Discoverable.
- Backward compatible where practical.
- Well documented.

Developers should recognize familiar patterns across every service.

Resource Naming

Resources shall:

- Use nouns rather than verbs.
- Follow consistent pluralization.
- Use lowercase paths.
- Avoid implementation details.
- Represent business concepts.

Examples:

/members

/communities

/events

/committees

/documents

HTTP Method Usage

GET

Retrieve resources.

POST

Create resources or invoke non-idempotent actions.

PUT

Replace an existing resource.

PATCH

Partially update a resource.

DELETE

Remove a resource where permitted.

Method semantics remain consistent.

Response Structure

Representative response fields include:

- data
- meta
- pagination
- links
- errors
- requestId

Responses should follow a common structure.

Error Handling

Errors shall include:

- Error code.
- Human-readable message.
- Machine-readable identifier.
- Request identifier.
- Documentation reference where appropriate.

Errors should assist debugging.

Pagination

Supported mechanisms may include:

- Cursor pagination.
- Offset pagination (where appropriate).

Large collections should never require full retrieval.

Filtering

Filtering should support:

- Exact matches.
- Partial matches.
- Date ranges.
- Status values.
- Tags.
- Custom attributes.

Filtering remains predictable.

Sorting

Sorting shall support:

- Ascending.
 - Descending.
 - Multiple fields where practical.
-

Versioning

Public APIs shall remain versioned.

Versioning principles include:

- Explicit versions.
- Deprecation notices.
- Sunset periods.
- Migration guidance.
- Compatibility documentation.

Version transitions should be managed carefully.

API Lifecycle

Lifecycle stages:

Draft



Internal



Beta



General Availability



Deprecated



Sunset



Retired

Lifecycle expectations remain documented.

Documentation

Every API shall provide:

- Purpose.
- Authentication requirements.
- Request examples.
- Response examples.
- Error catalog.
- Rate limits.
- Version history.
- Changelog.

Documentation is part of the product.

Business Rules

BR-INT-006

APIs shall follow approved design standards.

BR-INT-007

Breaking changes require formal review.

BR-INT-008

Deprecated APIs shall provide migration guidance.

BR-INT-009

Every API shall include operational documentation.

BR-INT-010

API ownership shall remain clearly assigned.

Acceptance Criteria

API Architecture succeeds when:

- APIs remain predictable.
 - Documentation is complete.
 - Version upgrades are manageable.
 - Integrations remain stable.
 - Developer experience improves.
-

Completion Criteria

Complete when:

- API standards are documented.
 - Lifecycle policy is established.
 - Governance requirements are defined.
-

Next Document

17-03 — Authentication, Authorization, API Security & Developer Identity

Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Part 3 — Authentication, Authorization, API Security & Developer Identity

Document ID: HCP-PB-17-03

Parent: Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Domain: Platform Security

Status: Draft

Version: 1.0

Purpose

This document defines the authentication, authorization, API security, developer identity, and access management framework for the Hash Community Platform (HCP).

The objective is to provide secure, scalable, and standards-based access for users, applications, services, AI agents, and ecosystem partners.

Vision

Secure identities.

Trusted integrations.

Least-privilege access.

Philosophy

Every request should have an authenticated identity and an explicitly authorized scope.

Trust should never be assumed.

Identity Types

The platform supports:

- Human users
- Organizations
- Communities
- Applications
- Services
- AI agents
- Plugins
- Marketplace extensions
- Partner systems
- Administrative accounts

Every identity is uniquely managed.

Authentication

Supported authentication methods include:

- Username/password
- Passkeys (WebAuthn)
- OAuth 2.1
- OpenID Connect (OIDC)
- API keys (limited use cases)
- Service accounts
- Machine-to-machine authentication

Authentication should follow modern standards.

Authorization

Authorization shall support:

- Role-Based Access Control (RBAC)
- Attribute-Based Access Control (ABAC)
- Resource ownership
- Permission inheritance
- Scoped access tokens
- Fine-grained permissions

Authorization remains context-aware.

Access Tokens

Tokens should define:

- Identity
- Scope
- Expiration
- Audience
- Issuer
- Permissions

Short-lived tokens are preferred.

API Security

The platform shall provide:

- TLS encryption
- Rate limiting
- Request validation
- Replay protection
- Input sanitization
- Secret management
- Threat detection
- Audit logging

Security is layered.

Developer Identity

Developers may register:

- Applications
- API credentials
- Webhook endpoints
- OAuth clients
- Sandbox environments

Every integration remains accountable.

Credential Management

Credentials shall support:

- Rotation
- Revocation
- Expiration
- Usage monitoring
- Secret storage
- Recovery procedures

Secrets are never permanent.

Business Rules

BR-INT-011

Every API request shall originate from an authenticated identity unless explicitly designated as public.

BR-INT-012

Authorization decisions shall follow least-privilege principles.

BR-INT-013

Secrets shall never be stored in plaintext.

BR-INT-014

API credentials shall be individually revocable.

BR-INT-015

Security events shall be logged and auditable.

Acceptance Criteria

Platform Security succeeds when:

- Identity is consistently authenticated.
 - Permissions remain enforceable.
 - Credentials are manageable.
 - Security incidents decrease.
 - Developers integrate securely.
-

Completion Criteria

Complete when:

- Authentication framework is documented.
 - Authorization model is defined.
 - API security requirements are established.
-

Next Document

17-04 — Event-Driven Architecture, Webhooks, Messaging & Integration Patterns

Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Part 4 — Event-Driven Architecture, Webhooks, Messaging & Integration Patterns

Document ID: HCP-PB-17-04

Parent: Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Domain: Event Platform

Status: Draft

Version: 1.0

Purpose

This document defines the event-driven architecture, webhook framework, messaging patterns, and integration communication standards for the Hash Community Platform (HCP).

The objective is to enable loosely coupled, scalable, observable, and resilient communication between platform services, integrations, and external systems.

Vision

Systems communicate through events.

Integrations react in real time.

Architecture remains loosely coupled.

Philosophy

Business events are platform assets.

Every significant business action should be capable of producing an event that authorized consumers may observe and process.

Event-Driven Principles

The platform shall:

- Publish business events.
- Support asynchronous communication.
- Minimize service coupling.
- Enable independent scaling.
- Preserve event integrity.
- Maintain delivery observability.

Events describe what happened.

Representative Events

Examples include:

- MemberCreated
- MemberUpdated
- CommunityCreated
- CommitteeAssigned
- MeetingScheduled
- EventPublished
- DocumentApproved
- RoleChanged
- PaymentReceived
- VolunteerAssigned

Events represent completed business actions.

Event Structure

Representative fields include:

- eventId
- eventType
- occurredAt
- producer
- resourceId
- version
- correlationId
- payload

Events remain self-describing.

Event Delivery

Supported delivery mechanisms include:

- Internal event bus
- Webhooks
- Message queues
- Streaming platforms
- Partner subscriptions

Consumers choose appropriate delivery methods.

Webhooks

Webhook capabilities include:

- Subscription management
- Secret verification
- Retry policies
- Dead-letter handling
- Delivery history
- Event filtering

Webhook delivery remains reliable.

Messaging Patterns

Supported patterns include:

- Publish/Subscribe
- Request/Reply
- Event Notification
- Event-Carried State Transfer
- Command Messaging
- Scheduled Messaging

Pattern selection depends on business requirements.

Reliability

The platform shall support:

- Idempotency
- Retry mechanisms
- Ordering where required
- Duplicate detection
- Delivery acknowledgements
- Failure monitoring

Reliability remains measurable.

Business Rules

BR-INT-016

Business events shall be versioned.

BR-INT-017

Webhook deliveries shall be authenticated.

BR-INT-018

Failed deliveries shall support retries.

BR-INT-019

Event consumers shall remain isolated from producers.

BR-INT-020

Event processing shall be observable.

Acceptance Criteria

The Event Platform succeeds when:

- Integrations react in near real time.
 - Platform services remain loosely coupled.
 - Delivery reliability remains high.
 - Event consumers scale independently.
 - Observability supports troubleshooting.
-

Completion Criteria

Complete when:

- Event architecture is documented.
 - Webhook framework is defined.
 - Messaging patterns are established.
-

Next Document

17-05 — SDKs, Developer Experience, Documentation & Sandbox Platform

Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Part 5 — SDKs, Developer Experience, Documentation & Sandbox Platform

Document ID: HCP-PB-17-05

Parent: Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Domain: Developer Experience

Status: Draft

Version: 1.0

Purpose

This document defines the developer experience (DX), SDK strategy, documentation standards, sandbox environment, and tooling ecosystem for the Hash Community Platform (HCP).

The objective is to enable developers to discover, learn, integrate, test, and deploy platform capabilities efficiently and confidently.

Vision

A delightful developer experience.

Comprehensive tooling.

Fast time to first success.

Philosophy

The developer experience is a product.

Documentation, tooling, examples, and support are as important as the APIs themselves.

Strategic Objectives

The developer platform shall:

- Reduce onboarding time.
- Encourage ecosystem growth.
- Simplify integrations.
- Promote best practices.
- Increase developer satisfaction.
- Accelerate application development.
- Improve platform adoption.

Developers are ecosystem partners.

Developer Portal

The Developer Portal shall provide:

- API documentation
- SDK downloads
- Quick-start guides
- Authentication tutorials
- Webhook documentation
- Event catalog
- Changelogs
- Release notes
- Status dashboard
- Support resources

The portal is the primary developer destination.

SDK Strategy

Official SDKs may include:

- JavaScript / TypeScript
- Node.js
- Python
- Java
- .NET
- Go
- PHP

SDKs should remain consistent and well maintained.

Documentation Standards

Documentation shall include:

- Getting started
- Concepts
- Tutorials
- API reference
- Event reference
- SDK guides
- Sample applications
- Troubleshooting
- FAQs
- Migration guides

Learning paths should support multiple experience levels.

Sandbox Environment

Developers shall receive:

- Test accounts
- Sample communities
- Mock data
- API credentials
- Webhook testing
- AI testing
- Rate-limit simulation
- Error simulation

Experimentation should be safe.

Sample Applications

Reference implementations may include:

- Community portal
- Mobile client
- Event management
- AI assistant integration
- Analytics dashboard
- Plugin examples

Examples accelerate adoption.

Developer Tooling

Tooling may include:

- CLI
- Postman collection
- OpenAPI definitions
- Code generators
- Webhook inspector
- Event explorer
- API playground

Tools reduce friction.

Business Rules

BR-INT-021

Public APIs shall provide documentation before General Availability.

BR-INT-022

Official SDKs shall remain version-aligned with supported APIs.

BR-INT-023

Sandbox environments shall remain isolated from production.

BR-INT-024

Documentation shall be continuously maintained.

BR-INT-025

Developer tooling shall support common workflows.

Acceptance Criteria

Developer Experience succeeds when:

- Integration time decreases.
 - Documentation satisfaction increases.
 - SDK adoption grows.
 - Support requests decline.
 - Ecosystem participation expands.
-

Completion Criteria

Complete when:

- DX strategy is documented.
 - SDK roadmap is established.
 - Sandbox platform is defined.
-

Next Document

17-06 — Plugin Framework, Marketplace Extensions & Application Ecosystem

Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Part 6 — Plugin Framework, Marketplace Extensions & Application Ecosystem

Document ID: HCP-PB-17-06

Parent: Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Domain: Platform Extensibility

Status: Draft

Version: 1.0

Purpose

This document defines the plugin architecture, extension framework, marketplace ecosystem, lifecycle management, and governance model for extending the Hash Community Platform (HCP).

The objective is to enable organizations, partners, and developers to safely add new capabilities without modifying the platform's core services.

Vision

An extensible platform.

A thriving ecosystem.

Innovation beyond the core product.

Philosophy

The platform should provide stable extension points that allow innovation while preserving security, reliability, and governance.

Extensions complement the platform—they do not compromise it.

Strategic Objectives

The extension ecosystem shall:

- Encourage third-party innovation.
- Reduce customization of core services.
- Support reusable solutions.
- Increase ecosystem participation.
- Enable marketplace growth.
- Preserve platform quality.
- Maintain operational safety.

The ecosystem expands platform value.

Extension Types

Representative extension categories include:

- UI components
- Dashboards
- Workflow actions
- AI skills
- Reports
- Themes
- Notification channels
- Data connectors
- Analytics modules
- Administrative tools

Extension points remain intentional.

Plugin Runtime

The runtime shall provide:

- Sandboxed execution
- Resource isolation
- Permission enforcement
- Version compatibility
- Lifecycle hooks
- Event subscriptions
- API access
- Secure configuration

Plugins execute safely.

Marketplace

The marketplace shall support:

- Discovery
- Categories
- Ratings
- Reviews
- Version history
- Licensing
- Pricing models
- Installation
- Updates
- Publisher profiles

Marketplace quality remains curated.

Plugin Lifecycle

Lifecycle stages include:

Draft



Private



Review



Approved



Published



Deprecated



Archived

Lifecycle expectations remain documented.

Security

Plugins shall support:

- Permission declarations
- Code review
- Signature verification
- Sandboxing
- Security scanning
- Audit logging
- Update verification

Trust is continuously maintained.

Business Rules

BR-INT-026

Plugins shall execute within sandboxed environments.

BR-INT-027

Marketplace submissions require review before publication.

BR-INT-028

Plugins shall explicitly declare requested permissions.

BR-INT-029

Extensions shall not bypass platform authorization.

BR-INT-030

Plugin lifecycle events shall be auditable.

Acceptance Criteria

The Plugin Platform succeeds when:

- Third-party innovation grows.
 - Platform stability remains high.
 - Marketplace quality is maintained.
 - Security incidents remain low.
 - Organizations customize safely.
-

Completion Criteria

Complete when:

- Plugin architecture is documented.
 - Marketplace governance is defined.
 - Extension lifecycle is established.
-

Next Document

17-07 — External Integrations, Enterprise Connectivity & Partner Ecosystem

Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Part 7 — External Integrations, Enterprise Connectivity & Partner Ecosystem

Document ID: HCP-PB-17-07

Parent: Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Domain: Enterprise Integrations

Status: Draft

Version: 1.0

Purpose

This document defines the enterprise integration strategy, external connectivity framework, partner ecosystem, and interoperability principles for the Hash Community Platform (HCP).

The objective is to enable secure, scalable, and maintainable integration with third-party platforms, enterprise applications, cloud services, and strategic partners.

Vision

Connected organizations.

Interoperable platforms.

An expanding ecosystem.

Philosophy

Organizations should not be forced to replace existing systems to adopt HCP.

Instead, HCP should integrate seamlessly with the technology already in use.

Strategic Objectives

The integration ecosystem shall:

- Reduce data silos.
- Support enterprise adoption.
- Enable partner innovation.
- Simplify interoperability.
- Encourage automation.
- Preserve governance.
- Maintain security.

Integration increases platform value.

Integration Categories

Representative categories include:

Identity

- Enterprise SSO
 - Directory services
 - Identity providers
-

Productivity

- Email
 - Calendars
 - Document collaboration
 - Video conferencing
-

Communication

- SMS
 - Email providers
 - Push notifications
 - Messaging platforms
-

Finance

- Accounting systems
 - ERP
 - Payment gateways
 - Budget systems
-

Analytics

- Business Intelligence
 - Data warehouses
 - Reporting platforms
-

AI

- External AI providers
 - Vector databases
 - Translation services
 - Speech services
-

Storage

- Cloud storage
 - Document repositories
 - Backup systems
-

Compliance

- Archiving
 - Records management
 - Audit platforms
-

Integration Patterns

Supported patterns include:

- REST APIs
- GraphQL
- Webhooks
- Event streaming
- Scheduled synchronization
- Batch imports
- File exchange
- Message queues

Pattern selection depends on business needs.

Data Synchronization

Synchronization strategies include:

- Real-time
- Near real-time
- Scheduled
- On-demand
- One-way
- Bi-directional

Consistency requirements vary by domain.

Partner Ecosystem

Partners may provide:

- Integration connectors
- Industry solutions
- Compliance modules
- AI capabilities
- Analytics
- Regional services

Partnership expands platform reach.

Business Rules

BR-INT-031

Enterprise integrations shall respect platform security policies.

BR-INT-032

Synchronization conflicts shall be detectable.

BR-INT-033

Integration failures shall be observable.

BR-INT-034

Partner capabilities shall undergo governance review.

BR-INT-035

Organizations shall retain control over connected systems.

Acceptance Criteria

Enterprise Connectivity succeeds when:

- Integrations remain reliable.
 - Adoption increases.
 - Data consistency improves.
 - Partner participation grows.
 - Organizations retain flexibility.
-

Completion Criteria

Complete when:

- Enterprise integration strategy is documented.
 - Connectivity framework is defined.
 - Partner ecosystem is established.
-

Next Document

17-08 — API Governance, Ecosystem Operations & Platform Evolution

Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Part 8 — API Governance, Ecosystem Operations & Platform Evolution

Document ID: HCP-PB-17-08

Parent: Chapter 17 — Integration Platform, APIs, Extensibility & Ecosystem

Domain: Platform Governance

Status: Draft

Version: 1.0

Purpose

This document defines the governance framework, operational processes, quality standards, and long-term evolution strategy for the Hash Community Platform (HCP) integration ecosystem.

The objective is to ensure APIs, events, SDKs, plugins, connectors, and developer resources remain secure, consistent, and sustainable as the platform evolves.

Vision

A trusted platform.

A healthy ecosystem.

Continuous evolution.

Philosophy

An ecosystem grows through clear governance, predictable evolution, and shared standards.

Platform stability is achieved through disciplined stewardship rather than restricting innovation.

Strategic Objectives

The governance framework shall:

- Preserve API quality.
- Maintain ecosystem trust.
- Encourage innovation.
- Protect backward compatibility.
- Improve developer experience.
- Strengthen security.
- Support sustainable growth.

Governance enables scale.

Governance Domains

Platform governance includes:

- API standards
- Event standards
- SDK quality
- Connector certification
- Plugin review
- Documentation
- Security
- Observability
- Version management
- Deprecation planning

Each domain has defined ownership.

Ecosystem Operations

Operational responsibilities include:

- API monitoring
- Marketplace moderation
- Connector validation
- SDK maintenance
- Documentation updates
- Incident management
- Developer support
- Community engagement

Operations sustain the ecosystem.

Version Governance

Platform evolution shall support:

- Version lifecycle management
- Deprecation schedules
- Migration tooling
- Compatibility testing
- Consumer notifications
- Long-term support releases

Change should remain predictable.

Quality Management

Quality shall be evaluated through:

- API reliability
- Documentation coverage
- SDK adoption
- Connector health
- Marketplace quality
- Developer satisfaction
- Platform performance

Quality is measurable.

Community Participation

The ecosystem should encourage:

- Developer feedback
- Feature proposals
- Open discussions
- Beta programs
- Community contributions
- Extension publishing

Healthy ecosystems are collaborative.

Business Rules

BR-INT-036

Governance policies shall apply consistently across the ecosystem.

BR-INT-037

Deprecation schedules shall be communicated in advance.

BR-INT-038

Quality metrics shall guide platform improvements.

BR-INT-039

Developer feedback shall inform roadmap planning.

BR-INT-040

Platform evolution shall prioritize stability.

Acceptance Criteria

Platform Governance succeeds when:

- Ecosystem quality remains high.
 - Platform evolution is predictable.
 - Developer trust increases.
 - Operational health remains measurable.
 - Innovation continues responsibly.
-

Completion Criteria

Complete when:

- Governance framework is documented.
 - Operational model is defined.
 - Evolution strategy is established.
-

End of Chapter 17

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 1 — Platform Engineering Vision, Reliability Philosophy & Operational Principles

Document ID: HCP-PB-18-01

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Platform Engineering

Status: Draft

Version: 1.0

Purpose

This document defines the operational philosophy, reliability principles, engineering culture, and long-term platform engineering strategy for the Hash Community Platform (HCP).

The objective is to establish a production environment that is reliable, observable, secure, scalable, and continuously improving.

Vision

Reliable systems.

Predictable operations.

Engineering excellence.

Philosophy

Reliability is a product feature.

Operational quality directly influences user trust.

Every engineering decision should consider reliability, maintainability, recoverability, and observability.

Strategic Objectives

Platform Engineering shall:

- Maximize availability.
- Minimize operational risk.
- Improve deployment confidence.
- Enable safe change.
- Simplify operations.
- Reduce recovery time.
- Encourage automation.

Operational excellence is continuous.

Engineering Principles

Platform engineering follows:

- Automation over manual work.
- Infrastructure as Code.
- Immutable infrastructure where practical.
- Self-healing systems.
- Observability by default.
- Continuous verification.
- Progressive delivery.

Engineering should reduce operational complexity.

Reliability Principles

The platform shall prioritize:

- High availability.
- Fault tolerance.
- Graceful degradation.
- Fast recovery.
- Predictable behavior.
- Operational transparency.
- Continuous improvement.

Reliability is measurable.

Operational Culture

Engineering teams should embrace:

- Blameless postmortems.
- Continuous learning.
- Shared ownership.
- Documentation.
- Automation.
- Knowledge sharing.
- Operational readiness.

Healthy culture improves reliability.

Production Readiness

Every production service should demonstrate:

- Monitoring.
- Alerting.
- Logging.
- Documentation.
- Runbooks.
- Backup strategy.
- Recovery testing.
- Capacity planning.

Readiness is verified before deployment.

Business Rules

BR-OPS-001

Production services shall satisfy operational readiness requirements before release.

BR-OPS-002

Reliability objectives shall be measurable.

BR-OPS-003

Operational improvements shall prioritize automation.

BR-OPS-004

Engineering teams shall maintain production documentation.

BR-OPS-005

Operational incidents shall produce actionable learning.

Acceptance Criteria

Platform Engineering succeeds when:

- Availability improves.
 - Incidents decrease.
 - Recovery accelerates.
 - Automation increases.
 - Teams gain operational confidence.
-

Completion Criteria

Complete when:

- Operational philosophy is documented.
 - Reliability principles are defined.
 - Engineering culture is established.
-

Next Document

18-02 — Cloud Infrastructure, Networking & Compute Architecture

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 2 — Cloud Infrastructure, Networking & Compute Architecture

Document ID: HCP-PB-18-02

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Infrastructure

Status: Draft

Version: 1.0

Purpose

This document defines the cloud infrastructure, networking architecture, compute strategy, storage architecture, and foundational operational services for the Hash Community Platform (HCP).

The objective is to provide a secure, scalable, resilient, and cost-effective infrastructure capable of supporting long-term platform growth.

Vision

Reliable infrastructure.

Scalable compute.

Resilient networking.

Philosophy

Infrastructure should be automated, observable, modular, and replaceable.

Individual infrastructure components may change over time without requiring application redesign.

Strategic Objectives

Infrastructure shall:

- Maximize availability.
- Support horizontal scaling.
- Minimize operational complexity.
- Enable disaster recovery.
- Protect critical data.
- Optimize operational costs.
- Simplify maintenance.

Infrastructure is an enabler, not a bottleneck.

Infrastructure Layers

Representative layers include:

- DNS
- CDN
- Load Balancer
- API Gateway
- Compute
- Storage
- Database
- Object Storage
- Messaging
- Monitoring
- Backup
- Secrets Management

Each layer has defined operational responsibilities.

Compute Strategy

Supported compute models include:

- Virtual Machines
- Containers
- Kubernetes
- Serverless functions
- Background workers
- Scheduled jobs

Compute remains workload-appropriate.

Networking

Networking architecture shall support:

- Private networking
- Public ingress
- Service discovery
- Internal load balancing
- TLS termination
- Network segmentation
- Firewall policies
- DDoS protection

Networking should minimize unnecessary exposure.

Storage

Storage capabilities include:

- Block storage
- Object storage
- File storage
- Database storage
- Backup storage
- Archive storage

Data durability remains a priority.

Infrastructure Automation

Infrastructure shall support:

- Infrastructure as Code
- Immutable deployments
- Configuration management
- Automated provisioning
- Drift detection
- Environment consistency

Automation reduces operational risk.

High Availability

Infrastructure should support:

- Redundant compute
- Multiple availability zones where practical
- Load balancing
- Automatic failover
- Database replication
- Backup validation

Single points of failure should be minimized.

Business Rules

BR-OPS-006

Production infrastructure shall be reproducible through Infrastructure as Code.

BR-OPS-007

Critical services shall avoid unnecessary single points of failure.

BR-OPS-008

Infrastructure changes shall be version controlled.

BR-OPS-009

Production networking shall enforce secure communication.

BR-OPS-010

Infrastructure capacity shall be continuously monitored.

Acceptance Criteria

Infrastructure succeeds when:

- Services remain highly available.
 - Scaling remains predictable.
 - Infrastructure changes are automated.
 - Recovery remains reliable.
 - Costs remain manageable.
-

Completion Criteria

Complete when:

- Infrastructure strategy is documented.
 - Networking architecture is defined.
 - Automation approach is established.
-

Next Document

18-03 — Containers, Kubernetes, Service Mesh & Workload Orchestration

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 3 — Containers, Kubernetes, Service Mesh & Workload Orchestration

Document ID: HCP-PB-18-03

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Workload Orchestration

Status: Draft

Version: 1.0

Purpose

This document defines the containerization strategy, workload orchestration model, service discovery architecture, and service-to-service communication standards for the Hash Community Platform (HCP).

The objective is to ensure applications are portable, scalable, resilient, and consistently deployed across development, testing, and production environments.

Vision

Portable workloads.

Automated orchestration.

Resilient services.

Philosophy

Applications should be packaged once and deployed consistently across environments.

Operational behavior should be managed by the orchestration platform rather than individual applications.

Strategic Objectives

The orchestration platform shall:

- Standardize deployments.
- Improve portability.
- Enable horizontal scaling.
- Simplify service discovery.
- Support rolling updates.
- Improve fault recovery.
- Reduce operational inconsistency.

Workloads remain platform-independent.

Container Strategy

Applications shall be packaged as containers where practical.

Containerized workloads should include:

- Application runtime.
- Dependencies.
- Configuration interfaces.
- Health endpoints.
- Logging interfaces.
- Metrics endpoints.

Containers remain immutable after deployment.

Workload Types

Representative workloads include:

- Web applications.
- APIs.
- Background workers.
- Scheduled jobs.
- AI inference services.
- Event processors.
- Data synchronization services.
- Administrative utilities.

Each workload has an appropriate execution model.

Orchestration Capabilities

The platform shall support:

- Scheduling.
- Auto-restart.
- Scaling.
- Rolling deployments.
- Rollbacks.
- Health checks.
- Resource allocation.
- Affinity rules.

Operations should be automated.

Service Discovery

Services shall support:

- Dynamic discovery.
- Stable service names.
- Internal DNS.
- Load balancing.
- Health-aware routing.

Consumers should not depend on fixed IP addresses.

Service Mesh

Where operational complexity justifies it, a service mesh may provide:

- Mutual TLS (mTLS).
- Traffic management.
- Retry policies.
- Circuit breaking.
- Observability.
- Service authorization.
- Request routing.

Service communication remains secure and observable.

Configuration Management

Applications shall externalize:

- Environment variables.
- Secrets.
- Feature flags.
- Runtime configuration.
- Connection information.

Configuration should remain separate from application images.

Business Rules

BR-OPS-011

Container images shall remain immutable after publication.

BR-OPS-012

Every production workload shall expose health checks.

BR-OPS-013

Service discovery shall avoid hard-coded network addresses.

BR-OPS-014

Runtime configuration shall remain external to container images.

BR-OPS-015

Workload orchestration shall support automated recovery.

Acceptance Criteria

Workload orchestration succeeds when:

- Deployments remain consistent.
 - Scaling becomes predictable.
 - Recovery is automated.
 - Service communication remains reliable.
 - Operational overhead decreases.
-

Completion Criteria

Complete when:

- Container strategy is documented.
 - Orchestration model is defined.
 - Service communication standards are established.
-

Next Document

18-04 — CI/CD, Release Engineering & Deployment Pipelines

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 4 — CI/CD, Release Engineering & Deployment Pipelines

Document ID: HCP-PB-18-04

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Release Engineering

Status: Draft

Version: 1.0

Purpose

This document defines the Continuous Integration (CI), Continuous Delivery/Deployment (CD), release engineering practices, deployment pipelines, and software promotion strategy for the Hash Community Platform (HCP).

The objective is to enable frequent, reliable, secure, and automated software releases while minimizing operational risk.

Vision

Fast feedback.

Safe deployments.

Predictable releases.

Philosophy

Every software change should be automatically built, tested, validated, and promoted through controlled deployment stages before reaching production.

Automation increases confidence and reduces human error.

Strategic Objectives

Release Engineering shall:

- Reduce deployment risk.
- Increase deployment frequency.
- Improve software quality.
- Shorten feedback loops.
- Enable rapid rollback.
- Automate repetitive tasks.
- Maintain deployment consistency.

Release engineering is a reliability capability.

Delivery Pipeline

Representative pipeline stages include:

- Source control
- Build
- Static analysis
- Unit testing
- Security scanning
- Dependency validation
- Container build
- Integration testing
- Artifact publication
- Deployment
- Post-deployment verification

Each stage increases confidence.

Environment Promotion

Software should progress through:

Development



Testing



Staging



Production

Promotion remains controlled and auditable.

Deployment Strategies

Supported strategies include:

- Rolling deployments
- Blue/Green deployments
- Canary releases
- Feature flags
- Progressive delivery

Strategy selection depends on risk.

Release Management

Release processes shall support:

- Versioning
- Changelogs
- Rollbacks
- Release approvals
- Automated validation
- Deployment tracking

Releases remain observable.

Artifact Management

Artifacts shall be:

- Versioned
- Immutable
- Signed where appropriate
- Traceable
- Reproducible

Artifacts represent deployable software.

Business Rules

BR-OPS-016

Every production deployment shall originate from an approved pipeline.

BR-OPS-017

Deployable artifacts shall remain immutable.

BR-OPS-018

Deployment history shall be auditable.

BR-OPS-019

Rollback procedures shall be documented and tested.

BR-OPS-020

Pipeline failures shall prevent production deployment.

Acceptance Criteria

Release Engineering succeeds when:

- Deployment confidence increases.
 - Release frequency improves.
 - Rollbacks remain reliable.
 - Software quality improves.
 - Manual deployment effort decreases.
-

Completion Criteria

Complete when:

- CI/CD strategy is documented.
 - Deployment pipeline is defined.
 - Release governance is established.
-

Next Document

18-05 — Observability, Monitoring, Logging & Distributed Tracing

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 5 — Observability, Monitoring, Logging & Distributed Tracing

Document ID: HCP-PB-18-05

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Observability

Status: Draft

Version: 1.0

Purpose

This document defines the observability strategy, monitoring architecture, logging standards, metrics collection, alerting framework, and distributed tracing model for the Hash Community Platform (HCP).

The objective is to provide complete operational visibility into platform behavior, enabling rapid detection, diagnosis, and resolution of production issues.

Vision

Observable systems.

Actionable insights.

Rapid diagnosis.

Philosophy

Every production service should expose sufficient telemetry to understand its health, performance, and behavior without requiring direct access to the running system.

Observability is a design requirement.

Strategic Objectives

The observability platform shall:

- Detect failures quickly.
- Reduce Mean Time to Detect (MTTD).
- Reduce Mean Time to Recovery (MTTR).
- Improve troubleshooting.
- Support proactive operations.
- Enable capacity planning.
- Provide business visibility.

Visibility enables reliability.

Observability Pillars

The platform shall collect:

- Metrics
- Logs
- Traces
- Events

Together these provide a complete operational picture.

Metrics

Representative metrics include:

Infrastructure

- CPU
- Memory
- Disk
- Network

Application

- Request rate
- Error rate
- Latency
- Queue depth

Business

- Active users
- Registrations
- Payments
- Transactions
- Community activity

Technical and business metrics complement each other.

Logging

Logs shall support:

- Structured logging
- Correlation IDs
- Log levels
- Centralized collection
- Retention policies
- Searchability

Logs remain machine-readable.

Distributed Tracing

Tracing shall support:

- Request lifecycle visualization.
- Cross-service correlation.
- Dependency mapping.
- Latency analysis.
- Root-cause investigation.

Every request should be traceable.

Alerting

Alerting shall support:

- Threshold alerts.
- Anomaly detection.
- Service health alerts.
- Business KPI alerts.
- Escalation policies.
- Alert suppression.

Alerts should be actionable.

Dashboards

Representative dashboards include:

- Executive Dashboard
- Infrastructure Dashboard
- API Dashboard
- Database Dashboard
- AI Platform Dashboard
- Security Dashboard
- Business Dashboard
- Marketplace Dashboard

Different audiences require different views.

Business Rules

BR-OPS-021

Every production service shall expose operational metrics.

BR-OPS-022

Logs shall include correlation identifiers.

BR-OPS-023

Critical services shall support distributed tracing.

BR-OPS-024

Alert rules shall minimize false positives.

BR-OPS-025

Operational dashboards shall remain continuously available.

Acceptance Criteria

Observability succeeds when:

- Incidents are detected rapidly.
 - Root causes are identified efficiently.
 - Platform visibility improves.
 - Operational confidence increases.
 - Business health remains measurable.
-

Completion Criteria

Complete when:

- Observability strategy is documented.
 - Monitoring standards are defined.
 - Tracing architecture is established.
-

Next Document

18-06 — Incident Response, Runbooks, On-call & Operational Readiness

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 6 — Incident Response, Runbooks, On-call & Operational Readiness

Document ID: HCP-PB-18-06

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Incident Management

Status: Draft

Version: 1.0

Purpose

This document defines the incident response framework, operational readiness requirements, runbook standards, on-call practices, escalation model, and post-incident learning process for the Hash Community Platform (HCP).

The objective is to minimize the impact of production incidents through structured response, effective communication, rapid recovery, and continuous improvement.

Vision

Prepared teams.

Fast recovery.

Continuous learning.

Philosophy

Incidents are inevitable.

Preparedness determines outcomes.

Every operational incident should improve the platform's resilience.

Strategic Objectives

Incident Management shall:

- Detect incidents rapidly.
- Escalate appropriately.
- Restore service quickly.
- Minimize customer impact.
- Improve communication.
- Capture operational knowledge.
- Prevent recurrence.

Every incident is an opportunity to strengthen the platform.

Incident Classification

Representative severity levels:

SEV-1

Critical service outage.

Major security incident.

Widespread customer impact.

Immediate response required.

SEV-2

Major feature degradation.

Partial service disruption.

Significant operational impact.

SEV-3

Limited customer impact.

Workarounds available.

Operational inconvenience.

SEV-4

Minor issue.

Low business impact.

Routine resolution.

Incident Lifecycle

The platform shall support:

Detection



Classification



Acknowledgement



Investigation



Mitigation



Recovery



Verification



Communication



Postmortem



Improvement

Every phase is documented.

Runbooks

Every critical service shall provide runbooks covering:

- Service overview.
- Dependencies.
- Common failure scenarios.
- Diagnostic commands.
- Recovery procedures.
- Rollback guidance.
- Escalation contacts.
- Verification checklist.

Runbooks reduce uncertainty.

On-call Operations

Operational readiness includes:

- On-call schedules.
- Escalation policies.
- Handover procedures.
- Alert ownership.
- Response expectations.
- Incident communication.

Operational responsibilities remain clear.

Communication

Incident communication shall include:

- Internal updates.
- Customer notifications.
- Status page updates.
- Executive summaries.
- Resolution reports.

Communication should remain timely and accurate.

Postmortems

Every significant incident should include:

- Timeline.
- Root cause.
- Contributing factors.
- Customer impact.
- Lessons learned.
- Corrective actions.
- Preventive actions.
- Ownership.
- Due dates.

Postmortems remain blameless.

Business Rules

BR-OPS-026

Critical services shall maintain current operational runbooks.

BR-OPS-027

Every production incident shall be classified by severity.

BR-OPS-028

Significant incidents shall receive documented postmortems.

BR-OPS-029

Operational communication shall remain auditable.

BR-OPS-030

Corrective actions shall be tracked to completion.

Acceptance Criteria

Incident Management succeeds when:

- Detection time decreases.
 - Recovery time improves.
 - Communication becomes consistent.
 - Repeat incidents decline.
 - Operational confidence increases.
-

Completion Criteria

Complete when:

- Incident response framework is documented.
 - Runbook standards are defined.
 - Operational readiness requirements are established.
-

Next Document

18-07 — High Availability, Disaster Recovery, Backup & Business Continuity

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 7 — High Availability, Disaster Recovery, Backup & Business Continuity

Document ID: HCP-PB-18-07

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Business Continuity

Status: Draft

Version: 1.0

Purpose

This document defines the high availability (HA), disaster recovery (DR), backup, restoration, and business continuity strategy for the Hash Community Platform (HCP).

The objective is to minimize service interruption, protect critical data, and ensure rapid recovery from infrastructure failures, software defects, cyber incidents, and regional outages.

Vision

Highly available services.

Recoverable systems.

Resilient operations.

Philosophy

Failures are inevitable.

Data loss should be minimized.

Recovery procedures should be rehearsed rather than assumed.

Business continuity is a strategic capability.

Strategic Objectives

Business Continuity shall:

- Maximize uptime.
- Minimize data loss.
- Accelerate recovery.
- Protect critical services.
- Validate recovery procedures.
- Reduce operational uncertainty.
- Maintain stakeholder confidence.

Preparedness reduces disruption.

High Availability

Representative HA capabilities include:

- Redundant application instances.
- Load balancing.
- Database replication.
- Health-based failover.
- Redundant networking.
- Multiple availability zones where practical.
- Automated recovery.

Availability reduces outages.

Disaster Recovery

Representative disaster scenarios include:

- Data center outage.
- Cloud provider outage.
- Database corruption.
- Ransomware attack.
- Storage failure.
- DNS failure.
- Network disruption.
- Human error.

Recovery plans should exist for each scenario.

Backup Strategy

Backups shall support:

- Full backups.
- Incremental backups.
- Point-in-time recovery where supported.
- Encryption.
- Geographic separation.
- Automated scheduling.
- Retention policies.
- Integrity verification.

Backups are only valuable if they are restorable.

Recovery Objectives

Recovery planning shall define:

- Recovery Time Objective (RTO).
- Recovery Point Objective (RPO).
- Service priority.
- Recovery sequence.
- Recovery ownership.

Objectives guide investment decisions.

Business Continuity

Continuity planning includes:

- Critical business functions.
- Operational dependencies.
- Alternative operating procedures.
- Vendor dependencies.
- Communication plans.
- Recovery governance.

Business continuity extends beyond technology.

Recovery Testing

Recovery exercises should include:

- Backup restoration.
- Database failover.
- Infrastructure rebuild.
- Regional failover.
- Service validation.
- Communication rehearsals.

Testing validates assumptions.

Business Rules

BR-OPS-031

Critical data shall be backed up automatically.

BR-OPS-032

Recovery procedures shall be documented.

BR-OPS-033

Recovery exercises shall be performed regularly.

BR-OPS-034

Recovery objectives shall be measurable.

BR-OPS-035

Business continuity plans shall remain current.

Acceptance Criteria

Business Continuity succeeds when:

- Recovery objectives are consistently met.
 - Data integrity is preserved.
 - Downtime decreases.
 - Recovery confidence improves.
 - Stakeholder trust remains high.
-

Completion Criteria

Complete when:

- HA strategy is documented.
 - DR framework is established.
 - Business continuity planning is defined.
-

Next Document

18-08 — Performance Engineering, Capacity Planning & FinOps

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 8 — Performance Engineering, Capacity Planning & FinOps

Document ID: HCP-PB-18-08

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Performance Engineering

Status: Draft

Version: 1.0

Purpose

This document defines the performance engineering strategy, scalability model, capacity planning process, and FinOps practices for the Hash Community Platform (HCP).

The objective is to ensure the platform delivers responsive user experiences while using infrastructure resources efficiently and sustainably.

Vision

Fast systems.

Predictable growth.

Efficient operations.

Philosophy

Performance should be engineered proactively rather than optimized reactively.

Capacity should be planned using measurable trends.

Infrastructure costs should be continuously understood and optimized.

Strategic Objectives

Performance Engineering shall:

- Improve responsiveness.
- Support horizontal growth.
- Prevent resource exhaustion.
- Enable proactive scaling.
- Optimize infrastructure utilization.
- Control operational costs.
- Improve engineering efficiency.

Scalability should remain sustainable.

Performance Strategy

Representative performance activities include:

- Load testing.
- Stress testing.
- Spike testing.
- Endurance testing.
- Benchmarking.
- Profiling.
- Performance regression testing.

Testing builds confidence.

Capacity Planning

Capacity planning shall evaluate:

- Compute utilization.
- Database growth.
- Storage consumption.
- Network bandwidth.
- Cache efficiency.
- Queue depth.
- User growth.
- Transaction volume.

Planning should precede demand.

Scaling Models

The platform shall support:

- Horizontal scaling.
- Vertical scaling.
- Auto scaling.
- Elastic workloads.
- Queue-based scaling.
- Event-driven scaling.

Scaling remains workload-specific.

Performance Metrics

Representative metrics include:

- Response time.
- Throughput.
- Concurrent users.
- Requests per second.
- Database latency.
- Cache hit ratio.
- Queue latency.
- CPU utilization.
- Memory utilization.

Metrics guide optimization.

FinOps

Financial operations include:

- Infrastructure cost monitoring.
- Resource utilization analysis.
- Cost allocation.
- Budget forecasting.
- Capacity optimization.
- Reserved resource planning.
- Waste identification.

Efficiency supports sustainability.

Business Rules

BR-OPS-036

Critical services shall undergo regular performance testing.

BR-OPS-037

Capacity planning shall be data-driven.

BR-OPS-038

Infrastructure costs shall remain measurable.

BR-OPS-039

Performance regressions shall be investigated.

BR-OPS-040

Resource optimization shall balance performance and cost.

Acceptance Criteria

Performance Engineering succeeds when:

- User experience improves.
 - Scaling remains predictable.
 - Resource utilization improves.
 - Costs remain controlled.
 - Growth remains sustainable.
-

Completion Criteria

Complete when:

- Performance strategy is documented.
 - Capacity planning is defined.
 - FinOps practices are established.
-

Next Document

18-09 — Security Operations (SecOps), Compliance Monitoring & Vulnerability Management

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 9 — Security Operations (SecOps), Compliance Monitoring & Vulnerability Management

Document ID: HCP-PB-18-09

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Security Operations

Status: Draft

Version: 1.0

Purpose

This document defines the Security Operations (SecOps) strategy, vulnerability management process, compliance monitoring framework, security event detection, and operational security governance for the Hash Community Platform (HCP).

The objective is to continuously identify, assess, mitigate, and monitor security risks while maintaining compliance with organizational and regulatory requirements.

Vision

Continuous protection.

Rapid detection.

Measured response.

Philosophy

Security is an ongoing operational responsibility.

Every production environment should continuously monitor for threats, vulnerabilities, and policy violations.

Security should be integrated into everyday engineering practices.

Strategic Objectives

Security Operations shall:

- Detect threats early.
- Reduce attack surface.
- Respond rapidly.
- Improve compliance.
- Protect customer data.
- Strengthen operational resilience.
- Promote security awareness.

Security is everyone's responsibility.

Security Monitoring

Representative monitoring includes:

- Authentication events.
- Authorization failures.
- Privilege changes.
- API abuse.
- Network anomalies.
- Infrastructure changes.
- Malware indicators.
- Configuration drift.

Visibility supports defense.

Vulnerability Management

The platform shall support:

- Asset inventory.
- Vulnerability scanning.
- Risk classification.
- Patch management.
- Exception tracking.
- Verification.
- Reporting.

Risk should be prioritized.

Security Events

Representative events include:

- Credential compromise.
- Suspicious login activity.
- Data exfiltration attempts.
- Privilege escalation.
- Denial-of-service attacks.
- Malware detection.
- Insider threats.
- Supply chain vulnerabilities.

Events require structured response.

Compliance Monitoring

Compliance activities include:

- Configuration auditing.
- Access reviews.
- Security policy validation.
- Encryption verification.
- Log retention validation.
- Backup compliance.
- Regulatory reporting.

Compliance remains measurable.

Security Response

Operational response includes:

- Detection.
- Triage.
- Containment.
- Investigation.
- Eradication.
- Recovery.
- Lessons learned.

Response should remain repeatable.

Business Rules

BR-OPS-041

Critical vulnerabilities shall be prioritized for remediation.

BR-OPS-042

Security events shall remain auditable.

BR-OPS-043

Production environments shall undergo continuous monitoring.

BR-OPS-044

Compliance controls shall be periodically verified.

BR-OPS-045

Security incidents shall follow documented response procedures.

Acceptance Criteria

Security Operations succeeds when:

- Threat detection improves.
 - Vulnerabilities decrease.
 - Response times improve.
 - Compliance remains measurable.
 - Customer trust strengthens.
-

Completion Criteria

Complete when:

- SecOps strategy is documented.
 - Vulnerability management is defined.
 - Compliance monitoring is established.
-

Next Document

18-10 — Platform Operations Governance, SRE Maturity & Future Evolution

Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Part 10 — Platform Operations Governance, SRE Maturity & Future Evolution

Document ID: HCP-PB-18-10

Parent: Chapter 18 — Platform Operations, Reliability, DevOps & Site Reliability Engineering (SRE)

Domain: Operations Governance

Status: Draft

Version: 1.0

Purpose

This document defines the governance framework, Site Reliability Engineering (SRE) maturity model, operational review process, and future evolution strategy for the Hash Community Platform (HCP).

The objective is to ensure operational excellence scales alongside the platform through structured governance, measurable reliability objectives, and continuous organizational improvement.

Vision

Reliable platforms.

Mature operations.

Continuous evolution.

Philosophy

Operational excellence is not a destination but a continuous improvement process.

Processes, tooling, and organizational structures should evolve as the platform grows.

Strategic Objectives

Operations Governance shall:

- Standardize operational practices.
- Measure reliability.
- Improve engineering efficiency.
- Reduce operational risk.
- Promote cross-team collaboration.
- Enable organizational learning.
- Support long-term scalability.

Governance provides consistency without unnecessary bureaucracy.

Governance Model

Operational governance includes:

- Reliability standards.
- Service ownership.
- Operational reviews.
- Change governance.
- Architecture reviews.
- Capacity reviews.
- Security reviews.
- Incident reviews.

Responsibilities remain clearly defined.

SRE Principles

Representative SRE practices include:

- Service Level Indicators (SLIs).
- Service Level Objectives (SLOs).
- Error budgets.
- Automation.
- Blameless postmortems.
- Reliability engineering.
- Operational metrics.

Reliability should be measurable.

Operational Reviews

Recurring reviews should include:

- Weekly operational review.
- Monthly reliability review.
- Quarterly architecture review.
- Capacity planning review.
- Disaster recovery review.
- Security posture review.
- Cost optimization review.

Regular reviews promote continuous improvement.

Service Ownership

Every critical service shall define:

- Service owner.
- Technical owner.
- Operational owner.
- Documentation owner.
- Escalation path.
- Review cadence.

Ownership drives accountability.

Continuous Improvement

Improvement activities include:

- Automation initiatives.
- Technical debt reduction.
- Runbook refinement.
- Tooling enhancements.
- Reliability improvements.
- Process optimization.
- Knowledge sharing.

Operational maturity grows incrementally.

Business Rules

BR-OPS-046

Every critical service shall define measurable reliability objectives.

BR-OPS-047

Operational governance reviews shall occur regularly.

BR-OPS-048

Blameless postmortems shall support organizational learning.

BR-OPS-049

Service ownership shall remain documented.

BR-OPS-050

Operational maturity shall be periodically assessed.

Acceptance Criteria

Operations Governance succeeds when:

- Reliability improves.
 - Operational consistency increases.
 - Engineering efficiency improves.
 - Organizational learning accelerates.
 - Customer trust strengthens.
-

Completion Criteria

Complete when:

- Governance framework is documented.
 - SRE maturity model is established.
 - Operational review cadence is defined.
-

End of Chapter 18

Next Chapter

Chapter 19 — Artificial Intelligence Platform & Intelligent Automation

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 1 — Intelligence Platform Vision & Principles

Document ID: HCP-PB-19-01

Parent: Chapter 19 — Intelligence Platform

Domain: Artificial Intelligence

Status: Draft

Version: 1.0

Purpose

This document defines the strategic vision, architectural principles, governance philosophy, and long-term objectives for the Intelligence Platform of the Hash Community Platform (HCP).

The Intelligence Platform provides reusable intelligence capabilities that enhance every module, workflow, and user experience across the platform.

Vision

Every workflow becomes smarter.

Every user becomes more productive.

Every module gains intelligence.

Philosophy

Artificial intelligence should amplify human capability rather than replace human judgment.

The platform should provide trustworthy, explainable, reusable, and measurable intelligence services that can be consumed consistently across products and domains.

Strategic Objectives

The Intelligence Platform shall:

- Improve productivity.
 - Automate repetitive work.
 - Enhance decision-making.
 - Reduce operational effort.
 - Increase accessibility.
 - Enable personalization.
 - Accelerate knowledge discovery.
 - Support responsible AI adoption.
-

Scope

The Intelligence Platform supports:

- Natural language understanding.
 - Content generation.
 - Semantic search.
 - Knowledge retrieval.
 - Intelligent workflows.
 - Recommendation systems.
 - AI agents.
 - Decision support.
 - Speech services.
 - Vision services.
 - Translation.
 - Automation.
-

Intelligence Principles

The platform shall prioritize:

- Human-centered AI.
 - Transparency.
 - Explainability.
 - Safety.
 - Privacy.
 - Reusability.
 - Cost efficiency.
 - Continuous learning.
-

Platform Characteristics

The Intelligence Platform shall be:

Reusable

Composable

Observable

Secure

Provider-independent

Scalable

Measurable

Extensible

Human Oversight

Critical business decisions should allow configurable human review before execution.

Automation should remain appropriate to the level of operational risk.

Business Rules

BR-AI-001

AI capabilities shall be reusable across multiple modules.

BR-AI-002

Every AI capability shall expose measurable performance metrics.

BR-AI-003

Intelligence services shall remain provider-independent where practical.

BR-AI-004

High-risk AI workflows shall support human approval.

BR-AI-005

The platform shall maintain operational visibility into AI usage.

Acceptance Criteria

The Intelligence Platform succeeds when:

- AI improves productivity.
 - Automation reduces manual effort.
 - Intelligence services remain reusable.
 - User trust increases.
 - Platform capabilities expand sustainably.
-

Completion Criteria

Complete when:

- Vision is documented.
 - Principles are established.
 - Governance philosophy is defined.
-

Next Document

19-02 — AI Architecture & Model Strategy

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 2 — AI Architecture & Model Strategy

Document ID: HCP-PB-19-02

Parent: Chapter 19 — Intelligence Platform

Domain: AI Architecture

Status: Draft

Version: 1.0

Purpose

This document defines the architectural strategy for selecting, managing, evaluating, and evolving artificial intelligence models used by the Hash Community Platform (HCP).

The objective is to ensure AI capabilities remain provider-independent, adaptable, measurable, and cost-effective while delivering consistent user experiences.

Vision

The best model for the task.

Not one model for every task.

Philosophy

Applications request outcomes, not models.

The Intelligence Platform is responsible for selecting the most appropriate model based on capability, latency, cost, reliability, privacy, and policy.

Strategic Objectives

The AI Architecture shall:

- Support multiple providers.
- Enable provider independence.
- Optimize cost.
- Improve response quality.
- Reduce latency.
- Increase resilience.
- Support future models.

Models remain replaceable.

Supported Model Categories

Representative categories include:

- Large Language Models (LLMs)
- Small Language Models (SLMs)
- Embedding Models
- Vision Models
- Speech Recognition Models
- Text-to-Speech Models
- OCR Models
- Translation Models
- Recommendation Models
- Classification Models

Capabilities matter more than vendors.

Model Selection Factors

Selection should consider:

- Task suitability.
- Accuracy.
- Latency.
- Cost.
- Privacy requirements.
- Context window.
- Tool support.
- Availability.
- Regional compliance.

Selection policies remain configurable.

Provider Independence

Applications shall not directly integrate with AI providers.

Instead they communicate with the Intelligence Platform using stable internal APIs.

Provider changes should not require application changes.

Deployment Models

The platform shall support:

- Public cloud AI APIs.
- Private cloud deployments.
- Self-hosted models.
- Hybrid deployments.
- Edge inference where appropriate.

Deployment remains workload-dependent.

Model Lifecycle

Every model shall support:

- Registration.
- Versioning.
- Evaluation.
- Approval.
- Deployment.
- Monitoring.
- Retirement.

Model evolution remains governed.

Business Rules

BR-AI-006

Applications shall not depend on specific AI vendors.

BR-AI-007

Model selection policies shall be centrally managed.

BR-AI-008

Approved models shall undergo evaluation before production use.

BR-AI-009

The platform shall support model replacement without API changes.

BR-AI-010

Model usage shall remain measurable and auditable.

Acceptance Criteria

The AI Architecture succeeds when:

- Provider switching is straightforward.
 - Models remain interchangeable.
 - Cost optimization improves.
 - Reliability increases.
 - AI capabilities evolve without disrupting applications.
-

Completion Criteria

Complete when:

- Model strategy is documented.
 - Provider abstraction is defined.
 - Lifecycle governance is established.
-

Next Document

19-03 — AI Gateway & Provider Management

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 3 — AI Gateway & Provider Management

Document ID: HCP-PB-19-03

Parent: Chapter 19 — Intelligence Platform

Domain: AI Gateway

Status: Draft

Version: 1.0

Purpose

This document defines the AI Gateway architecture, provider management strategy, routing policies, request lifecycle, and governance controls for all intelligence services within the Hash Community Platform (HCP).

The AI Gateway serves as the single entry point for AI capabilities across the platform, abstracting provider-specific implementations from applications.

Vision

One gateway.

Many providers.

Consistent intelligence.

Philosophy

Applications should request intelligence capabilities through a single internal interface.

The gateway is responsible for provider selection, routing, policy enforcement, resilience, observability, and cost optimization.

Strategic Objectives

The AI Gateway shall:

- Centralize AI access.
 - Abstract provider APIs.
 - Optimize routing.
 - Enforce governance.
 - Improve resilience.
 - Control operational costs.
 - Simplify application development.
-

Core Responsibilities

The gateway shall provide:

- Capability routing.
 - Provider abstraction.
 - Authentication.
 - Authorization.
 - Rate limiting.
 - Request validation.
 - Response normalization.
 - Retry logic.
 - Timeout management.
 - Fallback handling.
 - Usage accounting.
 - Audit logging.
-

Supported Providers

Representative provider categories include:

- Commercial cloud AI providers.
- Open-source model deployments.
- Private enterprise models.
- Domain-specific models.
- Future AI providers.

The gateway remains extensible.

Routing Policies

Routing decisions may consider:

- Capability required.
- Provider availability.
- Latency.
- Cost.
- Privacy classification.
- Customer tier.
- Geographic region.
- Organizational policy.

Routing should remain configurable.

Request Lifecycle

Every request shall support:

1. Authentication.
2. Authorization.
3. Policy evaluation.
4. Capability resolution.
5. Model selection.
6. Provider routing.
7. Execution.
8. Response normalization.
9. Telemetry collection.
10. Audit logging.

Every step should be observable.

Resilience

The gateway shall support:

- Automatic retries.
- Provider failover.
- Circuit breakers.
- Timeouts.
- Graceful degradation.
- Health monitoring.

Intelligence services should remain highly available.

Business Rules

BR-AI-011

Applications shall access AI exclusively through the AI Gateway.

BR-AI-012

Provider credentials shall never be exposed to applications.

BR-AI-013

Gateway routing policies shall remain centrally managed.

BR-AI-014

Every AI request shall be logged and traceable.

BR-AI-015

Provider failures shall trigger configured resilience policies.

Acceptance Criteria

The AI Gateway succeeds when:

- Applications remain provider-independent.
 - Routing is policy-driven.
 - Operational visibility improves.
 - AI reliability increases.
 - Governance remains consistent.
-

Completion Criteria

Complete when:

- Gateway architecture is documented.
 - Routing model is established.
 - Provider abstraction is defined.
-

Next Document

19-04 — Prompt Engineering Platform

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 4 — Prompt Engineering Platform

Document ID: HCP-PB-19-04

Parent: Chapter 19 — Intelligence Platform

Domain: Prompt Engineering

Status: Draft

Version: 1.0

Purpose

This document defines the Prompt Engineering Platform, including prompt lifecycle management, template architecture, versioning, governance, evaluation, and deployment practices for the Hash Community Platform (HCP).

The objective is to ensure prompts are reusable, maintainable, measurable, and continuously improved without requiring application changes.

Vision

Reusable prompts.

Versioned prompts.

Governed prompts.

Philosophy

Applications should reference prompt capabilities rather than embedding prompt text.

Prompts should be treated as managed platform assets.

Strategic Objectives

The Prompt Engineering Platform shall:

- Centralize prompt management.
 - Enable prompt reuse.
 - Support version control.
 - Improve prompt quality.
 - Simplify experimentation.
 - Enable governance.
 - Support continuous evaluation.
-

Prompt Types

Representative prompt categories include:

- Chat prompts.
- Summarization prompts.
- Translation prompts.
- Classification prompts.
- Extraction prompts.
- Recommendation prompts.
- Agent prompts.
- Workflow prompts.
- System prompts.
- Evaluation prompts.

Prompts remain capability-oriented.

Prompt Structure

Every prompt shall define:

- Identifier.
- Version.
- Purpose.
- Capability.
- Variables.
- Constraints.
- Safety instructions.
- Expected output format.
- Owner.
- Status.

Prompt metadata supports governance.

Prompt Lifecycle

Prompts shall support:

- Draft.
- Review.
- Testing.
- Approval.
- Deployment.
- Monitoring.
- Retirement.

Lifecycle management reduces operational risk.

Versioning

Prompt updates shall preserve previous versions.

Applications may reference:

- Latest approved version.
- Specific versions.
- Experimental versions.

Version changes remain auditable.

Evaluation

Prompt quality shall be evaluated using:

- Accuracy.
- Consistency.
- Latency.
- Cost.
- Hallucination rate.
- User satisfaction.
- Safety compliance.

Evaluation should remain continuous.

Business Rules

BR-AI-016

Applications shall reference prompts by identifier.

BR-AI-017

Prompt revisions shall remain version controlled.

BR-AI-018

Production prompts shall undergo evaluation before deployment.

BR-AI-019

Prompt ownership shall be documented.

BR-AI-020

Prompt performance shall remain measurable.

Acceptance Criteria

The Prompt Engineering Platform succeeds when:

- Prompt reuse increases.
 - Quality improves.
 - Governance strengthens.
 - Prompt evolution accelerates.
 - Applications remain unchanged during prompt updates.
-

Completion Criteria

Complete when:

- Prompt strategy is documented.
 - Lifecycle is defined.
 - Governance is established.
-

Next Document

19-05 — Memory Architecture

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 5 — Memory Architecture

Document ID: HCP-PB-19-05

Parent: Chapter 19 — Intelligence Platform

Domain: Memory Architecture

Status: Draft

Version: 1.0

Purpose

This document defines the Memory Architecture for the Hash Community Platform (HCP), including memory types, storage strategies, lifecycle management, retrieval policies, governance, and privacy controls.

The objective is to enable intelligent, personalized, and context-aware experiences while maintaining user trust, privacy, and operational efficiency.

Vision

Persistent knowledge.

Relevant context.

Responsible memory.

Philosophy

Memory should improve user experiences without becoming intrusive.

Not everything should be remembered.

Every stored memory should have a clear purpose, owner, lifecycle, and governance policy.

Strategic Objectives

The Memory Platform shall:

- Improve personalization.
 - Preserve useful context.
 - Reduce repetitive interactions.
 - Support AI agents.
 - Enable long-running workflows.
 - Respect privacy.
 - Support user control.
-

Memory Types

The platform shall support:

- Session Memory
- Conversation Memory
- User Memory
- Organization Memory
- Agent Memory
- Workflow Memory
- Knowledge Memory
- Temporary Working Memory

Each serves a distinct purpose.

Session Memory

Stores context for a single active interaction.

Characteristics:

- Short-lived.
 - Automatically discarded after session expiration.
 - Optimized for responsiveness.
-

Conversation Memory

Maintains context across related conversations.

Supports:

- Follow-up questions.
 - Multi-turn reasoning.
 - Context continuity.
-

User Memory

Stores long-term preferences explicitly approved for retention.

Examples:

- Preferred language.
- Notification preferences.
- Frequently used workflows.
- Accessibility settings.

Users retain visibility and control.

Organization Memory

Supports shared organizational context.

Examples:

- Internal terminology.
- Policies.
- Approved templates.
- Shared procedures.

Memory belongs to the organization rather than individuals.

Agent Memory

Allows AI agents to retain operational context.

Examples:

- Previous actions.
- Intermediate plans.
- Tool outputs.
- Task history.

Agent memory supports continuity while remaining governed.

Workflow Memory

Supports long-running business processes.

Examples:

- Approval chains.
- Multi-day automations.
- Pending tasks.
- Execution checkpoints.

Workflows may span hours, days, or weeks.

Knowledge Memory

Represents curated institutional knowledge.

Sources include:

- Documentation.
- Policies.
- Manuals.
- Training materials.
- Structured datasets.

Knowledge memory complements retrieval systems.

Memory Lifecycle

Every memory shall support:

- Creation.
- Classification.
- Retention.
- Retrieval.
- Update.
- Archival.
- Deletion.

Lifecycle management ensures governance.

Privacy

Memory shall support:

- User consent.
- Access controls.
- Encryption.
- Retention policies.
- Deletion requests.
- Auditability.

Privacy remains foundational.

Business Rules

BR-AI-021

Users shall control long-term personal memory where applicable.

BR-AI-022

Memory shall be classified by type and retention policy.

BR-AI-023

Sensitive memory shall be encrypted.

BR-AI-024

Memory retrieval shall respect authorization policies.

BR-AI-025

Memory operations shall remain auditable.

Acceptance Criteria

The Memory Platform succeeds when:

- AI interactions become more contextual.
 - Personalization improves.
 - Repetition decreases.
 - Privacy remains protected.
 - Users trust memory behavior.
-

Completion Criteria

Complete when:

- Memory architecture is documented.
 - Governance is established.
 - Lifecycle is defined.
-

Next Document

19-06 — Knowledge Platform (RAG)

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 6 — Knowledge Platform (Retrieval-Augmented Generation)

Document ID: HCP-PB-19-06

Parent: Chapter 19 — Intelligence Platform

Domain: Knowledge Platform

Status: Draft

Version: 1.0

Purpose

This document defines the Knowledge Platform for the Hash Community Platform (HCP), including knowledge ingestion, indexing, retrieval, governance, and Retrieval-Augmented Generation (RAG).

The objective is to enable AI capabilities to retrieve accurate, authorized, and current organizational knowledge while reducing hallucinations and improving explainability.

Vision

Knowledge that is searchable.

Knowledge that is trustworthy.

Knowledge that powers intelligence.

Philosophy

Knowledge should be treated as a managed organizational asset.

AI should retrieve relevant information from trusted sources before generating responses whenever domain knowledge is required.

Strategic Objectives

The Knowledge Platform shall:

- Centralize organizational knowledge.
 - Improve AI accuracy.
 - Reduce hallucinations.
 - Support explainable responses.
 - Enable semantic search.
 - Respect authorization.
 - Maintain knowledge freshness.
-

Knowledge Sources

Representative sources include:

- Policies.
- Manuals.
- Documentation.
- Wikis.
- Standard Operating Procedures.
- Meeting notes.
- Product catalogs.
- Structured databases.
- Approved external sources.

Knowledge sources remain governed.

Knowledge Lifecycle

Knowledge assets shall support:

- Registration.
- Ingestion.
- Classification.
- Indexing.
- Retrieval.
- Versioning.
- Archival.
- Deletion.

Knowledge evolves over time.

Retrieval

Retrieval shall support:

- Keyword search.
- Semantic search.
- Hybrid search.
- Metadata filtering.
- Authorization-aware retrieval.
- Relevance ranking.

Retrieval should remain explainable.

Retrieval-Augmented Generation

The platform shall support:

1. User query.
2. Query understanding.
3. Knowledge retrieval.
4. Context assembly.
5. Prompt construction.
6. AI generation.
7. Citation generation.
8. Response delivery.

Generation should remain grounded in retrieved knowledge.

Knowledge Governance

Knowledge governance includes:

- Ownership.
- Approval.
- Version control.
- Retention.
- Access control.
- Auditability.

Governance improves trust.

Business Rules

BR-AI-026

AI responses using organizational knowledge shall retrieve relevant context before generation where applicable.

BR-AI-027

Knowledge retrieval shall respect authorization policies.

BR-AI-028

Knowledge assets shall remain version controlled.

BR-AI-029

Retrieved knowledge shall support traceability.

BR-AI-030

Knowledge freshness shall remain measurable.

Acceptance Criteria

The Knowledge Platform succeeds when:

- AI accuracy improves.
 - Hallucinations decrease.
 - Organizational knowledge becomes reusable.
 - Responses remain explainable.
 - Users trust generated answers.
-

Completion Criteria

Complete when:

- Knowledge strategy is documented.
 - Retrieval model is established.
 - Governance is defined.
-

Next Document

19-07 — Embeddings & Semantic Search

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 7 — Embeddings & Semantic Search

Document ID: HCP-PB-19-07

Parent: Chapter 19 — Intelligence Platform

Domain: Semantic Search

Status: Draft

Version: 1.0

Purpose

This document defines the semantic search architecture, embedding strategy, indexing model, retrieval mechanisms, and governance framework for the Hash Community Platform (HCP).

The objective is to enable intelligent discovery of documents, memories, workflows, users, products, and knowledge based on meaning rather than exact keyword matching.

Vision

Search by meaning.

Discover intelligently.

Retrieve relevant context.

Philosophy

Users think in concepts rather than keywords.

The platform should understand semantic intent and retrieve the most relevant information regardless of wording.

Embeddings are an implementation mechanism that enables semantic understanding.

Strategic Objectives

The Semantic Search Platform shall:

- Improve search quality.
 - Support AI retrieval.
 - Enable knowledge discovery.
 - Improve recommendations.
 - Support personalization.
 - Power intelligent navigation.
 - Reduce search friction.
-

Search Types

The platform shall support:

- Keyword Search.
- Semantic Search.
- Hybrid Search.
- Filtered Search.
- Similarity Search.
- Contextual Search.
- Personalized Search.

Different workloads may require different retrieval strategies.

Embedding Strategy

Embeddings shall support:

- Documents.
- Conversations.
- Memories.
- Knowledge assets.
- Images.
- Products.
- Organizations.
- Users.
- Events.
- Workflows.

Embedding generation shall remain provider-independent.

Indexing

The platform shall support:

- Incremental indexing.
- Full re-indexing.
- Version-aware indexing.
- Multi-tenant indexing.
- Metadata indexing.
- Authorization-aware indexing.

Indexes remain continuously maintained.

Retrieval Pipeline

Retrieval shall include:

1. Query analysis.
2. Query embedding.
3. Candidate retrieval.
4. Authorization filtering.
5. Re-ranking.
6. Context assembly.
7. Response generation.

Search quality depends on the entire pipeline.

Governance

Semantic Search shall support:

- Access control.
- Auditability.
- Freshness monitoring.
- Index ownership.
- Version tracking.
- Privacy controls.

Search respects organizational governance.

Business Rules

BR-AI-031

Semantic retrieval shall respect authorization policies.

BR-AI-032

Embedding generation shall remain provider-independent.

BR-AI-033

Indexes shall remain synchronized with approved knowledge sources.

BR-AI-034

Semantic search shall support multi-tenant isolation.

BR-AI-035

Retrieval quality shall remain measurable.

Acceptance Criteria

The Semantic Search Platform succeeds when:

- Search relevance improves.
 - Discovery becomes easier.
 - AI retrieval quality increases.
 - Personalization improves.
 - Users find information more efficiently.
-

Completion Criteria

Complete when:

- Semantic strategy is documented.
 - Retrieval pipeline is defined.
 - Governance is established.
-

Next Document

19-08 — Agent Framework

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 8 — Agent Framework

Document ID: HCP-PB-19-08

Parent: Chapter 19 — Intelligence Platform

Domain: Agent Framework

Status: Draft

Version: 1.0

Purpose

This document defines the Agent Framework for the Hash Community Platform (HCP), including agent architecture, lifecycle, capabilities, governance, execution model, and integration with platform services.

The objective is to provide a reusable foundation for intelligent agents that can perform tasks, interact with users, invoke tools, collaborate with other agents, and operate within defined governance boundaries.

Vision

Agents that assist.

Agents that automate.

Agents that collaborate.

Philosophy

An agent is an autonomous software worker that pursues goals within defined policies and constraints.

Agents are not user interfaces. They are platform services that may expose multiple interaction channels.

Strategic Objectives

The Agent Framework shall:

- Enable reusable agents.
 - Support autonomous task execution.
 - Integrate with platform tools.
 - Respect governance policies.
 - Support human oversight.
 - Encourage collaboration.
 - Remain observable.
-

Agent Characteristics

Every agent shall support:

- Identity.
- Goals.
- Capabilities.
- Tools.
- Memory.
- Knowledge access.
- Planning.
- Reasoning.
- Communication.
- Auditability.

Agents operate with clearly defined responsibilities.

Agent Lifecycle

Agents shall support:

- Registration.
- Configuration.
- Deployment.
- Activation.
- Execution.
- Suspension.
- Retirement.

Lifecycle events remain traceable.

Agent Capabilities

Representative capabilities include:

- Planning.
- Summarization.
- Classification.
- Recommendation.
- Retrieval.
- Translation.
- Workflow execution.
- Tool invocation.
- Decision support.
- Reporting.

Capabilities may evolve independently.

Tool Integration

Agents may interact with:

- Internal APIs.
- External APIs.
- Databases.
- Knowledge Platform.
- Memory Platform.
- Workflow Engine.
- Notification services.
- File storage.
- Search services.

Tool usage shall remain governed.

Governance

Every agent shall define:

- Owner.
- Purpose.
- Allowed tools.
- Memory scope.
- Approval requirements.
- Execution limits.
- Audit policies.

Governance ensures accountability.

Business Rules

BR-AI-036

Every agent shall have a documented purpose.

BR-AI-037

Agent actions shall remain auditable.

BR-AI-038

Agents shall only access authorized tools and knowledge.

BR-AI-039

High-risk actions shall support configurable human approval.

BR-AI-040

Agent execution shall remain observable.

Acceptance Criteria

The Agent Framework succeeds when:

- Agents remain reusable.
 - Automation increases.
 - Governance remains enforceable.
 - Human oversight is available.
 - Platform capabilities expand safely.
-

Completion Criteria

Complete when:

- Agent architecture is documented.
 - Governance is established.
 - Lifecycle is defined.
-

Next Document

19-09 — Multi-Agent Collaboration

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 9 — Multi-Agent Collaboration

Document ID: HCP-PB-19-09

Parent: Chapter 19 — Intelligence Platform

Domain: Multi-Agent Systems

Status: Draft

Version: 1.0

Purpose

This document defines the architecture for multi-agent collaboration within the Hash Community Platform (HCP), including coordination models, delegation strategies, communication protocols, governance, and execution management.

The objective is to enable specialized agents to work together on complex tasks while maintaining accountability, transparency, and operational efficiency.

Vision

Specialized agents.

Shared goals.

Coordinated execution.

Philosophy

Complex business problems should be solved by teams of specialized agents rather than a single monolithic agent.

Each agent contributes expertise while operating within defined responsibilities and governance boundaries.

Strategic Objectives

The Multi-Agent Platform shall:

- Support collaboration.
 - Enable task delegation.
 - Improve scalability.
 - Reduce complexity.
 - Increase specialization.
 - Maintain observability.
 - Support human oversight.
-

Collaboration Models

The platform shall support:

- Coordinator–Worker.
- Planner–Executor.
- Peer Collaboration.
- Review & Approval.
- Event-Driven Collaboration.
- Workflow-Orchestrated Collaboration.

Different tasks may require different collaboration patterns.

Agent Communication

Agents shall communicate using:

- Structured messages.
- Events.
- Shared workflow state.
- Shared memory references.
- Knowledge retrieval.
- Tool outputs.

Communication should remain auditable.

Task Delegation

Delegation shall support:

- Goal decomposition.
- Task assignment.
- Priority management.
- Dependency tracking.
- Progress reporting.
- Completion validation.

Delegation improves efficiency.

Shared Context

Collaborating agents may share:

- Workflow identifiers.
- Approved memory references.
- Relevant knowledge.
- Intermediate outputs.
- Execution metadata.

Sharing shall respect authorization policies.

Conflict Resolution

The platform shall support:

- Consensus workflows.
- Human arbitration.
- Rule-based prioritization.
- Confidence scoring.
- Escalation policies.

Disagreements should be resolved transparently.

Governance

Every collaboration shall define:

- Participating agents.
- Coordinator.
- Scope.
- Allowed tools.
- Approval requirements.
- Audit trail.

Governance remains explicit.

Business Rules

BR-AI-041

Every collaborative workflow shall identify a coordinating agent.

BR-AI-042

Agent communication shall remain auditable.

BR-AI-043

Delegated tasks shall preserve traceability.

BR-AI-044

Shared context shall respect authorization boundaries.

BR-AI-045

Human oversight shall be available for configurable high-risk collaborations.

Acceptance Criteria

The Multi-Agent Platform succeeds when:

- Collaboration improves task completion.
 - Specialization increases.
 - Workflows remain transparent.
 - Governance is enforceable.
 - Human oversight remains available.
-

Completion Criteria

Complete when:

- Collaboration architecture is documented.
 - Communication model is established.
 - Governance is defined.
-

Next Document

19-10 — Workflow Intelligence Engine

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 10 — Workflow Intelligence Engine

Document ID: HCP-PB-19-10

Parent: Chapter 19 — Intelligence Platform

Domain: Workflow Intelligence

Status: Draft

Version: 1.0

Purpose

This document defines the Workflow Intelligence Engine for the Hash Community Platform (HCP), including workflow modeling, orchestration, automation, event handling, human participation, and AI integration.

The objective is to enable reliable, observable, and adaptable business processes that coordinate humans, AI agents, and software systems.

Vision

Intelligent workflows.

Adaptive automation.

Human-aware orchestration.

Philosophy

Business processes should be modeled independently of AI.

AI may assist, optimize, or automate workflow steps, but workflow definitions remain explicit, versioned, and governed.

Strategic Objectives

The Workflow Intelligence Engine shall:

- Orchestrate business processes.
 - Coordinate AI agents.
 - Coordinate human tasks.
 - Integrate enterprise systems.
 - Support long-running processes.
 - Enable automation.
 - Provide operational visibility.
-

Workflow Components

Every workflow shall define:

- Trigger.
- Goal.
- Participants.
- Tasks.
- Decisions.
- Conditions.
- Approvals.
- Timeouts.
- Escalations.
- Completion criteria.

Workflow behavior remains explicit.

Supported Triggers

Representative triggers include:

- User actions.
- Scheduled events.
- API calls.
- Business events.
- Agent requests.
- Webhooks.
- External integrations.

Workflows remain event-driven.

Workflow Participants

Participants may include:

- Human users.
- AI agents.
- Internal services.
- External systems.
- Third-party integrations.

Participation depends on workflow requirements.

Workflow States

Representative states include:

- Draft.
- Pending.
- Running.
- Waiting.
- Approved.
- Rejected.
- Completed.
- Failed.
- Cancelled.

State transitions remain traceable.

Human Participation

Human tasks shall support:

- Review.
- Approval.
- Rejection.
- Delegation.
- Comments.
- Escalation.

Human involvement remains configurable.

Workflow Governance

Workflows shall define:

- Owner.
- Version.
- Permissions.
- Audit requirements.
- SLA.
- Retention policy.

Governance supports operational consistency.

Business Rules

BR-AI-046

Workflow definitions shall remain version controlled.

BR-AI-047

Workflow execution shall remain observable.

BR-AI-048

Human approvals shall be configurable.

BR-AI-049

Workflow state changes shall remain auditable.

BR-AI-050

Long-running workflows shall support recovery after interruption.

Acceptance Criteria

The Workflow Intelligence Engine succeeds when:

- Business processes become reusable.
 - Automation increases.
 - Human oversight remains available.
 - Operational visibility improves.
 - Workflow reliability strengthens.
-

Completion Criteria

Complete when:

- Workflow architecture is documented.
 - Governance is established.
 - Execution model is defined.
-

Next Document

19-11 — Human-in-the-Loop Systems

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 11 — Human-in-the-Loop Systems

Document ID: HCP-PB-19-11

Parent: Chapter 19 — Intelligence Platform

Domain: Human-AI Collaboration

Status: Draft

Version: 1.0

Purpose

This document defines the Human-in-the-Loop (HITL) architecture for the Hash Community Platform (HCP), including review workflows, approval models, intervention mechanisms, escalation paths, and governance for AI-assisted decision-making.

The objective is to ensure intelligent automation remains accountable, transparent, and adaptable to organizational risk.

Vision

Humans guide.

AI assists.

Together they achieve better outcomes.

Philosophy

Automation should match the level of business risk.

AI should not replace human judgment where legal, financial, ethical, or organizational accountability requires human oversight.

The platform shall support configurable levels of autonomy.

Strategic Objectives

The Human-in-the-Loop Platform shall:

- Support configurable approvals.
 - Improve trust.
 - Reduce operational risk.
 - Increase transparency.
 - Enable safe automation.
 - Preserve accountability.
 - Capture human feedback.
-

Autonomy Levels

The platform shall support:

Level 0 — Human Only

Level 1 — AI Suggests

Level 2 — AI Drafts

Level 3 — AI Executes with Approval

Level 4 — AI Executes with Audit

Level 5 — Fully Autonomous

Organizations determine acceptable autonomy by workflow.

Human Actions

Human participants may:

- Review.
- Approve.
- Reject.
- Modify.
- Delegate.
- Pause.
- Escalate.
- Cancel.

All interventions remain traceable.

Approval Models

Representative models include:

- Single approver.
- Multiple approvers.
- Sequential approval.
- Parallel approval.
- Consensus.
- Risk-based approval.

Approval strategies remain configurable.

Escalation

Escalation may occur due to:

- Timeout.
- High confidence uncertainty.
- Policy violation.
- High business impact.
- Human request.
- Workflow rules.

Escalations improve resilience.

Feedback Loop

Human feedback shall support:

- AI evaluation.
- Prompt improvement.
- Workflow optimization.
- Model benchmarking.
- Knowledge refinement.

Human expertise continuously improves the platform.

Governance

Every approval workflow shall define:

- Owner.
- Required approvers.
- Approval SLA.
- Escalation policy.
- Audit policy.
- Retention.

Governance supports accountability.

Business Rules

BR-AI-051

High-risk workflows shall support configurable human approval.

BR-AI-052

Human interventions shall remain auditable.

BR-AI-053

Organizations shall define autonomy levels for workflows.

BR-AI-054

Approval workflows shall support escalation.

BR-AI-055

Human feedback shall be retained for continuous improvement.

Acceptance Criteria

The Human-in-the-Loop Platform succeeds when:

- AI adoption increases.
 - Organizational trust improves.
 - Automation remains appropriate to risk.
 - Human oversight remains effective.
 - Feedback improves platform quality.
-

Completion Criteria

Complete when:

- HITL architecture is documented.
 - Approval model is defined.
 - Governance is established.
-

Next Document

19-12 — AI Safety & Governance

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 12 — AI Safety & Governance

Document ID: HCP-PB-19-12

Parent: Chapter 19 — Intelligence Platform

Domain: AI Governance

Status: Draft

Version: 1.0

Purpose

This document defines the governance framework for artificial intelligence within the Hash Community Platform (HCP), including safety controls, policy enforcement, risk management, compliance, monitoring, and continuous oversight.

The objective is to ensure AI capabilities are deployed responsibly while protecting users, organizations, and platform integrity.

Vision

Safe intelligence.

Trusted automation.

Responsible innovation.

Philosophy

Every AI capability shall operate within clearly defined governance boundaries.

Safety is not a feature added after deployment; it is a platform capability designed into every layer of the Intelligence Platform.

Strategic Objectives

The AI Governance Platform shall:

- Protect users.
 - Reduce operational risk.
 - Improve transparency.
 - Support regulatory compliance.
 - Enable responsible automation.
 - Maintain accountability.
 - Continuously improve governance.
-

Governance Domains

The platform shall govern:

- AI models.
- Prompt templates.
- Agents.
- Workflows.
- Memory.
- Knowledge.
- Semantic search.
- Human oversight.
- External AI providers.
- AI APIs.

Governance applies across the entire platform.

Safety Controls

Representative controls include:

- Prompt injection protection.
- Output validation.
- Data classification.
- Content moderation.
- Policy enforcement.
- Tool permission controls.
- Sensitive data protection.
- Hallucination mitigation.

Safety controls remain configurable.

Risk Management

The platform shall classify AI workloads by risk.

Representative categories:

- Low Risk.
- Moderate Risk.
- High Risk.
- Critical Risk.

Risk levels influence autonomy, approvals, and monitoring.

Compliance

Governance shall support:

- Audit logging.
- Data retention.
- Consent management.
- Access controls.
- Privacy requirements.
- Organizational policies.
- Regional regulations.

Compliance remains measurable.

Incident Management

AI incidents shall support:

- Detection.
- Classification.
- Containment.
- Investigation.
- Resolution.
- Post-incident review.

Governance includes operational response.

Governance Lifecycle

Every AI capability shall support:

- Registration.
- Review.
- Approval.
- Deployment.
- Monitoring.
- Reassessment.
- Retirement.

Lifecycle management improves consistency.

Business Rules

BR-AI-056

Every AI capability shall have an assigned owner.

BR-AI-057

High-risk AI capabilities shall undergo governance review before production deployment.

BR-AI-058

AI policy violations shall generate auditable events.

BR-AI-059

Organizations shall configure governance policies.

BR-AI-060

Governance metrics shall remain observable.

Acceptance Criteria

The AI Governance Platform succeeds when:

- AI remains trustworthy.
 - Policy violations decrease.
 - Compliance improves.
 - User confidence increases.
 - Governance scales with platform growth.
-

Completion Criteria

Complete when:

- Governance framework is documented.
 - Safety controls are defined.
 - Risk model is established.
-

Next Document

19-13 — Model Evaluation & Observability

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 13 — Model Evaluation & Observability

Document ID: HCP-PB-19-13

Parent: Chapter 19 — Intelligence Platform

Domain: Evaluation & Observability

Status: Draft

Version: 1.0

Purpose

This document defines the evaluation and observability framework for AI capabilities within the Hash Community Platform (HCP), including quality measurement, operational monitoring, experimentation, benchmarking, and continuous improvement.

The objective is to ensure AI systems remain reliable, measurable, cost-effective, and aligned with organizational goals.

Vision

Measure continuously.

Improve continuously.

Trust through evidence.

Philosophy

AI quality should be demonstrated through measurable evidence rather than assumptions.

Every model, prompt, agent, and workflow should produce operational metrics that support informed decision-making.

Strategic Objectives

The Evaluation Platform shall:

- Measure AI quality.
 - Monitor operational health.
 - Detect regressions.
 - Benchmark providers.
 - Support experimentation.
 - Improve cost efficiency.
 - Drive continuous improvement.
-

Evaluation Scope

The platform shall evaluate:

- AI models.
- Prompt templates.
- Agents.
- Knowledge retrieval.
- Memory retrieval.
- Workflow execution.
- Tool usage.
- Human feedback.

Evaluation spans the entire Intelligence Platform.

Evaluation Metrics

Representative metrics include:

- Accuracy.
- Precision.
- Recall.
- Hallucination rate.
- Citation quality.
- Task completion rate.
- Latency.
- Cost per request.
- User satisfaction.
- Human override rate.

Metrics should be standardized where possible.

Operational Monitoring

The platform shall monitor:

- API availability.
- Token usage.
- Provider latency.
- Error rates.
- Workflow duration.
- Agent execution.
- Tool failures.
- Retrieval latency.

Monitoring supports operational excellence.

Benchmarking

Benchmarking shall support:

- Model comparison.
- Prompt comparison.
- Agent comparison.
- Provider comparison.
- Version comparison.
- Cost comparison.

Comparisons should be repeatable and evidence-based.

Experimentation

The platform shall support:

- A/B testing.
- Shadow testing.
- Canary deployments.
- Prompt experiments.
- Model experiments.
- Retrieval experiments.

Experiments enable safe improvement.

Governance Integration

Evaluation results shall inform:

- Governance reviews.
- Autonomy levels.
- Workflow optimization.
- Prompt revisions.
- Model selection.
- Cost optimization.

Measurement drives governance decisions.

Business Rules

BR-AI-061

Every production AI capability shall define measurable success metrics.

BR-AI-062

Regression testing shall occur before production deployment.

BR-AI-063

Evaluation datasets shall remain version controlled.

BR-AI-064

Operational metrics shall be retained for trend analysis.

BR-AI-065

Evaluation results shall support auditability.

Acceptance Criteria

The Evaluation Platform succeeds when:

- AI quality becomes measurable.
 - Performance regressions are detected quickly.
 - Business outcomes improve.
 - Costs remain observable.
 - Optimization becomes data-driven.
-

Completion Criteria

Complete when:

- Evaluation framework is documented.
 - Monitoring strategy is defined.
 - Benchmarking process is established.
-

Next Document

19-14 — Intelligence Analytics & Optimization

Chapter 19 — Intelligence Platform (AI, Agents & Automation)

Part 14 — Intelligence Analytics & Optimization

Document ID: HCP-PB-19-14

Parent: Chapter 19 — Intelligence Platform

Domain: Intelligence Analytics

Status: Draft

Version: 1.0

Purpose

This document defines the Intelligence Analytics & Optimization framework for the Hash Community Platform (HCP), including business intelligence, operational analytics, optimization strategies, forecasting, and continuous improvement.

The objective is to ensure intelligence capabilities create measurable value for users, organizations, and the platform.

Vision

Measure impact.

Optimize continuously.

Improve outcomes.

Philosophy

The success of an intelligence platform should be measured by organizational outcomes rather than AI activity alone.

Analytics should explain not only what happened, but why it happened and how it can improve.

Strategic Objectives

The Intelligence Analytics Platform shall:

- Measure business impact.
 - Identify optimization opportunities.
 - Improve operational efficiency.
 - Support strategic decisions.
 - Forecast trends.
 - Drive continuous improvement.
 - Demonstrate return on investment.
-

Analytics Domains

The platform shall analyze:

- AI utilization.
- Workflow efficiency.
- Agent productivity.
- User engagement.
- Knowledge usage.
- Human oversight.
- Operational costs.
- Business outcomes.

Analytics spans technical and business dimensions.

Key Performance Indicators

Representative KPIs include:

- Task completion time.
- Automation rate.
- Human approval rate.
- User satisfaction.
- Cost savings.
- AI adoption.
- Workflow efficiency.
- Productivity improvement.
- Community engagement.
- Return on investment.

KPIs should align with organizational objectives.

Optimization Opportunities

The platform shall identify:

- Workflow bottlenecks.
- Low-performing prompts.
- Underutilized knowledge.
- High-cost AI operations.
- Slow approval processes.
- Frequently overridden AI actions.
- Retrieval quality improvements.

Insights should be actionable.

Forecasting

Analytics shall support:

- Usage forecasting.
- Capacity planning.
- Cost forecasting.
- Adoption forecasting.
- Operational trend analysis.
- Growth projections.

Forecasts assist long-term planning.

Recommendations

The platform may recommend:

- Workflow improvements.
- Prompt revisions.
- Model changes.
- Agent enhancements.
- Knowledge updates.
- Staffing adjustments.
- Governance refinements.

Recommendations support decision-makers.

Business Rules

BR-AI-066

Intelligence KPIs shall align with organizational objectives.

BR-AI-067

Optimization recommendations shall remain explainable.

BR-AI-068

Forecasting models shall identify confidence levels.

BR-AI-069

Business metrics shall remain historically comparable.

BR-AI-070

Analytics shall support executive reporting.

Acceptance Criteria

The Intelligence Analytics Platform succeeds when:

- Business outcomes improve.
 - Operational efficiency increases.
 - AI investments become measurable.
 - Optimization becomes continuous.
 - Executive decision-making improves.
-

Completion Criteria

Complete when:

- Analytics framework is documented.
 - KPI model is established.
 - Optimization strategy is defined.
-

End of Chapter 19

Chapter 20 — Product Design Language

Part 1 — Design Philosophy

Document ID: HCP-PB-20-01

Parent: Chapter 20 — Product Design Language

Domain: Design Philosophy

Status: Draft

Version: 1.0

Purpose

This document defines the fundamental design philosophy of the Hash Community Platform (HCP).

It establishes the guiding beliefs that influence every interface, interaction, workflow, animation, visual decision, and user experience across the platform.

This philosophy serves as the foundation for all future design work.

Vision

Technology should disappear.

Community should shine.

Philosophy

The best interface is one that allows people to focus on each other rather than the software itself.

HCP should feel like a trusted companion that quietly supports community activities without demanding unnecessary attention.

The platform should never become the center of the experience.

The community is the product.

The software enables it.

Core Beliefs

Community First

Every design decision should strengthen relationships between people.

Invisible Technology

Technology should remain in the background.

Users should think about the trail, the event, the community, or the conversation—not about how to operate the application.

Reduce Friction

Every unnecessary tap, click, dialog, permission request, and decision increases friction.

The platform should remove effort wherever possible.

Calm Interfaces

Interfaces should never overwhelm users.

Information should be revealed progressively.

Complexity should remain hidden until needed.

Respect Attention

Notifications, animations, colors, sounds, and prompts compete for attention.

Attention is a limited resource.

The platform should spend it carefully.

Design for Confidence

Users should always understand:

- where they are,
 - what happened,
 - what happens next,
 - and how to recover.
-

Progressive Disclosure

Advanced functionality should appear only when users need it.

Beginners should never feel intimidated.

Experienced users should never feel limited.

Human Before AI

AI exists to help people.

AI should never replace meaningful community relationships.

Automation should create more opportunities for human interaction—not fewer.

Consistency

Identical actions should behave identically throughout the platform.

Consistency reduces cognitive load.

Delight Through Simplicity

The platform should surprise users with thoughtful details rather than visual excess.

Small moments of polish create lasting impressions.

Design Goals

The HCP experience should feel:

- Warm
 - Friendly
 - Trustworthy
 - Calm
 - Lightweight
 - Modern
 - Fast
 - Predictable
 - Inclusive
 - Human
-

Anti-Goals

The platform should never feel:

- Corporate
 - Cold
 - Busy
 - Distracting
 - Complicated
 - Technical
 - Confusing
 - Aggressive
 - Noisy
 - Over-designed
-

Experience Priorities

When trade-offs exist, prioritize:

1. Clarity
2. Simplicity
3. Speed
4. Accessibility
5. Reliability
6. Beauty
7. Delight

Beauty should never reduce usability.

Design Questions

Before introducing a new feature, designers should ask:

- Does this strengthen the community?
- Does this reduce effort?
- Does this create trust?
- Is this understandable?
- Can a first-time user succeed?
- Can this be simplified?
- Does this respect attention?
- Would removing it improve the experience?

If the answer to the last question is “yes,” reconsider adding the feature.

Business Rules

BR-UX-001

Every interface shall prioritize community interactions over platform interactions.

BR-UX-002

Every new feature shall reduce or justify added complexity.

BR-UX-003

Every interaction shall provide clear user feedback.

BR-UX-004

Design consistency shall take precedence over feature novelty.

BR-UX-005

The platform shall remain usable without prior training.

Acceptance Criteria

The design philosophy succeeds when:

- New users require minimal onboarding.
 - Navigation feels intuitive.
 - Users complete common tasks efficiently.
 - Community interactions become easier.
 - Trust in the platform increases.
-

Completion Criteria

Complete when:

- Design philosophy is documented.
 - Core beliefs are established.
 - UX priorities are defined.
-

Next Document

20-02 — Design Principles

Chapter 20 — Product Design Language

Part 2 — Design Principles

Document ID: HCP-PB-20-02

Parent: Chapter 20 — Product Design Language

Domain: Design Principles

Status: Draft

Version: 1.0

Purpose

This document defines the design principles that guide product decisions across the Hash Community Platform (HCP).

These principles establish a shared decision-making framework for designers, engineers, product managers, and contributors, ensuring every feature delivers a consistent, intuitive, and community-centered experience.

Vision

Consistent principles create consistent experiences.

Principle 1 — Design for People, Not Screens

Every interface exists to help people accomplish meaningful goals.

Avoid designing around pages or layouts. Instead, design around user intentions, tasks, and relationships.

Success is measured by what users accomplish—not by how attractive a screen appears.

Principle 2 — Clarity Before Cleverness

Interfaces should be immediately understandable.

Avoid ambiguous icons, hidden interactions, unnecessary animations, or terminology that requires explanation.

If users need to think about the interface, simplify it.

Principle 3 — One Primary Action

Every screen should have one obvious primary action.

Secondary actions should support—not compete with—the user's main objective.

Users should never wonder:

"What am I supposed to do next?"

Principle 4 — Progressive Disclosure

Reveal complexity only when needed.

Beginners should feel confident.

Experienced users should still have access to powerful capabilities.

Principle 5 — Immediate Feedback

Every interaction should acknowledge the user's action.

Examples include:

- Loading indicators.
- Success confirmations.
- Error explanations.
- Progress indicators.
- State changes.

Silence creates uncertainty.

Principle 6 — Consistency Over Novelty

Users benefit more from familiar patterns than unique interactions.

Reuse established navigation, layouts, terminology, and interaction models whenever possible.

Principle 7 — Forgive Mistakes

People make mistakes.

The platform should make recovery easy through:

- Undo actions.
- Confirmation for destructive operations.
- Autosave.
- Drafts.
- Clear validation messages.

Prevent irreversible errors whenever practical.

Principle 8 — Minimize Cognitive Load

Reduce unnecessary decisions.

Use sensible defaults.

Pre-fill known information.

Group related content.

Hide irrelevant complexity.

Every unnecessary decision slows users down.

Principle 9 — Accessibility by Default

Accessibility is a design requirement, not an enhancement.

Every interaction should support users with different abilities, devices, and environments.

Principle 10 — Respect Time

Fast experiences demonstrate respect.

Reduce:

- Waiting.
- Repetition.
- Unnecessary navigation.
- Excessive forms.
- Duplicate data entry.

Time saved compounds across every interaction.

Principle 11 — Earn Trust Continuously

Trust is built through predictable behavior.

Users should always understand:

- What the platform is doing.
- Why it is happening.
- What information is being used.
- What happens next.

Transparency builds confidence.

Principle 12 — Community-Centered Design

Whenever possible, guide users toward participation rather than passive consumption.

Design should encourage:

- Joining.
- Sharing.
- Collaborating.
- Supporting others.
- Celebrating achievements.

The platform succeeds when communities become stronger.

Decision Framework

When evaluating competing solutions, prioritize:

1. User understanding.
 2. Task completion.
 3. Community value.
 4. Accessibility.
 5. Performance.
 6. Maintainability.
 7. Visual refinement.
-

Questions for Every Design Review

Before approving a feature, ask:

- Is the primary action obvious?
 - Can a first-time user succeed?
 - Have unnecessary steps been removed?
 - Does this reduce or increase cognitive load?
 - Can users recover from mistakes?
 - Is the language clear?
 - Does this strengthen trust?
 - Does it encourage community participation?
-

Business Rules

BR-UX-006

Every screen shall expose one clearly identifiable primary action.

BR-UX-007

All destructive actions shall provide an appropriate recovery mechanism or confirmation.

BR-UX-008

Every interactive state shall provide visible user feedback.

BR-UX-009

Accessibility requirements shall be considered during initial design, not after implementation.

BR-UX-010

Product decisions shall prioritize user outcomes over visual novelty.

Acceptance Criteria

The design principles succeed when:

- Product decisions become more consistent.
 - New contributors make aligned design choices.
 - Users navigate confidently.
 - Errors become easier to recover from.
 - Community participation increases.
-

Completion Criteria

Complete when:

- Design principles are documented.
 - Review framework is established.
 - Decision priorities are defined.
-

Next Document

20-03 — Emotional Experience

Chapter 20 — Product Design Language

Part 3 — Emotional Experience

Document ID: HCP-PB-20-03

Parent: Chapter 20 — Product Design Language

Domain: Emotional Experience

Status: Draft

Version: 1.0

Purpose

This document defines the emotional qualities the Hash Community Platform (HCP) should evoke throughout the user journey.

While functionality determines what users can do, emotional experience influences how they feel while doing it. The goal is to foster confidence, belonging, and enjoyment without relying on excessive visual effects or unnecessary complexity.

Vision

Every interaction should strengthen trust, belonging, and confidence.

Philosophy

People rarely remember every feature they used.

They remember how a product made them feel.

For HCP, the desired feeling is that of joining a welcoming community where participation is simple, safe, and rewarding.

Emotional Pillars

Belonging

Users should feel they are part of a community rather than using a piece of software.

Design should highlight:

- Groups.
 - Shared experiences.
 - Member contributions.
 - Community achievements.
 - Welcoming language.
-

Confidence

Users should feel in control.

The interface should communicate:

- What is happening.
- What happens next.
- Whether actions succeeded.
- How to recover from mistakes.

Confidence reduces hesitation.

Warmth

The platform should feel approachable.

Use:

- Friendly language.

- Encouraging microcopy.
- Human-centered messaging.
- Positive reinforcement.

Avoid robotic or overly formal communication.

Trust

Trust should be earned through consistency and transparency.

The platform should:

- Explain important actions.
 - Respect privacy.
 - Keep promises.
 - Avoid surprises.
 - Make policies understandable.
-

Celebration

Community achievements deserve recognition.

Celebrate:

- First event joined.
- Volunteer milestones.
- Community anniversaries.
- Completed trails.
- Positive contributions.

Recognition should feel genuine rather than gamified.

Calm

Avoid overwhelming users.

Reduce:

- Visual clutter.
- Notification overload.
- Excessive animations.
- Competing calls to action.

Calm interfaces help people focus.

Inclusion

Every member should feel welcome regardless of:

- Experience level.
- Device.
- Language.
- Accessibility needs.
- Community role.

Inclusive design expands participation.

Emotional Journey

First Visit

Desired emotions:

- Curiosity.
- Safety.
- Excitement.

Users should quickly understand what HCP offers and how to get involved.

Joining a Community

Desired emotions:

- Welcome.
- Confidence.
- Belonging.

The joining process should feel like entering a group, not completing paperwork.

Participating in an Event

Desired emotions:

- Anticipation.
- Connection.
- Enjoyment.

The interface should stay out of the way so users can focus on the experience itself.

Sharing Memories

Desired emotions:

- Pride.
- Gratitude.
- Nostalgia.

Uploading photos, writing trail reports, or thanking volunteers should feel meaningful.

Returning Later

Desired emotions:

- Familiarity.
- Comfort.
- Motivation.

Users should feel invited back, not pressured to return.

Microcopy Guidelines

Language should be:

- Friendly.
- Clear.
- Respectful.
- Inclusive.
- Encouraging.

Avoid:

- Blame.
 - Sarcasm.
 - Technical jargon.
 - Guilt-driven messaging.
 - Artificial urgency.
-

Notification Philosophy

Notifications should:

- Inform.
- Encourage.
- Celebrate.

They should not manipulate users into opening the app.

Every notification should have a clear purpose.

Business Rules

BR-UX-011

User messaging shall prioritize encouragement over urgency.

BR-UX-012

Recognition shall celebrate meaningful community participation rather than arbitrary engagement metrics.

BR-UX-013

Notifications shall provide value before requesting attention.

BR-UX-014

Important system actions shall reinforce user confidence through clear feedback.

BR-UX-015

The interface shall foster belonging throughout the user journey.

Acceptance Criteria

The emotional experience succeeds when:

- Users feel welcome during onboarding.
 - Community participation increases.
 - Trust in the platform grows.
 - Notifications are perceived as helpful.
 - Returning users feel comfortable and familiar with the experience.
-

Completion Criteria

Complete when:

- Emotional pillars are documented.
 - User journey emotions are defined.
 - Messaging philosophy is established.
-

Next Document

20-04 — Interaction Philosophy

Chapter 20 — Product Design Language

Part 4 — Interaction Philosophy

Document ID: HCP-PB-20-04

Parent: Chapter 20 — Product Design Language

Domain: Interaction Philosophy

Status: Draft

Version: 1.0

Purpose

This document defines how users interact with the Hash Community Platform (HCP).

It establishes consistent interaction patterns across mobile, web, and future platforms to ensure every interaction feels predictable, efficient, and human-centered.

Vision

Every interaction should feel effortless.

Philosophy

Users should never need to learn different interaction styles for different parts of the platform.

The same intent should always produce the same result.

Interactions should reward familiarity and minimize surprises.

Core Principles

Predictability

Interactive elements should behave consistently.

Buttons, links, gestures, forms, and navigation should follow established patterns throughout the platform.

Direct Manipulation

Where appropriate, users should interact directly with content.

Examples:

- Drag media into albums.
- Reorder itinerary items.
- Swipe between event photos.
- Pinch to zoom trail maps.

Avoid unnecessary intermediate dialogs.

Progressive Complexity

Simple tasks should remain simple.

Advanced capabilities should become available only when users need them.

Forgiveness

Design interactions so mistakes are easy to recover from.

Examples include:

- Undo actions.
- Draft preservation.
- Recoverable deletes.
- Autosave.

Users should rarely lose work.

Efficiency

Support both casual and experienced users.

Examples:

- Keyboard shortcuts on web.
 - Long-press context menus on mobile.
 - Bulk actions for administrators.
 - Smart defaults for forms.
-

Responsive Feedback

Every interaction should produce visible feedback.

Examples:

- Button state changes.
 - Progress indicators.
 - Success confirmations.
 - Error explanations.
 - Skeleton loading screens.
-

Minimal Interruptions

Avoid interrupting user flow.

Prefer:

- Inline validation.
- Toast notifications.
- Bottom sheets.
- Contextual prompts.

Reserve modal dialogs for high-impact decisions.

Navigation Behavior

Navigation should:

- Preserve context.
 - Avoid unnecessary page reloads.
 - Remember scroll position where appropriate.
 - Support deep linking.
 - Make returning to previous tasks simple.
-

Form Behavior

Forms should:

- Validate as users progress.
 - Save drafts automatically where practical.
 - Group related fields logically.
 - Use appropriate input controls.
 - Minimize required typing.
-

Search Behavior

Search should support:

- Instant suggestions.
- Typo tolerance.
- Recent searches.
- Filters.
- Clear empty states.

Search should help users discover rather than simply retrieve.

Notifications

Notifications should:

- Respect user preferences.
 - Be grouped when appropriate.
 - Avoid duplication.
 - Explain why they were received.
 - Offer relevant actions.
-

Empty States

Empty states should:

- Explain why no data is available.
- Suggest meaningful next actions.
- Avoid blaming the user.

Example:

Instead of:

"No events."

Prefer:

"Your next adventure starts here. Create or join an event to get started."

Error Handling

Errors should:

- Explain the problem clearly.
 - Describe what users can do next.
 - Avoid technical jargon.
 - Preserve entered information whenever possible.
-

Loading Behavior

Loading should:

- Be perceived as fast.
 - Use skeleton screens instead of blank pages.
 - Communicate progress for long operations.
 - Never block unrelated interactions unnecessarily.
-

Offline Behavior

When offline:

- Clearly indicate connectivity status.
 - Allow access to previously viewed content where feasible.
 - Queue supported actions for synchronization.
 - Explain what will happen once connectivity returns.
-

Gesture Philosophy

On touch devices:

- Tap for primary actions.
- Swipe for navigation or contextual actions.
- Long press for advanced options.
- Pinch for zooming maps and media.

Gestures should always have discoverable alternatives.

Business Rules

BR-UX-016

Identical interactions shall behave consistently across the platform.

BR-UX-017

Destructive actions shall support recovery where technically feasible.

BR-UX-018

Every user action shall receive immediate visual feedback.

BR-UX-019

Interactive patterns shall prioritize clarity over novelty.

BR-UX-020

Offline-capable features shall communicate synchronization status.

Acceptance Criteria

The interaction philosophy succeeds when:

- Users predict interface behavior.
 - Navigation feels consistent.
 - Errors are easy to recover from.
 - Work is rarely lost.
 - Interaction patterns remain reusable across products.
-

Completion Criteria

Complete when:

- Interaction principles are documented.
 - Navigation behavior is defined.
 - Form, loading, search, and error behaviors are standardized.
-

Next Document

20-05 — Visual Language

Chapter 20 — Product Design Language

Part 5 — Visual Language

Document ID: HCP-PB-20-05

Parent: Chapter 20 — Product Design Language

Domain: Visual Language

Status: Draft

Version: 1.0

Purpose

This document defines the visual language of the Hash Community Platform (HCP).

It establishes the visual grammar that guides every interface, ensuring consistency across mobile, web, admin, and future Bubble Barrel products.

The goal is not merely aesthetic consistency, but visual clarity that supports user understanding and community participation.

Vision

Every interface should communicate through clarity before decoration.

Philosophy

Visual design exists to support comprehension.

Every color, shape, icon, illustration, spacing decision, and animation should communicate purpose.

Decoration without meaning should be avoided.

Visual Personality

HCP should feel:

- Warm
- Modern
- Calm
- Trustworthy
- Approachable
- Lightweight
- Human
- Inclusive

The interface should avoid appearing corporate, overly playful, or overly technical.

Shape Language

Preferred characteristics:

- Soft rounded corners.
- Gentle curves.
- Consistent corner radii.
- Comfortable spacing.
- Clean edges.

Avoid aggressive angles or excessive ornamentation.

Rounded forms communicate approachability and reduce visual tension.

Color Philosophy

Color should communicate meaning before branding.

Primary uses include:

- Actions.
- Status.
- Hierarchy.
- Attention.
- Feedback.

Avoid using color as the only means of conveying information.

Accessibility remains mandatory.

Typography Philosophy

Typography should prioritize readability.

Characteristics:

- Clear hierarchy.
- Comfortable line height.
- Limited font families.
- Consistent sizing scale.
- High contrast.

Text should never compete with content.

Spacing Philosophy

Whitespace is an active design element.

Spacing should:

- Separate ideas.
- Create rhythm.
- Improve readability.
- Reduce cognitive load.

Crowded interfaces reduce confidence.

Iconography

Icons should:

- Be recognizable.
- Be consistent in stroke and style.
- Support labels where clarity benefits users.
- Represent familiar concepts.

Icons should clarify rather than decorate.

Imagery

Images should emphasize:

- Real communities.
- Authentic moments.
- Diversity.
- Outdoor activities.
- Shared experiences.
- Positive participation.

Avoid generic stock imagery whenever possible.

Illustration

Illustrations should:

- Simplify concepts.
- Welcome new users.
- Explain empty states.
- Humanize technical processes.

Illustrations should complement—not replace—clear language.

Motion

Motion should:

- Explain transitions.
- Reinforce hierarchy.
- Provide feedback.
- Maintain context.

Animation should never distract from the task.

Elevation

Elevation communicates hierarchy.

Use shadows and layers sparingly.

Higher elevation should indicate greater importance or temporary focus, such as dialogs or bottom sheets.

Density

The platform should maintain a medium visual density.

Users should feel:

- Comfortable.
- Unhurried.
- In control.

Avoid extremely dense enterprise layouts and excessively sparse consumer layouts.

Visual Consistency

Consistency applies to:

- Colors.
- Shapes.
- Shadows.
- Icons.
- Spacing.
- Typography.
- Motion.
- Layout patterns.

Visual familiarity reduces learning time.

Business Rules

BR-UX-021

Visual elements shall communicate purpose before decoration.

BR-UX-022

Color shall not be the sole indicator of meaning.

BR-UX-023

Spacing shall improve readability and interaction clarity.

BR-UX-024

Icons shall support comprehension rather than replace clear language.

BR-UX-025

Motion shall reinforce understanding rather than attract attention.

Acceptance Criteria

The visual language succeeds when:

- Interfaces feel immediately recognizable.
 - Users understand hierarchy quickly.
 - Reading effort decreases.
 - Accessibility standards remain satisfied.
 - Products maintain visual consistency across platforms.
-

Completion Criteria

Complete when:

- Visual grammar is documented.
 - Shape, color, typography, spacing, iconography, imagery, and motion philosophies are established.
-

Next Document

20-06 — Brand Expression

Chapter 20 — Product Design Language

Part 6 — Brand Expression

Document ID: HCP-PB-20-06

Parent: Chapter 20 — Product Design Language

Domain: Brand Expression

Status: Draft

Version: 1.0

Purpose

This document defines how the Hash Community Platform (HCP) expresses its identity visually and verbally while remaining aligned with the broader Bubble Barrel brand ecosystem.

It establishes a consistent approach to branding across interfaces, communications, marketing materials, and future platform extensions.

Vision

Every interaction should reinforce trust in both HCP and Bubble Barrel.

Brand Architecture

HCP is a product of Bubble Barrel.

The relationship should be visible without overwhelming HCP's individual identity.

Brand hierarchy:

Bubble Barrel

↓

Hash Community Platform

↓

Community (Kennel)

This hierarchy communicates ownership while allowing communities to retain their own identities.

Brand Personality

HCP should consistently feel:

- Welcoming
- Dependable
- Community-driven
- Curious
- Adventurous
- Inclusive
- Modern
- Respectful

Avoid personalities that feel:

- Corporate
 - Exclusive
 - Aggressive
 - Overly playful
 - Overly formal
-

Tone of Voice

Communication should be:

- Friendly.
- Clear.
- Direct.
- Respectful.
- Encouraging.

Examples:

Instead of:

"Authentication failed."

Prefer:

"We couldn't sign you in. Please check your email and password and try again."

Instead of:

"Submission rejected."

Prefer:

"We couldn't approve this yet. Here's what needs attention."

Messaging Principles

Messages should:

- Explain.
- Encourage.
- Guide.
- Celebrate.

Avoid:

- Blame.
 - Fear.
 - Artificial urgency.
 - Unnecessary technical language.
-

Logo Usage

The HCP logo should:

- Remain legible at all sizes.
 - Maintain sufficient clear space.
 - Never be distorted.
 - Never be recolored outside approved brand variants.
 - Always appear on appropriate contrast backgrounds.
-

Product Identity

HCP's identity should emphasize:

- Community.
- Shared experiences.
- Exploration.
- Stories.
- Belonging.

Visual elements should consistently reinforce these themes.

Photography Direction

Preferred imagery:

- Real members.
- Authentic events.
- Outdoor environments.
- Genuine interactions.
- Diverse communities.

Avoid:

- Staged corporate photography.
 - Unrealistic stock imagery.
 - Overly polished scenes that reduce authenticity.
-

Illustration Direction

Illustrations should:

- Support understanding.
- Welcome newcomers.
- Explain features.
- Celebrate participation.

Illustrations should reflect diversity and inclusion.

Iconography

Icons should:

- Match the shared Bubble Barrel icon style.
 - Be simple.
 - Be recognizable.
 - Maintain consistent stroke weight and proportions.
-

Brand Across Platforms

Brand consistency should extend to:

- Mobile applications.
 - Web applications.
 - Administrative portals.
 - Emails.
 - Documentation.
 - Social media.
 - Presentations.
 - Marketing assets.
-

Community Identity

While HCP provides the platform identity, individual kennels should retain flexibility to express:

- Logos.
- Banners.
- Colors (within accessibility constraints).
- Descriptions.
- Traditions.

The platform should celebrate local identity while preserving overall consistency.

Business Rules

BR-UX-026

Product branding shall remain consistent across all supported platforms.

BR-UX-027

User-facing communication shall follow the defined tone of voice.

BR-UX-028

Community branding shall not compromise usability or accessibility.

BR-UX-029

Marketing assets shall align with the Bubble Barrel brand architecture.

BR-UX-030

Brand expression shall reinforce trust, inclusion, and community.

Acceptance Criteria

The brand expression succeeds when:

- Users recognize HCP across platforms.
 - Communication feels consistent.
 - Community identity is respected.
 - Bubble Barrel ownership is clear without overshadowing HCP.
 - Marketing and product experiences feel unified.
-

Completion Criteria

Complete when:

- Brand architecture is documented.
 - Voice and tone are defined.
 - Visual identity guidelines are established.
-

Next Document

20-07 — Accessibility Philosophy

Chapter 20 — Product Design Language

Part 7 — Accessibility Philosophy

Document ID: HCP-PB-20-07

Parent: Chapter 20 — Product Design Language

Domain: Accessibility Philosophy

Status: Draft

Version: 1.0

Purpose

This document defines the accessibility philosophy for the Hash Community Platform (HCP).

It establishes accessibility as a core product requirement, ensuring that every member—regardless of ability, device, language, or environment—can meaningfully participate in the community.

Vision

Participation should never depend on ability.

Philosophy

Accessibility is not about designing for a small group of users.

It is about designing for the diversity of real people.

Every member deserves an experience that is understandable, usable, and respectful.

Accessibility improves the experience for everyone.

Design Principles

Inclusive by Default

Accessibility should be considered during planning, design, development, and testing—not added later.

Perceivable

Information should be available through multiple channels.

Examples:

- Text labels alongside icons.
 - Sufficient color contrast.
 - Alternative text for images.
 - Captions for videos.
 - Clear visual hierarchy.
-

Operable

Users should be able to complete tasks using different interaction methods.

Support should include:

- Keyboard navigation.
 - Touch navigation.
 - Screen readers.
 - Assistive technologies.
 - Reasonable touch target sizes.
-

Understandable

Interfaces should use:

- Plain language.
- Consistent navigation.
- Predictable interactions.
- Helpful error messages.
- Clear instructions.

Users should not need technical knowledge to participate.

Robust

The platform should work reliably across:

- Modern browsers.
 - Mobile devices.
 - Screen readers.
 - Different operating systems.
 - Varying network conditions.
-

Accessibility Goals

The platform should support users with:

- Visual impairments.
 - Hearing impairments.
 - Motor impairments.
 - Cognitive differences.
 - Temporary injuries.
 - Situational limitations (bright sunlight, noisy environments, poor connectivity).
-

Language Accessibility

The platform should:

- Avoid unnecessary jargon.
 - Explain unfamiliar terms.
 - Support localization.
 - Respect cultural differences.
 - Use inclusive language.
-

Motion Accessibility

Animations should:

- Support understanding.
 - Respect reduced-motion preferences.
 - Never trigger discomfort.
 - Remain optional where appropriate.
-

Color Accessibility

Color should never be the only way to communicate:

- Errors.
- Success.
- Warnings.
- Status.
- Selection.

Alternative indicators such as icons, text, or patterns should always be present.

Typography Accessibility

Typography should:

- Maintain readable font sizes.
 - Use adequate line spacing.
 - Preserve contrast.
 - Support dynamic text scaling.
 - Avoid decorative fonts for essential content.
-

Media Accessibility

Images should include meaningful alternative text.

Videos should provide:

- Captions.
- Transcripts where appropriate.
- Accessible controls.

Audio content should include transcripts whenever practical.

Form Accessibility

Forms should:

- Associate labels with fields.
 - Explain validation errors clearly.
 - Preserve user input after errors.
 - Indicate required fields consistently.
-

Accessibility Testing

Accessibility should be evaluated through:

- Automated testing.
 - Manual testing.
 - Keyboard-only navigation.
 - Screen reader testing.
 - User testing with people using assistive technologies where feasible.
-

Compliance

The platform should aim to conform with recognized accessibility standards such as WCAG 2.2 Level AA.

Where practical and beneficial, higher levels of accessibility should be pursued.

Business Rules

BR-UX-031

Accessibility shall be considered from the beginning of every feature.

BR-UX-032

Essential functionality shall remain usable without relying on color alone.

BR-UX-033

Interactive elements shall be accessible via keyboard where applicable.

BR-UX-034

Media content shall provide accessible alternatives when feasible.

BR-UX-035

Accessibility shall be verified before production release.

Acceptance Criteria

The accessibility philosophy succeeds when:

- Core workflows are usable by people with diverse abilities.
 - Accessibility defects decrease over time.
 - Users report confidence using assistive technologies.
 - Compliance goals are consistently met.
 - Inclusive participation increases.
-

Completion Criteria

Complete when:

- Accessibility philosophy is documented.
 - Inclusive design principles are established.
 - Testing expectations are defined.
-

Next Document

20-08 — Content Voice

Chapter 20 — Product Design Language

Part 8 — Content Voice

Document ID: HCP-PB-20-08

Parent: Chapter 20 — Product Design Language

Domain: Content Voice

Status: Draft

Version: 1.0

Purpose

This document defines the writing style, tone of voice, and content standards used throughout the Hash Community Platform (HCP).

Its purpose is to ensure every word—from onboarding to notifications, error messages to AI responses—feels consistent, clear, respectful, and aligned with the platform's mission of strengthening communities.

Vision

Every word should help someone move forward.

Philosophy

Content is part of the interface.

Good writing reduces confusion, builds trust, and helps people accomplish their goals with confidence.

Users should never need to translate system language into human language.

Voice Attributes

The HCP voice should be:

- Clear
- Friendly
- Respectful
- Helpful
- Honest
- Encouraging
- Inclusive
- Calm

Avoid sounding:

- Robotic
 - Condescending
 - Overly casual
 - Overly formal
 - Sales-focused
 - Alarmist
-

Writing Principles

Clarity First

Prefer familiar words over technical jargon.

Example:

Instead of:

"Authentication credentials are invalid."

Use:

"Your email or password is incorrect."

Action-Oriented

Help users understand what they can do next.

Example:

Instead of:

"Upload failed."

Use:

"We couldn't upload your photo. Please check your connection and try again."

Honest Communication

Never hide problems.

If something goes wrong:

- Explain what happened.

- Explain what users can do.
- Explain what the platform is doing.

Avoid vague messages.

Encourage, Don't Blame

Users should never feel at fault.

Instead of:

"You entered invalid data."

Use:

"We couldn't understand that date. Try using DD/MM/YYYY."

Celebrate Meaningful Moments

Recognize achievements that strengthen the community.

Examples:

- First event joined.
- First trail report published.
- Volunteer recognition.
- Community milestones.

Celebration should feel sincere, not manipulative.

Respect Attention

Keep messages concise.

Users should be able to understand essential information quickly.

Long explanations belong in help documentation—not dialogs.

Microcopy Standards

Buttons should use verbs.

Examples:

- Join Event
- Save Draft
- Invite Member
- Publish Report

Avoid vague labels like:

- OK
- Submit
- Continue

unless context makes them obvious.

Error Messages

Every error message should answer:

1. What happened?
 2. Why did it happen? (if known)
 3. What can I do next?
-

Success Messages

Success messages should:

- Confirm completion.
- Reinforce confidence.
- Avoid unnecessary celebration.

Example:

"Your event has been published."

not

"🎉 Amazing! Fantastic! You're awesome!"

Empty States

Empty states should:

- Explain the situation.
- Offer a meaningful next step.
- Encourage exploration.

Example:

"No upcoming events yet.

Why not create one or join a nearby community?"

Notifications

Notifications should:

- Deliver value.
 - Explain why they matter.
 - Respect user preferences.
 - Avoid clickbait language.
-

AI Responses

AI-generated content should:

- Clearly distinguish facts from suggestions.
 - Cite sources where appropriate.
 - Admit uncertainty when necessary.
 - Match the HCP voice.
-

Localization

Content should:

- Avoid idioms that do not translate well.
 - Use culturally neutral language where practical.
 - Support localization without changing intent.
-

Business Rules

BR-UX-036

User-facing content shall prioritize clarity over technical precision.

BR-UX-037

Every actionable message shall guide users toward an appropriate next step.

BR-UX-038

System messaging shall remain respectful and non-judgmental.

BR-UX-039

AI-generated content shall follow the same voice guidelines as human-written content.

BR-UX-040

Microcopy shall be reviewed as part of the product design process.

Acceptance Criteria

The content voice succeeds when:

- Users understand system messages quickly.
 - Support requests caused by unclear wording decrease.
 - Product copy feels consistent across features.
 - AI responses align with platform voice.
 - Community interactions remain welcoming and respectful.
-

Completion Criteria

Complete when:

- Voice attributes are documented.
 - Writing principles are established.
 - Messaging standards are defined.
-

Next Document

20-09 — Trust & Safety UX

Chapter 20 — Product Design Language

Part 9 — Trust & Safety UX

Document ID: HCP-PB-20-09

Parent: Chapter 20 — Product Design Language

Domain: Trust & Safety Experience

Status: Draft

Version: 1.0

Purpose

This document defines how trust, safety, and transparency are expressed through the user experience of the Hash Community Platform (HCP).

Its purpose is to ensure users feel informed, protected, respected, and empowered while participating in communities, events, and platform activities.

Vision

Safety should feel supportive, not restrictive.

Philosophy

Trust is built through consistent actions rather than isolated features.

The platform should communicate clearly, explain important decisions, and provide users with appropriate control over their information and interactions.

Trust Principles

Transparency

Users should understand:

- What information is collected.
- Why it is collected.
- Who can access it.
- How it is used.

Important decisions should be explainable.

User Control

Users should have meaningful control over:

- Privacy settings.
- Notification preferences.
- Profile visibility.
- Shared content.
- Community participation.

Control increases trust.

Predictability

Security-related interactions should be consistent.

Examples include:

- Login verification.
- Permission requests.
- Content reporting.

- Account recovery.

Unexpected behavior reduces confidence.

Respect

Safety features should protect users without treating them as potential offenders.

Language should remain respectful throughout moderation and enforcement processes.

Privacy Experience

Privacy settings should be:

- Easy to find.
- Easy to understand.
- Easy to change.

Avoid hidden or confusing controls.

Community Safety

Users should be able to:

- Report inappropriate content.
- Block unwanted interactions.
- Leave communities.
- Appeal moderation decisions where applicable.

Safety tools should be accessible without becoming intrusive.

Moderation Experience

Moderation actions should:

- Explain the reason when appropriate.
- Describe available next steps.
- Avoid unnecessarily exposing private information.

Moderation should reinforce fairness.

Verification

Where verification is supported, the platform should explain:

- Why verification is requested.
- How verification works.
- What benefits verification provides.

Verification should build confidence rather than create barriers.

Permission Requests

Permission requests should occur only when necessary.

Each request should explain:

- Why access is needed.
 - How it improves the experience.
 - Whether the feature remains usable without it.
-

Sensitive Actions

High-impact actions should include appropriate safeguards.

Examples:

- Account deletion.
- Community ownership transfer.
- Role changes.
- Data exports.

Users should understand the consequences before proceeding.

AI Transparency

When AI contributes to content or recommendations, the platform should indicate this clearly where it materially affects user decisions.

Users should know when they are interacting with AI-assisted features.

Recovery Experience

If something goes wrong:

- Preserve user work whenever possible.
- Explain what happened.
- Offer recovery options.
- Reduce frustration.

Recovery builds confidence.

Business Rules

BR-UX-041

Privacy controls shall remain understandable to non-technical users.

BR-UX-042

Users shall receive clear explanations before granting sensitive permissions.

BR-UX-043

Safety and moderation actions shall provide understandable reasons where appropriate.

BR-UX-044

High-impact operations shall communicate their consequences before execution.

BR-UX-045

AI-assisted experiences shall provide appropriate transparency.

Acceptance Criteria

The Trust & Safety UX succeeds when:

- Users report confidence in privacy controls.
 - Moderation processes are perceived as fair.
 - Sensitive actions are completed with fewer accidental errors.
 - AI-assisted features remain understandable.
 - Trust in the platform increases over time.
-

Completion Criteria

Complete when:

- Trust principles are documented.
 - Privacy and moderation experiences are defined.
 - Safety interactions are standardized.
-

Next Document

20-10 — Design Governance

Chapter 20 — Product Design Language

Part 10 — Design Governance

Document ID: HCP-PB-20-10

Parent: Chapter 20 — Product Design Language

Domain: Design Governance

Status: Draft

Version: 1.0

Purpose

This document defines how design decisions are proposed, reviewed, approved, documented, implemented, and maintained across the Hash Community Platform (HCP).

The objective is to ensure the product evolves consistently while preserving usability, accessibility, and brand integrity.

Vision

Consistency is created through governance, not coincidence.

Philosophy

A design system is a living product.

It requires ownership, documentation, review, and continuous improvement.

Every design decision should become easier—not harder—to understand over time.

Governance Objectives

The Design Governance process shall:

- Maintain consistency.
 - Reduce duplication.
 - Protect accessibility.
 - Improve collaboration.
 - Accelerate development.
 - Preserve product quality.
 - Support future products.
-

Design Authority

Every design artifact shall have a designated owner.

Examples include:

- Design tokens.
- Components.
- Icons.
- Typography.
- Illustrations.
- Motion patterns.
- Interaction standards.
- Content guidelines.

Ownership ensures accountability.

Change Management

All proposed design changes should include:

- Business rationale.
- User impact.
- Accessibility review.
- Engineering impact.
- Backward compatibility.
- Migration strategy (if required).

Changes should be reviewed before adoption.

Review Process

Design reviews should evaluate:

- User experience.
- Accessibility.
- Consistency.
- Performance implications.
- Brand alignment.
- Reusability.

Reviews focus on solving user problems rather than personal preferences.

Component Lifecycle

Every shared component shall move through defined stages:

1. Proposal
2. Prototype
3. Review
4. Approved
5. Production
6. Deprecated
7. Archived

Lifecycle management prevents uncontrolled growth.

Documentation

Every shared design asset should include:

- Purpose.
- Usage guidelines.
- Do and Don't examples.
- Accessibility considerations.
- Responsive behavior.
- Interaction notes.
- Related components.

Documentation is part of the deliverable.

Versioning

The Product Design Language, Design System, and Component Library shall be versioned independently.

Breaking changes should be documented with migration guidance.

Contribution Model

Anyone may propose improvements.

Approval should be based on:

- User value.
- Evidence.
- Consistency.
- Accessibility.
- Maintainability.

Authority should not replace evidence.

Quality Metrics

Representative governance metrics include:

- Component reuse rate.
- Accessibility compliance.
- Design review completion rate.
- Design debt.
- UI inconsistency reports.
- Time to adopt new components.

Metrics help evaluate system health.

Business Rules

BR-UX-046

Shared design assets shall have designated owners.

BR-UX-047

Breaking design changes shall include migration guidance.

BR-UX-048

Reusable components shall be documented before production adoption.

BR-UX-049

Accessibility review shall be part of every shared component review.

BR-UX-050

Design decisions shall be evidence-based where practical.

Acceptance Criteria

The Design Governance process succeeds when:

- Product consistency improves over time.
 - Duplicate components decrease.
 - Accessibility remains stable.
 - Design decisions become easier to understand.
 - New contributors onboard quickly.
-

Completion Criteria

Complete when:

- Governance process is documented.
 - Component lifecycle is defined.
 - Review model is established.
-

End of Chapter 20

Chapter 21 - User Experience Bible

Document ID: HCP-PB-21

Status: Draft

Version: 1.0

Purpose

Chapter 21 defines the user experience system for HCP: who the product serves, how users think, how they move through the application, and how important tasks should behave from first entry through completion.

This chapter translates the product bible into implementation-ready experience guidance.

Chapter Structure

Foundation

- 21-01 UX Vision
- 21-02 User Personas
- 21-03 User Mental Models
- 21-04 Experience Principles

Journeys

- J-001 User Onboarding
- J-002 Join Kennel
- J-003 Join Run
- J-004 Participate in Run
- J-005 Upload Photos and Videos
- J-006 Write Trail Report
- J-007 Volunteer Workflow
- J-008 Hare Workflow
- J-009 Committee Workflow
- J-010 Create New Kennel

Task Flows

- TF-001 User Onboarding
- TF-002 Join Kennel
- TF-003 Join Run
- TF-004 Participate in Run
- TF-005 Upload Photos and Videos
- TF-006 Write Trail Report
- TF-007 Volunteer Workflow
- TF-008 Hare Workflow

- TF-009 Committee Workflow
- TF-010 Create New Kennel

Navigation

- NF-001 Application Navigation

Traceability

- 21-05 Journey-to-Task-Flow Traceability Matrix
-

Experience Traceability

Every journey should map to at least one task flow. See [21-05-Journey-Task-Flow-Traceability.md](#) for the matrix confirming this and recording coverage gaps.

Every task flow should define:

- Actor
 - Trigger
 - Preconditions
 - UI flow
 - Validation
 - API or backend operations
 - Success states
 - Failure states
 - Accessibility
 - Analytics
 - Acceptance criteria
-

Completion Criteria

Chapter 21 is complete when:

- Core UX principles are documented.
 - Primary personas and mental models are defined.
 - Primary journeys are specified.
 - Matching task flows exist for implementation.
 - Navigation rules are documented.
 - Accessibility, analytics, performance, and error recovery expectations are defined for each critical task.
-

Chapter 21 — User Experience Bible

Part 1 — UX Vision

Document ID: HCP-PB-21-01

Parent: Chapter 21 — User Experience Bible

Domain: User Experience Vision

Status: Draft

Version: 1.0

Purpose

This document defines the long-term vision for the user experience of the Hash Community Platform (HCP).

It establishes the principles that guide every interaction, journey, workflow, and service provided by the platform.

The UX Vision ensures that all product decisions contribute toward a coherent, community-first experience.

Vision

HCP should feel less like using software and more like being part of a living community.

Technology should quietly support relationships, participation, and shared experiences without becoming the center of attention.

Experience Mission

Enable every community member to:

- Discover communities.
- Join confidently.
- Participate easily.
- Contribute meaningfully.
- Preserve memories.
- Build lasting relationships.

Every feature should support at least one of these outcomes.

Experience Goals

The platform should enable users to:

- Feel welcomed within minutes.
 - Understand their next step without guidance.
 - Complete common tasks efficiently.
 - Recover easily from mistakes.
 - Trust the platform with their information.
 - Return because of the community—not because of notifications.
-

Experience Characteristics

The ideal HCP experience is:

- Simple
 - Predictable
 - Inclusive
 - Reliable
 - Human
 - Calm
 - Fast
 - Helpful
 - Community-centered
-

Guiding Questions

Every UX decision should answer:

- Does this reduce effort?
- Does this strengthen relationships?
- Does this remove uncertainty?
- Does this encourage participation?
- Does this respect users' time?
- Does this improve trust?
- Does this remain accessible?

If the answer to several of these questions is “no,” the solution should be reconsidered.

User Success Definition

A successful experience is not measured by time spent in the application.

Success is measured by:

- Communities becoming more active.
- Members participating more frequently.
- Volunteers contributing more easily.
- Organizers spending less time on administration.
- Users completing tasks with confidence.

The platform succeeds when people accomplish meaningful goals.

Experience Across Platforms

Whether using:

- Mobile
- Web
- Tablet
- Future desktop clients

Users should recognize the same interaction model, terminology, and design language.

Platform conventions may differ, but the underlying experience remains consistent.

Experience Boundaries

HCP should:

- Help communities organize.
- Preserve community history.
- Facilitate communication.
- Encourage participation.
- Reduce administrative effort.

HCP should not:

- Replace face-to-face interaction.
 - Encourage addictive usage patterns.
 - Prioritize engagement metrics over community value.
 - Overcomplicate simple community activities.
-

Experience Metrics

Representative UX metrics include:

- Time to first successful action.
- Onboarding completion rate.
- Event participation rate.
- Volunteer participation.
- User retention.
- Task completion rate.
- User satisfaction.
- Accessibility satisfaction.
- Community health indicators.

These metrics should be reviewed regularly to guide product improvements.

Business Rules

BR-UX-051

Every new feature shall support at least one defined user outcome.

BR-UX-052

User success shall be measured primarily by successful task completion and community participation.

BR-UX-053

Platform engagement metrics shall not outweigh community well-being.

BR-UX-054

User experience decisions shall prioritize simplicity before feature expansion.

BR-UX-055

Cross-platform experiences shall remain functionally consistent.

Acceptance Criteria

The UX Vision succeeds when:

- Teams share a common understanding of the desired experience.
 - Product decisions consistently reinforce community goals.
 - UX metrics improve over successive releases.
 - Users complete common tasks with confidence.
 - Community participation increases.
-

Completion Criteria

Complete when:

- UX vision is documented.
 - Experience goals are defined.
 - User success metrics are established.
-

Next Document

21-02 — User Personas

Chapter 21 — User Experience Bible

Part 2 — User Personas

Document ID: HCP-PB-21-02

Parent: Chapter 21 — User Experience Bible

Domain: User Personas

Status: Draft

Version: 1.0

Purpose

This document defines the primary user personas for the Hash Community Platform (HCP).

Rather than focusing on demographic profiles, HCP models users by the roles they perform, the goals they pursue, and the responsibilities they hold within their communities.

A single person may occupy multiple personas over time.

Vision

Design for what people are trying to accomplish, not who they are.

Persona Philosophy

Personas represent patterns of behavior and responsibility.

Users may transition between personas throughout their journey in HCP.

The platform should support those transitions naturally.

Persona 1 — Visitor

Goal

Understand what HCP is and decide whether to join.

Typical Tasks

- Explore communities.
- Learn about hashing.
- Browse public events.
- View public content.

Success

The visitor confidently creates an account or decides to learn more.

Persona 2 — Community Member

Goal

Participate in community activities.

Typical Tasks

- Join events.
- View trails.
- Upload photos.
- Comment.
- React.
- Connect with other members.

Success

The member participates regularly with minimal administrative effort.

Persona 3 — Hare

Goal

Create engaging trail experiences.

Typical Tasks

- Plan trails.
- Publish trail information.
- Upload maps.
- Coordinate logistics.
- Share updates.

Success

Participants can easily find and enjoy the planned experience.

Persona 4 — Scribe

Goal

Preserve community history.

Typical Tasks

- Write trail reports.
- Edit AI-assisted drafts.
- Publish event summaries.
- Attach media.
- Archive memorable moments.

Success

Community memories remain accurate, engaging, and searchable.

Persona 5 — Volunteer

Goal

Support community operations.

Typical Tasks

- Assist organizers.
- Check in participants.
- Coordinate activities.
- Help during events.

Success

Operational tasks become easier and more reliable.

Persona 6 — Committee Member

Goal

Manage community administration.

Typical Tasks

- Review requests.
- Manage roles.
- Approve events.
- Moderate content.
- Communicate with members.

Success

Administrative effort decreases while transparency increases.

Persona 7 — Community Administrator

Goal

Operate the community effectively.

Typical Tasks

- Configure settings.
- Manage permissions.
- Oversee governance.
- Review analytics.
- Maintain community information.

Success

The community remains healthy, active, and well-managed.

Persona 8 — Platform Administrator

Goal

Maintain the overall HCP ecosystem.

Typical Tasks

- Monitor system health.
- Review reports.
- Manage platform policies.
- Support communities.
- Resolve escalated issues.

Success

The platform remains reliable, secure, and trusted.

Persona Transitions

Users may progress naturally.

Example progression:

Visitor



Member



Volunteer



Hare



Scribe



Committee Member



Community Administrator

Transitions should require minimal friction.

Shared Needs

Every persona values:

- Simplicity.
 - Reliability.
 - Trust.
 - Community.
 - Accessibility.
 - Fast interactions.
 - Clear communication.
-

Experience Expectations

Regardless of role, users should:

- Understand their next step.
 - Know their responsibilities.
 - Recover from mistakes easily.
 - Receive meaningful feedback.
 - Feel welcomed.
-

Business Rules

BR-UX-056

The platform shall support multiple personas per account.

BR-UX-057

Role transitions shall preserve user identity and history.

BR-UX-058

Interfaces shall adapt to responsibilities without overwhelming users.

BR-UX-059

Permissions shall be determined by assigned roles rather than separate accounts.

BR-UX-060

Common tasks shall remain consistent across personas where practical.

Acceptance Criteria

The persona framework succeeds when:

- Product decisions align with user goals.
 - Role transitions remain intuitive.
 - Common workflows remain efficient.
 - Permissions remain understandable.
 - Users recognize their responsibilities.
-

Completion Criteria

Complete when:

- Personas are documented.
 - Goals are defined.
 - Role transitions are established.
-

Next Document

21-03 — User Mental Models

Chapter 21 — User Experience Bible

Part 3 — User Mental Models

Document ID: HCP-PB-21-03

Parent: Chapter 21 — User Experience Bible

Domain: User Mental Models

Status: Draft

Version: 1.0

Purpose

This document defines the mental models users are expected to have when interacting with the Hash Community Platform (HCP).

Its purpose is to ensure the platform behaves in ways that match user expectations, reducing learning time, confusion, and support needs.

Vision

The platform should behave the way users expect, not the way the system is implemented.

Philosophy

People understand software by relating it to experiences they already know.

The platform should use familiar concepts, language, and workflows instead of exposing technical implementation details.

Mental Model 1 — Communities

Users think:

"I belong to one or more communities."

The interface should reinforce belonging rather than membership management.

Avoid exposing database concepts such as community IDs or relationship tables.

Mental Model 2 — Events

Users think:

"I'm joining today's event."

The interface should emphasize participation rather than registration workflows.

Joining should feel immediate and welcoming.

Mental Model 3 — Trails

Users think:

"We're following today's trail."

Trail information should be organized around the experience, not around files, maps, or records.

Mental Model 4 — Memories

Users think:

"I'm sharing memories from the event."

Media uploads should feel like contributing to a shared story rather than managing assets.

Mental Model 5 — Roles

Users think:

"Today I'm helping organize."

Roles should feel like responsibilities rather than permissions.

The interface should expose additional capabilities naturally when responsibilities change.

Mental Model 6 — Notifications

Users think:

"The community has something important to tell me."

Notifications should emphasize relevance instead of system activity.

Mental Model 7 — Search

Users think:

"Help me find what I'm looking for."

Search should prioritize meaningful results over exact matches.

It should tolerate spelling mistakes, synonyms, and partial queries.

Mental Model 8 — AI Assistance

Users think:

"Help me finish my task."

AI should feel like an assistant—not an obstacle or replacement.

Suggestions should remain editable.

Users retain final control.

Mental Model 9 — Privacy

Users think:

"I choose what others can see."

Privacy settings should be organized around visibility rather than technical permissions.

Mental Model 10 — History

Users think:

"I can always find things again."

Important information should remain discoverable.

History should feel permanent unless users intentionally remove it.

Cross-Cutting Principles

The interface should:

- Use familiar language.
 - Group related actions.
 - Preserve context.
 - Minimize surprises.
 - Explain unexpected behavior.
-

Avoid

Avoid exposing:

- Database terminology.
- Internal IDs.
- Technical errors.
- Infrastructure concepts.
- Permission matrices.

These belong in engineering—not in the user experience.

Business Rules

BR-UX-061

User-facing concepts shall reflect real-world community activities.

BR-UX-062

Technical implementation details shall remain hidden from end users unless required for troubleshooting.

BR-UX-063

Role changes shall be communicated in terms of responsibilities rather than permissions.

BR-UX-064

AI assistance shall remain user-controlled.

BR-UX-065

Information architecture shall align with user mental models.

Acceptance Criteria

The mental model framework succeeds when:

- New users understand the platform quickly.
 - Support requests related to navigation decrease.
 - Common workflows feel intuitive.
 - Users rarely encounter unfamiliar terminology.
 - Product decisions consistently reflect user expectations.
-

Completion Criteria

Complete when:

- Core mental models are documented.
 - Cross-cutting principles are established.
 - Technical abstractions are hidden from the primary user experience.
-

Next Document

21-04 — Experience Principles

Chapter 21 — User Experience Bible

Part 4 — Experience Principles

Document ID: HCP-PB-21-04

Parent: Chapter 21 — User Experience Bible

Domain: Experience Principles

Status: Draft

Version: 1.0

Purpose

This document defines the practical experience principles that guide the design, implementation, and evaluation of every user interaction within the Hash Community Platform (HCP).

These principles provide a common standard for product managers, designers, engineers, QA, and contributors when making product decisions.

Vision

Every interaction should move the user closer to their goal with confidence.

Principle 1 — Guide, Don't Instruct

The interface should naturally lead users toward successful outcomes.

Use layout, hierarchy, defaults, and context to guide behavior before relying on instructions.

Principle 2 — Minimize Decisions

Every additional decision increases cognitive effort.

Where practical:

- Pre-fill known information.
 - Select sensible defaults.
 - Recommend common options.
 - Hide advanced settings until needed.
-

Principle 3 — Preserve Progress

Users should rarely lose work.

The platform should:

- Autosave drafts.
 - Preserve form data.
 - Queue supported offline actions.
 - Restore interrupted sessions where appropriate.
-

Principle 4 — Keep Context

Users should always understand:

- Where they are.
- What they're working on.
- What changed.
- What happens next.

Avoid forcing users to reconstruct context after navigation or interruptions.

Principle 5 — Make Success Obvious

When an action succeeds, users should know immediately.

Examples:

- Clear confirmation messages.
 - Updated interface state.
 - Visual acknowledgement.
 - Optional undo actions.
-

Principle 6 — Make Failure Recoverable

Errors should never become dead ends.

Every recoverable failure should provide:

- A clear explanation.
 - A suggested next step.
 - Preservation of user input where possible.
-

Principle 7 — Prioritize Common Tasks

Optimize for the activities users perform most frequently.

Rare administrative tasks should not complicate everyday workflows.

Principle 8 — Respect Momentum

Avoid interrupting users during focused tasks.

Reduce unnecessary dialogs, confirmations, and navigation changes.

Let people stay “in the flow.”

Principle 9 — Build Confidence Incrementally

Trust is earned through many small interactions.

Examples include:

- Predictable navigation.
 - Accurate search results.
 - Honest messaging.
 - Reliable autosave.
 - Transparent AI suggestions.
-

Principle 10 — Design for Return Visits

Returning users should immediately recognize:

- New activity.
- Pending actions.
- Relevant updates.
- Recently viewed content.

The product should help users continue rather than start over.

Experience Review Checklist

Every significant feature should be evaluated against these questions:

- Is the user's primary goal obvious?
 - Can the task be completed with minimal unnecessary decisions?
 - Is progress preserved?
 - Is feedback immediate and understandable?
 - Are mistakes recoverable?
 - Does the interface preserve context?
 - Does this encourage meaningful participation?
 - Is the experience accessible?
 - Does it perform well on typical devices and networks?
 - Would a first-time user understand what to do?
-

Business Rules

BR-UX-066

User progress shall be preserved whenever technically feasible.

BR-UX-067

Every primary workflow shall provide immediate feedback for significant actions.

BR-UX-068

Product decisions shall prioritize high-frequency tasks over infrequent administrative workflows.

BR-UX-069

Recoverable failures shall provide actionable guidance.

BR-UX-070

Experience reviews shall be completed before production release of major features.

Acceptance Criteria

The experience principles succeed when:

- Users complete common tasks efficiently.
 - Progress is rarely lost.
 - Errors are easier to recover from.
 - Returning users quickly regain context.
 - Product reviews consistently reference these principles.
-

Completion Criteria

Complete when:

- Experience principles are documented.
 - Review checklist is established.
 - Operational UX standards are defined.
-

Next Document

21-05 — User Journey Maps

21-05 — Journey-to-Task-Flow Traceability Matrix

Document ID: HCP-PB-21-05

Parent Document: Chapter 21 — User Experience Bible

Status: Draft

Version: 1.0

Date: 2026-08-10

Added during Product Bible Phase 1 normalization (`CODEx/IMPLEMENTATION-ROADMAP.md`), per Chapter 21's own stated principle: "Every journey should map to at least one task flow."

Purpose

Chapter 21's README asserts the traceability principle but never provides the matrix itself. This document is that matrix: it confirms every journey has an implementing task flow, flags the one journey with a duplicate/legacy task flow, and records where a task flow's detail is thinner than its journey implies.

Matrix

Journey	Task Flow	Journey Status	Task Flow Status	Coverage Notes
J-001 User Onboarding	TF-001 User Onboarding	Draft	Draft	1:1, consistent.
J-002 Join Kennel	TF-002 Join Kennel	Draft	Draft	1:1, consistent.
J-003 Join Run	TF-003 Join Run (canonical) + TF-003.2 Join Run (superseded, nested under task-flows/TF-003-Join-Run/)	Draft	Draft (canonical) / Superseded	Two task flows exist for one journey — see Gap 1 below.
J-004 Participate in Run	TF-004 Participate in Run	Draft	Draft	1:1, consistent.
J-005 Upload Photos and Videos	TF-005 Upload Photos and Videos	Draft	Draft	1:1, consistent.
J-006 Write Trail Report	TF-006 Write Trail Report	Draft	Draft	1:1, consistent.
J-007 Volunteer Workflow	TF-007 Volunteer Workflow	Draft	Draft	1:1, consistent.
J-008 Hare Workflow	TF-008 Hare Workflow	Draft	Draft	1:1, consistent.
J-009 Committee Workflow	TF-009 Committee Workflow	Draft	Draft	1:1, consistent.

Journey	Task Flow	Journey Status	Task Flow Status	Coverage Notes
J-010 Create New Kennel	TF-010 Create New Kennel	Draft	Draft	1:1, consistent.

Navigation reference: NF-001 Application Navigation is a cross-cutting document, not tied to a single journey; it is not included as a matrix row but should be consulted alongside every task flow above for entry points and transitions between flows.

Coverage Gaps

Gap 1 — Duplicate task flow for J-003 (resolved this pass)

`task-flows/TF-003-Join-Run/TF-003.2-Join-Run.md` was a legacy, more implementation-detailed task flow nested one level below the canonical `task-flows/TF-003-Join-Run.md`. It has been marked **Superseded** (this pass — see `CODEX/DECISION-LOG.md`) rather than deleted, because it contains a Database Changes section, a Security section, concrete notification timing, and a QA Test Cases checklist that the canonical TF-003 does not yet have.

Follow-up (tracked in `CODEX/TODO.md`): merge TF-003.2's Database Changes, Security, and QA Test Cases sections into the canonical TF-003-Join-Run.md, then this row can be simplified to a single task flow.

Gap 2 — Task flows lack a uniform “Database Changes” / “Security” section

Only TF-003.2 (superseded) has explicit Database Changes and Security sections. TF-001 through TF-010 (canonical) follow a lighter template (Purpose, Actor, Trigger, Preconditions, UI Flow, Validation Rules, API, Backend Operations, Success/Failure States, Accessibility, Analytics, Performance, Acceptance Criteria) that folds database/security concerns into “Backend Operations” prose rather than a dedicated section. This is an internal consistency choice, not an error, but it means TF-003.2's extra structure should not be assumed present when reading any other TF-0xx file. No action required unless Phase 2 technical specification wants to standardize a richer template across all ten task flows.

Gap 3 — No task flow for kennel administration beyond creation

J-010 covers *creating* a kennel; ongoing kennel administration (officer management, branding, announcements — FR-KENNEL-006 through 011 in Annex 08C) has no dedicated journey or task flow. This is likely intentionally out of Chapter 21's initial ten flows but is worth flagging before Phase 3 scaffolds an admin surface with no UX spec behind it. Logged in `CODEx/TOD0.md`.

Completion Criteria

This matrix is complete when:

- Every journey in `journeys/` has at least one row.
 - Every task flow in `task-flows/` (including nested/legacy ones) appears in some row.
 - Coverage gaps are listed with an owning follow-up location rather than left implicit.
-

Journey Specification J-001

User Onboarding

Document ID

HCP-JS-001

Status

Draft

Version

1.0

Purpose

Help a new user discover HCP, create an account, understand the platform, and successfully join their first community with confidence.

Primary Persona

Visitor

Secondary Personas

Community Member

Goal

Become an active community member.

Success Definition

The user:

✓ Creates an account

✓ Verifies identity (if applicable)

✓ Completes profile

✓ Joins first kennel

✓ Understands next step

Entry Points

- App Install
 - Website
 - Invitation Link
 - QR Code
 - Shared Event Link
 - Community Referral
-

Preconditions

None

Trigger

User launches HCP for the first time.

Emotional State

Beginning

Curious

Slightly uncertain

Interested

Desired End State

Confident

Welcomed

Ready to participate

Happy Path

Launch App

↓

Welcome Screen

↓

Choose

Sign In

or

Create Account

↓

Account Created

↓

Profile Setup

↓

Location (optional)

↓

Suggested Kennels

↓

Join Kennel



Welcome Message



Upcoming Run



Home

Decision Points

Already has account?



No



Create Account

Nearby kennel exists?



Yes



Recommend it

Invitation link?



Yes



Automatically open invitation

Failure Paths

Email already exists



Offer Login

Network unavailable



Offline onboarding



Retry later

Invitation expired



Search manually

AI Assistance

Suggest nearby kennels

Explain Hashing

Recommend events

Complete profile

Answer newcomer questions

Notifications

Welcome

Upcoming Run

Community Greeting

Offline Behaviour

Profile stored locally

Sync automatically later

Analytics

APP_FIRST_OPEN

ACCOUNT_CREATED

PROFILE_COMPLETED

FIRST_KENNEL_JOINED

ONBOARDING_COMPLETED

TIME_TO_COMPLETE

Success Metrics

Completion Rate

Time to First Community

Time to First Run

Retention after 30 Days

UX Notes

Never overwhelm the user.

Never force unnecessary setup.

Always explain why information is requested.

Future Ideas

Import contacts

Import profile photo

AI onboarding guide

Interactive walkthrough

Journey Specification J-002

Join a Kennel

Document ID

HCP-JS-002

Status

Draft

Version

1.0

Purpose

Enable a member to discover, evaluate, and join one or more kennels with minimal friction while respecting each kennel's membership policies.

Primary Persona

Community Member

Supporting Personas

Visitor

Committee Member

Community Administrator

Business Goal

Increase successful community participation while reducing administrative effort.

User Goal

"I want to join a kennel so I can participate in its activities."

Success Definition

The journey is successful when the user:

- ✓ Finds a suitable kennel.
 - ✓ Understands what the kennel is about.
 - ✓ Completes the join process.
 - ✓ Receives confirmation.
 - ✓ Knows what to do next.
-

Entry Points

- Search
 - Nearby Kennels
 - Invitation Link
 - QR Code
 - Shared Event
 - Community Directory
 - Friend Profile
-

Preconditions

User account exists.

User is signed in.

Internet connection available.

Offline browsing of previously viewed kennels is permitted where feasible.

Journey Flow

Launch Discover



Browse Kennels



Search or Filter



Select Kennel



View Kennel Profile



Review Details



Tap Join



Decision:

Open Membership



Join Immediately

OR

Approval Required



Submit Join Request



Pending Review



Approved



Welcome Screen




Upcoming Events



Community Feed

Decision Logic

Membership Type?



User Questions

The interface should answer:

- What is this kennel?
- Where is it located?
- How active is it?
- Who can join?
- When is the next run?
- Who are the organizers?
- What happens after I join?

Emotional Journey

Stage	Emotion	UX Goal
Discover	Curious	Encourage exploration
Evaluate	Interested	Build confidence
Join	Slightly uncertain	Remove friction
Approved	Excited	Celebrate belonging
First Visit	Welcome	Encourage participation

AI Assistance

AI may:

- Recommend kennels based on location and interests.
- Explain unfamiliar hashing terminology.
- Answer newcomer questions.
- Translate descriptions where appropriate.
- Suggest upcoming runs after joining.

AI shall not automatically join a kennel or make membership decisions.

Offline Behaviour

Users may:

- Browse cached kennel profiles.
- View cached event information.

Users may not:

- Submit new join requests while offline.

Pending actions should synchronize automatically when connectivity returns.

Notifications

Trigger:

Join approved

↓

Push Notification

↓

Email (optional)

↓

In-app Notification

Trigger:

Upcoming first run

↓

Reminder

↓

Directions (if enabled)

Analytics Events

KENNEL_DISCOVERY_STARTED

KENNEL_PROFILE_VIEWED

JOIN_REQUEST_SUBMITTED

JOIN_REQUEST_APPROVED

JOIN_COMPLETED

TIME_TO_JOIN

FIRST_RUN_AFTER_JOIN

Accessibility

Support:

- Screen readers
- Keyboard navigation (web)
- Dynamic text
- High contrast
- Reduced motion
- Large touch targets

Failure Scenarios

Request Declined

Explain the outcome respectfully.

If permitted, explain why.

Offer to discover similar kennels.

Network Failure

Save progress where possible.

Allow retry.

Invitation Expired

Explain clearly.

Provide alternative discovery options.

Security Considerations

Do not expose private kennel information before membership where restricted.

Respect visibility rules for invitation-only communities.

Log membership changes for auditing.

Performance Targets

Kennel search results:

≤ 1 second (cached)

≤ 2 seconds (network)

Kennel profile load:

≤ 2 seconds

Join confirmation:

≤ 1 second after server response

Experience Contract

Maximum taps:

5

Maximum waiting time:

2 seconds

Primary CTA:

One

Recovery:

Always available

Accessibility:

WCAG 2.2 AA target

Acceptance Criteria

✓ Users can find a kennel easily.

✓ Join requirements are clear.

✓ Membership status is always visible.

✓ Notifications are delivered appropriately.

✓ First-time members know what to do next.

Related Journeys

J-001 User Onboarding

J-003 Join a Run

J-009 Committee Workflow

J-010 Create a Kennel

Journey Specification J-003

Join a Run

Document ID

HCP-JS-003

Status

Draft

Version

1.0

Purpose

Enable a community member to successfully join an upcoming Hash run with confidence while ensuring all eligibility requirements are satisfied.

Scope

This journey covers:

- Discovering a run
- Viewing run details
- Confirming participation
- Meeting participation requirements
- Receiving confirmation
- Preparing for the event

It does not cover:

- Attending the run (J-004)
- Event creation
- Committee approval workflows

Primary Persona

Community Member

Supporting Personas

Visitor (public run discovery)

Committee Member

Hare

Volunteer

Business Goals

- Increase event participation.
- Reduce manual attendance management.
- Improve attendance forecasting.
- Improve newcomer conversion.
- Provide organizers with reliable participant counts.

User Goals

"I want to join this run and know everything I need before arriving."

Preconditions

- User account exists.
- User is authenticated.
- Run has not ended.
- User has permission to view the run.
- Internet connectivity is available (cached viewing supported offline).

Triggers

- User taps an upcoming run.
- User opens an invitation.
- User follows a shared run link.
- User receives a notification.

Entry Points

- Home
- Upcoming Runs
- Community Page
- Calendar
- Notification
- Deep Link
- QR Code
- Shared URL

Journey Overview

Discover Run | ▼ Open Run Details | ▼ Review Information | ▼ Eligibility Check | ▼
Join Run | ▼ Confirmation | ▼ Calendar Reminder | ▼ Ready for Run Day

Detailed User Flow

1. User opens the run details page.
2. The system displays:
 - Title
 - Date and time
 - Meeting location
 - Trail difficulty (if available)
 - Distance (if available)
 - Organizer/Hare
 - Participation requirements
3. User reviews the information.
4. User selects ****Join Run****.
5. The system checks:
 - Membership requirements
 - Capacity (if limited)
 - Registration deadline
 - Any required acknowledgements
6. If eligible, the user confirms participation.
7. The system records the attendance.
8. The interface updates to ****You're Joining This Run****.
9. A confirmation notification is sent.
10. The event appears in the user's calendar within HCP.

Decision Logic

Run Available?

|— No | |— Display Closed | |— Yes | ▼ Eligible?

|— No | |— Explain Requirement | |— Yes | ▼ Already Joined?

|— Yes | |— Show Joined State | |— No | ▼ Join

Business Rules

- A user cannot join the same run twice.
- Joining automatically links the user to the event roster.
- Invitation-only runs require a valid invitation.
- Registration closes at the configured deadline.
- Organizers may override attendance where permitted.
- Capacity limits, if configured, must be enforced.

UI States

- Loading
- Run Available
- Already Joined
- Join Available
- Registration Closed
- Invitation Required
- Waitlist (optional future enhancement)
- Offline (view only)
- Error

Backend Operations

Primary Endpoint

POST /api/v1/runs/{runId}/join

Supporting Operations

- Validate permissions
- Check registration status
- Check capacity
- Create attendance record
- Update attendance count
- Publish analytics event
- Trigger notifications

Notifications

Immediate

- In-app confirmation
- Push notification

Scheduled

- Reminder 24 hours before
- Reminder 2 hours before
- Organizer announcements

Optional

- Calendar export
- Calendar sync

AI Assistance

AI may:

- Explain run terminology.
- Recommend suitable runs.
- Estimate preparation based on weather or terrain.
- Suggest what to bring.
- Answer newcomer questions.

AI shall not:

- Automatically register attendance.
- Override organizer rules.
- Modify event details.

Offline Behaviour

Users may:

- View cached run information.
- Read previous announcements.

Users may not:

- Join a run while offline.

If a join request is initiated just before connectivity is lost, the app should clearly indicate whether the request was completed or requires a retry to avoid duplicate attempts.

Security & Privacy

- Respect run visibility settings.
- Protect private event information.
- Log attendance changes.
- Prevent unauthorized registrations.
- Validate every request server-side.

Accessibility

- Screen reader support
- Keyboard navigation (web)
- Dynamic text
- High contrast
- Reduced motion
- Large touch targets
- Accessible maps where practical

Performance Targets

Run Details

≤ 2 seconds

Join Request

≤ 500 ms server target

Navigation

≤ 200 ms perceived

Analytics Events

RUN_VIEWED

JOIN_RUN_CLICKED

JOIN_RUN_SUCCESS

JOIN_RUN_FAILED

RUN_REMINDER_OPENED

FIRST_RUN_JOINED

Error Recovery

Scenario: Network failure

Action:

- Preserve current screen.
- Explain the issue.
- Offer retry.
- Do not lose context.

Scenario: Run becomes full

Action:

- Explain why registration is unavailable.
- Offer similar upcoming runs.
- If waitlists are supported in the future, offer to join the waitlist.

Scenario: Registration deadline passed

Action:

- Display the closing time.

- Suggest the next scheduled run.

Experience Contract

Maximum taps to join:

≤ 4

Maximum perceived wait:

≤ 2 seconds

Primary CTA:

One

Confirmation:

Immediate

Recovery:

Always available

Accessibility:

WCAG 2.2 AA target

Acceptance Criteria

- Eligible users can join successfully.
- Duplicate registrations are prevented.
- Registration status is always clear.
- Notifications are delivered as configured.
- Organizers see updated attendance.
- Users understand what happens next.

Future Enhancements

- Waitlists

- Guest registrations (if enabled by a community)
- Group registrations
- Smart preparation checklists
- Live travel estimates
- Weather-based recommendations

Related Specifications

J-001 User Onboarding

J-002 Join Kennel

J-004 Participate in a Run

TF-003 Join Run Task Flow

Journey Specification J-004

Participate in a Run

Document ID

HCP-JS-004

Status

Draft

Version

1.0

Purpose

Support members throughout the complete lifecycle of participating in a Hash run—from arrival through the closing social activities—while enhancing, but never distracting from, the in-person experience.

Scope

This journey covers:

- Preparing for arrival
- Check-in
- Participating in the run
- Live trail interaction
- Capturing memories
- Completing the event

This journey does not cover:

- Joining a run (J-003)
- Writing the trail report (J-006)
- Hare planning (J-008)

Primary Persona

Community Member

Supporting Personas

Visitor (where public participation is allowed)

Volunteer

Hare

Scribe

Committee Member

Business Goals

- Increase successful event participation.
- Reduce organizer workload.
- Improve community engagement.

- Capture richer event history.
- Encourage repeat participation.

User Goal

"I want to enjoy today's run and stay connected with the community."

Preconditions

- User has joined the run or public participation is permitted.
- Event is active.
- User has the HCP mobile app.
- GPS permissions are optional but recommended for navigation features.

Triggers

- Event reminder notification.
- Manual selection from Upcoming Runs.
- QR code at the event.
- Deep link shared by organizers.

Entry Points

- Home
- My Runs
- Notifications
- Calendar
- Community Feed
- QR Code

Journey Overview

Reminder | ▼ Travel to Venue | ▼ Arrive | ▼ Check-in | ▼ Opening Circle | ▼ Trail Begins | ▼ Beer Stop(s) | ▼ Trail Ends | ▼ Closing Circle | ▼ Social Gathering | ▼ Share Memories

Detailed User Flow

Before Arrival

The user can:

- View meeting location.
- Open navigation.
- Review event announcements.
- See recommended arrival time.
- Check weather (if integrated).
- View what to bring.

Arrival

The user may:

- Scan an event QR code.
- Check in manually.
- Be checked in by a volunteer.
- Confirm attendance automatically if location services are enabled and the community chooses to use geofencing.

During the Run

The app should remain quiet by default.

Optional features include:

- Live trail guidance (when enabled by the Hare).
- Safety announcements.
- Emergency contact information.
- Location sharing (opt-in only).
- Water or checkpoint notifications where relevant.

The app must never encourage users to look at their phones continuously while moving.

Beer Stops

Where applicable, users may:

- View tagged photos.
- Leave comments.
- React to shared moments.
- See checkpoint information.

These interactions should be lightweight and optional.

Trail Completion

Users receive:

- Confirmation of completed participation.
- Prompt to upload photos or videos.
- Invitation to view or contribute to the trail report when available.

After the Event

The app highlights:

- Event gallery.
- Trail report (when published).
- Upcoming runs.
- Community discussions.
- Volunteer opportunities.

Decision Logic

User Arrived?

|— No | |— Continue Navigation | |— Yes | ▼ Checked In?

|— No | |— Prompt Check-in | |— Yes | ▼ Run Active?

☐ No | ☐ Await Start | ☐ Yes | ☒ Participate

Business Rules

- Attendance should only be recorded once.
- Communities may choose manual, QR, or geofenced check-in.
- Live trail visibility follows the Hare's configured release rules.
- Location sharing is strictly opt-in.
- Users may leave the event at any time without affecting historical attendance records.

UI States

- Upcoming
- Navigating
- Awaiting Check-in
- Checked In
- Run Active
- Beer Stop
- Run Complete
- Gallery Available
- Trail Report Available
- Offline
- Error

Backend Operations

- Verify attendance.
- Record check-in.
- Update participation statistics.
- Retrieve live announcements.
- Synchronize media placeholders.
- Publish completion events.

Notifications

Immediate

- Check-in confirmed.
- Important organizer announcements.

Scheduled

- Run starting soon.
- Trail report published.
- Photo memories available.

Optional

- Community thank-you message.
- Upcoming related runs.

AI Assistance

AI may:

- Explain Hash traditions for newcomers.
- Answer event FAQs.
- Suggest what to bring before the event.
- Recommend future runs based on participation.
- Generate post-event summaries for personal activity history.

AI shall not:

- Replace organizer instructions.
- Publish event content without user approval.
- Infer attendance without confirmation.

Offline Behaviour

The app should continue functioning with limited connectivity.

Available offline:

- Cached event details.
- Meeting location.
- Emergency contacts.
- Previously downloaded trail information (if released).

Pending actions, such as photo uploads or comments, should synchronize

automatically when connectivity returns.

Security & Privacy

- Respect visibility settings for private events.
- Keep live location sharing disabled unless explicitly enabled.
- Protect participant lists according to community privacy settings.
- Encrypt sensitive communications.

Accessibility

- High-contrast maps where supported.
- VoiceOver/TalkBack compatibility.
- Dynamic text.
- Reduced motion.
- Large touch targets.
- Accessible QR check-in alternatives.

Performance Targets

Event screen load:

≤ 2 seconds

Check-in confirmation:

≤ 1 second

Announcements:

≤ 2 seconds after publication

Analytics Events

RUN_OPENED

CHECK_IN_COMPLETED

RUN_STARTED

BEER_STOP_VIEWED

RUN_COMPLETED

MEDIA_PROMPT_SHOWN

RETURNING_PARTICIPANT

Error Recovery

GPS unavailable

Explain that navigation features are limited and offer manual directions.

QR scan fails

Allow manual check-in or volunteer-assisted check-in.

Connectivity lost

Continue using cached information and synchronize pending actions when the connection returns.

Event cancelled

Notify participants immediately, explain the reason if available, and suggest the next scheduled event.

Experience Contract

Maximum taps to check in:

≤ 3

Maximum perceived wait:

≤ 2 seconds

Primary CTA:

One

Critical information always accessible.

The app should never distract users from the physical event.

Acceptance Criteria

- Users can check in successfully.
- Attendance is recorded accurately.
- Live event information is reliable.
- Privacy controls are respected.
- Participants can transition naturally into post-event activities.

Future Enhancements

- Apple Wallet / Google Wallet event passes.
- Bluetooth-based proximity check-in.
- Wearable device integration.
- Live safety alerts.
- Team challenges and participation badges.
- AI-generated personal event timeline.

Related Specifications

J-003 Join a Run

J-005 Upload Photos & Videos

J-006 Write Trail Report

TF-004 Participate in a Run

Journey Specification J-005

Upload Photos & Videos

Document ID

HCP-JS-005

Status

Draft

Version

1.0

Purpose

Enable participants to capture, upload, organize, and share photos and videos from a Hash event while preserving the authenticity and historical value of the community's memories.

Scope

This journey covers:

- Capturing media
- Selecting existing media
- Uploading
- Organizing
- Tagging
- Publishing
- Viewing uploaded content

It does not cover:

- Writing trail reports (J-006)
- Community moderation (J-009)
- Long-term archive export

Primary Persona

Community Member

Supporting Personas

Volunteer

Scribe

Committee Member

Community Administrator

Business Goals

- Preserve community history.
- Increase member engagement.
- Build searchable event archives.
- Encourage post-event participation.
- Support trail report creation.

User Goal

"I want to share my memories from today's run with everyone who participated."

Preconditions

- User is authenticated.
- User has permission to contribute media.
- The run exists.
- The event accepts community uploads.

Triggers

- Run completed.
- "Share your memories" prompt.
- Manual upload from gallery.
- Camera shortcut.
- Event gallery.

Entry Points

- Event page
- Event gallery
- Home feed
- Camera shortcut
- Trail report
- User profile
- Notifications

Journey Overview

Open Gallery | ▼ Choose Photos or Videos | ▼ Review Selection | ▼ Add Details |
▼ Upload | ▼ Processing | ▼ Published | ▼ Visible in Gallery

Detailed User Flow

1. User opens the event gallery.
2. User selects ****Add Photos & Videos****.
3. The app offers:
 - Camera
 - Photo Library
 - Video Library
4. User selects one or more items.
5. Preview screen displays:
 - Selected media
 - File count
 - Estimated upload size
6. User may optionally:
 - Add a caption
 - Tag people (with consent)
 - Tag a location (e.g., Beer Stop 1)
 - Mark as favorite
7. User taps ****Upload****.
8. Upload progress is displayed.
9. After processing:
 - Media appears in the event gallery.
 - Contributors receive confirmation.
 - Scribes can reference the media while preparing the trail report.

Decision Logic

Media Selected?

└─ No | └─ Return to Gallery | └─ Yes | ▼ Upload Successful?

└─ No | └─ Retry / Save Draft | └─ Yes | ▼ Publish to Gallery

Business Rules

- Multiple uploads are supported.
- Original files remain on the user's device unless deletion is requested separately.
- Communities may define moderation policies before publication.
- Captions are optional.
- Contributors may edit captions after upload.
- Media ownership remains associated with the uploader.

UI States

- Empty Gallery
- Selecting Media
- Preview
- Uploading
- Processing
- Published
- Pending Moderation
- Upload Failed
- Offline Queue

Backend Operations

- Generate upload session.
- Validate permissions.
- Virus/security scanning.
- Image optimization.
- Video transcoding.
- Thumbnail generation.
- Metadata extraction.
- Store media.
- Index for search.
- Publish gallery update.

Notifications

Immediate

- Upload completed.
- Upload failed.

Community

- New gallery items available (subject to notification preferences).

Optional

- Media featured in trail report.
- Photo tagged.
- Comment received.

AI Assistance

AI may:

- Suggest captions.
- Detect blurry or duplicate uploads.
- Recommend the best cover photo.
- Group similar photos.
- Identify landmarks or checkpoints where appropriate.
- Generate alt text for accessibility.

AI shall not:

- Publish captions without approval.
- Identify people automatically without explicit consent and enabled facial recognition features (if ever supported).
- Modify original media without user confirmation.

Offline Behaviour

Users may:

- Queue uploads.
- Add captions.
- Organize media.

When connectivity returns:

- Resume uploads automatically.
- Preserve upload order.
- Notify users of completed uploads.

Security & Privacy

- Respect community visibility settings.
- Strip sensitive metadata where configured (e.g., precise GPS coordinates).
- Validate file types and sizes.
- Encrypt uploads in transit.
- Scan uploaded files for malicious content.

Accessibility

- VoiceOver/TalkBack support.
- AI-generated alt text (editable).
- Keyboard support (web).
- Progress announcements.
- Large upload controls.
- High-contrast progress indicators.

Performance Targets

Gallery load:

≤ 2 seconds

Upload initialization:

≤ 1 second

Thumbnail generation:

≤ 3 seconds

Progress updates:

Near real-time

Analytics Events

MEDIA_UPLOAD_STARTED

MEDIA_UPLOAD_COMPLETED

MEDIA_UPLOAD_FAILED

CAPTION_ADDED

PHOTO_VIEWED

VIDEO_PLAYED

GALLERY_OPENED

Error Recovery

Upload Interrupted

- Pause upload.
- Resume automatically when possible.
- Allow manual retry.

Storage Limit Reached

- Explain the limitation.
- Suggest reducing file size or contacting administrators if community quotas apply.

Unsupported File

- Explain why the file cannot be uploaded.
- Display supported formats.

Processing Failure

- Preserve the upload request.
- Notify the user.
- Offer retry without requiring re-selection of media.

Experience Contract

Maximum taps to upload:

≤ 5

Maximum perceived wait before progress begins:

≤ 2 seconds

Primary CTA:

One

Recovery:

Automatic where feasible

Accessibility:

WCAG 2.2 AA target

Acceptance Criteria

- Multiple media files upload successfully.
- Offline uploads synchronize correctly.
- Captions remain editable.
- Galleries update automatically.
- Media permissions are respected.
- Contributors receive clear feedback.

Future Enhancements

- Live collaborative albums.

- 360° photos.
- Drone footage support.
- Automatic event highlight reels.
- Shared album invitations.
- AI-generated event slideshow.

Related Specifications

J-004 Participate in a Run

J-006 Write Trail Report

J-023 Report Content

TF-005 Upload Photos & Videos

Journey Specification J-006

Write Trail Report

Document ID

HCP-JS-006

Status

Draft

Version

1.0

Purpose

Enable the designated Scribe to efficiently create, review, publish, and maintain the official Trail Report for a Hash run while preserving the authentic voice, humour, and traditions of the community.

Scope

This journey covers:

- Draft creation
- AI-assisted draft generation
- Manual editing
- Media embedding
- Collaborative review
- Publishing
- Post-publication corrections

It does not cover:

- Media uploads (J-005)
- Hare planning (J-008)
- Community moderation (J-009)

Primary Persona

Scribe

Supporting Personas

Community Member

Committee Member

Community Administrator

AI Assistant

Business Goals

- Preserve the history of every run.
- Reduce the effort required to produce reports.
- Improve publication consistency.
- Increase post-event engagement.

- Build a searchable historical archive.

User Goal

"I want to publish an engaging Trail Report that accurately captures the spirit and events of today's run."

Preconditions

- The run has concluded.
- The Scribe has permission to create or edit the report.
- Event details and participant data are available.
- Media uploads may already exist but are optional.

Triggers

- Run marked as completed.
- Reminder to the Scribe.
- Manual selection from the event page.
- Committee request.

Entry Points

- Event page
- Scribe dashboard
- Notification
- Community administration
- Trail Report section

Journey Overview

Open Report | ▼ Generate Draft (Optional) | ▼ Edit Content | ▼ Embed Media | ▼ Preview | ▼ Publish | ▼ Community Reads

Detailed User Flow

1. The Scribe opens the Trail Report workspace.
2. The system loads:
 - Event details
 - Attendance
 - Hare information
 - Uploaded media
 - Community notes (where enabled)
3. The Scribe chooses to:
 - Start from a blank report, or
 - Generate an AI-assisted draft.
4. The AI drafts a report using available event context.
5. The Scribe reviews, edits, and personalizes the content.
6. Photos and videos are embedded where appropriate.
7. The report is previewed in its final format.
8. The Scribe publishes the report.
9. Members receive notifications that the report is available.

Decision Logic

AI Draft?



Business Rules

- Every run may have one official Trail Report.
- Drafts are autosaved.
- Publication requires Scribe or authorized editor permission.
- Published reports remain editable with version history.
- Significant edits create a new revision.
- AI-generated content must always be reviewed before publication.

UI States

- No Report
- Blank Draft
- AI Draft Generated
- Editing
- Autosaving
- Preview
- Publishing
- Published
- Revision Available
- Error

Backend Operations

- Load event metadata.
- Retrieve media.
- Generate AI draft (optional).
- Save draft revisions.
- Create report versions.
- Publish report.
- Notify subscribers.
- Update search index.

Notifications

Immediate

- Draft ready.
- Report published.
- Revision published.

Optional

- Mention notifications.
- Featured report.
- Weekly digest inclusion.

AI Assistance

AI may:

- Generate an initial draft.
- Summarize event highlights.
- Suggest headings.
- Improve grammar while preserving tone.
- Recommend photo placement.
- Generate accessibility descriptions for embedded images.
- Identify missing sections (e.g., no mention of hares or visitors).

AI shall not:

- Publish automatically.
- Rewrite community traditions.
- Fabricate events.
- Invent participant actions.
- Remove the Scribe's authorship.

Offline Behaviour

The editor should support:

- Draft writing.
- Autosave to local storage.
- Offline editing.

Publishing requires connectivity.

Unsynchronized changes should merge safely when the connection returns.

Security & Privacy

- Respect community visibility settings.
- Preserve revision history.
- Restrict editing to authorized roles.
- Log publication and revisions for auditing.

Accessibility

- Keyboard-first editing (web).
- Screen reader compatible editor.
- Dynamic text support.
- High contrast.
- Accessible media descriptions.
- Focus restoration after autosave and publishing.

Performance Targets

Editor load:

≤ 2 seconds

Autosave:

≤ 500 ms after inactivity

Preview generation:

≤ 2 seconds

Publish:

≤ 2 seconds

Analytics Events

REPORT_STARTED

AI_DRAFT_REQUESTED

AI_DRAFT_ACCEPTED

REPORT_AUTOSAVED

REPORT_PREVIEWED

REPORT_PUBLISHED

REPORT_VIEWED

REPORT_REVISED

Error Recovery

AI generation fails

- Explain the issue.
- Offer retry.
- Allow manual writing without interruption.

Connectivity lost

- Continue offline editing.
- Preserve all local changes.
- Resume synchronization when online.

Publish fails

- Keep the draft intact.
- Explain the reason.
- Retry without data loss.

Revision conflict

- Present both versions.

- Allow the editor to merge changes.

Experience Contract

Maximum taps to start writing:

≤ 3

Autosave:

Always enabled

Primary CTA:

Publish

Maximum perceived wait:

≤ 2 seconds

Accessibility:

WCAG 2.2 AA target

Acceptance Criteria

- Reports can be created from scratch or AI-assisted.
- Drafts are never lost.
- Revision history is maintained.
- Community members receive publication notifications.
- Reports are searchable.
- The Scribe retains final editorial control.

Future Enhancements

- Collaborative editing.
- Voice-to-text drafting.
- AI-assisted translation.
- Timeline view with synchronized media.
- Interactive maps embedded in reports.

- "On This Day" resurfacing of historical reports.

Related Specifications

J-004 Participate in a Run

J-005 Upload Photos & Videos

J-007 Volunteer Workflow

TF-006 Write Trail Report

Journey Specification J-007

Volunteer Workflow

Document ID

HCP-JS-007

Status

Draft

Version

1.0

Purpose

Enable volunteers to efficiently perform assigned operational duties before, during, and after a Hash run while providing organizers with visibility into event readiness and execution.

Scope

This journey covers:

- Volunteer assignment
- Task acceptance
- Event preparation
- Operational task execution
- Incident reporting
- Task completion
- Post-event wrap-up

This journey does not cover:

- Committee administration (J-009)
- Hare planning (J-008)

Primary Persona

Volunteer

Supporting Personas

Committee Member

Community Administrator

Community Member

Business Goals

- Reduce organizer workload.
- Improve operational consistency.
- Increase volunteer participation.
- Improve event safety.
- Record operational history.

User Goal

"I want to know exactly what I'm responsible for and complete my duties

efficiently."

Preconditions

- Volunteer has an active HCP account.
- Volunteer has accepted an assignment.
- Event exists.
- Volunteer permissions are active.


Triggers


- Assignment notification.
- Manual acceptance.
- Committee assignment.
- Volunteer self-registration (where enabled).

Entry Points

- Volunteer Dashboard
- Notification
- Event Details
- Community Dashboard

Journey Overview

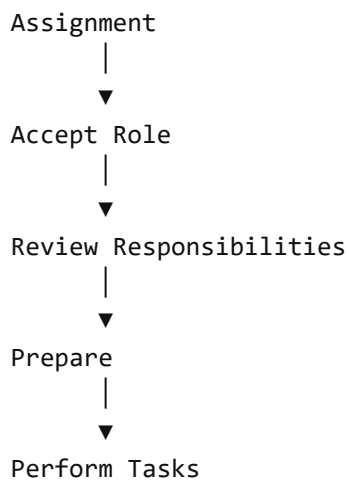

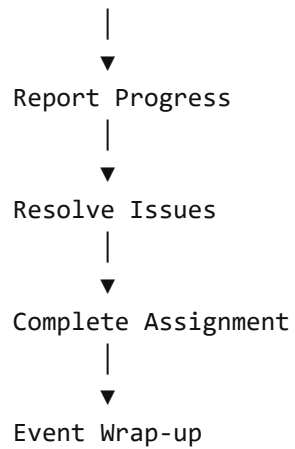

Detailed User Flow

Assignment

The volunteer receives:

- Assigned role
- Event name
- Date and time
- Reporting location
- Assigned coordinator
- Required equipment
- Checklist

Acceptance

Volunteer may:

- Accept assignment
- Decline assignment
- Request reassignment

Preparation

Volunteer reviews:

- Event briefing

- Safety information
- Operational checklist
- Emergency contacts
- Venue information

During Event

Volunteer may:

- Check in participants
- Answer questions
- Mark completed tasks
- Report incidents
- Request assistance
- Communicate with coordinators

Wrap-up

Volunteer:

- Confirms completed duties
- Submits notes
- Reports outstanding issues
- Marks assignment complete

Decision Logic

Assignment Received?

| Declined

| ▼

Notify Coordinator

|

| Accepted

| ▼

Task Complete?

| No

| ▼

Continue Assignment

|
└ Yes



Submit Completion

Operational Role Types

Supported examples:

- Check-in Volunteer
- Registration Volunteer
- Beer Stop Coordinator
- Photographer
- Safety Marshal
- First Aid Officer
- Sweeper
- Equipment Coordinator

Communities may define additional volunteer roles.

Business Rules

- Volunteers may hold multiple assignments.
- Assignments have defined start and end times.
- Volunteers may only access tools required for their assigned role.
- Incident reports cannot be deleted after submission.
- Coordinators may reassign incomplete tasks.

UI States

- Assignment Pending
- Accepted
- Preparing
- Active
- Awaiting Confirmation
- Completed
- Cancelled
- Error

Backend Operations

- Retrieve assignments.
- Record acceptance.
- Update task progress.
- Store incident reports.
- Record completion.
- Notify coordinators.
- Generate operational statistics.

Notifications

Immediate

- Assignment received.
- Assignment updated.
- Incident response.
- Coordinator message.

Scheduled

- Event reminder.
- Shift reminder.

Optional

- Thank-you message.
- Volunteer recognition.

AI Assistance

AI may:

- Summarize responsibilities.
- Recommend task order.
- Answer operational questions.
- Generate post-event summaries.
- Highlight incomplete checklist items.

AI shall not:

- Reassign volunteers.
- Close incidents.
- Override coordinator decisions.

Offline Behaviour

Available offline:

- Assigned checklist.
- Event briefing.
- Emergency contacts.
- Task completion queue.

Pending updates synchronize automatically when connectivity returns.

Security & Privacy

- Volunteers only access information relevant to their duties.
- Incident reports are securely stored.
- Sensitive participant information is protected.
- All operational changes are audited.

Accessibility

- Screen reader support.
- Large touch targets.
- High contrast.
- Offline-first design.
- Reduced motion.

Performance Targets

Assignment load:

≤ 2 seconds

Checklist updates:

≤ 500 ms

Notifications:

Near real-time

Analytics Events

VOLUNTEER_ASSIGNED

ASSIGNMENT_ACCEPTED

CHECKLIST_COMPLETED

INCIDENT_REPORTED

ASSIGNMENT_COMPLETED

VOLUNTEER_RETURNED

Error Recovery

Connectivity lost

Continue using cached checklists.

Queue updates until connectivity returns.

Assignment changed during event

Notify volunteer immediately.

Highlight the updated task.

Incident submission fails

Store locally.

Retry automatically.

Allow manual retry.

Experience Contract

Assignment acceptance:

≤ 2 taps

Checklist always available.

Primary CTA:

Complete Next Task

Recovery:

Automatic where feasible

Accessibility:

WCAG 2.2 AA target

Acceptance Criteria

- Volunteers can manage assignments independently.
- Coordinators have visibility into task progress.
- Incidents are captured reliably.
- Offline operation is supported.
- Operational history is preserved.

Future Enhancements

- Volunteer shift swapping.
- Skill and certification tracking.
- Digital equipment checkout.
- Volunteer achievement system.

- Team messaging channels.
- AI-powered staffing recommendations.

Related Specifications

J-004 Participate in a Run

J-008 Hare Workflow

J-009 Committee Workflow

TF-007 Volunteer Workflow

Journey Specification J-008

Hare Workflow

Document ID

HCP-JS-008

Status

Draft

Version

1.0

Purpose

Enable one or more Hares to design, prepare, manage, and conclude a Hash run while preserving the traditions, mystery, safety, and enjoyment of the experience.

Scope

This journey covers:

- Creating a run
- Planning the trail
- Configuring visibility
- Coordinating logistics
- Publishing participant information
- Managing live event updates
- Closing the event

This journey does not cover:

- Committee governance (J-009)
- Trail report authoring (J-006)

Primary Persona

Hare

Supporting Personas

Joint Hare

Committee Member

Volunteer

Community Member

Business Goals

- Simplify event planning.
- Preserve Hash traditions.
- Improve participant preparedness.
- Increase organizer confidence.
- Maintain accurate historical records.

User Goal

"I want to create a memorable run while keeping the trail secret until the right moment."

Preconditions

- User has Hare permissions for the event.
- Community allows event creation or assignment.
- Required event information can be saved.

Triggers

- Hare assignment.
- Committee creates a new run.
- Hare creates a new run (where permitted).

Entry Points

- Hare Dashboard
- Community Dashboard
- Event Management
- Notification
- Calendar

Journey Overview

Create Run | ▼ Configure Event | ▼ Plan Trail | ▼ Configure Visibility | ▼ Publish Event | ▼ Monitor Registrations | ▼ Run Day | ▼ Release Trail (Optional) | ▼ Complete Event

Detailed User Flow

Create Event

The Hare provides:

- Run title
- Date
- Start time
- Meeting location
- Description
- Hash cash (if applicable)
- Difficulty (optional)
- Estimated duration
- Special instructions

Plan Trail

The Hare may:

- Draw or upload the route.
- Define checkpoints.
- Mark beer stops.
- Add optional landmarks.
- Save draft versions.
- Invite a Joint Hare to collaborate.

Trail data remains private until released.

Configure Visibility

The Hare selects one of the following modes:

- ****Hidden**** – No trail information is visible before the event.
- ****Timed Release**** – Trail becomes visible automatically at a configured time.
- ****Manual Release**** – Hare releases the trail during the event.
- ****Public Preview**** – Limited information is visible before the event without revealing the full route.

Communities may define a default mode.

Prepare Participants

The Hare may publish:

- What to bring
- Safety notices
- Meeting instructions
- Parking information
- Contact details
- Weather recommendations

Event Monitoring

The Hare can view:

- Registration numbers
- Check-in status
- Volunteer assignments
- Participant announcements
- Operational alerts

During the Event

The Hare may:

- Publish announcements.
- Release the trail (if manual).
- Update meeting information.
- Respond to incidents.
- Coordinate with volunteers.

Event Completion

The Hare:

- Marks the event complete.
- Reviews participation.
- Transfers responsibility to the Scribe for the Trail Report.
- Reviews operational notes.

Decision Logic

Trail Ready?

|— No | |— Continue Planning | |— Yes | ▼ Visibility Mode?

|— Hidden |— Timed |— Manual |— Preview | ▼ Publish Event

Business Rules

- Every run must have at least one Hare.
- Multiple Hares may collaborate.
- Trail visibility must follow the configured release mode.
- Event history cannot be deleted after completion; it may only be archived according to community policy.
- Trail revisions are versioned.
- Visibility changes are audited.

UI States

- Draft
- Planning
- Ready for Review
- Published
- Registration Open
- Registration Closed
- Event Active
- Trail Released
- Event Completed
- Archived
- Error

Backend Operations

- Create event.
- Save draft.
- Store trail geometry.
- Manage trail versions.
- Apply visibility rules.
- Publish announcements.
- Record operational updates.
- Mark completion.
- Archive event.

Notifications

Immediate

- Event published.
- Trail released.
- Schedule updated.
- Important announcements.

Scheduled

- Registration reminders.
- Volunteer reminders.
- Weather alerts (if integrated).

AI Assistance

AI may:

- Review event details for completeness.
- Suggest preparation checklists.
- Detect conflicting schedules.
- Recommend participant guidance.
- Generate draft event descriptions.
- Flag unusually long or hazardous routes for review.

AI shall not:

- Reveal hidden trail information.
- Publish events automatically.
- Modify visibility settings.
- Override Hare decisions.

Offline Behaviour

Available offline:

- Event details.
- Planning notes.
- Trail drafts.
- Checklists.

Changes synchronize when connectivity returns.

Conflicts require Hare review before merging.

Security & Privacy

- Hidden trails are encrypted and inaccessible to unauthorized users.
- Only authorized planners may edit event details.
- All trail releases and visibility changes are logged.
- Sensitive location information is protected until the configured release point.

Accessibility

- Keyboard-accessible planning tools (web).
- Screen reader support.
- High contrast.
- Dynamic text.
- Reduced motion.
- Accessible map controls where feasible.

Performance Targets

Event editor load:

≤ 2 seconds

Trail save:

≤ 1 second

Announcement publication:

≤ 2 seconds

Visibility update:

≤ 2 seconds

Analytics Events

RUN_CREATED

RUN_UPDATED

TRAIL_SAVED

TRAIL_RELEASED

ANNOUNCEMENT_PUBLISHED

EVENT_COMPLETED

Error Recovery

Connectivity lost

Save locally.

Resume synchronization automatically.

Trail save conflict

Display both versions.

Allow manual merge.

Release failed

Keep trail private.

Notify the Hare.

Allow retry.

Event cancellation

Notify registered participants.

Explain the reason when appropriate.

Offer rescheduling options.

Experience Contract

Maximum taps to publish an announcement:

≤ 3

Trail draft autosave:

Always enabled

Primary CTA:

Publish Event / Save Draft (depending on state)

Accessibility:

WCAG 2.2 AA target

Critical operations require confirmation where irreversible.

Acceptance Criteria

- Hares can create and manage runs.
- Hidden trails remain protected until release.
- Participants receive accurate event information.
- Collaborative planning is supported.
- Event history is preserved.

Future Enhancements

- Collaborative real-time trail editing.
- Offline map editing.
- Route simulation.

- Terrain and elevation analysis.
- Weather-aware planning.
- Hazard reporting.
- Template trails for recurring events.

Related Specifications

J-003 Join a Run

J-004 Participate in a Run

J-006 Write Trail Report

J-007 Volunteer Workflow

J-009 Committee Workflow

TF-008 Hare Workflow

Journey Specification J-009

Committee Workflow

Document ID

HCP-JS-009

Status

Draft

Version

1.0

Purpose

Enable committee members to manage the governance, operations, and long-term

health of a Hash community while respecting local traditions and organizational structures.

Scope

This journey covers:

- Committee administration
- Role assignment
- Community management
- Member management
- Event oversight
- Content moderation
- Operational reporting

It does not cover:

- Hare planning (J-008)
- Volunteer task execution (J-007)

Primary Persona

Committee Member

Supporting Personas

Community Administrator

Grand Master

Religious Adviser

Hash Cash

On Sec

Trail Master

Community Member

Business Goals

- Reduce administrative effort.
- Support diverse committee structures.
- Improve governance transparency.
- Preserve institutional knowledge.
- Increase community continuity.

User Goal

"I want to efficiently manage my community while ensuring members have a great experience."

Preconditions

- User belongs to the committee.
- Appropriate permissions are assigned.
- Community exists.


Triggers

- Committee election.
- Appointment.
- Promotion.
- Manual assignment.

Entry Points

- Committee Dashboard
- Community Dashboard
- Notifications
- Administration Menu

Journey Overview

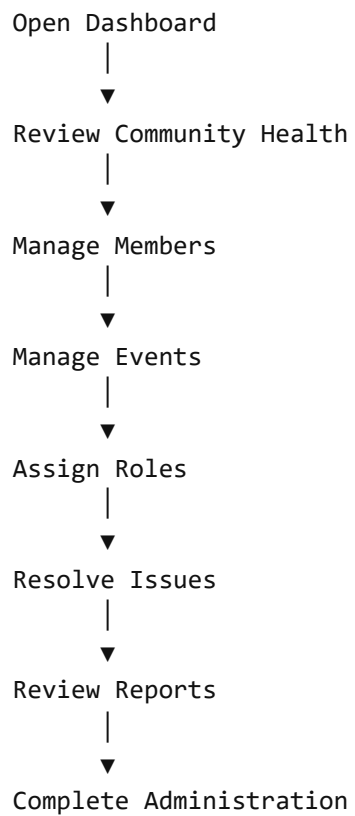

Detailed User Flow

Dashboard

Committee members see:

- Upcoming events
- Membership statistics
- Pending approvals
- Volunteer status
- Reports awaiting review
- Recent incidents
- Community announcements

Member Management

Committee members may:

- Approve join requests
- Invite members
- Suspend memberships
- Reinstate members
- Update roles
- View participation history

Actions are limited by permissions.

Event Oversight

Committee members may:

- Create events
- Approve events (if required)
- Assign Hares
- Assign volunteers
- Monitor registrations
- Cancel or postpone events
- Review attendance

Governance

Committee members may:

- Create committee roles
- Assign responsibilities
- Configure permissions
- Define approval workflows
- Set community policies

Moderation

Committee members may:

- Review reported content
- Hide inappropriate media
- Resolve disputes
- Warn members
- Archive discussions

Every moderation action is logged.

Reporting

Committee members may view:

- Membership growth
- Attendance trends
- Volunteer participation
- Event completion
- Media engagement
- Community health metrics

Decision Logic

Administrative Action?

|— Member | ▼ Permission Check | |— Event | ▼ Permission Check | |—
Moderation | ▼ Permission Check | |— Governance ▼ Permission Check

Business Rules

- Permissions are role-based.
- Communities define their own committee structure.
- Every administrative action is audited.
- Role assignments may have start and end dates.
- Suspensions preserve historical records.
- Governance changes require appropriate authorization.

Role Framework

Committee roles are configurable.

Examples include:

- Grand Master
- Religious Adviser
- Hash Cash
- On Sec
- Trail Master
- Hare Raiser
- Mismanagement

Communities may create additional custom roles.

Roles define responsibilities.

Permissions define capabilities.

The two concepts remain separate.

UI States

- Dashboard
- Member Review
- Event Management
- Governance
- Reports

- Moderation Queue
- Archived
- Error

Backend Operations

- Retrieve dashboard data.
- Update memberships.
- Assign roles.
- Record governance changes.
- Generate reports.
- Publish announcements.
- Store audit logs.

Notifications

Immediate

- New join request.
- Incident reported.
- Event cancelled.
- Role assignment.

Scheduled

- Committee meeting reminder.
- Pending approvals.
- Monthly governance summary.

AI Assistance

AI may:

- Summarize dashboard activity.
- Highlight communities needing attention.
- Suggest volunteer assignments.
- Detect unusual participation patterns.
- Draft announcements.
- Recommend policy updates based on historical trends.

AI shall not:

- Suspend members.
- Assign committee roles.
- Override governance decisions.
- Moderate content automatically without human review.

Offline Behaviour

Available offline:

- Previously loaded dashboards.
- Policies.
- Meeting agendas.
- Reports.

Administrative changes require synchronization before becoming effective.

Security & Privacy

- Principle of least privilege.
- Multi-factor authentication recommended for committee accounts.
- Full audit trail of governance actions.
- Sensitive member information protected.
- Role changes require authorization.

Accessibility

- Keyboard navigation.
- Screen reader support.
- High contrast.
- Dynamic text.
- Reduced motion.

Performance Targets

Dashboard load:

≤ 2 seconds

Administrative updates:

≤ 1 second

Report generation:

≤ 5 seconds

Analytics Events

COMMITTEE_DASHBOARD_OPENED

MEMBER_APPROVED

ROLE_ASSIGNED

EVENT_CREATED

CONTENT_MODERATED

REPORT_GENERATED

Error Recovery

Permission denied

Explain why access is unavailable.

Offer contact information for a higher-level administrator where appropriate.

Concurrent edit

Notify the user that another committee member has updated the same record.

Offer merge or refresh options.

Report generation failed

Preserve filters.

Allow retry.

Notify when the report becomes available.

Experience Contract

Maximum taps for common administrative tasks:

≤ 5

Primary CTA:

Context-specific

Administrative actions should always display clear confirmation and, where appropriate, an undo period.

Accessibility:

WCAG 2.2 AA target

Acceptance Criteria

- Committee members can manage their communities efficiently.
- Permission boundaries are enforced.
- Governance actions are fully audited.
- Community structures remain customizable.
- Administrative tools remain consistent across devices.

Future Enhancements

- Committee elections.
- Meeting agenda management.
- Voting and resolutions.
- Budget tracking.
- Strategic planning workspace.

- Cross-kennel collaboration.

Related Specifications

J-007 Volunteer Workflow

J-008 Hare Workflow

J-010 Create a Kennel

TF-009 Committee Workflow

Journey Specification J-010

Create a New Kennel

Document ID

HCP-JS-010

Status

Draft

Version

1.0

Purpose

Enable qualified members to establish a new Hash kennel within HCP through a structured registration, verification, and onboarding process that protects community integrity while supporting global growth.

Scope

This journey covers:

- Registering a new kennel
- Defining governance
- Creating branding
- Assigning founding committee members
- Verification
- Publishing
- Community onboarding

It does not cover:

- Day-to-day committee administration (J-009)
- Event management (J-008)

Primary Persona

Founding Organizer

Supporting Personas

Committee Member

Regional Coordinator (optional)

Platform Administrator

Business Goals

- Encourage sustainable community growth.
- Prevent duplicate communities.
- Preserve community history.
- Standardize community creation.
- Improve discoverability.

User Goal

"I want to establish a new Hash kennel that members can confidently discover and

```
join."
```

```
---
```

Preconditions

- User has an HCP account.
- User meets minimum eligibility requirements.
- Required community information is available.

```
---
```

Triggers

- User selects ****Create Community****.
- Invitation from a regional coordinator.
- Platform onboarding for a new region.

```
---
```

Entry Points

- Dashboard
- Communities
- Administration
- Welcome Flow
- Direct Link

```
---
```

Journey Overview

Start Registration | ▼ Check Existing Kennels | ▼ Enter Community Details | ▼
Configure Governance | ▼ Invite Founding Committee | ▼ Submit Verification | ▼
Platform Review | ▼ Approved | ▼ Community Published | ▼ Member Onboarding

Detailed User Flow

Step 1 – Community Information

Founder provides:

- Kennel name
- Common abbreviation
- Country
- State / Province
- City
- Meeting area
- Description
- Founding date (optional if newly formed)

Step 2 – Duplicate Detection

The system searches for:

- Similar kennel names
- Matching locations
- Similar abbreviations

Potential duplicates are displayed before registration continues.

Step 3 – Branding

Founder may upload:

- Logo
- Banner
- Community colors
- Social links
- Website
- Contact email

Branding may be updated later.

Step 4 – Governance

Founder defines:

- Committee structure
- Initial committee members
- Membership policy
- Event visibility defaults
- Notification preferences

Step 5 – Verification

Verification may include:

- Existing Hash references
- Supporting documentation (optional)
- Regional coordinator review (where applicable)
- Platform review

Verification requirements may vary by region.

Step 6 – Publication

Once approved:

- Community profile becomes searchable.
- Members can request to join.
- Events can be created.
- Committee dashboards become available.

Decision Logic

Duplicate Found?

| — Yes | ▼ Review Existing Community | | — No | ▼ Submit Verification | ▼
Approved?

|— No | ▼ Return with Feedback | — Yes | ▼ Publish Community

Business Rules

- One active kennel per verified identity and location unless an exception is approved.
- Duplicate detection runs before submission.
- Communities retain permanent identifiers.
- Community names remain unique within defined geographic constraints.
- Verification status is visible.
- Historical communities may be archived but not permanently deleted.

UI States

- Draft
- Duplicate Warning
- Awaiting Verification
- Under Review
- Approved
- Published
- Archived
- Rejected
- Error

Backend Operations

- Validate submitted information.
- Run duplicate detection.
- Create draft community.
- Store branding assets.
- Create governance records.
- Start verification workflow.
- Publish approved community.
- Generate community identifier.

Notifications

Immediate

- Registration received.
- Verification requested.
- Additional information requested.

Status Updates

- Under review.
- Approved.
- Rejected.
- Published.

Community

- Founding committee invitations.
- Welcome messages.
- First member joined.

AI Assistance

AI may:

- Suggest clearer descriptions.
- Check for incomplete information.
- Recommend governance templates.
- Detect potential duplicate communities.
- Generate welcome content.
- Recommend onboarding steps.

AI shall not:

- Approve communities.
- Override verification.
- Assign committee roles.
- Publish communities automatically.

Offline Behaviour

Users may:

- Prepare draft information.
- Edit descriptions.

- Upload branding assets (queued).

Submission and verification require connectivity.

Security & Privacy

- Founding records are auditable.
- Verification documents are protected.
- Community ownership changes are logged.
- Sensitive contact information is restricted according to permissions.

Accessibility

- Keyboard support.
- Screen reader compatibility.
- High contrast.
- Dynamic text.
- Accessible file uploads.
- Reduced motion.

Performance Targets

Draft save:

≤ 1 second

Duplicate search:

≤ 2 seconds

Verification submission:

≤ 2 seconds

Community publication:

≤ 5 seconds after approval

Analytics Events

KENNEL_CREATION_STARTED

DUPLICATE_WARNING_SHOWN

VERIFICATION_SUBMITTED

KENNEL_APPROVED

KENNEL_PUBLISHED

FOUNDING_MEMBER_INVITED

Error Recovery

Duplicate detected

Present the potential match.

Allow the user to cancel, request ownership of an existing community (where applicable), or continue with additional justification.

Verification rejected

Explain the reason.

Preserve all entered information.

Allow resubmission after corrections.

Upload failure

Retry without losing previously entered information.

Experience Contract

Maximum steps:

6

Progress indicator:

Always visible

Draft autosave:

Always enabled

Accessibility:

WCAG 2.2 AA target

Primary CTA:

Submit for Verification

Acceptance Criteria

- Legitimate communities can be created successfully.
- Duplicate communities are minimized.
- Verification workflow is clear.
- Governance is configured before publication.
- Founding committee members can begin operating immediately after approval.

Future Enhancements

- Regional federation support.
- Community mergers.
- Community transfer of ownership.
- Anniversary timeline.
- Public verification badges.
- International community directory.

Related Specifications

J-001 User Onboarding

J-002 Join Kennel

J-009 Committee Workflow

TF-010 Create New Kennel

Task Flow TF-001

User Onboarding

Task ID: TF-001

Journey: J-001 User Onboarding

Status: Draft

Version: 1.0

Purpose

Describe the exact interaction flow for helping a new user create an account, complete a minimum useful profile, join or discover a first kennel, and understand the next action.

Primary Actor

Visitor

Trigger

User launches HCP for the first time, opens an invitation link, scans a QR code, or selects Create Account.

Preconditions

- Application is installed or web session is available.
- User is not authenticated.
- Network connectivity is available for account creation.
- Invitation context may be present but is not required.

UI Flow

Welcome

↓

Create Account or Sign In

↓

Account Details

↓

Verification

↓

Profile Setup

↓

Location or Invitation Context

↓

Suggested Kennels

↓

Join First Kennel or Explore

↓

Welcome Home

Screen Elements

Welcome screen:

- Product identity
- Short orientation
- Create Account
- Sign In

Account screen:

- Email or phone
- Passwordless or password flow, depending on platform policy
- Terms and privacy links

Profile setup:

- Display name
- Optional profile photo
- Optional city or region
- Notification preferences

Next step:

- Suggested kennel
- Invitation target
- Upcoming nearby run
- Explore communities

Validation Rules

Email or phone valid?

↓

Account already exists?

↓

Verification completed?

↓

Minimum profile complete?

↓

Invitation valid?

↓

Continue to suggested next action

API

POST /api/v1/auth/register

POST /api/v1/auth/verify

PATCH /api/v1/users/me/profile

GET /api/v1/kennels/suggestions

Success State

- User account exists.
- Authentication session is active.
- Minimum profile is complete.
- First recommended action is visible.
- Onboarding completion event is emitted.

Failure States

Email already exists

↓

Offer Sign In

Verification failed

↓

Allow retry and resend

Invitation expired

↓

Explain and route to discovery

Network error

↓

Preserve entered details and retry

Accessibility

- Form fields have explicit labels.
- Errors are announced to assistive technology.
- Verification inputs support paste and keyboard entry.
- Focus moves to the next required field or success heading.
- Dynamic text and reduced motion are supported.

Analytics

ONBOARDING_STARTED

ACCOUNT_CREATED

VERIFICATION_COMPLETED

PROFILE_COMPLETED

SUGGESTED_KENNELS_VIEWED

ONBOARDING_COMPLETED

Performance

Initial screen ready: <= 1 second

Account creation response target: <= 1 second

Profile save response target: ≤ 500 ms

Suggested kennel load: ≤ 2 seconds

Acceptance Criteria

- A new user can create an account without guidance.
- Existing users are routed to sign in without duplicate accounts.
- Profile setup collects only minimum useful information.
- Invitation context is preserved through authentication.
- User lands on a clear next action after onboarding.

Task Flow TF-002

Join Kennel

Task ID: TF-002

Journey: J-002 Join a Kennel

Status: Draft

Version: 1.0

Purpose

Describe the exact interaction flow required for joining a kennel while respecting each kennel's membership policy.

Primary Actor

Community Member

Trigger

User taps Join on a kennel profile, invitation page, shared community link, or onboarding recommendation.

Preconditions

- User account exists.
- User is authenticated or can be returned to the same kennel after authentication.
- Kennel is visible to the user.
- Membership status is available.

UI Flow

Kennel Profile

↓

Review Description, Officers, Location, Activity, and Policy

↓

Join

↓

Authentication Check

↓

Membership Policy Check

↓

Confirmation or Request Form

↓

Submit

↓

Success, Pending Review, or Recovery State

Validation Rules

User logged in?

↓

Already member?

↓

Kennel accepts requests?

↓

Invitation required?

↓

Invitation valid?

↓

Continue

Membership Policy Logic

Open membership

↓

Join immediately

Approval required

↓

Submit request and show pending state

Invitation only

↓

Require valid invitation code or link

Closed membership

↓

Explain that joining is unavailable

API

POST /api/v1/kennels/{kennelId}/join

POST /api/v1/kennels/{kennelId}/join-requests

GET /api/v1/kennels/{kennelId}/membership-status

Loading State

- Disable Join button.
- Show progress indicator.
- Prevent duplicate requests.
- Preserve the user's current context.

Success State

- Membership status updates.
- Member count updates.
- User roles refresh.
- Community feed refreshes.
- Success confirmation appears.
- User is offered next actions: view upcoming runs, introduce themselves, or configure notifications.

Failure States

Network error

↓

Retry without losing context

Permission denied

↓

Explain why joining is unavailable

Already member

↓

Show Go to Community

Invitation expired

↓

Explain and offer discovery alternatives

Request declined

↓

Explain respectfully and preserve privacy

Accessibility

- Join controls are keyboard accessible.
- Loading, success, pending, and failure states are announced.
- Focus moves to the confirmation or pending-status heading.
- Dialogs have clear labels and escape paths.
- Dynamic text and high contrast are supported.

Analytics

KENNEL_PROFILE_VIEWED

JOIN_BUTTON_CLICKED

JOIN_REQUEST_SUBMITTED

JOIN_API_SUCCESS

JOIN_API_FAILED

JOIN_COMPLETED

Performance

Membership status check: <= 500 ms target

Join request: <= 500 ms server target

Maximum perceived wait: <= 2 seconds

Acceptance Criteria

- One request is sent per user action.
- Duplicate memberships are prevented.
- Open, approval-required, invitation-only, and closed memberships are handled.
- Authentication returns the user to the original kennel context.
- All states are accessible.

Task Flow TF-003

Join Run

Task ID: TF-003

Journey: J-003 Join a Run

Status: Draft

Version: 1.0

Purpose

Describe the implementation flow for joining an upcoming run and preparing the user for the event.

Primary Actor

Authenticated Member

Trigger

User taps Join Run from run details, a notification, a deep link, a QR code, or a community calendar.

Preconditions

- User is authenticated.
- Run exists.
- User can view the run.
- Registration is open.
- User is eligible to join.

UI Flow

Run Details

↓

Join Run

↓

Eligibility Check

↓

Confirmation Dialog

↓

Loading State

↓

Attendance Created

↓

Joined State

↓

Reminder Scheduled

Validation Rules

Run available?

↓

User eligible?

↓

Already joined?

↓

Registration open?

↓

Capacity available?

↓

Required acknowledgements complete?

↓

Continue

API

POST /api/v1/runs/{runId}/join

GET /api/v1/runs/{runId}/eligibility

POST /api/v1/runs/{runId}/reminders

Backend Operations

- Validate permissions.
- Check registration deadline.
- Check capacity.
- Create attendance record.
- Increment participant count.
- Insert audit log.
- Publish analytics event.
- Schedule reminders.

Success State

- Button changes to Joined.
- Attendance count updates.
- Confirmation appears.
- Calendar actions become available.
- Preparation details remain visible.

Failure States

Run full

↓

Explain and offer similar runs

Registration closed

↓

Show closing time and next run

Already joined

↓

Restore joined state

Network error

↓

Retry safely without duplicate attendance

Permission denied

↓

Explain requirement

Accessibility

- Confirmation dialog is fully keyboard accessible.
- Loading, success, and failure states are announced.
- Focus returns to the Joined status after success.
- Maps and location details include accessible alternatives.

Analytics

RUN_VIEWED

JOIN_RUN_CLICKED

JOIN_RUN_SUCCESS

JOIN_RUN_FAILED

FIRST_RUN_JOINED

RUN_REMINDER_SCHEDULED

Performance

Eligibility check: ≤ 500 ms target

Join request: ≤ 500 ms server target

UI response: ≤ 100 ms perceived

Maximum perceived wait: ≤ 2 seconds

Acceptance Criteria

- Eligible users can join a run.
- Duplicate joins are prevented.
- Closed, full, cancelled, and restricted runs show clear recovery.
- Reminders are scheduled according to preferences.
- Organizers see updated attendance.

Task Flow TF-004

Participate in Run

Task ID: TF-004

Journey: J-004 Participate in a Run

Status: Draft

Version: 1.0

Purpose

Define the run-day flow from reminder and arrival through check-in, live participation, completion, and post-event prompts.

Primary Actor

Community Member

Trigger

User opens a run-day reminder, scans an event QR code, or opens an active run from My Runs.

Preconditions

- Run is upcoming or active.
- User has joined the run or public participation is permitted.
- Event details are visible to the user.
- Cached event data is available where possible.

UI Flow

Reminder or Active Run

↓

Run-Day Screen

↓

Directions and Arrival Details

↓

Check In

↓

Opening Circle State

↓

Run Active State

↓

Optional Announcements or Trail Features

↓

Mark Complete or Event Ends

↓

Share Memories and View Next Actions

Check-In Methods

- Manual check-in
- QR code scan
- Volunteer-assisted check-in
- Optional geofenced confirmation where enabled by the community

Validation Rules

Event active or upcoming?

↓

User eligible to check in?

↓

Already checked in?

↓

Check-in method valid?

↓

Record attendance

API

POST /api/v1/runs/{runId}/check-in

GET /api/v1/runs/{runId}/live

POST /api/v1/runs/{runId}/complete

GET /api/v1/runs/{runId}/announcements

Success State

- Check-in status changes to Checked In.
- Event status and critical details remain visible.
- Emergency and organizer contact information remains available.
- Completion prompt appears after the event.

Failure States

QR scan fails

↓

Offer manual or volunteer-assisted check-in

GPS unavailable

↓

Keep manual directions visible

Connectivity lost

↓

Use cached details and queue non-critical updates

Event cancelled

↓

Show cancellation reason and next event options

Accessibility

- QR check-in has a non-camera alternative.
- Critical information is available without map interaction.
- Announcements are readable and screen-reader friendly.
- Large touch targets support use outdoors.
- Reduced-motion settings are respected.

Analytics

RUN_DAY_OPENED

CHECK_IN_STARTED

CHECK_IN_COMPLETED

ANNOUNCEMENT_VIEWED

RUN_COMPLETED

MEDIA_PROMPT_SHOWN

Performance

Run-day screen load: <= 2 seconds

Check-in confirmation: <= 1 second

Announcement delivery: near real-time

Acceptance Criteria

- Users can access arrival and event details quickly.
- Check-in succeeds through at least one accessible method.
- Attendance is recorded once.
- Offline mode preserves critical information.
- The app remains quiet and does not distract from the physical event.

Task Flow TF-005

Upload Photos and Videos

Task ID: TF-005

Journey: J-005 Upload Photos and Videos

Status: Draft

Version: 1.0

Purpose

Define the media contribution flow for selecting, describing, uploading, processing, and publishing event photos and videos.

Primary Actor

Community Member

Trigger

User taps Add Photos and Videos from an event gallery, post-run prompt, trail report, or camera shortcut.

Preconditions

- User is authenticated.
- User can contribute media to the run.
- Run exists.
- Community media uploads are enabled.

UI Flow

Event Gallery

↓

Add Photos and Videos

↓

Choose Source

↓

Select Media

↓

Preview Selection

↓

Add Caption, Tags, or Location

↓

Upload

↓

Processing

↓

Published or Pending Moderation

Validation Rules

Media selected?

↓

File type supported?

↓

File size within limits?

↓

User has upload permission?

↓

Community quota available?

↓

Start upload

API

POST /api/v1/media/upload-sessions

PUT /api/v1/media/{uploadId}/chunks

POST /api/v1/runs/{runId}/media

PATCH /api/v1/media/{mediaId}/metadata

Success State

- Upload progress reaches complete.
- Media appears in gallery or pending moderation.

- Caption and metadata are saved.
- Contributor receives confirmation.
- Scribes can reference published media.

Failure States

Unsupported file

↓

Explain supported formats

Upload interrupted

↓

Pause and resume automatically where possible

Processing failed

↓

Preserve upload and offer retry

Quota exceeded

↓

Explain limit and suggest alternatives

Offline

↓

Queue upload and sync later

Accessibility

- Media controls have accessible names.
- Upload progress is announced.
- Captions and alt text can be edited.
- Keyboard upload works on web.

- Color is not the only indicator of upload status.

Analytics

GALLERY_OPENED

MEDIA_UPLOAD_STARTED

MEDIA_UPLOAD_COMPLETED

MEDIA_UPLOAD_FAILED

CAPTION_ADDED

MEDIA_PENDING_MODERATION

Performance

Upload session creation: ≤ 1 second

Preview generation: ≤ 2 seconds

Progress updates: near real-time

Thumbnail availability: ≤ 3 seconds after processing

Acceptance Criteria

- Multiple files can be uploaded.
- Interrupted uploads recover without reselecting media.
- Offline uploads queue safely.
- Media respects event and community visibility rules.
- Published media appears in the correct event gallery.

Task Flow TF-006

Write Trail Report

Task ID: TF-006

Journey: J-006 Write Trail Report

Status: Draft

Version: 1.0

Purpose

Define the Scribe workflow for creating, editing, previewing, publishing, and revising the official trail report for a run.

Primary Actor

Scribe

Trigger

User opens Create Trail Report after a run concludes or responds to a Scribe reminder.

Preconditions

- Run has concluded or report creation is otherwise enabled.
- User has Scribe or editor permission.
- Event metadata is available.
- Existing media may be available but is optional.

UI Flow

Trail Report Workspace

↓

Choose Blank Draft or AI Draft

↓

Load Event Context

↓

Write or Review Draft

↓

Embed Media

↓

Preview

↓

Publish

↓

Published Report

Validation Rules

User has edit permission?

↓

Official report already exists?

↓

Draft loaded or created?

↓

Required fields complete?

↓

Preview generated?

↓

Publish

API

POST /api/v1/runs/{runId}/reports

POST /api/v1/runs/{runId}/reports/generate-draft

PATCH /api/v1/reports/{reportId}

POST /api/v1/reports/{reportId}/publish

Success State

- Report is published.
- Report has a permanent URL.
- Members receive configured notifications.
- Search index is updated.
- Revision history records publication.

Failure States

AI draft fails

↓

Allow manual writing

Autosave fails

↓

Preserve local draft and retry

Publish fails

↓

Keep draft intact and explain recovery

Revision conflict

↓

Show both versions and allow merge

Accessibility

- Editor supports keyboard navigation.
- Formatting controls have labels.
- Autosave status is announced politely.
- Preview is screen-reader accessible.
- Embedded media includes editable alt text.

Analytics

REPORT_STARTED

AI_DRAFT_REQUESTED

REPORT_AUTOSAVED

REPORT_PREVIEWED

REPORT_PUBLISHED

REPORT_REVISED

Performance

Editor load: <= 2 seconds

Autosave after inactivity: <= 500 ms target

Preview generation: <= 2 seconds

Publish: <= 2 seconds

Acceptance Criteria

- A Scribe can start from blank or AI-assisted draft.
- Drafts are not lost during connectivity changes.
- Published reports are versioned.
- AI content requires human approval.
- Members can access the final report from the event and archive.

Task Flow TF-007

Volunteer Workflow

Task ID: TF-007

Journey: J-007 Volunteer Workflow

Status: Draft

Version: 1.0

Purpose

Define the volunteer assignment flow from notification and acceptance through checklist execution, incident reporting, and completion.

Primary Actor

Volunteer

Trigger

Volunteer receives an assignment notification, self-selects a role, or opens a volunteer task from the event page.

Preconditions

- Volunteer has an HCP account.
- Event exists.
- Assignment exists or self-signup is enabled.
- User has permission to view volunteer tools.

UI Flow

Assignment Notification

↓

Volunteer Task Detail

↓

Accept, Decline, or Request Reassignment

↓

Review Briefing and Checklist

↓

Check In for Shift

↓

Complete Tasks

↓

Report Issues if Needed

↓

Submit Completion

Validation Rules

Assignment active?

↓

User assigned or eligible?

↓

Role still available?

↓

Required briefing acknowledged?

↓

Continue

API

GET /api/v1/events/{eventId}/volunteer-assignments

POST /api/v1/volunteer-assignments/{assignmentId}/accept

PATCH /api/v1/volunteer-assignments/{assignmentId}/tasks/{taskId}

POST /api/v1/events/{eventId}/incidents

POST /api/v1/volunteer-assignments/{assignmentId}/complete

Success State

- Assignment status updates.
- Checklist progress is visible to coordinators.

- Incident reports are recorded.
- Completion is confirmed.
- Volunteer recognition can be queued.

Failure States

Assignment no longer available

↓

Explain and show alternatives

Connectivity lost

↓

Keep checklist available and queue updates

Incident submission fails

↓

Store locally and retry

Permission changed

↓

Explain and return to event overview

Accessibility

- Checklist controls are large and labeled.
- Status changes are announced.
- Incident forms support keyboard and screen readers.
- Offline state is clear without relying on color alone.

Analytics

VOLUNTEER_ASSIGNMENT_VIEWED

ASSIGNMENT_ACCEPTED

ASSIGNMENT_DECLINED

CHECKLIST_ITEM_COMPLETED

INCIDENT_REPORTED

ASSIGNMENT_COMPLETED

Performance

Assignment load: <= 2 seconds

Checklist update: <= 500 ms target

Incident save: <= 1 second target

Acceptance Criteria

- Volunteers can accept or decline assignments.
- Assigned tasks remain visible offline.
- Coordinators can see progress.
- Incidents are captured reliably.
- Completion is auditable.

Task Flow TF-008

Hare Workflow

Task ID: TF-008

Journey: J-008 Hare Workflow

Status: Draft

Version: 1.0

Purpose

Define the Hare workflow for creating a run, planning a trail, configuring visibility, publishing event details, and completing run-day responsibilities.

Primary Actor

Hare

Trigger

Hare creates a run, receives an assignment, or opens the Hare dashboard for an upcoming event.

Preconditions

- User has Hare or event-management permission.
- Community exists.
- Event creation is enabled.
- Required run information can be saved.

UI Flow

Hare Dashboard

↓

Create or Open Run

↓

Enter Event Details

↓

Plan Trail

↓

Configure Visibility

↓

Review Completeness

↓

Publish Event

↓

Monitor Registration

↓

Run-Day Tools

↓

Complete Event

Validation Rules

Required event details complete?

↓

Meeting location valid?

↓

At least one Hare assigned?

↓

Visibility configured?

↓

Community policy satisfied?

↓

Publish

API

POST /api/v1/runs

PATCH /api/v1/runs/{runId}

POST /api/v1/runs/{runId}/trail-versions

PATCH /api/v1/runs/{runId}/visibility

POST /api/v1/runs/{runId}/publish

POST /api/v1/runs/{runId}/complete

Success State

- Run is saved or published.
- Trail draft is versioned.
- Visibility policy is enforced.
- Participants can view allowed details.
- Hare retains run-day tools.

Failure States

Missing required fields

↓

Highlight fields and preserve draft

Trail save conflict

↓

Show versions and allow merge

Visibility release fails

↓

Keep trail private and allow retry

Publish blocked by policy

↓

Explain required approval

Accessibility

- Forms support keyboard navigation.
- Map tools provide non-map alternatives where practical.
- Visibility controls include text descriptions.
- Critical actions require accessible confirmation.

Analytics

RUN_CREATED

RUN_DRAFT_SAVED

TRAIL_VERSION_SAVED

TRAIL_VISIBILITY_UPDATED

RUN_PUBLISHED

EVENT_COMPLETED

Performance

Event editor load: <= 2 seconds

Draft save: ≤ 1 second

Trail save: ≤ 1 second target

Visibility update: ≤ 2 seconds

Acceptance Criteria

- Hares can create and publish runs.
- Trail drafts autosave and version correctly.
- Hidden trails remain private until release.
- Policy blocks are clear and recoverable.
- Event completion transfers context to post-event workflows.

Task Flow TF-009

Committee Workflow

Task ID: TF-009

Journey: J-009 Committee Workflow

Status: Draft

Version: 1.0

Purpose

Define the committee administration flow for reviewing community health, managing members, overseeing events, assigning roles, moderating content, and reviewing reports.

Primary Actor

Committee Member

Trigger

Committee member opens the committee dashboard, receives an administrative notification, or follows an approval link.

Preconditions

- User is authenticated.
- User has committee permissions.
- Community exists.
- Administrative scope is known.

UI Flow

Committee Dashboard

↓

Review Alerts and Metrics

↓

Choose Administrative Area

↓

Permission Check

↓

Take Action

↓

Confirmation

↓

Audit Log

↓

Dashboard Refresh

Administrative Areas

- Member approvals
- Role assignments
- Event oversight
- Volunteer staffing
- Moderation queue
- Reports and analytics
- Governance settings

Validation Rules

User has role?

↓

Role has permission?

↓

Action requires confirmation?

↓

Related record still current?

↓

Submit action

API

GET /api/v1/communities/{communityId}/committee-dashboard

PATCH /api/v1/memberships/{membershipId}

POST /api/v1/communities/{communityId}/roles/assignments

POST /api/v1/moderation/actions

GET /api/v1/communities/{communityId}/reports

Success State

- Administrative action is applied.
- Audit record is written.
- Dashboard metrics refresh.
- Affected users receive notifications where appropriate.
- Undo window is available for reversible actions.

Failure States

Permission denied

↓

Explain missing permission

Concurrent edit

↓

Refresh and show changed record

Action blocked by policy

↓

Explain required approval

Report generation fails

↓

Preserve filters and retry

Accessibility

- Dashboard regions have landmarks.
- Tables support keyboard navigation.
- Batch actions are clearly labeled.
- Confirmation dialogs are screen-reader friendly.
- Status and error messages are announced.

Analytics

COMMITTEE_DASHBOARD_OPENED

MEMBER_APPROVAL_REVIEWED

MEMBER_APPROVED

ROLE_ASSIGNED

EVENT_OVERSIGHT_ACTIONED

CONTENT_MODERATED

REPORT_GENERATED

Performance

Dashboard load: <= 2 seconds

Common administrative update: <= 1 second

Report generation: <= 5 seconds

Acceptance Criteria

- Committee users can complete common administrative tasks.
- Permissions are enforced consistently.
- Administrative actions are audited.

- Concurrent changes are handled safely.
- Dashboard remains understandable across roles.

Task Flow TF-010

Create New Kennel

Task ID: TF-010

Journey: J-010 Create a New Kennel

Status: Draft

Version: 1.0

Purpose

Define the flow for registering, verifying, and publishing a new kennel while preventing duplicates and establishing minimum governance.

Primary Actor

Founding Organizer

Trigger

User selects Create Community, opens a regional coordinator invitation, or starts kennel creation from onboarding.

Preconditions

- User has an HCP account.

- User meets minimum eligibility requirements.
- Required community information is available.
- Platform allows new kennel submissions in the region.

UI Flow

Create Community

↓

Eligibility and Orientation

↓

Community Details

↓

Duplicate Detection

↓

Branding

↓

Governance Setup

↓

Founding Committee Invitations

↓

Verification Submission

↓

Review Status

↓

Approved and Published

Validation Rules

Founder eligible?

↓

Required details complete?

↓

Potential duplicate found?

↓

Governance configured?

↓

Verification information complete?

↓

Submit for review

API

POST /api/v1/kennels/drafts

PATCH /api/v1/kennels/{kennelId}

GET /api/v1/kennels/duplicates

POST /api/v1/kennels/{kennelId}/founding-committee

POST /api/v1/kennels/{kennelId}/verification

POST /api/v1/kennels/{kennelId}/publish

Success State

- Draft is saved.
- Verification request is submitted.
- Founding committee invitations are sent.
- Approved kennel is published.
- Founder sees setup checklist and next actions.

Failure States

Duplicate detected

↓

Show possible matches and next options

Verification rejected

↓

Preserve draft and show correction path

Upload failure

↓

Retry branding upload without losing form state

Eligibility blocked

↓

Explain requirement and support contact path

Accessibility

- Multi-step progress is announced.
- Forms have clear labels and inline errors.
- File uploads have accessible alternatives.
- Duplicate warnings are not color-only.
- Draft status is visible and announced.

Analytics

KENNEL_CREATION_STARTED

KENNEL_DRAFT_SAVED

DUPLICATE_WARNING_SHOWN

FOUNDING_MEMBER_INVITED

VERIFICATION_SUBMITTED

KENNEL_APPROVED

KENNEL_PUBLISHED

Performance

Draft save: <= 1 second

Duplicate search: <= 2 seconds

Verification submission: <= 2 seconds

Publication after approval: <= 5 seconds

Acceptance Criteria

- A founder can submit a complete kennel registration.
- Duplicate detection runs before verification.
- Governance exists before publication.
- Verification status is clear.
- Published kennels are immediately discoverable according to visibility rules.

Task Flow TF-003.2

Join Run

Task ID

TF-003.2

Journey

J-003 Join a Run

Status

Superseded by TF-003-Join-Run.md

Version

1.0

Supersession Note

Added 2026-08-10 during Product Bible Phase 1 normalization
(`CODEX/IMPLEMENTATION-ROADMAP.md`).

This legacy nested task flow is **superseded** by the top-level `task-flows/TF-003-Join-Run.md`, which is the canonical Join Run task flow referenced by `Chapter 21 README.md` and the Chapter 21 traceability matrix (`21-05-Journey-Task-Flow-Traceability.md`).

This document is retained rather than deleted because it contains implementation detail not yet present in the canonical TF-003: a **Database Changes** section, a **Security** section (CSRF, authorization, server validation, audit logging), a **Notifications** section with concrete timing, and a **QA Test Cases** checklist (including explicit offline-mode and event-cancelled cases). These should be reviewed and merged into `TF-003-Join-Run.md` during Phase 2 technical specification work – tracked in `CODEX/TODO.md`.

Do not treat this file as authoritative for new implementation work. Use `TF-003-Join-Run.md`.

Purpose

Describe the implementation of the Join Run interaction.

Actor

Authenticated Member

Trigger

User taps

Join Run

Preconditions

✓ User authenticated

✓ Run exists

✓ Registration open

✓ User eligible

UI Flow

Run Details

↓

Join Run Button

↓

Confirmation Dialog

↓

Loading State

↓

API Request

↓

Success

↓

Joined State

↓

Reminder Scheduled

Screen Elements

Primary CTA

Join Run

Secondary CTA

Cancel

Supporting Elements

Run information

Requirements

Capacity

Registration deadline

Validation Rules

User authenticated?

↓

YES

Run exists?

↓

YES

Already joined?

↓

NO

Registration open?

↓

YES

Capacity available?

↓

YES

Permission granted?

↓

YES

Continue

API

POST

/api/v1/runs/{runId}/join

Request

```
{  
  runId  
}
```

Response

```
{  
  attendanceId  
  status  
  joinedAt  
}
```

Database Changes

Attendance

+1

Participant Count

Increment

Audit Log

Insert

Analytics Queue

Publish Event

Notifications

Immediately

Push

In-App

Optional Email

Schedule

24-hour reminder

2-hour reminder

Success State

Button changes

Joined

Show success banner

Update attendance count

Enable calendar actions

Failure States

Run Full

↓

Display explanation

Offer similar runs

Registration Closed

↓

Display closing time

Already Joined

↓

Show joined state

Network Error

↓

Retry

Permission Denied

↓

Explain

Analytics

JOIN_RUN_CLICKED

JOIN_RUN_SUCCESS

JOIN_RUN_FAILED

Accessibility

Announce

Loading

Success

Failure

Restore focus

Performance

API

≤500ms

UI Response

≤100ms

Animation

60fps

Security

CSRF

Validated

Authorization

Required

Server validation

Required

Audit logging

Required

QA Test Cases

✓ Successful join

✓ Already joined

✓ Registration closed

✓ Event cancelled

✓ Network interruption

✓ Capacity exceeded

✓ Unauthorized user

✓ Offline mode

Acceptance Criteria

All validations pass

Duplicate joins prevented

Notifications delivered

Attendance updated

Audit recorded

Analytics emitted

Navigation Flow NF-001

Application Navigation

Purpose

Define how users move between the major areas of HCP.

Navigation Philosophy

Users should never feel lost.

Every screen should answer:

- Where am I?
- What can I do?
- How do I leave?
- What changed?

Primary Areas

Home

Communities

Events

Map

Notifications

Profile

Bottom Navigation (Mobile)

 Home

 Runs

 Map

 Notifications

 Profile

Web Navigation

Sidebar

Top Navigation

Breadcrumbs

Context Panels

Navigation Rules

Primary destinations

≤1 tap

Secondary destinations

≤2 taps

Deep destinations

≤3 taps

Never exceed 4 unless absolutely necessary.

Back Navigation

Back should return users to the previous context.

Never reset filters unless explicitly requested.

Never lose scroll position.

State Preservation

Remember

- Scroll
- Search
- Filters
- Open Tabs
- Expanded Sections

Restore when returning.

Cross Role Navigation

A Committee Member

should not see an entirely different app.

Instead

additional tools appear naturally.

The navigation model remains familiar.

Notification Navigation

Opening a notification

↓

Navigate directly

↓

Highlight related content

↓

Provide Back

to previous location.

External Links

External content

↓

Open browser

Return

↓

Restore previous application state.

Deep Links

Every important resource
should have
its own shareable URL.

Examples

Community

Run

Trail Report

Photo

Event

Announcement

Member Profile

Performance Targets

Navigation

$\leq 200\text{ms}$

Screen Ready

≤ 1 second

Transition

60fps

Accessibility

Navigation landmarks

Keyboard support

Screen reader labels

Focus restoration

Reduced motion

Acceptance

No dead ends

No orphan screens

Back always works

Navigation always recoverable

Chapter 22 – Interaction State Model

Document ID: HCP-PB-22

Parent Document: HCP Product Bible

Status: Draft

Version: 1.0

Date: 2026-08-10

Authority: Codex-inferred and consolidated from Chapter 8 annexes (08C, 08D, 08E, 08F, 08G, 08H, 08K, 08L, 08M, 08P) and `CODEX/ARCHITECTURE-RULES.md`. Not previously a repository file. See `CODEX/DECISION-LOG.md` for the decision to add this chapter.

Purpose

Chapter 8 defines the lifecycle of individual domains (Kennels, Membership, Runs, Trails, Scribe Studio, Run Capsule, Events, Governance) separately, each in its own annex. No single document previously collected these into one canonical state model, and none of them addressed client-side interaction state (loading, offline, syncing, conflict) at all.

Chapter 22 is that canonical state model. It exists so that:

- Every entity with a lifecycle has exactly one authoritative state diagram.
- Every state has defined entry/exit actors and guard conditions.
- Client interaction state (a concern the Chapter 8 annexes do not cover) is specified before mobile/web implementation begins, per the offline requirement in the HCP vision and ``CODEX/ARCHITECTURE-RULES.md``.

Where this chapter's state names differ from the source annex, the source annex is authoritative per the Authority Order in ``CODEX/HCP-CODEX-HANDOFF.md``, and the difference is recorded under **Contradictions & Gaps** below rather than silently resolved.

Modeling Conventions

Each state machine in this chapter is written as:

```
```text
State A → State B → State C
```

for the primary/expected path, with a **Guards & Alternate Transitions** list for branches, rejections, and reversals. Each machine also lists:

- **Owning Domain** — the Chapter 8 annex that is authoritative for this entity.
- **Actors** — who may trigger a transition.
- **Invalid transitions** — rejected by the platform (all annexes agree these must be enforced server-side, not just hidden in UI).

State names are copied verbatim from the source annex wherever possible so this chapter can be diffed against Chapter 8 later without translation loss.

# Part A — Core Entity State Machines

## A.1 Kennel Lifecycle

Owning Domain: Annex 08C — Kennels.

Draft → Pending Verification → Active → Inactive → Archived

Actors: Creator (Draft only), Platform/Community Verifiers (Pending Verification → Active), Kennel Officers (Active ↔ Inactive), Platform Admin (→ Archived).

Guards & Alternate Transitions:

- Verification level is itself a sub-state of Active (Pending, Community Verified, Officer Verified, Platform Verified per FR-KENNEL-002) and does not gate core functionality — it gates trust signals shown elsewhere (see Chapter 22 A.8).
- Archived kennels are read-only; reactivation requires Platform Admin action and is logged.

Invalid transitions: Draft → Active (must pass through Pending Verification); Archived → any state other than Active via explicit Platform Admin reactivation.

## A.2 Membership Lifecycle

Owning Domain: Annex 08L (08L-01, organization-level) and Annex 08D (08D, member-facing detail). **These two annexes define overlapping but non-identical status vocabularies — see Contradictions & Gaps, item 1.** This chapter adopts the reconciled model below as the implementation-ready canonical state set; Chapter 8 remains the requirements source.

Applicant → Pending Review → Active → Inactive / Suspended → Resigned / Removed → Archived

Actors: Applicant (Applicant), Kennel Officers (Pending Review → Active/Rejected, → Suspended, → Removed), Member (→ Resigned), System (Active → Inactive after configurable dormancy, if a kennel enables it).

Guards & Alternate Transitions:

- Visiting Member and Honorary Member are membership **types**, not states — a Visiting Member still carries one of the states above (see Chapter 23, Membership entity).
- Suspended → Active (Reinstatement, FR-MEMBER-009) preserves original join date and history.
- Resigned and Removed are terminal for the membership record but never delete historical participation (BR pattern repeated across every annex: history is immutable).
- Officer roles must be relinquished before a member may transition to Resigned (FR-MEMBER-014).

Invalid transitions: Any state → Active without passing through an approval step, except Reinstatement from Suspended/Inactive.

## A.3 Run Session Lifecycle

Owning Domain: Annex 08E — Runs (08E-01, 08E-06).

Draft → Scheduled → Planning → Trail Hidden → Trail Released → Check-In Open → Live Run → Circle → Reporting → Archived → Run Capsule

Actors: Hare/Trail Master/Officer (Draft → Planning stages), Hare (Trail Hidden → Trail Released, per configured release mode), Officers (Check-In Open, Live Run start/pause/resume/end), System (Circle → Reporting → Archived → Run Capsule, largely automatic per FR-RUN-013 through FR-RUN-016).

Guards & Alternate Transitions:

- Live Run supports a **Paused** sub-state (FR-RUN-010/011); pause duration is recorded on the timeline and the run returns to Live Run on resume. Paused is not a sibling of Live Run in the top-level chain — it is a transient interruption of it.

- Archived → Run Capsule is automatic and immediate (FR-RUN-016); a Run Session and its Run Capsule are effectively the same object post-archival, viewed through two lenses (operational vs. historical). See Chapter 23 A.3 for the entity relationship.
- Circle may be explicitly skipped by an authorized officer, but a reason must be recorded (BR-RUN-005).

Invalid transitions: Skipping Trail Hidden → Live Run directly is rejected; Trail Released must occur even under “release at run start” mode, it simply co-occurs with Check-In Open/Live Run in that configuration rather than being skipped.

## A.4 Trail Lifecycle

Owning Domain: Annex 08F — Trail Studio (08F-01, 08F-06).

Idea → Draft → Planning → Review → Locked → Hidden → Released → Live → Completed  
→ Archived → Historic Trail

Actors: Hare/Co-Hare (Idea → Review), Hare (Lock, per FR-TRAIL-005), Officer (may unlock), Hare (Hidden → Released, per configured release mode from FR-TRAIL-007).

Guards & Alternate Transitions:

- A Trail cannot exist without an associated Run Session (BR-TRAIL-002); its lifecycle advances in lockstep with, but is not identical to, the parent Run Session lifecycle (A.3). Hidden/Released trail states are the mechanism behind the Run Session’s own Trail Hidden/Trail Released states.
- Restore Draft is a permitted reverse transition from Locked (per the 08F-06 permission matrix), but never from Hidden or later — secrecy, once active, is not silently reversible.

Invalid transitions: Released → Hidden (secrecy cannot be re-imposed once participants have navigation access); Archived/Historic Trail → any editable state (corrections become revisions, not edits, per BR-TRAIL-014).

## A.5 Trail Report Lifecycle (Scribe Studio)

Owning Domain: Annex 08G — Scribe Studio (08G-01, 08G-06).



The **Story Collection** process (continuous, automatic, running throughout the Run Session — see 08G-01) is not itself a state machine; it is a background aggregation feed into the Story Graph. The **Trail Report** (the editorial artifact the Scribe publishes) has its own state machine:

Draft → Scribe Editing → Review → Published → Archived

Actors: Scribe/Assistant Scribe (Draft, Scribe Editing), Reviewers if enabled (Review — comment/suggest only), Scribe or Officer (Published — BR-SCRIBE-002 restricts this to exactly one Official Trail Report per Run Session).

Guards & Alternate Transitions:

- Multiple Draft revisions may exist simultaneously (FR-STORY-006); only one becomes the Official Trail Report at Published.
- AI-assisted drafts are clearly a sub-state/flag on Draft ( `aiAssisted: true` until a human accepts each suggestion), never a separate lifecycle state — AI drafts cannot reach Published without passing through human Scribe Editing (BR-SCRIBE-005).

Invalid transitions: Draft → Published directly (must pass Scribe Editing at minimum); Published → Draft (corrections create a new revision, the original publication is preserved per BR-SCRIBE-011).

## A.6 Run Capsule Lifecycle

Owning Domain: Annex 08H — Run Capsule (08H-01, 08H-05).

Planned → Preparing → Live → Draft → Pending Publication → Published → Archived → Legacy

Actors: System (Planned through Draft — fully automatic per FR-CAPSULE-001/002), Scribe/Officer (Pending Publication → Published, gated by Trail Report publication), Officer/Admin (→ Archived).

Guards & Alternate Transitions:

- Legacy is a distinct entry point, not a downstream state — historic runs imported from legacy systems enter directly at Legacy (FR-CAPSULE-010) and may be incrementally enriched without ever having passed through Planned/Preparing/Live.
- Supplemental contributions (BR-CAPSULE-005) may be attached to a Published or Archived Capsule without changing its state — enrichment after publication does not revert the state machine.

Invalid transitions: Published/Archived/Legacy → Draft (the historical record does not reopen; corrections are revisions per BR-CAPSULE-004).

## A.7 Event Lifecycle (Multi-Participant / Interhash Events)

Owning Domain: Annex 08K — Event & Interhash Management (08K-00).

Draft → Planning → Registration Open → Registration Closed → Preparation → Live Event → Completed → Archived

Actors: Organizer/Committee (Draft → Preparation), System or Organizer (Registration Open/Closed, per configured cutoff), Organizer (Live Event, Completed).

Guards & Alternate Transitions:

- A single Event may contain multiple child Run Sessions (weekly-run-style) or Sessions/Activities (conference-style), each with its own state machine (A.3). The Event state gates which child-object operations are available, but does not directly drive them.

Invalid transitions: Registration Open before Planning is complete; Completed → Live Event (an event does not un-conclude — post-event corrections are handled as Run Capsule/Trail Report revisions on the child objects, not Event state reversal).

## A.8 Kennel Verification Level (Sub-state of Kennel Active)

Owning Domain: Annex 08C (FR-KENNEL-002).

Pending → Community Verified → Officer Verified → Platform Verified

This is a monotonically increasing trust indicator layered on top of A.1, not a separate lifecycle. It never regresses automatically; only a Platform Admin action can demote it, and that action is audited (see Chapter 24, `KenneIVerificationLevelChanged`).

## A.9 Identity Trust Level (Sub-state of Identity, Cross-Cutting)

Owning Domain: Annex 08M (FR-ID-010).

Unverified → Verified Email → Verified Member → Trusted Volunteer → Officer Verified → Organization Verified → Platform Verified

Trust Level is per-Identity (not per-Membership) and is consumed by the Authorization model (08M-03) as one input among several (role, relationship, policy) — it is advisory context, not itself a permission grant. See Chapter 23 for the Identity/TrustLevel relationship and Chapter 24 for `TrustLevelChanged`.

## A.10 Officer / Role Assignment State (Cross-Cutting, Inferred)

Owning Domain: Synthesized from Annex 08L (08L-01 FR-GOV-006, 08L-04 FR-GOV-033) and Annex 08M (FR-ID-024). No single source annex states this as an explicit machine; Chapter 8 describes appointment and delegation as events with start/end dates. This chapter makes the implicit state machine explicit:

Nominated → Appointed → Active → Term Ended / Delegated / Revoked → Historical

Actors: Nominating body/electorate (Nominated), Organization per its governance policy (Appointed), Delegator (Delegated — time-boxed, auto-expires per FR-GOV-033), Officer/Organization (Term Ended, Resignation), Organization/Admin (Revoked — for cause).

### Guards & Alternate Transitions:

- Delegated is a parallel, time-limited grant of a subset of an Active officer's authority to a third party; it does not change the delegating officer's own Active state, and it auto-expires without requiring a manual transition.
- All terminal transitions (Term Ended, Revoked, Resignation) land on Historical, preserved permanently on the org's Leadership Timeline (FR-GOV-006) — never deleted.

This is flagged as **Codex-inferred** in `CODEX/DECISION-LOG.md` since no annex states it as a formal machine.

## A.11 Notification Delivery State (Cross-Cutting)

Owning Domain: Annex 08P — Notification Center (08P-01).

Created → Evaluated → Queued/Batched/Digested → Delivered → Read/Acknowledged → Expired

Actors: System only (fully automatic per FR-NOT-004 Attention Intelligence evaluation).

### Guards & Alternate Transitions:

- Evaluated may branch to any of Immediate, Batch, Digest, Scheduled, Escalated, Manual Approval, or Silent Update delivery policies (FR-NOT-008) before reaching Delivered.
- Critical-priority notifications may bypass Quiet Hours suppression (FR-NOT-006) but still pass through Evaluated for the explainability record (FR-NOT-010).

Invalid transitions: Delivered → Queued (a delivered notification is immutable per FR-NOT-001; a correction is a new notification, not a re-delivery).

# Part B — Client Interaction States (Offline & Sync)

The HCP vision requires offline behavior “where practical, especially for run participation, maps, media capture, and later sync” ( `CODEx/HCP-CODEX-HANDOFF.md` ). No Chapter 8 annex specifies client-side interaction state. This section is **Codex-inferred** and should be treated as Proposed pending implementation review, not Approved requirements.

## B.1 Sync Status (applies to any locally-editable object: Trail plans, Trail Report drafts, membership actions taken offline, etc.)

```
Local Draft → Queued for Sync → Syncing → Synced
 ↘ Conflict → Resolved → Synced
 ↘ Sync Failed → Retry → Syncing
```

### Rules:

- An object in Local Draft or Queued for Sync is visible only to its author; it does not affect any other user’s view or count toward server-side state (e.g., attendance) until Synced.
- Conflict resolution never silently discards data — per the repeated Chapter 8 principle that history/edits must be attributable, a Conflict must present both versions to the user (or, for structured fields, apply a documented merge policy) rather than last-write-wins.
- Domain events (Chapter 24) are only emitted once an action reaches Synced. A Queued or Syncing action has not “happened” from the platform’s point of view yet.

## B.2 Media Upload Queue State

```
Captured → Queued → Uploading → Processing → Available
 ↘ Upload Failed → Retry → Uploading
```

### Rules:

- Captured media is stored locally immediately (per the offline-first media capture requirement) and is queryable by its own device before Available.
- Processing covers server-side transcoding/moderation (BR-RUN-012 moderation options: immediate, officer approval, AI-assisted, community reporting) — Available is only reached after any configured moderation gate clears.
- MediaAsset ownership/attribution (BR-CAPSULE-007, BR-RUN-007) is fixed at Captured and does not change through the rest of the state machine.

## B.3 Trail Release — Offline Device Behavior

This state exists specifically to satisfy the requirement that “hidden/timed trail release must be enforced by backend authorization, not only UI hiding” ( [CODEX/ARCHITECTURE-RULES.md](#) ).

```
Locked (No Local Data) → Pre-Cached Encrypted → Release Condition Met (Online) → Decrypted Locally
Locked (No Local Data) → Pre-Cached Encrypted → Release Condition Met (Offline, Cached Rule) → Decrypted Locally (Provisional) → Server-Confirmed
```

### Rules:

- A device may pre-cache the encrypted trail payload before release (to support offline participation) but must not hold the decryption capability until the release condition is met.

- For time-based or check-in-based release conditions, the device may evaluate the condition locally while offline (Provisional decrypt) **only if** the kennel's release policy explicitly allows offline provisional release; this must reconcile with the server on reconnect, and any discrepancy (e.g., clock skew, revoked release) is logged as an audit/security event (Chapter 24) even though the trail was already shown to the participant.
- Manual-release and geofenced-release modes should default to requiring connectivity, since they depend on a live authorization decision (an officer's manual action, or a server-verified geofence), unless a kennel explicitly opts into offline-tolerant behavior. This default-secure choice is a Codex inference and should be confirmed with the Product Bible owner — flagged in `CODEX/TODO.md`.

## B.4 Offline Map & Trail Data Availability

Not Downloaded → Downloading → Available Offline → Stale (Newer Version Exists) → Updating → Available Offline

Rules:

- Stale data remains usable (participation should never hard-block on connectivity) but is visually indicated as potentially outdated.
- Beer Checks, waypoints, and hazards downloaded for offline use follow the same secrecy rules as B.3 — offline caching of Hidden-state trail data is not permitted; only Released trail data may be cached for offline map use.

## B.5 Generic Screen/Request States (Cross-Cutting UI)

Every screen or data-fetching interaction in the mobile and web clients should resolve to one of:

Loading → Success  
 Loading → Empty  
 Loading → Error (Retryable) → Loading  
 Loading → Error (Unauthorized) → [Auth flow]  
 Loading → Offline (Cached Data Shown) → Success (Refreshed)

This is standard client UX and is listed here only so Chapter 21 task flows and Chapter 24 events can reference it consistently rather than each task flow inventing its own vocabulary.

---



# Contradictions & Gaps

Per the Required Codex Behavior in the handoff (“write down contradictions before resolving them”), the following are logged rather than silently resolved:

1. **Membership status vocabulary mismatch.** Annex 08L-01 (FR-GOV-002) lists organization-level membership states as *Applicant, Pending Review, Active, Visiting Member, Honorary Member, Inactive, Suspended, Archived*. Annex 08D (FR-MEMBER-004) lists member-facing statuses as *Pending, Active, Suspended, Inactive, Resigned, Removed, Archived*. Section A.2 above reconciles these by treating Visiting Member/Honorary Member as membership **types** (already modeled separately in 08D FR-MEMBER-003) rather than states, and by adopting 08D’s Resigned/Removed as the terminal states 08L does not explicitly enumerate. This reconciliation is Codex-inferred; it should be confirmed against the referenced conversation’s original Chapter 22 draft if that source becomes available, and is logged in `CODEX/DECISION-LOG.md`.
2. **Communication Hub scope vs. no-DM MVP rule.** Annex 08O (Communication Hub overview) lists “Direct messaging” and “Private Chat” among its supported scope and conversation types. `CODEX/HCP-CODEX-HANDOFF.md` and `CODEX/ARCHITECTURE-RULES.md` both explicitly exclude one-to-one DMs from MVP. This chapter treats Direct/Private Chat as **out of MVP scope, Future** per the handoff’s authority (handoff package outranks a Chapter 8 annex only where the annex is describing long-term platform scope rather than MVP scope — annexes elsewhere in Chapter 8 do distinguish current vs. future capability, e.g. 08P-02 “future”). No state machine for Direct Message is included in this chapter. Flagged in `CODEX/TODO.md`.
3. **Officer/Role Assignment (A.10) has no source state machine.** Synthesized from appointment/delegation business rules scattered across 08L and 08M. Marked Codex-inferred above.
4. **Client interaction states (Part B) have no Chapter 8 source at all.** The offline requirement is stated as a principle in the handoff and in `CODEX/ARCHITECTURE-RULES.md` but never specified as concrete states anywhere in the existing Product Bible. All of Part B is Codex-inferred and Proposed, not Approved.

5. **Trail offline provisional release (B.3)** introduces a security-relevant default (deny offline provisional release for manual/geofenced modes) that is not stated anywhere in Chapter 8. This needs explicit product sign-off before implementation and is carried into `CODEX/TODO.md`.
-

# Relationship To Other Chapters

- Chapter 23 (Domain Model) defines the entities these states belong to and their `status` fields.
  - Chapter 24 (Domain Events) defines the event emitted on each transition in this chapter — every arrow in every diagram above should have a corresponding past-tense event in the Chapter 24 registry.
  - Chapter 21 task flows should reference the state names in this chapter directly rather than inventing per-flow state vocabulary; TF-003 through TF-010 are not yet updated to do so (see Chapter 21 traceability matrix, added as part of this same documentation pass).
-

# Completion Criteria

This chapter is complete when:

- Every entity lifecycle already defined in Chapter 8 has a corresponding, terminology-consistent state machine here.
  - Every state machine names its owning domain, actors, and invalid transitions.
  - Client interaction states required by the offline principle are specified at least at Proposed status.
  - All contradictions between source annexes, or between an annex and the CODEX handoff, are logged rather than silently resolved.
-

# Chapter 23 — Domain Model and Entity Relationships

Document ID: HCP-PB-23

Parent Document: HCP Product Bible

Status: Draft

Version: 1.0

Date: 2026-08-10

Authority: Codex-inferred and consolidated from Chapter 8 annexes and

`CODEx/ARCHITECTURE-RULES.md`. Not previously a repository file. See `CODEx/DECISION-LOG.md`.

---

# Purpose

Chapter 8 describes entities implicitly, scattered across functional requirements (“the system shall...”). No annex previously listed HCP’s entities, their attributes, and their relationships in one place. This chapter is that canonical domain model — the required input before any Prisma schema, OpenAPI resource model, or database migration is written (per `CODEx/ARCHITECTURE-RULES.md`: “Before coding data models, create a canonical domain model and map it to Prisma”).

This chapter intentionally stops at conceptual/logical modeling: entities, key attributes, and relationships. It does not define column types, indexes, or Prisma syntax — that belongs to the Phase 2 technical specification work ( `CODEx/IMPLEMENTATION-ROADMAP.md` ), which should treat this chapter as its starting point.

---

# Modeling Conventions

- **Entity** — a noun with identity and a lifecycle (see Chapter 22 where applicable).
  - **Value/Type field** — an attribute whose values are enumerated elsewhere (e.g., Membership Type) rather than a related entity.
  - Cardinality is written `A (1) – (0..*) B`, read “one A relates to zero or more B.”
  - `status` on any entity below refers to the corresponding state machine in Chapter 22, not a free-text field.
  - Every entity has an immutable, globally unique identifier (UUID), per the repeated Chapter 8 principle that identifiers never change (e.g., BR-CAPSULE-001, FR-ID-002, BR-TRAIL-001).
-

# Part A — Identity & Membership Domain

Source: Annex 08M, Annex 08D, Annex 08L-01.

## Person

Represents the human being. Attributes: legal name (optional), preferred name, date of birth (optional), country, languages, emergency contacts, privacy preferences. Never publicly exposed directly — see Identity.

## Identity

The permanent HCP identity tied to a Person. Attributes: UUID, public Hash name, join date, status, trust level, verification status. Immutable identifier (FR-ID-002).

- Person (1) — (1) Identity
- Identity (1) — (0..\*) HashName (current + historical, FR-ID-003)
- Identity (1) — (1) PublicProfile
- Identity (1) — (1) PrivateProfile
- Identity (1) — (0..\*) Membership
- Identity (1) — (0..\*) OrganizationAffiliation (non-membership relationships: volunteer, advisor, former officer — FR-ID-007)
- Identity (1) — (1) HashPassport
- Identity (1) — (1) TrustLevel (current value; history retained as IdentityTimeline entries)

## PublicProfile / PrivateProfile

Split per FR-ID-004/005 for privacy-by-default. PublicProfile: photo, Hash name, bio, home kennel, current roles, awards, passport summary. PrivateProfile: contact details, recovery methods, verification data, medical info, security preferences (encrypted).



## Membership

The entity for one Identity's relationship to one Kennel/Organization. Attributes: organization, membership type (Full/Associate/Visiting/Honorary/Life/Guest/Virgin/Committee — FR-MEMBER-003), status (Chapter 22 A.2), start date, end date, sponsor.

- Identity (1) — (0..\*) Membership
- Kennel (1) — (0..\*) Membership
- Membership (1) — (0..\*) MembershipTimelineEntry (immutable, FR-MEMBER-010)
- Membership (1) — (0..\*) RoleAssignment (roles attach to the affiliation, not the identity directly — FR-ID-008)

## OrganizationAffiliation

Non-membership relationship (Volunteer, Advisor, Event Organizer, Former Officer, Honorary Guest, Partner Organization — FR-ID-007). Structurally parallel to Membership but does not carry membership-type semantics.

## RoleAssignment

A role scoped to a Membership or OrganizationAffiliation (Grand Master, Trail Master, Hash Cash, Committee Chair, Volunteer, etc.). Attributes: role name, permission set reference, start date, end date, appointment method.

- Membership or OrganizationAffiliation (1) — (0..\*) RoleAssignment
- RoleAssignment (0..1) — (0..\*) Delegation (temporary sub-grant, FR-ID-024)

## TrustLevel

Value type attached to Identity (Unverified → Platform Verified, Chapter 22 A.9). History preserved via IdentityTimeline.

## HashPassport

One per Identity, created automatically (FR-PASSPORT-001).

- HashPassport (1) — (0..\*) PassportStamp (First Hash, First Hare, etc. — FR-PASSPORT-002)
  - HashPassport (1) — (0..\*) PassportMilestone (10/50/100/... runs — FR-PASSPORT-004)
  - HashPassport (1) — (1) LifetimeStatistics (runs attended, trails laid, beer checks, distance, etc. — FR-PASSPORT-005, derived/aggregated, not independently authored)
  - HashPassport (1) — (0..\*) PassportMemory (pinned favorites, notes — FR-PASSPORT-006)
  - HashPassport (1) — (0..\*) CountryVisited / KennelVisited (FR-PASSPORT-003)
-

# Part B — Kennel & Governance Domain

Source: Annex 08C, Annex 08L.

## Kennel (Organization)

Attributes: name, short name, country/state/city, time zone, description, branding, status (Chapter 22 A.1), verification level (Chapter 22 A.8), organization type (Local Kennel, Regional/National/Continental Association, International Committee, Working Group, Heritage Foundation, Temporary Event Committee — FR-GOV organization types).

- Kennel (0..1) — (0..\*) Kennel (parent-child organizational hierarchy, FR-GOV org hierarchy)
- Kennel (1) — (0..\*) Membership
- Kennel (1) — (0..\*) OfficerAppointment (a specialization of RoleAssignment scoped to named officer positions — FR-GOV-004/005/006)
- Kennel (1) — (0..\*) Run
- Kennel (1) — (0..\*) Announcement
- Kennel (1) — (0..\*) SisterKennelRelationship (FR-KENNEL-012, self-referential many-to-many)

## OfficerPosition / OfficerAppointment

OfficerPosition is the definition (Grand Master, Trail Master, ...) with description, responsibilities, permission set, term duration, appointment method. OfficerAppointment is the historical record of one Identity holding one OfficerPosition within one Kennel for a bounded period (Chapter 22 A.10).

- Kennel (1) — (0..\*) OfficerPosition
- OfficerPosition (1) — (0..\*) OfficerAppointment
- Identity (1) — (0..\*) OfficerAppointment

## Committee

Attributes: name, chair (RoleAssignment), members, mandate.

- Kennel (1) — (0..\*) Committee
- Committee (1) — (0..\*) Motion
- Motion (1) — (0..\*) Vote
- Committee (1) — (0..\*) MeetingRecord (minutes, referenced as Evidence — see Part G)

## Constitution / Policy

Version-controlled governance documents (FR-ID-027, FR-GOV Policy Engine).

- Kennel (1) — (0..\*) Policy
- Policy (1) — (0..\*) PolicyRevision (immutable version history)

## Delegation

Time-boxed transfer of a subset of an officer's authority (FR-ID-024, FR-GOV-033).

Attributes: delegator, delegate, scope, duration, reason, auto-expiration.

- RoleAssignment (1) — (0..\*) Delegation

## ComplianceRecord / GovernanceAuditEntry

Immutable record of a governance action: actor, timestamp, organization, action, object, previous state, new state, supporting evidence (FR-GOV-034).

- Kennel (1) — (0..\*) GovernanceAuditEntry
-

# Part C — Events & Runs Domain

Source: Annex 08E, Annex 08K.

## Event

A multi-participant gathering, potentially spanning multiple Run Sessions or Sessions/Activities (Weekly Run, Full Moon Run, Red Dress Run, Campout, Nash Hash, Interhash). Attributes: type, status (Chapter 22 A.7), venue(s), dates.

- Kennel or a coalition of Kennels (1..) — (0..) Event
- Event (1) — (0..\*) SessionOrActivity
- Event (1) — (0..\*) Registration
- Event (1) — (0..\*) VolunteerAssignment
- Event (0..) — (0..) Sponsor

## Run (Run Session)

The core weekly/one-off run object. Attributes: run number (unique within Kennel — BR-RUN-001), title, date, start time, meeting location, theme, run type, visibility, status (Chapter 22 A.3).

- Kennel (1) — (0..\*) Run (BR-RUN-002, single ownership)
- Event (0..1) — (0..\*) Run (a Run may optionally belong to a larger Event)
- Run (1) — (1..\*) Hare (via RoleAssignment scoped to this Run — FR-RUN-003, multiple hares/co-hares supported)
- Run (1) — (0..1) Trail — in practice one primary Trail plus optional split trails; see Trail entity (BR-TRAIL-004, a Trail cannot exist without a Run)
- Run (1) — (0..\*) Participation (attendance/RSVP/check-in records)
- Run (1) — (0..1) Circle
- Run (1) — (0..1) TrailReport (BR-RUN-006, at most one official report)
- Run (1) — (1) RunCapsule (auto-created at Draft, finalized at Archived — FR-RUN-016, FR-CAPSULE-001)
- Run (1) — (0..\*) MediaAsset

## Participation

One Identity's attendance record for one Run. Attributes: RSVP status, check-in method (GPS/QR/Officer/Manual — FR-RUN-008), visitor flag, home kennel attribution (BR-RUN-009). Immutable once the Run is archived (BR-RUN-008).

- Run (1) — (0..\*) Participation
- Identity (1) — (0..\*) Participation

## Circle

The post-run ceremony. Attributes: awards, down-downs, songs, announcements. May be explicitly skipped with a recorded reason (BR-RUN-005).

- Run (1) — (0..1) Circle
- Circle (1) — (0..\*) Award

## VolunteerAssignment

Attributes: role, assignee, event/run reference, confirmation status.

- Event or Run (1) — (0..\*) VolunteerAssignment
  - Identity (1) — (0..\*) VolunteerAssignment
-

# Part D — Trail Domain

Source: Annex 08F.

## Trail

Attributes: name (unique within Run — BR-TRAIL-001), trail type, lead Hare, co-Hares, estimated distance/duration, terrain type, status (Chapter 22 A.4), release mode and condition.

- Run (1) — (1) Trail (a Run may have multiple named Trails — Main/A/B/Walkers — modeled as multiple Trail rows sharing the same Run)
- Trail (1) — (0..\*) Waypoint
- Trail (1) — (0..\*) BeerCheck
- Trail (1) — (0..\*) DigitalChalkSymbol
- Trail (1) — (0..\*) TrailRevision (immutable version history — BR-TRAIL-008)
- Trail (1) — (0..\*) MediaAsset (linked, never orphaned — BR-TRAIL-012)

## Waypoint / BeerCheck / DigitalChalkSymbol

Geo-located trail components. Attributes: coordinates, symbol type, visibility rule (subject to the same secrecy state as the parent Trail — BR-TRAIL-005).

## TrailRevision

Attributes: editor, timestamp, changed elements, previous values, reason (optional). Deleted symbols remain in this history (BR-TRAIL-007).

---

# Part E — Story & Capsule Domain

Source: Annex 08G, Annex 08H.

## StoryAsset (Story Card)

An individual collected or manually authored moment (photo caption, quote, incident, Beer Check note). Attributes: category (Trail/Beer Check/Circle/Visitor/Award/Song/Incident/Humor/Safety/Historical/General — FR-STORY-004), timestamp, contributor, source.

- Run (1) — (0..\*) StoryAsset
- StoryAsset (0..\*) — (0..1) TrailReport (may or may not be pulled into the narrative)

## TrailReport

The official editorial artifact (Chapter 22 A.5). Attributes: status, official Scribe, assistant scribes, reviewers, narrative sections, AI-assisted flag.

- Run (1) — (0..1) TrailReport (BR-SCRIBE-002, exactly one official report)
- TrailReport (1) — (0..\*) ReportRevision (immutable — BR-SCRIBE-008)
- TrailReport (1) — (0..\*) StoryAsset (referenced as supporting evidence — FR-STORY-008)

## RunCapsule

The permanent historical artifact (Chapter 22 A.6). Attributes: status, creation timestamp, publication timestamp.

- Run (1) — (1) RunCapsule (BR-CAPSULE-002, exactly one)
- RunCapsule (1) — (0..1) TrailReport
- RunCapsule (1) — (0..\*) MediaAsset (consolidated galleries — FR-CAPSULE-004)
- RunCapsule (1) — (0..\*) SupplementalArtifact (post-publication additions — BR-CAPSULE-005)
- RunCapsule (1) — (1) Timeline (constructed automatically — FR-CAPSULE-005)



## SupplementalArtifact

Attributes: type (photo, scanned newsletter, interview, reflection), timestamp, contributor.  
Clearly distinguished from the original record (BR-CAPSULE-005).

---

# Part F — Media Domain

Source: cross-cutting (08E-06 BR-RUN-007, 08F-06 BR-TRAIL-012, 08H-05 BR-CAPSULE-007).

## MediaAsset

Attributes: uploader, upload timestamp, type (photo/video/audio), licensing info (optional), sync/upload state (Chapter 22 B.2), moderation state.

Every MediaAsset must link to at least one of: Run, Trail (or Trail Segment/Waypoint/Beer Check), Circle, StoryAsset, or General Gallery — unlinked media is not permitted (BR-RUN-007, BR-TRAIL-012).

- MediaAsset (1) — (1..\*) [Run | Trail | Circle | StoryAsset | Gallery]
  - Kennel (1) — (0..\*) Gallery/Album
-

# Part G — Communication & Notification Domain

Source: Annex 08O, Annex 08P. **Direct/one-to-one conversation types from 08O are modeled here as Future/out-of-MVP per Chapter 22, Contradictions & Gaps item 2 — not implemented in the initial schema.**

## Announcement

Attributes: kennel, author, pinned flag, schedule, category.

- Kennel (1) — (0..\*) Announcement

## Channel (MVP scope: Kennel/Event/Committee-scoped group channels only — no private 1:1 Conversation entity in MVP)

Attributes: type (Organization Channel, Event Channel, Committee Workspace, Governance Discussion), participants.

- Kennel or Event or Committee (1) — (0..\*) Channel
- Channel (1) — (0..\*) Message

## Notification

Attributes: category, priority, context object reference, recipient(s), delivery channels, delivery policy, status (Chapter 22 A.11). Immutable once delivered (FR-NOT-001).

- Identity (1) — (0..\*) Notification
- Notification (0..\*) — (1) [any domain event's aggregate, as its context object]

## NotificationPreference

Attributes: category, organization, event, channel, priority, language, device. Preference inheritance is configurable (FR-NOT-009).

- Identity (1) — (0..\*) NotificationPreference
-

# Part H — Evidence & Audit Domain

Source: Annex 08N, cross-cutting audit requirements repeated in nearly every other annex.

## EvidenceRecord

Attributes: category (Attendance, Identity, Membership, Governance, Financial, Historical, Geographical, Media, Awards, Volunteer Service, Trail Verification, Administrative, Imported Records), source, confidence score, verification status, chain of custody.

- Any governed fact (Membership approval, Officer appointment, Award, Passport stamp, Trail verification, ...) (0..) — (0..) EvidenceRecord

## AuditLog

Immutable, append-only record of privileged/administrative actions. Attributes: actor, action, resource, decision, timestamp, context, supporting policy, evidence reference (FR-ID-030, FR-GOV-034).

- Every entity in this chapter with a `status` transition or administrative action produces AuditLog entries; see Chapter 24 for the event-to-audit mapping.

## DomainEvent


The append-only event record underlying the event bus described in Chapter 24.

Distinct from AuditLog: DomainEvent is the mechanism (facts that happened, used for eventing/integration); AuditLog is the governance record (who was allowed to do what, and why). The two overlap in content but serve different consumers.

---

# Entity Relationship Overview (Text

# Diagram)

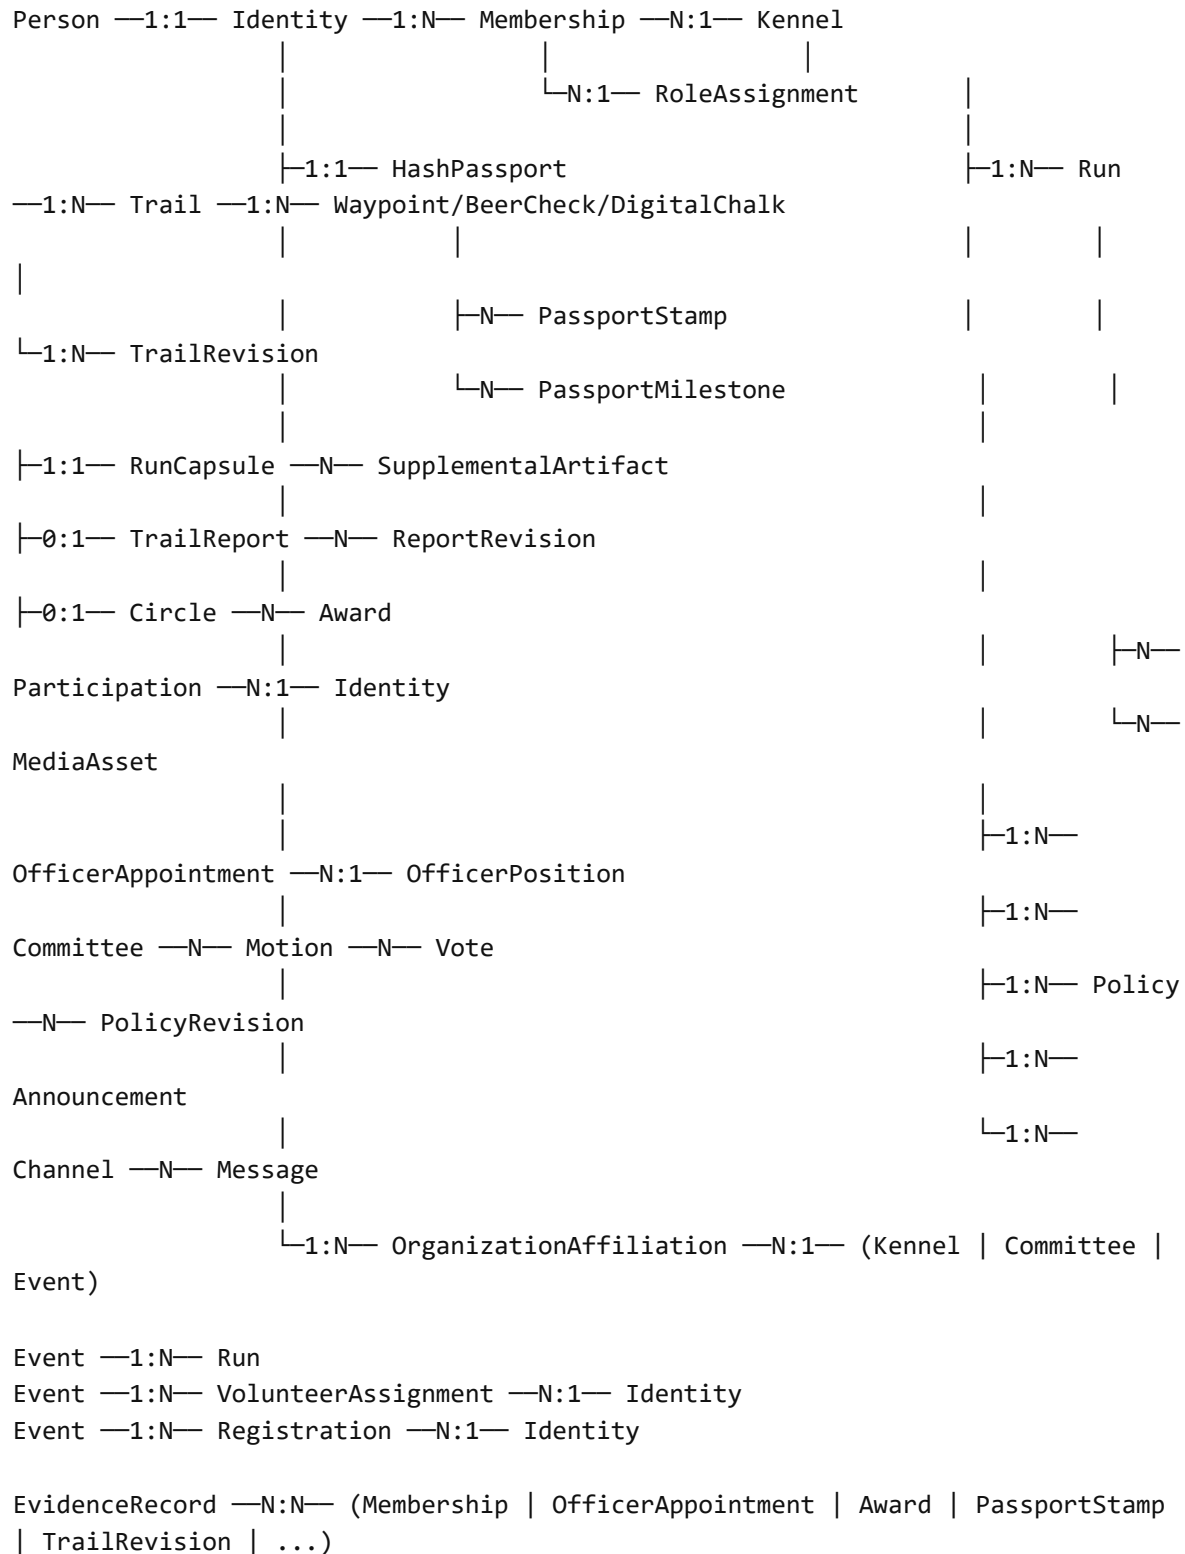

AuditLog —N:1— (any governed entity above)

DomainEvent —N:1— (any entity above, as its aggregate)

---



# Naming & Identifier Conventions

- All entity identifiers are UUIDs and are immutable once assigned (repeated across BR-CAPSULE-001, BR-TRAIL-001, FR-ID-002).
  - Human-facing numbers (e.g., Run Number) are unique only within their owning Kennel, not globally (BR-RUN-001).
  - `status` fields use the enumerations defined in Chapter 22, not free text.
  - Every entity that Chapter 8 describes as historically preserved (Membership, OfficerAppointment, TrailRevision, ReportRevision, RunCapsule) is append-only in practice: corrections are new rows/revisions referencing the original, never destructive updates.
-

# Data Ownership Summary

Per `CODEX/ARCHITECTURE-RULES.md` and repeated Chapter 8 business principles:

- A Kennel owns its Runs, Trails (via Runs), Committees, Policies, and Announcements.
  - An Identity owns its Person data, HashPassport, and PublicProfile/PrivateProfile.
  - A Membership is jointly referenced by Identity and Kennel but is its own entity, not a foreign key on either.
  - Contributor attribution on MediaAsset, StoryAsset, and TrailRevision belongs to the contributing Identity permanently, even if the Kennel later removes or archives the parent object.
  - RunCapsule and TrailReport, once published, are historical records; no entity in this chapter permits destructive edits to a published historical record.
-

# Gaps Carried Forward

- No canonical Prisma schema exists yet; this chapter is the required input for Phase 2 ( `CODEX/IMPLEMENTATION-ROADMAP.md` ).
  - Field-level attribute types (string length, enum exhaustiveness, required/optional at the database level) are intentionally out of scope here and belong to the Phase 2 Prisma draft.
  - The Registration entity (Part C) is named by analogy with Event Management (08K) but 08K-00 is an overview document only; a full Registration/Ticket data model was not found in the inspected annexes and should be verified against 08K-01 through 08K-06 if/when those detail documents are added.
-

# Completion Criteria

This chapter is complete when:

- Every entity referenced across Chapter 8 annexes has an entry here with attributes and relationships.
  - Every relationship has a stated cardinality.
  - Ownership rules are explicit for entities that could otherwise appear ambiguously owned (Membership, contributor attribution).
  - Gaps requiring Phase 2 follow-up are listed rather than guessed at the schema level.
-

# Chapter 24 — Event-Driven Architecture and Domain Events

Document ID: HCP-PB-24

Parent Document: HCP Product Bible

Status: Draft

Version: 1.0

Date: 2026-08-10

Authority: Codex-inferred and consolidated from Chapter 8 annexes, Chapter 22, Chapter 23, and `CODEX/ARCHITECTURE-RULES.md`. Not previously a repository file. See `CODEX/DECISION-LOG.md`.

---

# Purpose

Chapter 8 repeatedly requires that actions “generate notifications,” “create an audit record,” or “trigger Hash Passport updates” without naming the underlying event or its consumers. `CODEX/ARCHITECTURE-RULES.md` already establishes the event envelope and naming convention; this chapter is the registry that fills that envelope in for every state transition defined in Chapter 22 and every entity defined in Chapter 23.

This chapter exists so that:

- Every state transition in Chapter 22 has exactly one owning event.
  - Every event has a declared producer and a declared set of consumers, so notification, audit, search indexing, passport updates, and Run Capsule assembly are traceable rather than implicit.
  - Implementation (Phase 3+) has a single source to generate an event bus contract from, instead of inferring events ad hoc per feature.
-

# Event Envelope

Per `CODEX/ARCHITECTURE-RULES.md`, every domain event carries:

Field	Description
<code>eventId</code>	Unique identifier for this event instance.
<code>eventType</code>	Past-tense name from the registry below (e.g., <code>RunPublished</code> ).
<code>occurredAt</code>	When the fact became true on the server (see Offline Rules below — distinct from when a client-side action was taken).
<code>version</code>	Schema version of this event type's payload.
<code>actorId</code>	Identity that caused the event (or <code>system</code> for automatic transitions).
<code>aggregateType</code>	The Chapter 23 entity this event belongs to (e.g., <code>Run</code> ).
<code>aggregateId</code>	The specific entity instance.
<code>payload</code>	Event-specific data — kept minimal; consumers that need more should query the aggregate, not rely on payload completeness.

**Naming convention:** past tense, `AggregateVerbed` (e.g., `MembershipApproved` , not `ApproveMembership` ). Each event has exactly one owning publisher — the service/domain that owns the aggregate.

# Event Registry

Organized by Chapter 23 domain. “Consumers” lists which cross-cutting systems care, not literal service names — Phase 3 may implement these as one service or several.



## Identity & Membership Events

Event	Trigger (Chapter 22 state)	Producer	Consumers
IdentityCreated	Identity created at registration	Identity Service	Notification, Search Index, Audit
HashNameChanged	New primary Hash name recorded	Identity Service	Search Index, Audit
TrustLevelChanged	A.9 transition	Identity Service	Authorization, Audit, AI (context signal only)
MembershipRequested	A.2 Applicant → Pending Review	Membership Service	Notification (officers), Audit
MembershipApproved	A.2 Pending Review → Active	Membership Service	Notification, Passport, Search Index, Audit
MembershipRejected	A.2 Pending Review → (terminal)	Membership Service	Notification, Audit
MembershipSuspended	A.2 Active → Suspended	Membership Service	Notification, Authorization, Audit
MembershipReinstated	A.2 Suspended/Inactive → Active	Membership Service	Notification, Authorization, Audit
MembershipResigned	A.2 Active → Resigned	Membership Service	Notification (officers), Audit
MembershipRemoved	A.2 Active → Removed	Membership Service	Notification, Authorization, Audit

Event	Trigger (Chapter 22 state)	Producer	Consumers
HomeKennelTransferred	FR-MEMBER-007	Membership Service	Search Index, Passport, Audit
PassportStampAwarded	FR-PASSPORT-002 milestone rule fires	Passport Service	Notification, Search Index
PassportMilestoneReached	FR-PASSPORT-004 threshold crossed	Passport Service	Notification, Search Index
RoleAssigned	A.10 Nominated/Appointed → Active	Governance Service	Notification, Authorization, Audit
RoleDelegated	A.10 Active → Delegated	Governance Service	Authorization, Audit
RoleDelegationExpired	A.10 Delegated auto-expiration	Governance Service (scheduled)	Authorization, Audit
RoleEnded	A.10 → Historical (term end, resignation, revocation)	Governance Service	Notification, Authorization, Audit

## Kennel & Governance Events

Event	Trigger	Producer	Consumers
KennelCreated	A.1 (Draft created)	Kennel Service	Notification (platform admin), Search Index, Audit
KennelVerified	A.1 Pending Verification → Active	Kennel Service	Notification, Search Index, Audit
KennelVerificationLevelChanged	A.8	Kennel Service	Search Index, Audit
KennelArchived	A.1 → Archived	Kennel Service	Search Index, Audit
AnnouncementPublished	Kennel officer publishes	Communication Service	Notification, Search Index
CommitteeCreated / CommitteeDissolved	Governance action	Governance Service	Notification, Audit
MotionSubmitted / VoteCast / MotionResolved	08L-02/03 governance workflow	Governance Service	Notification, Audit, Evidence
PolicyPublished / PolicyRevised	FR-ID-027	Governance Service	Notification, Search Index, Audit
DelegationGranted / DelegationRevoked	FR-GOV-033	Governance Service	Authorization, Audit
ComplianceIssueFlagged	FR-GOV-036 dashboard rule fires	Governance Service (scheduled)	Notification (officers)

## Run & Event Management Events

Event	Trigger (Chapter 22 state)	Producer	Consumers
RunCreated	A.3 (Draft)	Run Service	Audit, RunCapsule (bootstraps FR-CAPSULE-001)
RunScheduled	A.3 Draft → Scheduled	Run Service	Notification, Search Index, Calendar
HareAssigned	FR-RUN-003	Run Service	Notification, Audit
RunPlanningLocked	A.3 (planning lock, FR-RUN-005)	Run Service	Audit
TrailHidden	A.3 → Trail Hidden (mirrors A.4)	Run Service / Trail Service	Audit
TrailReleased	A.3 → Trail Released / A.4 Hidden → Released	Trail Service	Notification, RunCapsule, Audit
CheckInOpened	A.3 → Check-In Open	Run Service	Notification
ParticipantCheckedIn	Participation created/updated	Run Service	Passport, RunCapsule, Notification (officer view)
RunStarted	A.3 → Live Run	Run Service	Notification, RunCapsule
RunPaused / RunResumed	A.3 Live Run sub-state	Run Service	Notification (safety-critical, may bypass Quiet Hours per FR-NOT-006)

Event	Trigger (Chapter 22 state)	Producer	Consumers
RunEnded	A.3 Live Run → Circle	Run Service	RunCapsule, Notification
CircleSkipped	BR-RUN-005 exception path	Run Service	Audit (requires reason)
RunArchived	A.3 → Archived	Run Service	RunCapsule (finalization), Search Index, Audit
RunCapsuleCreated	Automatic, mirrors RunCreated	RunCapsule Service	Search Index
EventCreated / EventPublished	A.7 Draft → Planning/Registration Open	Event Service	Notification, Search Index
RegistrationOpened / RegistrationClosed	A.7	Event Service	Notification
VolunteerAssigned / VolunteerConfirmed	Event/Run volunteer workflow	Event Service	Notification (grouped per FR-NOT-005)
EventCompleted / EventArchived	A.7	Event Service	RunCapsule (child runs), Search Index

## Trail Events

Event	Trigger (Chapter 22 A.4)	Producer	Consumers
TrailCreated	Idea/Draft	Trail Service	Audit
TrailLocked	Locked	Trail Service	Audit
TrailReviewCompleted	Review → Locked	Trail Service	Audit
DigitalChalkPlaced / DigitalChalkRemoved	FR-TRAIL edits	Trail Service	Audit (deleted symbols retained per BR-TRAIL- 007)
TrailRevised	Any planning edit	Trail Service	Audit (TrailRevision created)
TrailCompleted	Live → Completed	Trail Service	RunCapsule, Search Index
TrailArchived	→ Historic Trail	Trail Service	Search Index, Audit

## Story & Capsule Events

Event	Trigger (Chapter 22 A.5/A.6)	Producer	Consumers
StoryAssetCollected	Automatic collection (FR-STORY-001)	Scribe Service	RunCapsule
StoryAssetCreated	Manual Scribe entry (FR-STORY-002)	Scribe Service	RunCapsule
TrailReportDraftCreated	A.5 Draft	Scribe Service	Audit
TrailReportAIDraftGenerated	FR-STORY-007	Scribe Service (AI)	Audit (must carry AI-assisted flag, never auto-published)
TrailReportSubmittedForReview	A.5 Scribe Editing → Review	Scribe Service	Notification (reviewers)
TrailReportPublished	A.5 → Published	Scribe Service	Notification, Passport, RunCapsule, Search Index, Audit
TrailReportRevised	Post-publication correction	Scribe Service	Audit (ReportRevision created, original preserved)
RunCapsulePublished	A.6 Pending Publication	RunCapsule Service	Notification, Search Index,

Event	Trigger (Chapter 22 A.5/A.6)	Producer	Consumers
	→ Published		Audit
RunCapsuleSupplementAdded	BR-CAPSULE-005	RunCapsule Service	Search Index
RunCapsuleArchived / RunCapsuleLegacyImported	A.6	RunCapsule Service	Search Index, Audit

## Media Events

Event	Trigger (Chapter 22 B.2)	Producer	Consumers
MediaCaptured	Captured (local only — not synced yet, see Offline Rules)	Client (local)	none until synced
MediaUploaded	Queued → Uploading → Processing complete	Media Service	RunCapsule, Scribe, Search Index
MediaModerationRequired	BR-RUN-012 gate	Media Service	Notification (moderators)
MediaApproved / MediaRejected	Moderation decision	Media Service	Notification (uploader), Audit
MediaLinked	Association to Run/Trail/Circle/StoryAsset (BR-RUN-007)	Media Service	RunCapsule



## Notification Events

Event	Trigger (Chapter 22 A.11)	Producer	Consumers
NotificationEvaluated	Created → Evaluated	Notification Service	(internal — feeds FR-NOT-010 explainability)
NotificationDelivered	→ Delivered	Notification Service	Analytics
NotificationRead	→ Read/Acknowledged	Client	Analytics

Note: NotificationEvaluated / Delivered / Read are themselves consumers-of-events for nearly every other event in this registry — Notification is the single largest consumer across the whole table and is omitted from repeated mention in every row above only for brevity; treat “Notification” in any Consumers column as “subject to CODEX/ARCHITECTURE-RULES.md Event Architecture Rules and the kennel’s own notification configuration (BR-RUN-013: notifications only for events the kennel has enabled).”

## Evidence & Audit Events

Event	Trigger	Producer	Consumers
EvidenceRecordCreated	Any FR-*-Evidence reference across annexes	Evidence Service	Audit, AI (source citation)
AuditEntryRecorded	Meta-event: created alongside nearly every event above that touches a governed or historical entity	Audit Service (subscribes to the bus)	(terminal — Audit is a consumer of consumers)

# Consumer Responsibility Matrix

Consumer	Subscribes to	Notes
Notification Center	Any event with a configured notification rule (BR-RUN-013)	Applies Chapter 22 A.11 attention intelligence before delivery; grouping per FR-NOT-005.
Audit Log	Any event touching a governed entity (Membership, RoleAssignment, Governance, Trail, TrailReport, RunCapsule, Kennel)	Immutable, append-only; never the sole record — AuditLog references the DomainEvent, it does not replace it.
Search Index	Any event that changes discoverable content (Kennel, Run, TrailReport, RunCapsule, Media, Person public profile)	Permission-aware indexing per Annex 08Q; must respect privacy settings at index time, not only query time.
Hash Passport	MembershipApproved , ParticipantCheckedIn , HareAssigned , TrailReportPublished , and other milestone-relevant events	Derives PassportStamp/Milestone; never the event's producer.
Run Capsule Assembly	Nearly every Run/Trail/Story/Media event scoped to a given Run	Continuous assembly per FR-CAPSULE-002; this is the most event-dense consumer in the platform.
AI Platform	Story/Report events (for drafting assistance), Evidence events (for citation), Search events (for discovery)	Per AI Rules in CODEX/ARCHITECTURE-RULES.md : AI must not itself produce events that register attendance, override permissions, publish reports, or modify governance. AI-authored suggestions are always represented as a flagged sub-state (Chapter 22 A.5) consumed by a human before the human's action produces the real event.

# Event Ordering, Consistency & Idempotency

- Events are ordered per-aggregate ( `aggregateId` ) — the platform guarantees a consumer sees `RunCreated` before `RunPublished` for the same Run, but makes no cross-aggregate ordering guarantee (e.g., no guarantee `MembershipApproved` arrives before `RunPublished` just because they happened in that order in one officer's session).
  - Consumers must be idempotent against redelivery — an event may be delivered more than once (at-least-once delivery is the assumed default until Phase 2 selects a concrete message transport).
  - State transitions that Chapter 22 marks as invalid (e.g., `Published → Draft` ) must never have a corresponding event emitted; the producer rejects the action before any event is created.
-

# Offline & Delayed Sync Event Rules

Per Chapter 22 Part B and `CODEX/ARCHITECTURE-RULES.md` Offline And Sync Rules:

- An action taken while a device is offline does **not** emit a domain event at the moment the user performs it. The event is emitted only when the queued action reaches the Chapter 22 B.1 `Synced` state on the server.
  - `occurredAt` reflects server confirmation time by default. Where a kennel's release policy explicitly allows offline provisional trail release (Chapter 22 B.3), the event payload must carry both the client-asserted local time and the server-confirmed `occurredAt`, and any discrepancy is separately recorded via `AuditEntryRecorded` for security review — this is a deliberate exception to “one event, one timestamp” and should not be generalized to other event types without similar justification.
  - Media follows its own queue (Chapter 22 B.2): `MediaCaptured` is a local-only marker, not a bus event; `MediaUploaded` is the first point this domain becomes visible to any other consumer.
  - Conflict resolution (Chapter 22 B.1) that changes a previously-queued value before sync completes does not emit an event for the discarded intermediate value — only the resolved, synced value produces an event.
-

# AI Event Boundaries

Restating and making explicit, for this chapter's purposes, the AI Rules already stated in `CODEX/ARCHITECTURE-RULES.md` :

- AI may **consume**: Story/Report events (to draft), Search/Evidence events (to explain and cite), Notification events (to summarize).
  - AI may **produce**: only advisory artifacts ( `TrailReportAIDraftGenerated` , AI governance suggestions per FR-GOV-040) that require a human action to become a “real” event elsewhere in this registry ( `TrailReportPublished` , `MotionResolved` , etc.).
  - AI must never be the `actorId` on `MembershipApproved` , `ParticipantCheckedIn` , `RoleAssigned` , `TrailReportPublished` , `RunCapsulePublished` , or any governance/attendance/publication event. The `actorId` on those events is always a human Identity or `system` for a rule-based automatic transition (e.g., `RoleDelegationExpired` ), never an AI agent.
-

# Gaps Carried Forward

- This registry is Codex-inferred by mapping Chapter 22 states and Chapter 23 entities onto the event conventions already established in `CODEx/ARCHITECTURE-RULES.md`. No Chapter 8 annex names these events explicitly (they describe triggers in prose: “shall generate notifications,” “shall create an audit record”). If the referenced conversation’s original Chapter 24 draft becomes available, it should be diffed against this registry.
  - A concrete message transport (e.g., outbox pattern, message queue choice) is Phase 2/3 technical specification work, not addressed here.
  - Payload schemas per event (beyond the shared envelope) are not defined at this stage — they belong with the OpenAPI/Prisma work in Phase 2.
-

# Completion Criteria

This chapter is complete when:

- Every state transition in Chapter 22 has a corresponding event in this registry.
  - Every event names a single producer and its known consumers.
  - Offline/sync timing rules are explicit for events whose trigger may occur while a client is disconnected.
  - All event-production boundaries are explicit and consistent with `CODEx/ARCHITECTURE-RULES.md`.
-