

Cloud Computing Mini Project Report

Slackbot for Heroku

R.Harikrishnan (D17A/52), Salil Shahane (D17A/61), Abhishek Shetye (D17A/63)

Abstract

Chatbots are a popular way to allow real people to perform complex tasks in an easily understandable manner. The aim of this project is to build a chatbot for Slack (a messaging platform) that lets a team control their Heroku (a cloud platform service) account by modifying their deployed instances. This is useful for teams that already have a Slack group and want to provide internal cloud access in a clear and transparent manner

Introduction

Slack is a cloud-based team collaboration tool founded by Stewart Butterfield. Slack began as an internal tool used by their company, Tiny Speck, in the development of Glitch, a now defunct online game. The name is an acronym for "Searchable Log of All Conversation and Knowledge". Slack teams allow communities, groups, or teams to join through a specific URL or invitation sent by a team admin or owner. Although Slack was meant for organizational communication, it has been slowly turning into a community platform, a function for which users had previously used message boards or social media such as Facebook or LinkedIn groups. Many of these communities are categorized by topics which a group of people may be interested in discussing.

Heroku is a cloud Platform-as-a-Service (PaaS) supporting several programming languages that is used as a web application deployment model. Heroku, one of the first cloud platforms, has been in development since June 2007, when it supported only the Ruby programming language, but now supports Java, Node.js, Scala, Clojure, Python, PHP, and Go. For this reason, Heroku is said to be a polyglot platform as it lets the developer build, run and scale applications in a similar manner across all the languages. Heroku was acquired by Salesforce.com in 2010. Applications

that are run from the Heroku server use the Heroku DNS Server to direct to the application domain (typically "applicationname.herokuapp.com"). Each of the application containers, or dynos, are spread across a "dyno grid" which consists of several servers. Heroku's Git server handles application repository pushes from permitted users.

A **chatbot** is a computer program which conducts a conversation via auditory or textual methods. Such programs are often designed to convincingly simulate how a human would behave as a conversational partner. Chatbots are typically used in dialog systems for various practical purposes including customer service or information acquisition. Some chatterbots use sophisticated natural language processing systems, but many simpler systems scan for keywords within the input, then pull a reply with the most matching keywords, or the most similar wording pattern, from a database.

Implementation Details

A bot is a simple server-side program that receives a user's message (from the messaging platform), parses it to determine the user's intent, performs the task and sends a reply back the chat application's server.


Slack allows developers to deploy bots on channels that they have access to. This involves registering the bot's URL with Slack, which will send an HTTP request whenever an event takes place on the channel. Heroku allows developers to manage their cloud instances through an API. Both of these abilities have been leveraged to make the user experience as simple as possible.

Through the Slack settings for an organization, a bot can be added to a particular channel and given granular access to events that occur in the channel such as messages posted, files uploaded etc.

Heroku applications are bundled into packages called slugs, which contain all the dependencies needed to run the application. This slug is given a unique id, and can be modified, copied and

deleted as required. For example, an application can be forked by simply copying it's slug and redeploying it in another instance.

The bot has been implemented using Python, and deployed on a Heroku instance.

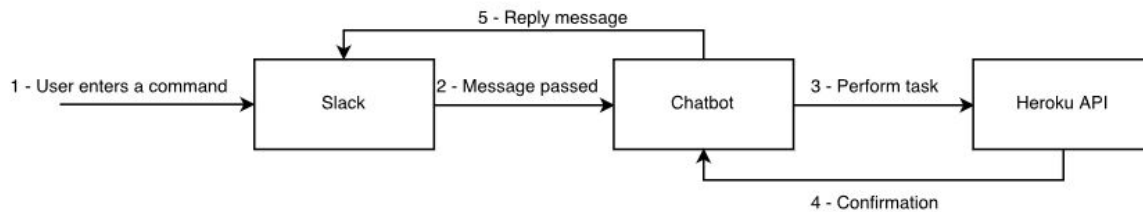

System Architecture

herokubot.py

```
import time
from slackclient import SlackClient
import heroku3
import requests

SLACK_BOT_TOKEN = 'XXXXXXXX'
SLACK_BOT_ID = 'XXXXXX'
SLACK_BOT_TAG = "<" + SLACK_BOT_ID + ">"
HEROKU_API_KEY = 'XXXX-XXXX-XXXX-XXXX-XXXX'

slack_client = SlackClient(SLACK_BOT_TOKEN)
heroku_conn = heroku3.from_key(HEROKU_API_KEY)

def create_app(app_name):
    try:
        heroku_conn.create_app(app_name)
        return True
    except TypeError as te:
```

```

        return False

def rename_app(old_app_name, new_app_name):
    try:
        heroku_conn.app(old_app_name).rename(new_app_name)
        return True
    except requests.exceptions.HTTPError as he:
        return False

def delete_app(app_name):
    try:
        heroku_conn.app(app_name).delete()
        return True
    except requests.exceptions.HTTPError as he:
        return False

def app_exists(app_name):
    apps = heroku_conn.apps()
    for app in apps:
        if app.name == app_name:
            return True
    return False

def fork_app(original_app_name, new_app_name):
    response = ''
    if app_exists(original_app_name) == False:
        response = original_app_name + ' does not exist'
        return False, response
    if app_exists(new_app_name) == False:
        response = new_app_name + ' does not exist. Creating...\n'
        create_success = create_app(new_app_name)
        if create_success:
            response += (new_app_name + ' created successfully\n')
        else:
            response += (new_app_name + ' could not be created')
        return False, response
    slug_id = get_latest_slug_id(original_app_name)

```

```

create_new_release(slug_id, new_app_name)
response += (original_app_name + ' has been forked successfully')
return True, response

def get_latest_slug_id(app_name):
    url = 'https://api.heroku.com/apps/' + app_name + '/releases'
    headers = {'Content-Type': 'application/json',
               'Accept': 'application/vnd.heroku+json; version=3',
               'Authorization': 'Bearer ' + HEROKU_API_KEY}
    response = requests.get(url=url, headers=headers)
    return response.json()[-1]['slug']['id']

def create_new_release(slug_id, new_app_name):
    url = 'https://api.heroku.com/apps/' + new_app_name + '/releases'
    headers = {'Content-Type': 'application/json',
               'Accept': 'application/vnd.heroku+json; version=3',
               'Authorization': 'Bearer ' + HEROKU_API_KEY}
    data = '{"slug": "' + slug_id + '"}'
    requests.post(url=url, headers=headers, data=data)

def get_logs(app_name, lines):
    if app_exists(app_name) == False:
        response = app_name + ' does not exist'
        return False, response
    log_url = create_log_url(app_name, lines)
    return True, requests.get(log_url).text

def create_log_url(app_name, lines):
    url = 'https://api.heroku.com/apps/' + app_name + '/log-sessions'
    headers = {'Content-Type': 'application/json',
               'Accept': 'application/vnd.heroku+json; version=3',
               'Authorization': 'Bearer ' + HEROKU_API_KEY}
    data = '{"lines": "' + lines + '"}'
    r = requests.post(url=url, headers=headers, data=data)
    return r.json()["logplex_url"]

def handle_command(command, channel):

```

```

"""
    Receives commands directed at the bot and determines if they
    are valid commands. If so, then acts on the commands.
"""

print('Received request : ' + command)
response = ''
# parse command arguments
try:

    if command.startswith("create app"):
        app_name = command.split(" ")[2]
        success = create_app(app_name)
        if success:
            response = app_name + ' has been created successfully'
        else:
            response = app_name + ' could not be created as the name has been
taken already'

    elif command.startswith("rename app"):
        old_app_name = command.split(" ")[2]
        new_app_name = command.split(" ")[4]
        success = rename_app(old_app_name, new_app_name)
        if success:
            response = old_app_name + ' has been renamed successfully'
        else:
            response = old_app_name + ' could not be renamed as it does not
exist, or the name ' + new_app_name + \
                ' has already been taken'

    elif command.startswith("delete app"):
        app_name = command.split(" ")[2]
        success = delete_app(app_name)
        if success:
            response = app_name + ' has been deleted successfully'
        else:
            response = app_name + ' does not exist'

```

```

elif command.startswith("list apps"):
    apps = heroku_conn.apps()
    response = ''
    for app in apps:
        response = response + "ID : " + app.id + " Name : " + app.name +
"\n"

```

```

elif command.startswith("fork app"):
    original_app_name = command.split(" ")[2]
    new_app_name = command.split(" ")[4]
    success, response = fork_app(original_app_name, new_app_name)

```

```

elif command.startswith("get logs for"):
    app_name = command.split(" ")[3]
    lines = command.split(" ")[4][6:]
    success, response = get_logs(app_name, lines)

```

```

else:
    response = "Invalid command."
    print("An invalid command was given : " + command)

```

```

except Exception as e:
    print("An exception was thrown : " + str(e))
    response = 'An error occurred.'

```

```

slack_client.api_call("chat.postMessage", channel=channel,
                      text=response, as_user=True)

```

```

def parse_slack_output(slack_rtm_output):
    """
    The Slack Real Time Messaging API is an events firehose.
    this parsing function returns None unless a message is
    directed at the Bot, based on its ID.
    """
    output_list = slack_rtm_output

```

```

if output_list and len(output_list) > 0:
    for output in output_list:
        if output and output['type'] == 'message' and 'text' in output:
            message_text = output['text']
            if message_text != '' and message_text.startswith(SLACK_BOT_TAG):
                return message_text.split(SLACK_BOT_TAG)[1].strip().lower(),
output['channel']
return None, None

if __name__ == "__main__":
    READ_WEBSOCKET_DELAY = 1
    if slack_client.rtm_connect():
        print("HerokuBot has started successfully.")
        while True:
            command, channel = parse_slack_output(slack_client.rtm_read())
            if command and channel:
                handle_command(command, channel)
                time.sleep(READ_WEBSOCKET_DELAY)
    else:
        print("Connection failed. Invalid Slack token or bot ID ?")

```


Result

The Heroku cloud platform has been studied. It's API has been used to create a chatbot for Slack that allows the manipulation of the instances under an account. The bot has the following functionalities :

- Creating a new instance
- Renaming an existing instance
- Deleting an existing instance
- Listing all running instances
- Forking an existing instance
- Obtaining the logs of a live instance

A sample single page web application written in PHP has been deployed to a Heroku instance. The above functionalities have been tested against this instance.

Snapshots

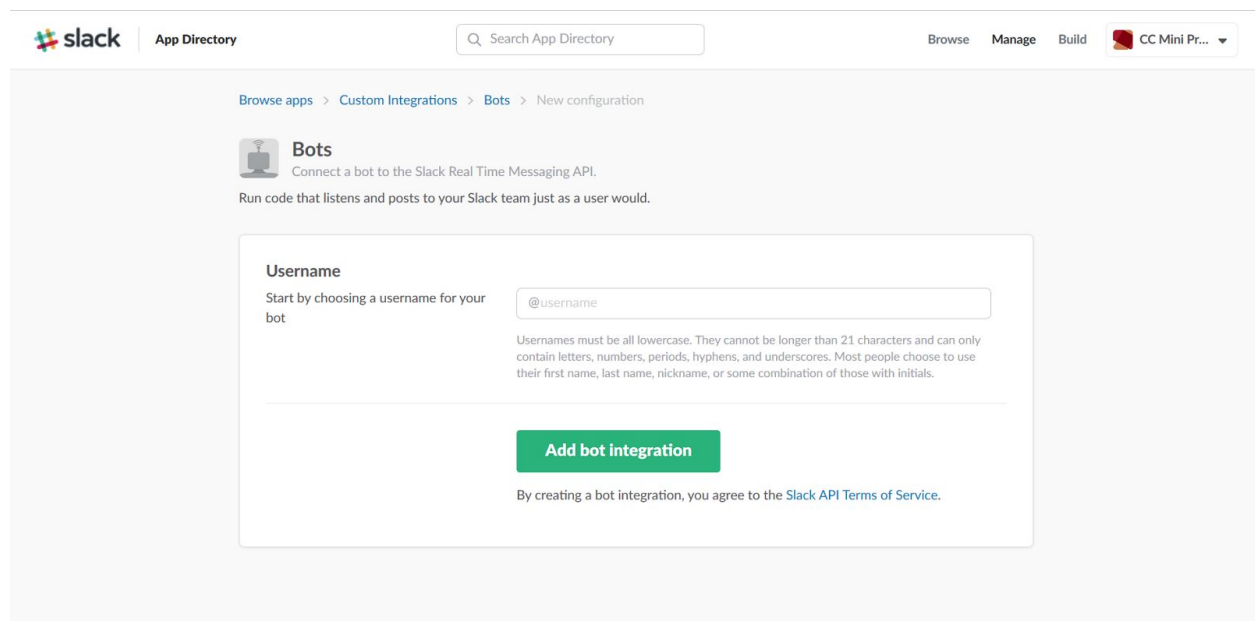

The screenshot shows the Slack App Directory interface for configuring a bot. At the top, there's a navigation bar with the Slack logo, 'App Directory', a search bar, and links for 'Browse', 'Manage', 'Build', and a user profile 'CC Mini Pr...'. Below this, a breadcrumb trail reads 'Browse apps > Custom Integrations > Bots > New configuration'. The main heading is 'Bots' with a subtext 'Connect a bot to the Slack Real Time Messaging API.' and a description 'Run code that listens and posts to your Slack team just as a user would.' The configuration form includes a 'Username' section with a text input field containing '@username'. A note specifies that usernames must be all lowercase, no longer than 21 characters, and can contain letters, numbers, periods, hyphens, and underscores. A green 'Add bot integration' button is prominently displayed. At the bottom, a disclaimer states: 'By creating a bot integration, you agree to the Slack API Terms of Service.'

Adding a bot user to a Slack channel

Personal apps > cc-website-app

Overview Resources Deploy Metrics Activity Access Settings

Installed add-ons \$0.00/month Configure Add-ons

There are no add-ons for this app
You can add add-ons to this app and they will show here. [Learn more](#)

Dyno formation \$0.00/month Configure Dynos

This app is using free dynos

web vendor/bin/heroku-php-nginx ON

Collaborator activity Manage Access


rhari991@gmail.com 1 deploy


Latest activity All Activity

- rhari991@gmail.com: Deployed @422a5e 3 days ago • v3
- rhari991@gmail.com: Build succeeded 3 days ago • [View build log](#)
- rhari991@gmail.com: Enable Logplex 3 days ago • v2
- rhari991@gmail.com: Initial release 3 days ago • v1


heroku.com Blogs Careers Documentation Support Terms of Service Privacy Cookies © 2017 Salesforce.com


The Heroku dashboard for a deployed instance

 **rhari991** 2:46 AM
@herokubot create app cc-test-app-1


 **herokubot** APP 2:46 AM
cc-test-app-1 has been created successfully


Creating an app

 **rhari991** 2:47 AM
@herokubot rename app cc-test-app-1 to cc-test-app-2

 **herokubot** APP 2:47 AM
cc-test-app-1 has been renamed successfully

Renaming an app

 **rhari991** 2:47 AM
@herokubot delete app cc-test-app-2


 **herokubot** APP 2:47 AM
cc-test-app-2 has been deleted successfully


Deleting an app

 **rhari991** 2:48 AM
 @herokubot list apps


 **herokubot** APP 2:48 AM
 ID : 3e2dd4ea-198d-4575-b4b1-6ae26a02787b Name : cc-forked-website-3
 ID : 91ce5286-eace-4626-8d27-da7a9b94a5dc Name : cc-forked-website-1
 ID : af37cad7-cb2d-4a6f-9530-ba9f69f21474 Name : cc-website-app


Listing all live apps

 **rhari991** 2:49 AM
 @herokubot fork app cc-website-app to cc-forked-website-app

 **herokubot** APP 2:49 AM
 cc-forked-website-app does not exist. Creating...
 cc-forked-website-app created successfully
 cc-website-app has been forked successfully

Forking a live app

 **rhari991** 2:50 AM
 @herokubot get logs for cc-website-app lines=10

 **herokubot** APP 2:50 AM
 2017-04-15T21:01:49.144980+00:00 heroku[router]: at=info method=GET path="/favicon.ico" host=cc-website-app.herokuapp.com request_id=7f665423-d8ce-40df-aad9-b6e1af1874fa fwd="54.89.92.4" dyno=web.1 connect=1ms service=1ms status=404 bytes=305 protocol=https
 2017-04-15T21:01:49.080339+00:00 app[web.1]: 10.149.67.224 - - [15/Apr/2017:21:01:49 +0000] "GET /css/style.css HTTP/1.1" 206 16385 "-" "Slackbot-LinkExpanding 1.0 (+https://api.slack.com/robots)"
 2017-04-15T21:01:49.105418+00:00 app[web.1]: 10.69.218.196 - - [15/Apr/2017:21:01:49 +0000] "GET /css/style.css HTTP/1.1" 416 206 "-" "Slackbot-LinkExpanding 1.0 (+https://api.slack.com/robots)"
 2017-04-15T21:01:49.137907+00:00 app[web.1]: 10.41.203.70 - - [15/Apr/2017:21:01:49 +0000] "GET /favicon.ico HTTP/1.1" 404 162 "https://slack.com" "Slackbot-LinkExpanding 1.0 (+https://api.slack.com/robots)"
 2017-04-15T21:01:49.108411+00:00 heroku[router]: at=info method=GET path="/css/style.css" host=cc-website-app.herokuapp.com request_id=b772944d-a8f4-4dab-b172-80f1c1c8314c fwd="54.165.241.61" dyno=web.1 connect=0ms service=0ms status=416 bytes=401 protocol=https
 2017-04-15T21:37:05.128545+00:00 heroku[web.1]: Idling
 2017-04-15T21:37:05.128966+00:00 heroku[web.1]: State changed from up to down
 2017-04-15T21:37:05.968884+00:00 heroku[web.1]: Stopping all processes with SIGTERM
 2017-04-15T21:37:05.980854+00:00 app[web.1]: Going down, terminating child processes...
 2017-04-15T21:37:06.087107+00:00 heroku[web.1]: Process exited with status 143

Fetching logs

Conclusion

The Heroku cloud platform has been studied. It uses slugs to package code in reusable containers and allows users to modify their working using dynos and add-on packs. The Heroku API has been used to create an interactive chatbot for Slack.

References

- 1) <https://devcenter.heroku.com/articles/platform-api-reference>
- 2) <https://api.slack.com/bot-users>

- 3) <https://en.wikipedia.org/wiki/Heroku>
- 4) [https://en.wikipedia.org/wiki/Slack_\(software\)](https://en.wikipedia.org/wiki/Slack_(software))