

Question: 36 (Marks: 1)

Degree of mobility in network where user moves between access networks, while maintaining ongoing connections is known as .....

Choices:

Moderate Mobility



High Mobility



Low Mobility



No Mobility

Question: 35 (Marks: 1)

Wireless LAN protocol stack does not include \_\_\_\_\_.

Choices:


Logical link control

☐

Radio

☐

Passive optical network

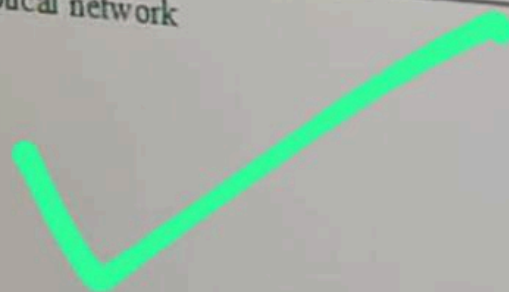☒

802.11 MAC

Question: 33 (Marks: 1)

Broadband access technology is based on .....

Choices:

☐ Shared medium and long distance

☐ Non-shared medium and short distance

☒ Shared medium and short distance

☐ Non-shared medium and long distance

Question: 34 (Marks: 1)

Ad hoc network has \_\_\_\_\_

Choices:

☐ Fixed number of nodes☐ Proper infrastructure☒ No proper infrastructure☐ Non-spatial distribution

Question: 26 (Marks: 1)

Every router on source-dest path maintains \_\_\_\_\_ for each passing connection.

Choices:

State



Flow



Control



Connection



Question:  (Marks: 1)

\_\_\_\_\_ file is used to hold OMNeT++ configuration and parameters of our model.

Choices:

☐ omnetpp.ini

☒ omnet++.ini

☐ omnet++.cmd

☐ omnetpp.ned

Ability to grow is known as .....

Choices:

Scalability

☐

Availability

☐

Reliability

☐

Efficiency

☐

Question: 5 (Marks: 1)

It requires \_\_ RTTs per object in modeling non persistence connections.



Choices:

1



2



3



4



TIME LEFT

## Network Modeling and Simulation (CS432)

Question: 29 (Marks: 1)

In which of the following technique, one checksum is computed over the header and another checksum computed over entire packet.

Choices:

☐ TCP and UDP☐ IP☐ XTP☒ TCP and IP

Question: 26 (Marks: 1)

Every router on source-dest path maintains \_\_\_\_\_ for each passing connection.



Choices:

☒ State☐ Flow☐ Control☐ Connection

Question: 28 (Marks: 1)

In Parity Checks technique ----- parity detect single bit errors.

Choices:

☒ Single bit

☐ Multiple bits

☐ 0 bit

☐ Error bit

Question: **24** (Marks: 1)

\_\_\_\_\_ identifies the operation in the wake of TimeOut.

Choices:

NFC 2581

☐

RFC 2581

☒

SFC 2581

☐

TFC 2581

☐

Question: 23 (Marks: 1)

In Max Frame Size computation Ethernet recommends ..... frame size as maximum.



Choices:

1500 Bytes

☒

1600 Bytes

☐

100 Bytes

☐

1700 Bytes

☐

Packet transmission in ALOHA protocol is .....

Choices:

Dependent



Independent



Synchronized



Randomized



Question: 12 (Marks: 1)

\_\_\_\_\_ is a sequence of bits that delimits a frame's Start and End.

Choices:

☒ Flag

☐ Index

☐ IP

☐ Frame

Question: 31 (Marks: 1)

Ethernet recommends minimum frame size up to \_\_\_\_\_.

Choices:

64 Bits



32 Bytes



156 MB



64 Bytes



Question: 30 (Marks: 1)

Packets in Priority queue are scheduled in ----- order.

Choices:

☐ LIFO

☐ FIFO

☒ Ascending

☐ Descending

Question: 7 (Marks: 1)

During periods of congestion, \_\_\_\_\_ queuing benefits UDP flows over TCP flows

Choices:

FCFS



Priority



LIFO



FIFO



TIME LEFT

Poisoned reverse does not work if more than \_\_ neighbors are involved in looping

Choices:

1



2



3



4



Question: 22 (Marks: 1)

\_\_\_\_\_ Queues provide best effort services.

Choices:

Priority

☐

FIFO

☒

LIFO

☐

Fair

☐

Question: 40 (Marks: 1)

Total time for N objects in persistent connection is -----



Choices:

$(N) \cdot \text{RTT} + N \cdot \text{Transmit time}$



$(N+1) \cdot \text{RTT} + N \cdot \text{Transmit time}$



$2\text{RTT} + N \cdot \text{Transmit time}$



$N \cdot 2\text{RTT} + N \cdot \text{Transmit time}$



Question: 37 (Marks: 1)

WiMAX stands for .....

Choices:

☐ Wireless Interoperability for Microwave Access

☐ Worldwide Interoperability for Multi-purpose Access

☒ Worldwide Interoperability for Microwave Access

☐ Wire-line Intra-operability for Microwave Access

Question: 20 (Marks: 1)

Weighted fair queue supports bit by bit \_\_\_\_\_ scheduling.

Choices:

Round robin



FIFO



LIFO



Priority Queue



Question: 17 (Marks: 1)

In TCP congestion control,  $\text{Rate} = \text{CongWin} / \underline{\hspace{2cm}}$ .

Choices:

☒ RTT☐ LastByteSent☐ LastByteRecv

Question: 19 (Marks: 1)

QoS routing is to find a \_\_\_\_\_ route for the session.

Choices:

☐ Good☐ Shortest☒ Delayed☐ Typical

Question: 25 (Marks: 1)

\_\_\_\_\_ is the complexity of the link state protocol in datagram networks.

Choices:

☐  $O(n)$

☐  $O(\log n)$

☐  $O(n \log n)$

☒  $O(n^2)$

Question: 10 (Marks: 1)

IntServ (QoS model) simulate the "virtual circuit" of ATM or frame relay on layer \_\_\_\_.

Choices:

2



3



4



5



Question: 15 (Marks: 1)

IEEE 802.16 is an emerging \_\_\_\_\_ technology.



Choices:

☐ wire line MAN

☐ wireless WAN

☒ wireless MAN

☐ wireless VLAN

Question: 1 (Marks: 1)

Size of scalar results file size is \_\_\_\_\_ vector results file.

Choices:

☒ often greater than☐ often less than☐ often equal to☐ always equal to

Question: 2 (Marks: 1)

Ability to grow is known as .....

Choices:

☒ Scalability

☐ Availability

☐ Reliability

☐ Efficiency

Question: 21 (Marks: 1)

Route lookup essentially involves tracing \_\_\_\_-bit destination address in the trie to find the vertex.



Choices:

16




32



64



128

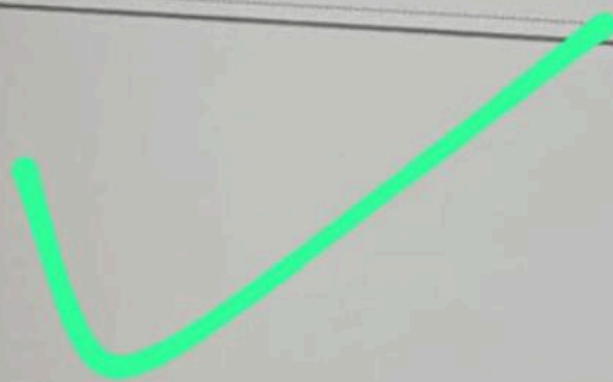

Mingwenv means \_\_\_\_\_

Choices:

☐ Ming Window Environment

☒ Minimalist GNU for Windows Environment

☐ Mini Graphical Windows Environment

☐ Mini Google Windows Environment

Question: 18 (Marks: 1)

The \_\_\_\_\_ queuing system consists of a single queuing station with a single server.

Choices:

☒ M/M/1☐ M/N/1☐ M/M/0☐ M/N/0

Question: 13 (Marks: 1)

Directed graph is represented with the help of \_\_\_\_\_

Choices:

☐  $G(N, E)$ ☐  $E(G, N)$ ☐  $N(E, G)$ ☒  $E(N, G)$ 

## Assessment Quiz

Question # 2 of 4

Time Left: 73

Total time required to receive a file from HTTP server is more than -----

Select the correct option

 Reload Math Equation

- |                                  |         |
|----------------------------------|---------|
| <input type="radio"/>            | 1RTT    |
| <input checked="" type="radio"/> | 2RTT    |
| <input type="radio"/>            | 1.5 RTT |
| <input type="radio"/>            | 0.5 RTT |

Click to Save Answer &amp; Move to Next Question

## Assessment Quiz

In formula of average access delay  $\Delta/(1 - \Delta b)$ , **b** is representing \_\_\_\_\_

Select the correct option

Reload Math Equations

|                                  |                                            |
|----------------------------------|--------------------------------------------|
| <input type="radio"/>            | Arrival time of objects to the access link |
| <input type="radio"/>            | Request rate of client to the access link  |
| <input type="radio"/>            | Access rate of objects to the access link  |
| <input checked="" type="radio"/> | Arrival rate of objects to the access link |

Click to Save Answer & Move to Next Question



Type here to search



## Assessment Quiz

Question # 2 of 4

Time Left: 58 sec

If web cache do not have the required response, the request is forwarded to -----

Select the correct option

Reload Math Equations

|                                  |                 |
|----------------------------------|-----------------|
| <input type="radio"/>            | Comuter's Cache |
| <input type="radio"/>            | FTP Server      |
| <input checked="" type="radio"/> | Origin Server   |
| <input type="radio"/>            | Web Cache       |

Click to Save Answer & Move to Next Question

Type here to search



## Assessment Quiz

Question # 3 of 4

Time Left: 65 sec(s)

Handshaking, windows, & acknowledgements are \_\_\_\_\_ functions:

Select the correct option

Reload Math Equations

|                                  |            |
|----------------------------------|------------|
| <input type="radio"/>            | Cache      |
| <input checked="" type="radio"/> | Protocol   |
| <input type="radio"/>            | Throughput |
| <input type="radio"/>            | Network    |

Click to Save Answer &amp; Move to Next Question

Type here to search



## Assessment Quiz

Question # 1014

Time Left: 07 sec

Persistent means \_\_\_\_\_

Select the correct option



Reload Math Equations

|                                  |                    |
|----------------------------------|--------------------|
| <input type="radio"/>            | Break able         |
| <input checked="" type="radio"/> | Continious         |
| <input type="radio"/>            | Without continuity |
| <input type="radio"/>            | Un break able      |

Click to Save Answer &amp; Move to Next Question



## Assessment Quiz

Quiz Duration: 6 Minute(s)

Quiz Result: 4 out of 4

## Assessment Attempt Detail

| Question                                                                                                                                                           | Result      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| In case of persistence HTTP total time required to receive every file from HTTP server is more than _____ except first file which have to wait for more than 2RTT. | ✓ - Correct |
| Wen web cache is in use, HTTP request is first sent to _____.                                                                                                      | ✓ - Correct |
| The web cache reside in _____.                                                                                                                                     | ✓ - Correct |
| Disk-access speed and _____ is one of performance factor of workstation & server.                                                                                  | ✓ - Correct |

Retake Quiz

## Assessment Quiz



Question # 2 of 4

Time Left: 63 sec(s)

Victim type and Impact on the victim are part of \_\_\_\_\_.

Select the correct option

Reload Math Equations

|                                  |                   |
|----------------------------------|-------------------|
| <input checked="" type="radio"/> | Attack module     |
| <input type="radio"/>            | OMNeT++ Framework |
| <input type="radio"/>            | Defense module    |
| <input type="radio"/>            | INET Framework    |

Click to Save Answer &amp; Move to Next Question



## Assessment Quiz

Question # 2 of 4

Time Left: 62 sec(s)

In case of non-persistence HTTP total time required to receive every file from HTTP server is more than \_\_\_\_\_.

Select the correct option

Reload Math Equations

|                                  |         |
|----------------------------------|---------|
| <input type="radio"/>            | 1.5 RTT |
| <input checked="" type="radio"/> | 2RTT    |
| <input type="radio"/>            | 1RTT    |
| <input type="radio"/>            | 0.5 RTT |

Click to Save Answer &amp; Move to Next Question



## Assessment Quiz



Question # 3 of 4

Time Left: 44 sec(s)

Total time requires to get N requested files in case of non - persistent HTTP is \_\_\_\_\_

Select the correct option

[Reload Math Equations](#)

|                                  |                                               |
|----------------------------------|-----------------------------------------------|
| <input type="radio"/>            | $N \cdot RTT + N \cdot \text{Transmit time}$  |
| <input checked="" type="radio"/> | $N \cdot 2RTT + N \cdot \text{Transmit time}$ |
| <input type="radio"/>            | $N \cdot 3RTT + N \cdot \text{Transmit time}$ |
| <input type="radio"/>            | $(N+1)RTT + N \cdot \text{Transmit time}$     |

[Click to Save Answer & Move to Next Question](#)

Type here to search



## Assessment Quiz

Question # 2014

Time Left: 02 Sec(s)

Deployment location and attack detection technique are part of\_\_\_\_\_.

Select the correct option

Reload Math Equations

|                                  |                   |
|----------------------------------|-------------------|
| <input type="radio"/>            | OMNeT++ Framework |
| <input type="radio"/>            | INET Framework    |
| <input checked="" type="radio"/> | Defense module    |
| <input type="radio"/>            | Attack module     |

Click to Save Answer & Move to Next Question





## Assessment Quiz

Question # 3 of 4

Time Left: 57 sec(s)

If web cache do not have the required response, the request is forwarded to \_\_\_\_\_.

Select the correct option

[Reload Math Equations](#)

|                                  |                 |
|----------------------------------|-----------------|
| <input type="radio"/>            | Web Cache       |
| <input checked="" type="radio"/> | Origin Server   |
| <input type="radio"/>            | Comuter's Cache |
| <input type="radio"/>            | FTP Server      |

[Click to Save Answer & Move to Next Question](#)

## Assessment Quiz

Question # 3 of 4

Time left: 0

How client and server connects in case of HTTP communication?

Select the correct option

[🔄 Reload Math Equa](#)

|                                  |                            |
|----------------------------------|----------------------------|
| <input checked="" type="radio"/> | 3 way hand shaking         |
| <input type="radio"/>            | 2 way hand shaking         |
| <input type="radio"/>            | No hand shaking involve    |
| <input type="radio"/>            | Request and response model |

[Click to Save Answer & Move to Next Question](#)

## Assessment Quiz

Question # 4 of 4

Time Left: 49 sec(s)

When web cache is in use, HTTP request is first sent to -----

Select the correct option

Reload Math Equations

|                                  |                  |
|----------------------------------|------------------|
| <input type="radio"/>            | Origin Server    |
| <input type="radio"/>            | Computer's Cache |
| <input checked="" type="radio"/> | Web Cache        |
| <input type="radio"/>            | Main Server      |

Click to Save Answer &amp; Move to Next Question



## Assessment Quiz

Question # 2 of 4

Time Left: 60 sec(s)

When web cache is in use, average HTTP response time -----

Select the correct option

Reload Math Equations

|                                  |             |
|----------------------------------|-------------|
| <input type="radio"/>            | Remain same |
| <input checked="" type="radio"/> | Decreases   |
| <input type="radio"/>            | Increases   |
| <input type="radio"/>            | Become half |

Click to Save Answer &amp; Move to Next Question



Type here to search



## Assessment Quiz

Question # 3 of 4

Time Left: 65 sec(s)

HTTP works on \_\_\_\_\_ layer.

Select the correct option

Reload Math Equations

|                                  |             |
|----------------------------------|-------------|
| <input type="radio"/>            | Data link   |
| <input checked="" type="radio"/> | Application |
| <input type="radio"/>            | Network     |
| <input type="radio"/>            | Transport   |

Click to Save Answer &amp; Move to Next Question

## Assessment Quiz

Question # 4 of 4

Time Left: 40 Sec(s)

The web cache reside in \_\_\_\_\_

Select the correct option

Reload Math Equations

|                                  |              |
|----------------------------------|--------------|
| <input type="radio"/>            | Main server  |
| <input checked="" type="radio"/> | Proxy Server |
| <input type="radio"/>            | Laptop       |
| <input type="radio"/>            | Web Server   |

Click to Save Answer & Move to Next Question

Type here to search



## Assessment Quiz

A Circular Distributed Hash Table (DHT) is a distributed data structure used in \_\_\_\_\_ networks to efficiently locate resources and services.

Select the correct option

 Reload Math Equation

|                                  |               |
|----------------------------------|---------------|
| <input type="radio"/>            | Client server |
| <input type="radio"/>            | Centralized   |
| <input checked="" type="radio"/> | Peer-to-Peer  |
| <input type="radio"/>            | Dynamic       |

Click to Save Answer & Move to Next Question

Type here to search



## Assessment Quiz

The delay from Internet router to institution router is called \_\_\_\_\_

Select the correct option

Reload Math Equations

- |                                  |                        |
|----------------------------------|------------------------|
| <input type="radio"/>            | Minimum access delay   |
| <input type="radio"/>            | Average access delay   |
| <input checked="" type="radio"/> | Average internet delay |
| <input type="radio"/>            | Maximum access delay   |

Click to Save Answer & Move to Next Question

Type here to search



## Assessment Quiz

## Post-Assessment

Question # 3 of 4

Time Left: 57 sec(s)

Web browser receives HTTP -----

Select the correct option

🔄 Reload Math Equations

|                                  |            |
|----------------------------------|------------|
| <input checked="" type="radio"/> | Response   |
| <input type="radio"/>            | Data       |
| <input type="radio"/>            | Connection |
| <input type="radio"/>            | Request    |

## Assessment Quiz

Browsing behavior determined by a list of \_\_\_\_\_ web sites to visit at specific times

Select the correct option

Reload Math Equations

|                                  |            |
|----------------------------------|------------|
| <input checked="" type="radio"/> | Predefined |
| <input type="radio"/>            | Optimal    |
| <input type="radio"/>            | Routing    |
| <input type="radio"/>            | Cached     |

Click to Save Answer & Move to Next Question

Type here to search





## Assessment Quiz

## Post-Assessment

Question # 4 of 4

Time Left: 53 sec(s)

Implementation of \_\_\_\_\_ is a newly added support in OMNET++

Select the correct option



Reload Math Equations



RFC 1035



RFC 1951



RFC 931



RFC 1034



## Assessment Quiz

DNS client that can query a DNS server is a supported \_\_\_\_\_ operation

Select the correct option

🔄 Reload Math Equations

|                                  |          |
|----------------------------------|----------|
| <input checked="" type="radio"/> | DNS      |
| <input type="radio"/>            | MDNS     |
| <input type="radio"/>            | OMNET ++ |
| <input type="radio"/>            | Server   |

Click to Save Answer & Move to Next Question



## Assessment Quiz

The HTTP 1.1 also provides the PUT and \_\_\_\_\_ methods

Select the correct option

Reload Math Equation

|                                  |          |
|----------------------------------|----------|
| <input type="radio"/>            | Request  |
| <input checked="" type="radio"/> | DELETE   |
| <input type="radio"/>            | REMOVE   |
| <input type="radio"/>            | Response |

Click to Save Answer & Move to Next Question



Type here to search



## Assessment Quiz

The HTTP browser actually utilizes the HTTP -----

Select the correct option

🔄 Reload Math Equations

☒ Response

☐ BrowserDirect

☐ NodeBase

☐ BrowserBase

Click to Save Answer & Move to Next Question

## Assessment Quiz

Formula for average access delay is \_\_\_\_\_

Select the correct option

Reload Math Equations

☐  $\Delta/(1 + \Delta b)$

☒  $\Delta/(1 - \Delta b)$

☐  $\Delta^*(1 - \Delta b)$

☐  $\Delta/(\Delta b - 1)$

Click to Save Answer & Move to Next Question



## Assessment Quiz

### Post-Assessment

Question # 2 of 4

Time Left: 43 sec(s)

What is the correct formula to find the efficiency of BitTorrent.

Select the correct option

 Reload Math Equations

- |                                  |                                                               |
|----------------------------------|---------------------------------------------------------------|
| <input checked="" type="radio"/> | $(T_{\text{BitTorrent}} - T_{\text{CSFD}}) / T_{\text{CSFD}}$ |
| <input type="radio"/>            | $(T_{\text{BitTorrent}} + T_{\text{CSFD}}) / T_{\text{CSFD}}$ |
| <input type="radio"/>            | $(T_{\text{BitTorrent}} * T_{\text{CSFD}}) / T_{\text{CSFD}}$ |
| <input type="radio"/>            | $(T_{\text{BitTorrent}} - T_{\text{CSFD}}) * T_{\text{CSFD}}$ |

## Assessment Quiz

A torrent use \_\_\_\_\_ architecture.

Select the correct option

Reload Math Equations

|                                  |               |
|----------------------------------|---------------|
| <input checked="" type="radio"/> | P2P           |
| <input type="radio"/>            | HTTP          |
| <input type="radio"/>            | Client Server |
| <input type="radio"/>            | TCP           |

Click to Save Answer & Move to Next Question



## Assessment Quiz

The transport layer manages the successful delivery of the data from the host to the other -----

Select the correct option

 Reload Math Equations

|                                  |        |
|----------------------------------|--------|
| <input type="radio"/>            | Router |
| <input checked="" type="radio"/> | Host   |
| <input type="radio"/>            | Tower  |
| <input type="radio"/>            | Air    |

Click to Save Answer & Move to Next Question

## Assessment Quiz

The support for TCP in the INET framework is very -----

Select the correct option

Reload Math Equations

|                                  |         |
|----------------------------------|---------|
| <input type="radio"/>            | Less    |
| <input type="radio"/>            | Mdeium  |
| <input checked="" type="radio"/> | Broad   |
| <input type="radio"/>            | Optimal |

Click to Save Answer & Move to Next Question