CS604P

Final Term

2024

Subjective &Mcqs

SOLVED BY


Iqra Azhar

YTUBE Mth zone for vu


Assignment||Quiz||GDB||project seminor
||Online math classes||online book shop
||Lms Handling Services available

CONTACT 03235429064


CS604P FINAL TERM BY IQRA AZHAR 2

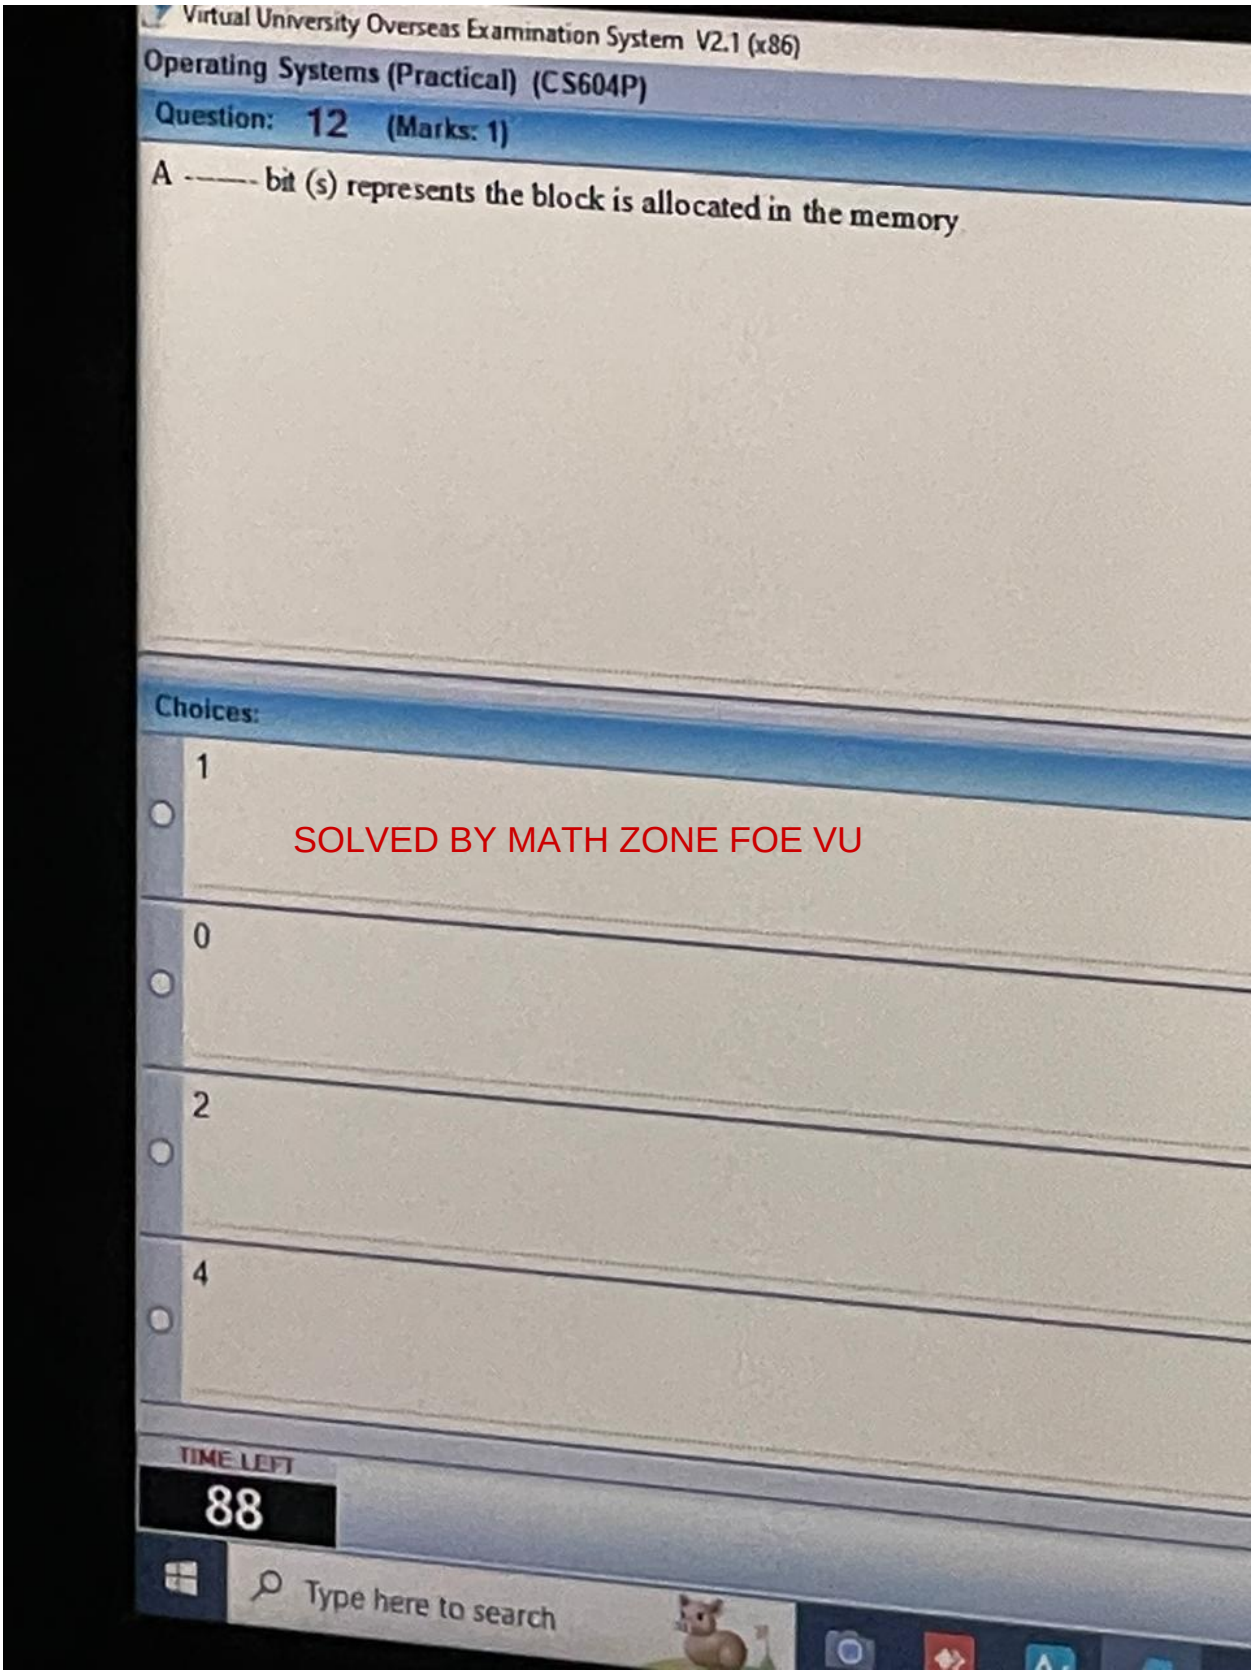


CS604P FINAL TERM BY IQRA AZHAR 2

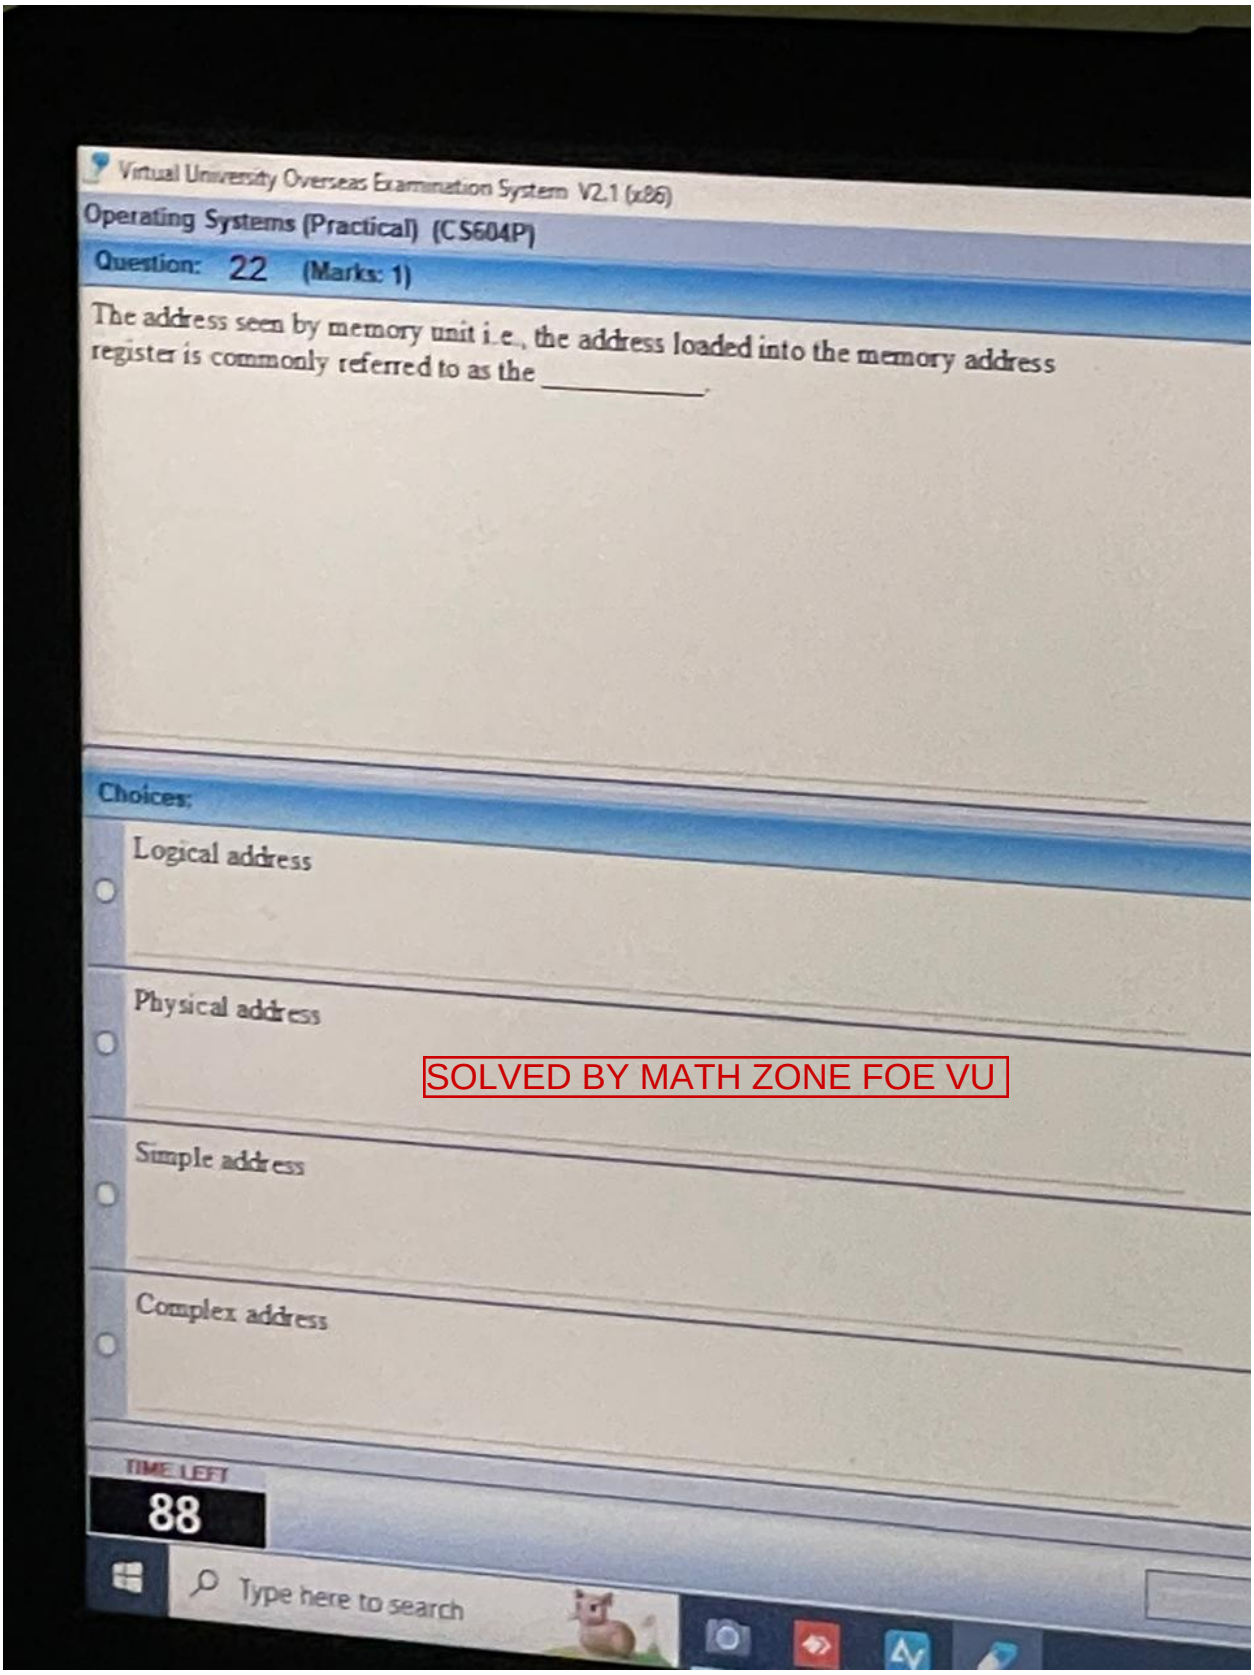


CS604P FINAL TERM BY IQRA AZHAR 2

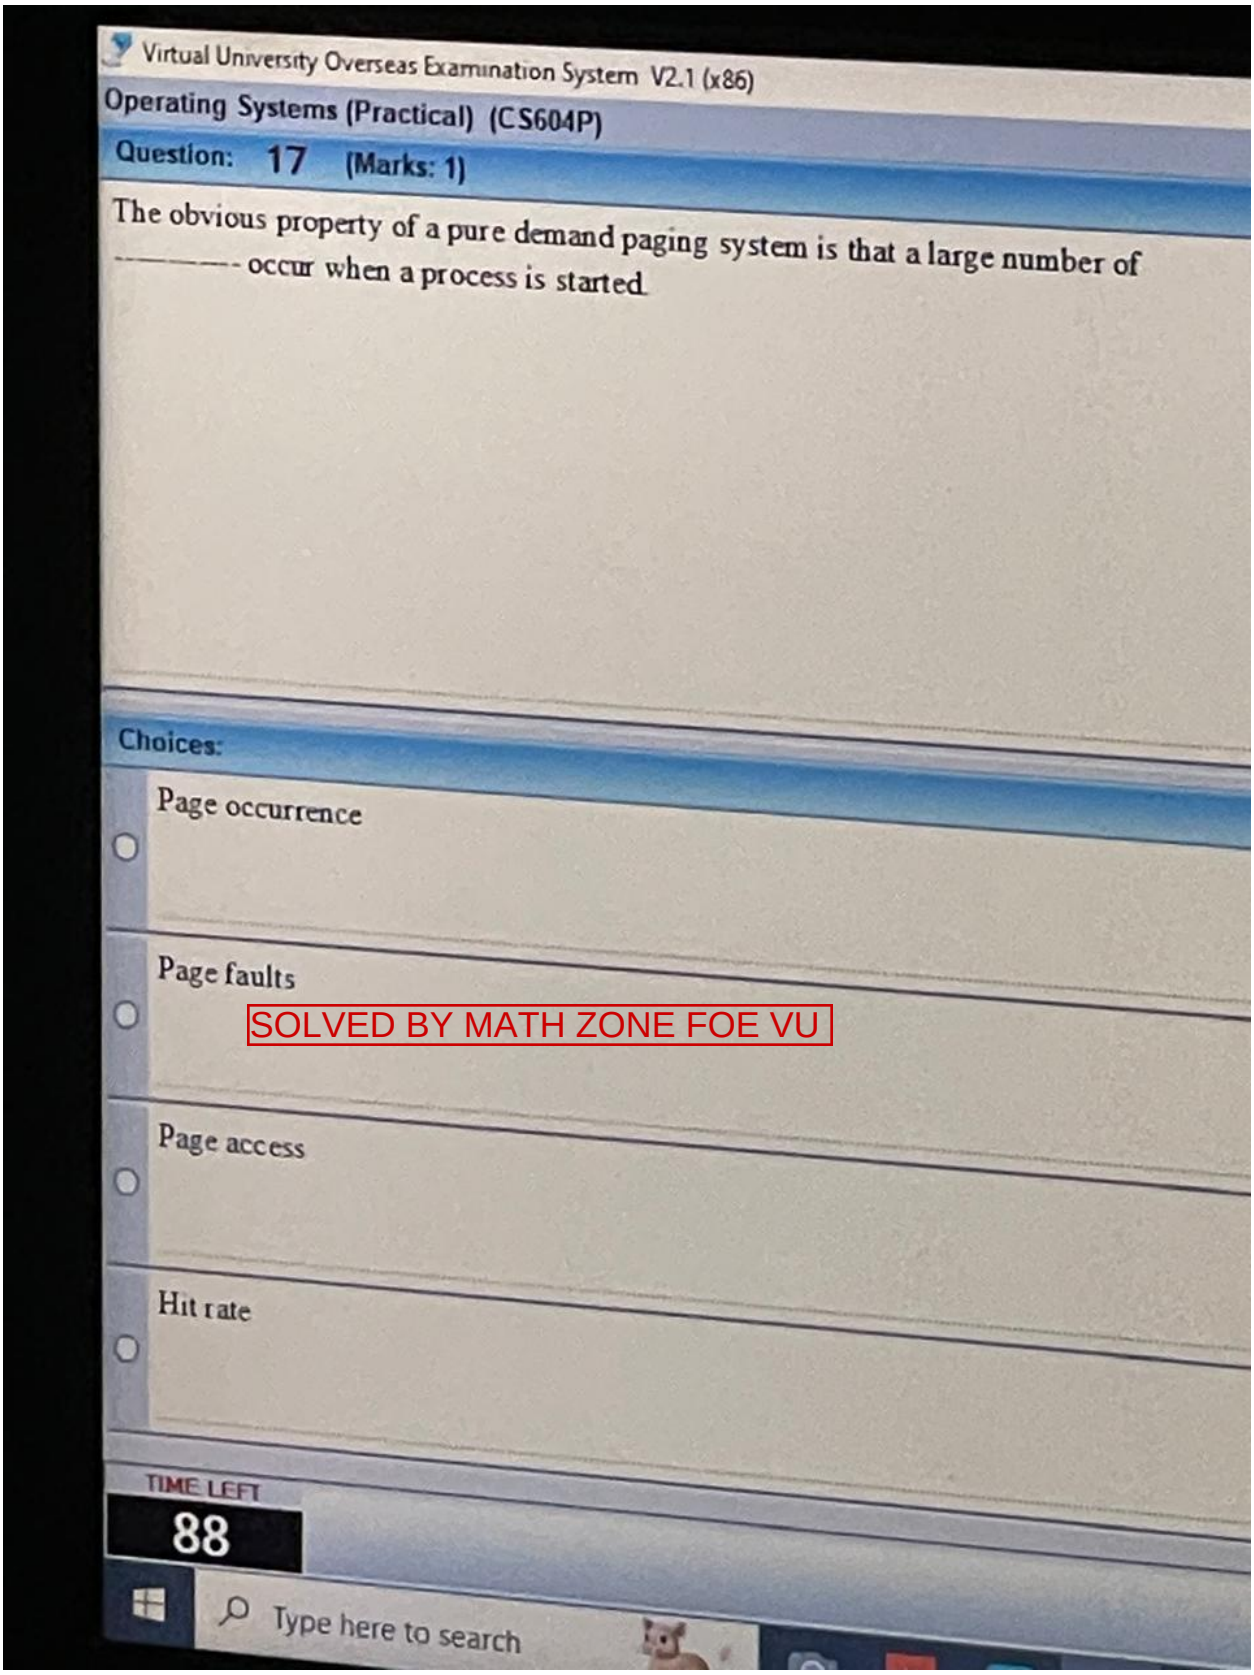


CS604P FINAL TERM BY IQRA AZHAR 2

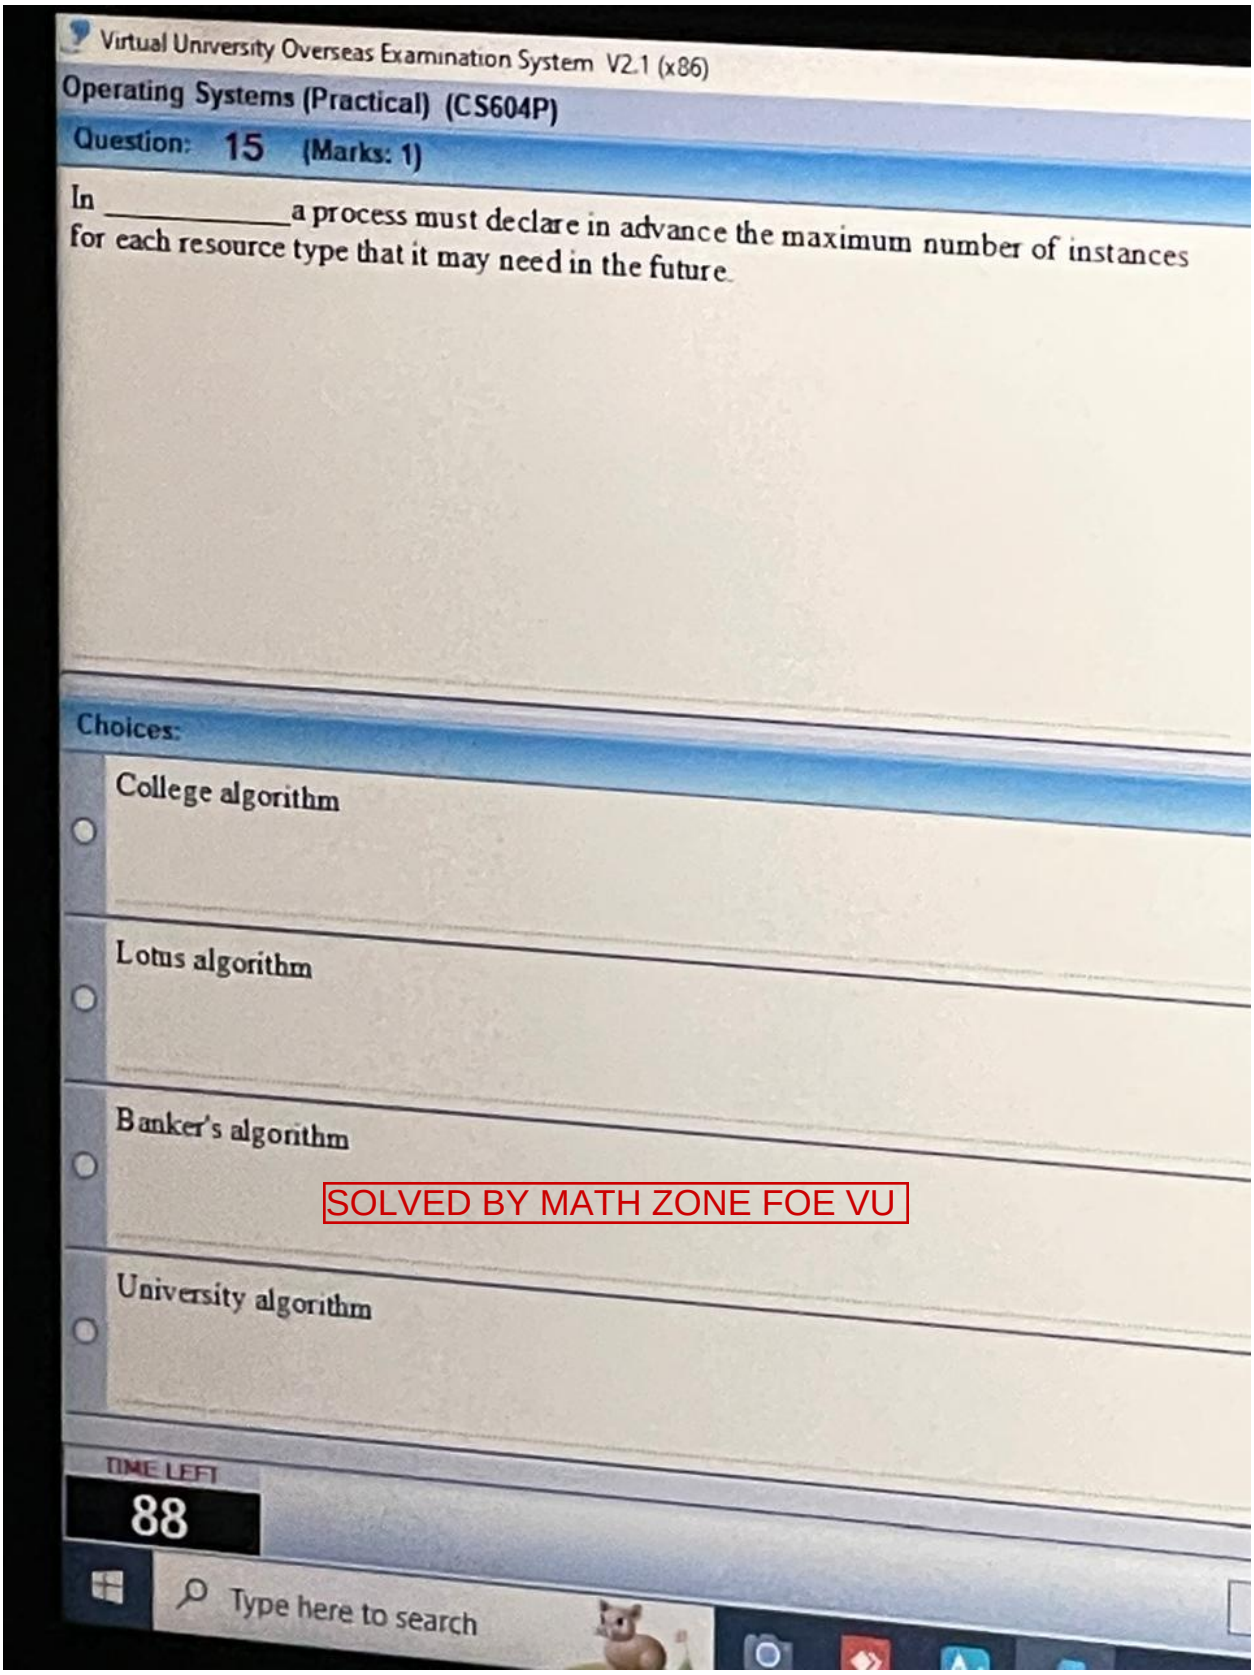


CS604P FINAL TERM BY IQRA AZHAR 2

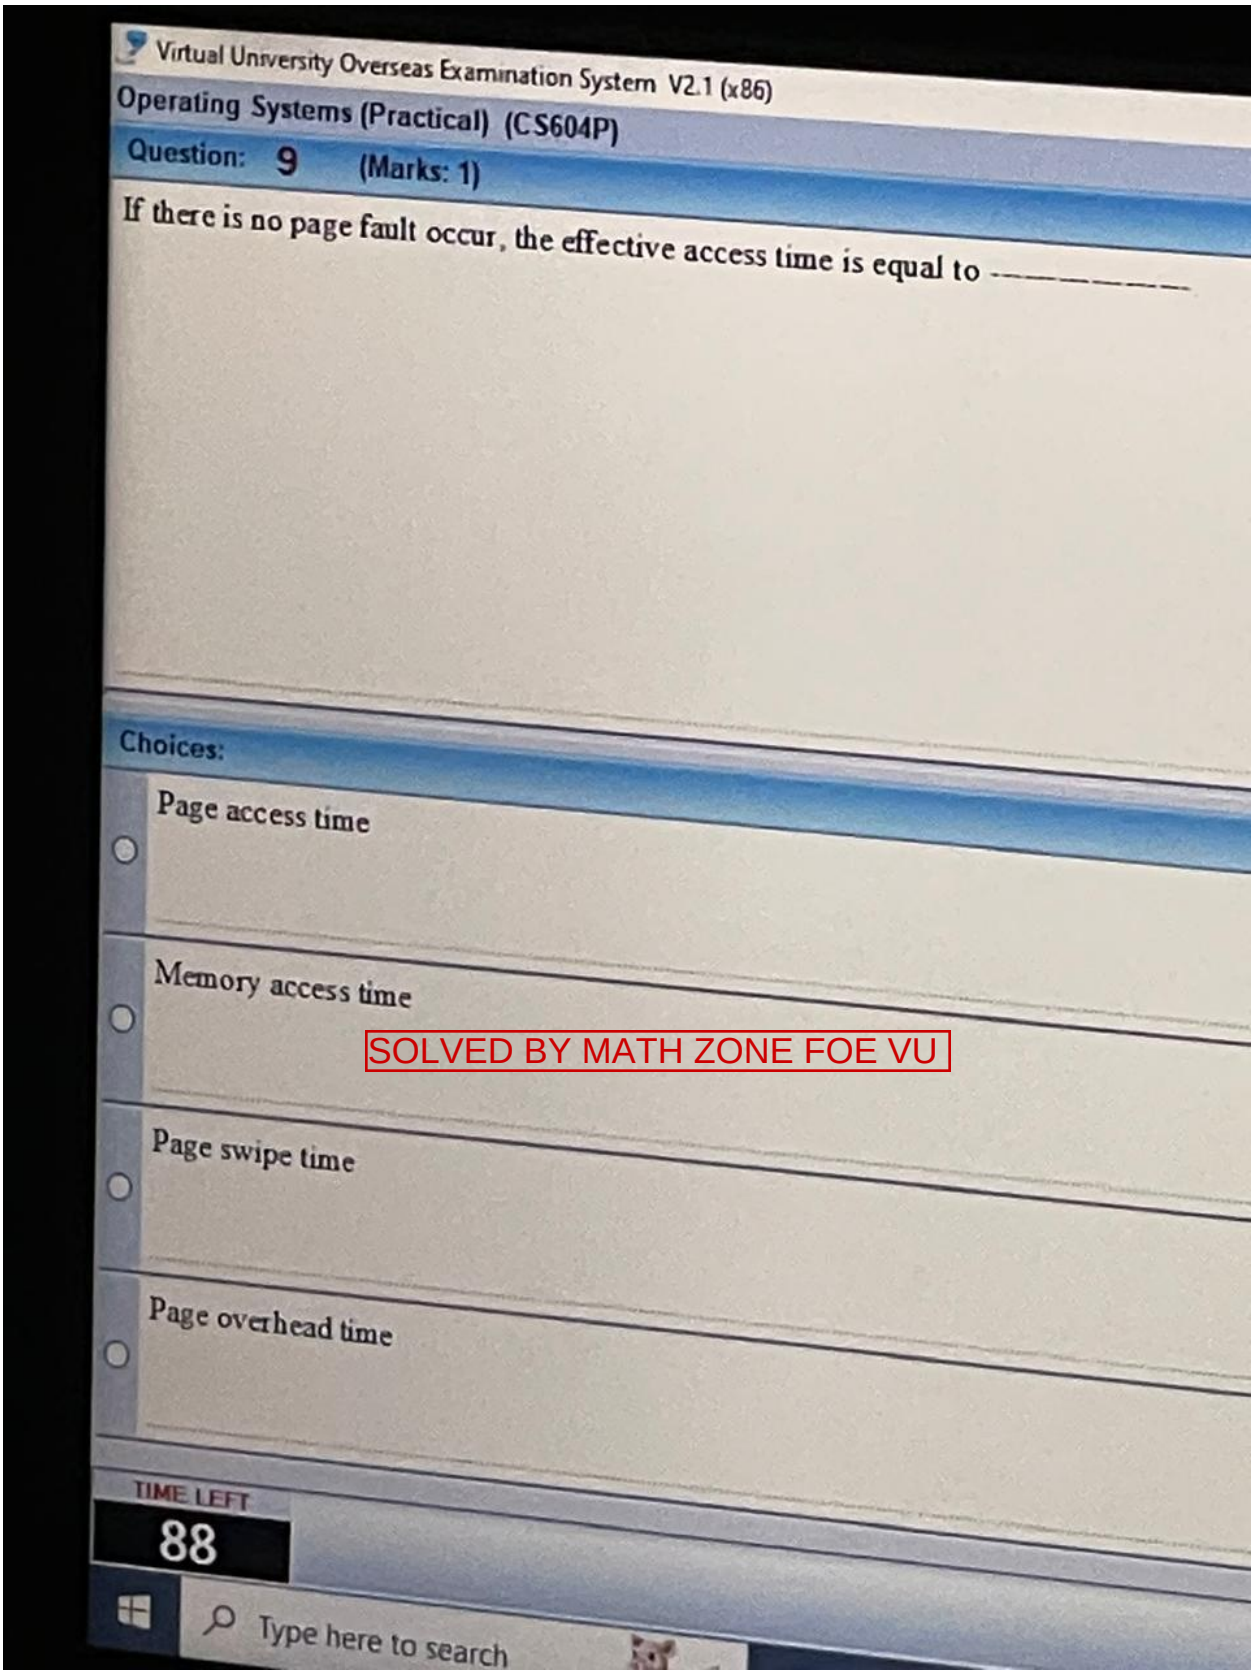


CS604P FINAL TERM BY IQRA AZHAR 2

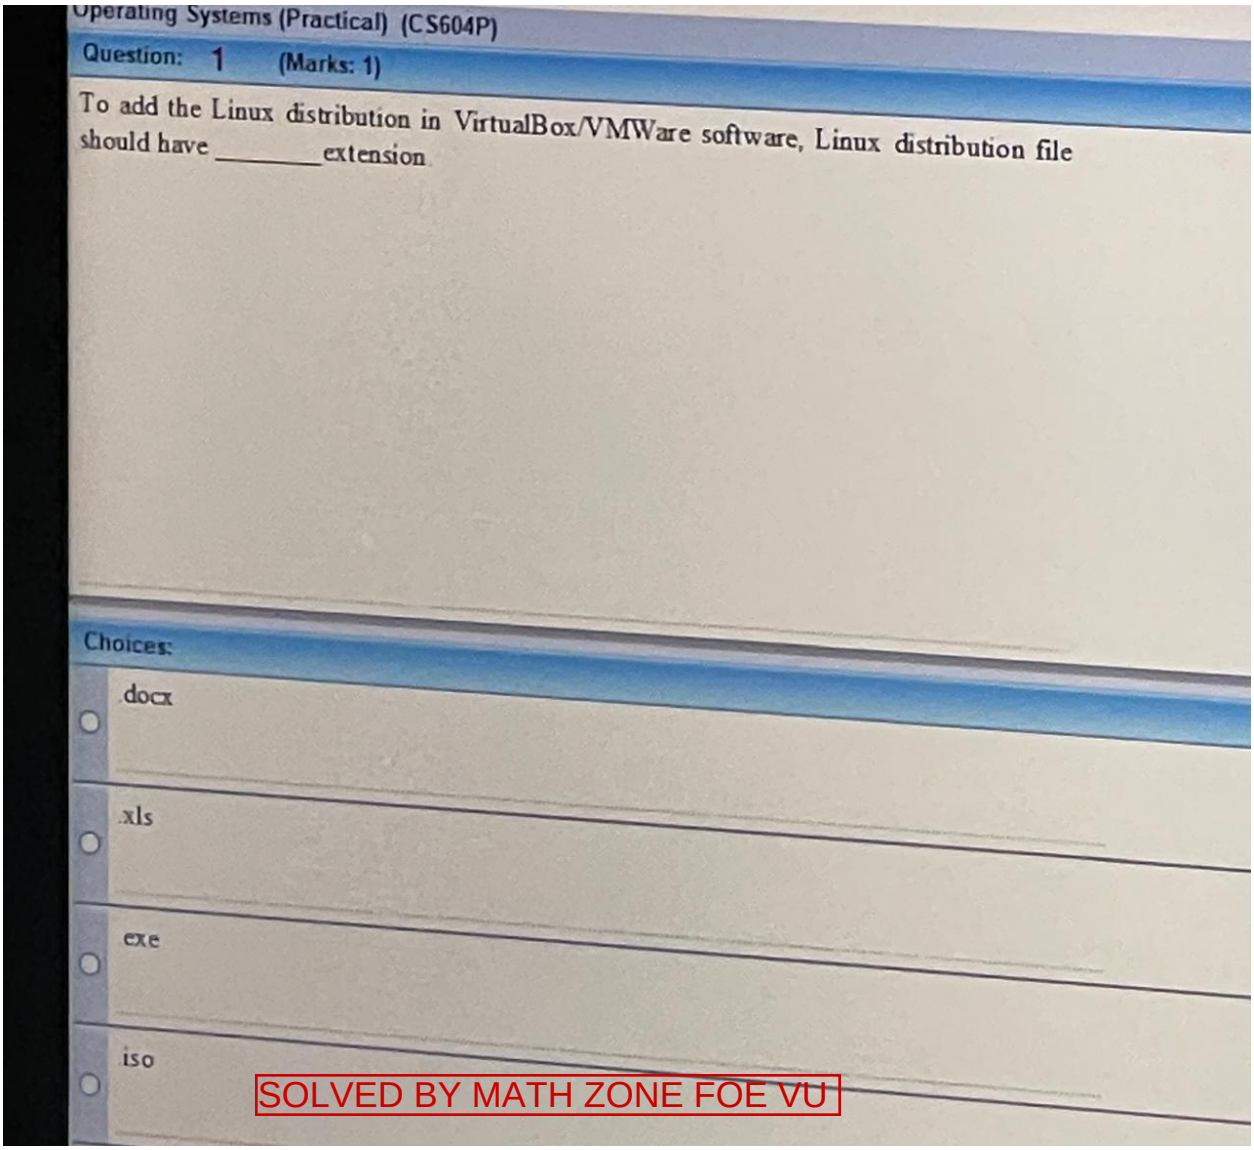


CS604P FINAL TERM BY IQRA AZHAR 2

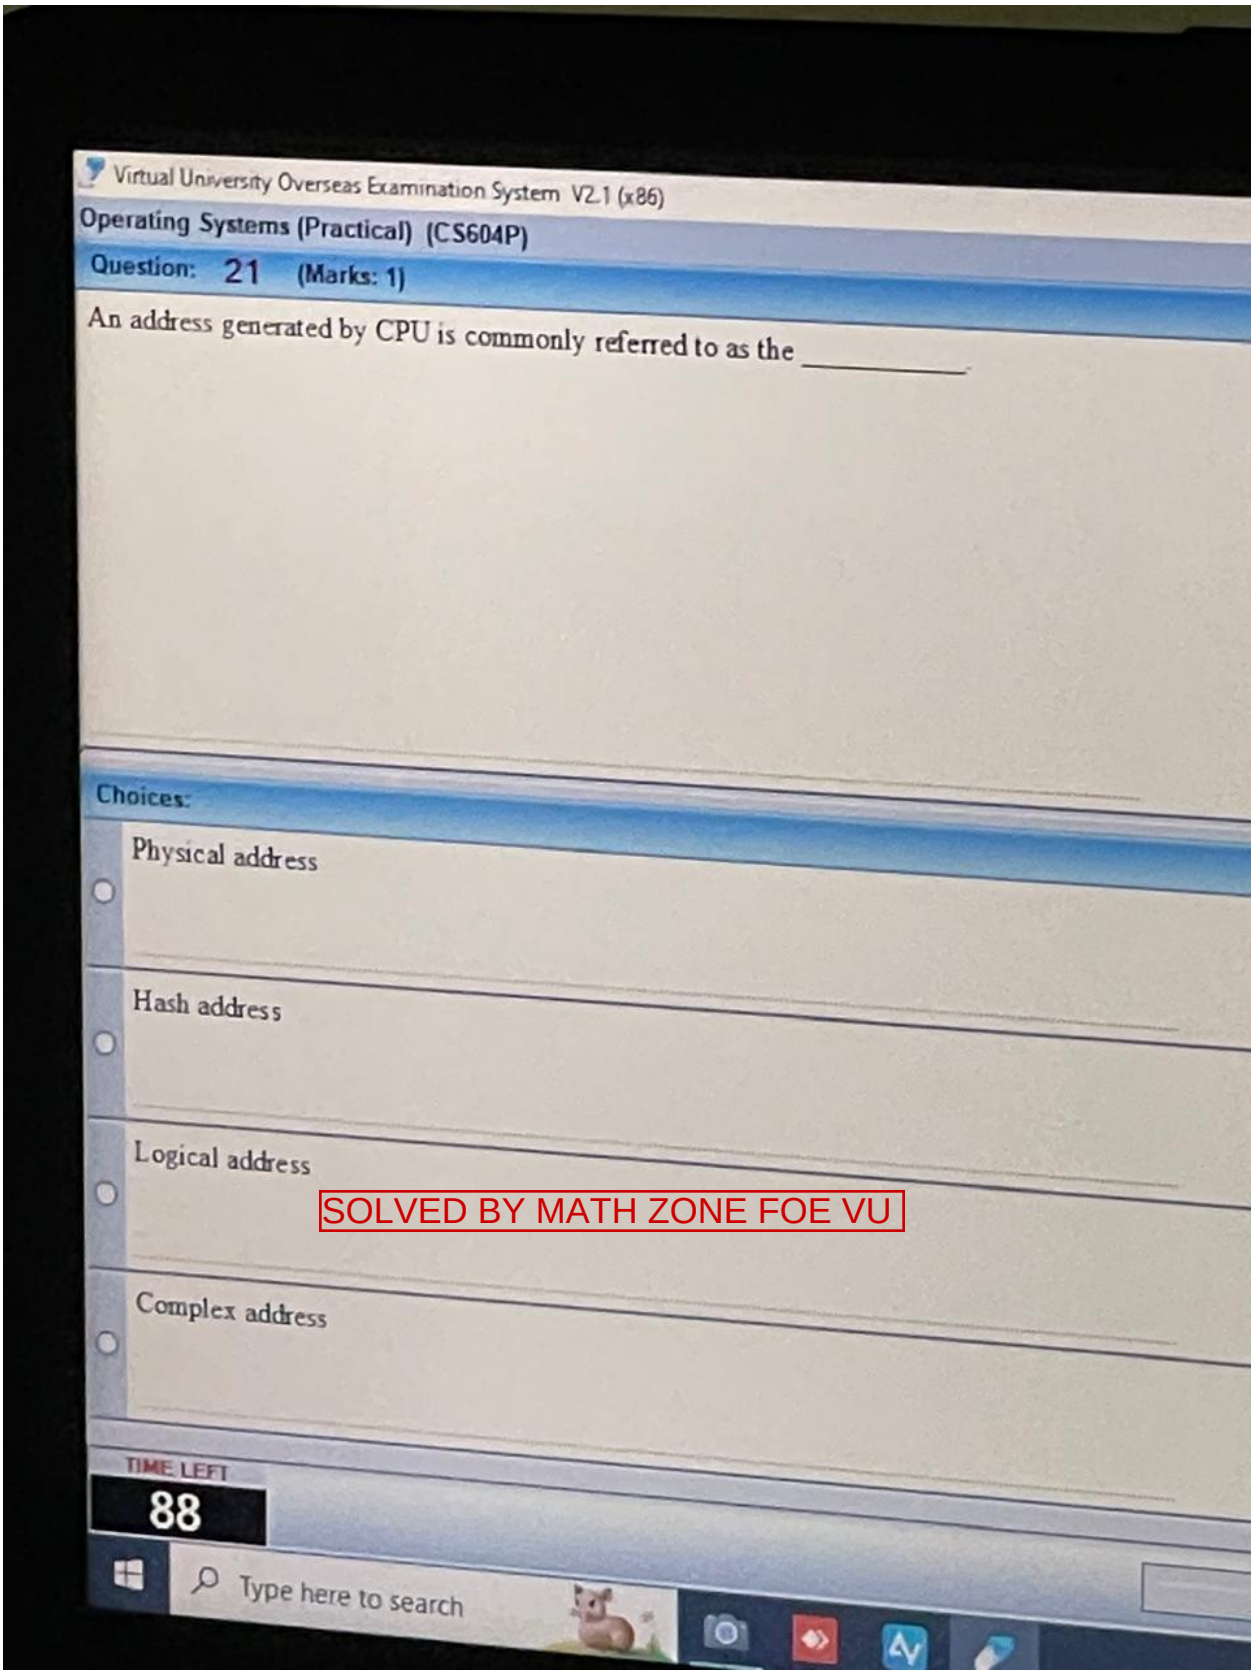


CS604P FINAL TERM BY IQRA AZHAR 2

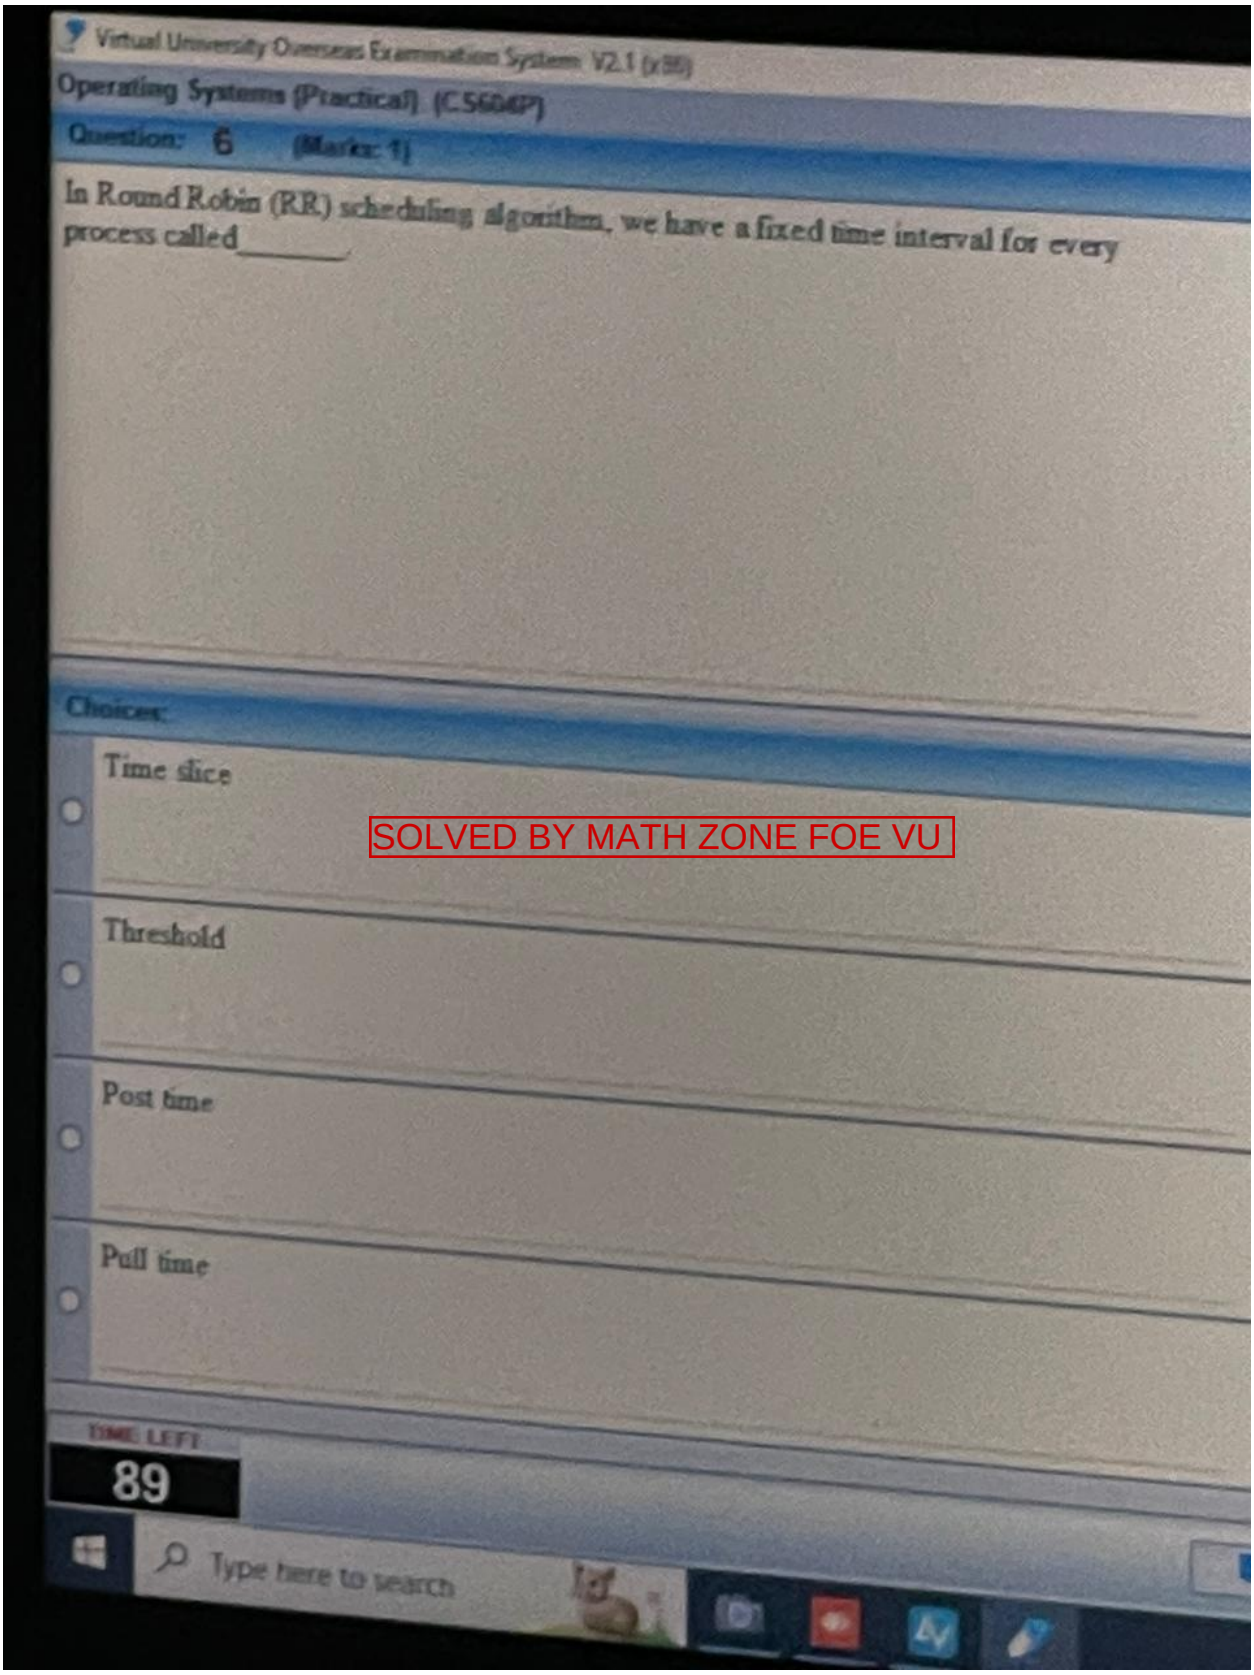


CS604P FINAL TERM BY IQRA AZHAR 2

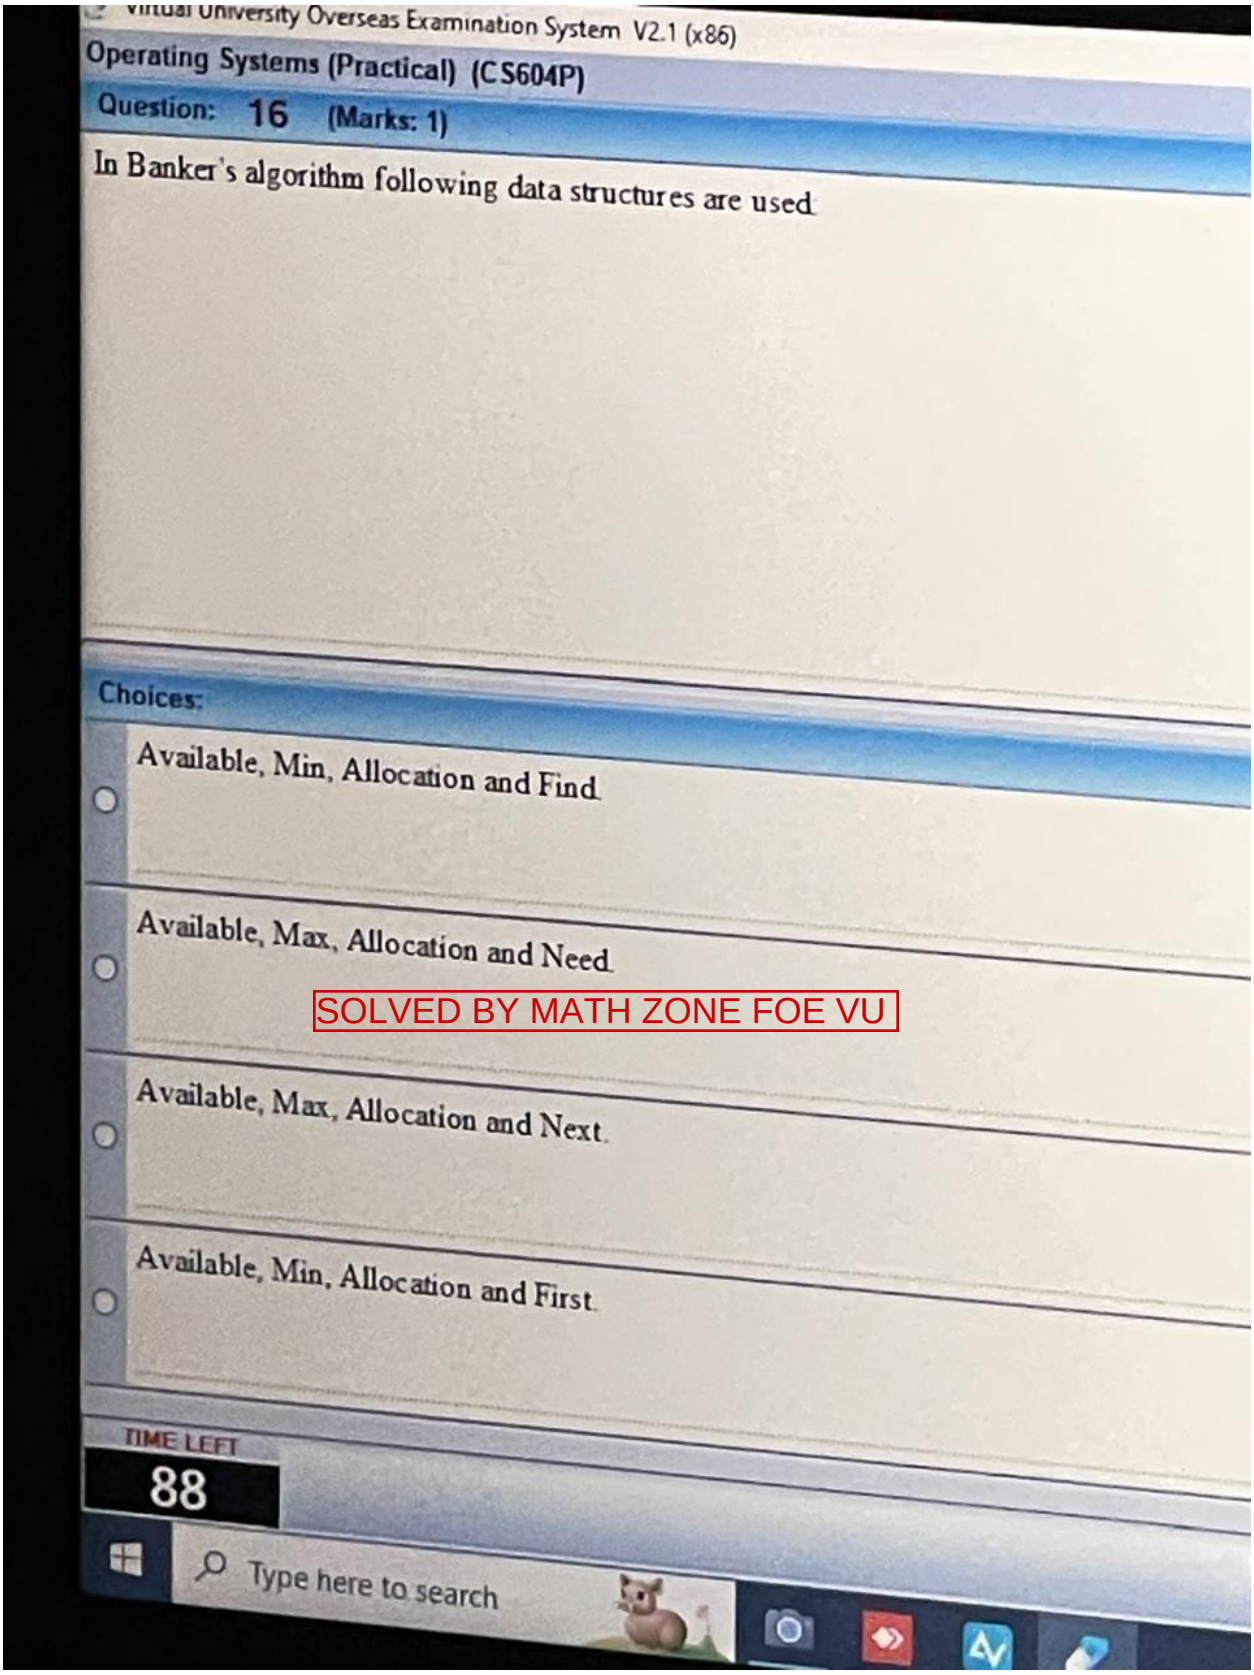


CS604P FINAL TERM BY IQRA AZHAR 2

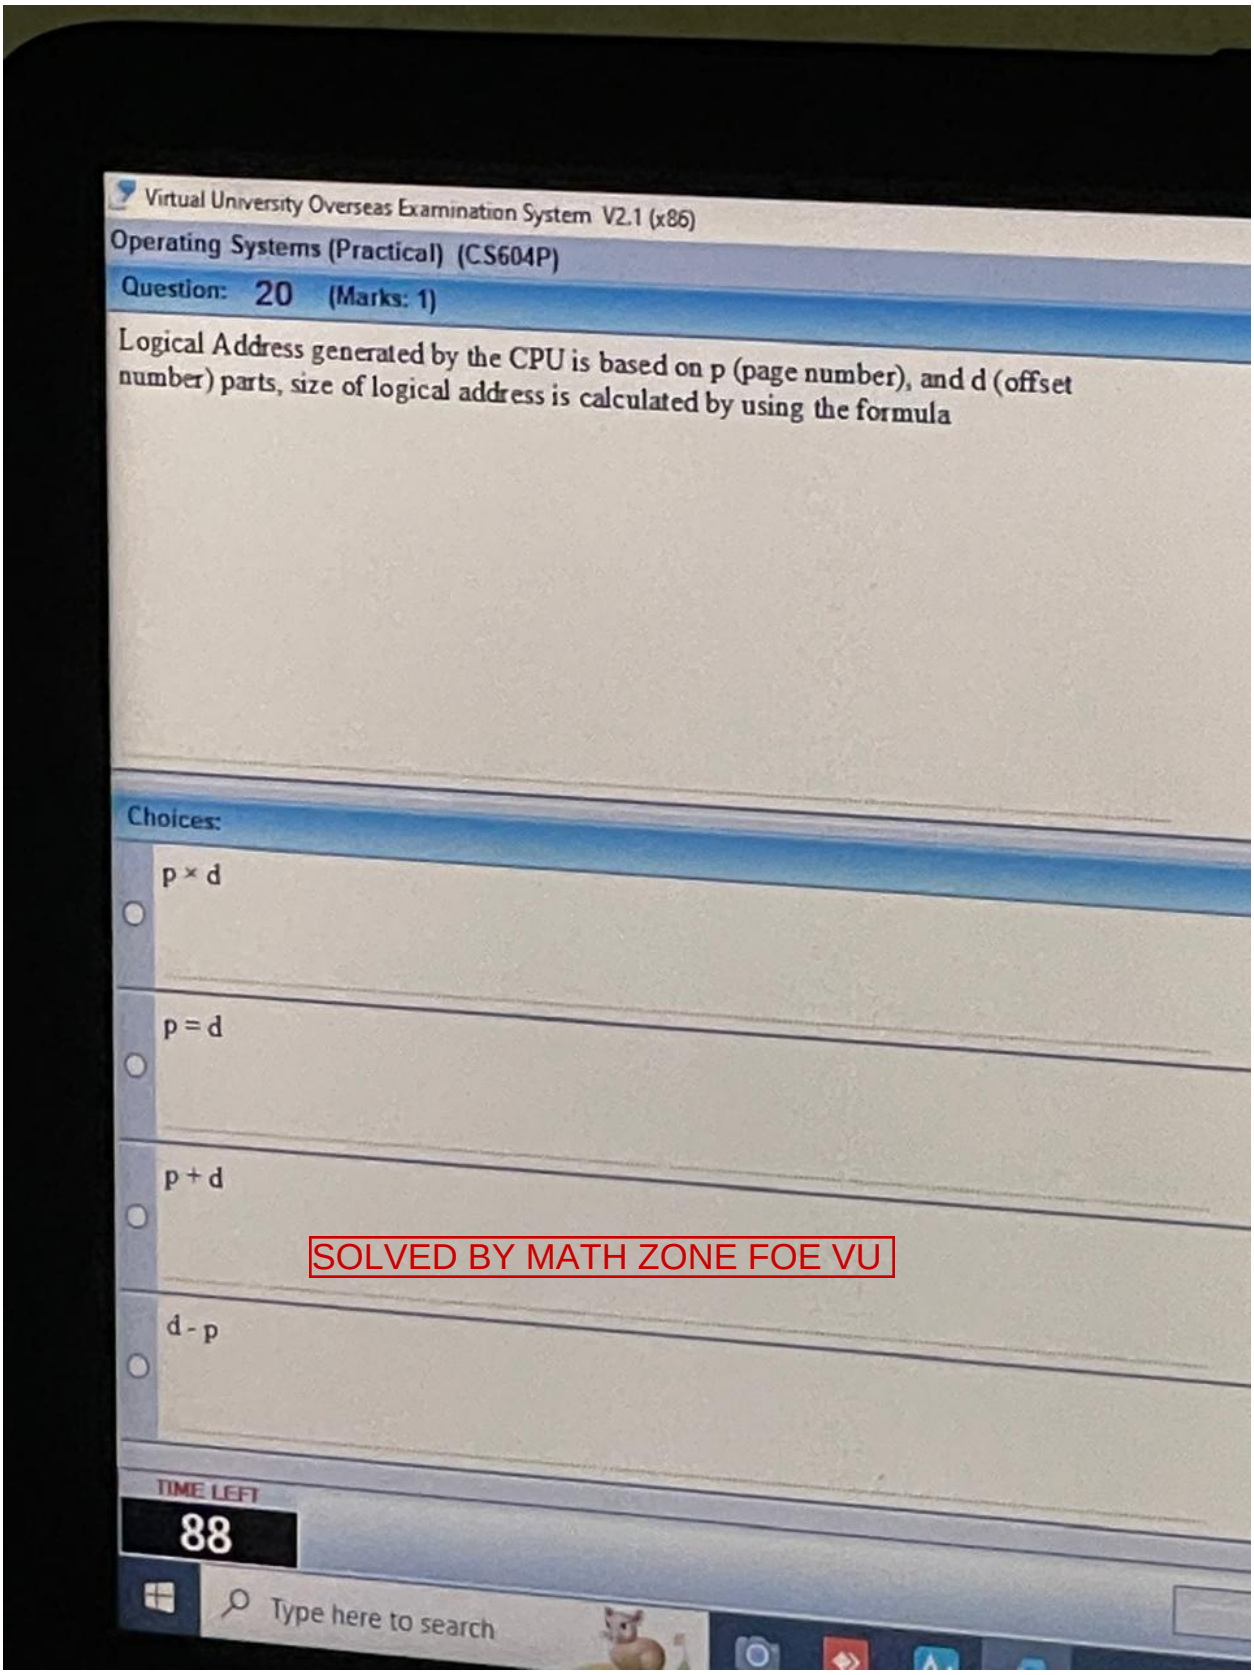


CS604P FINAL TERM BY IQRA AZHAR 2

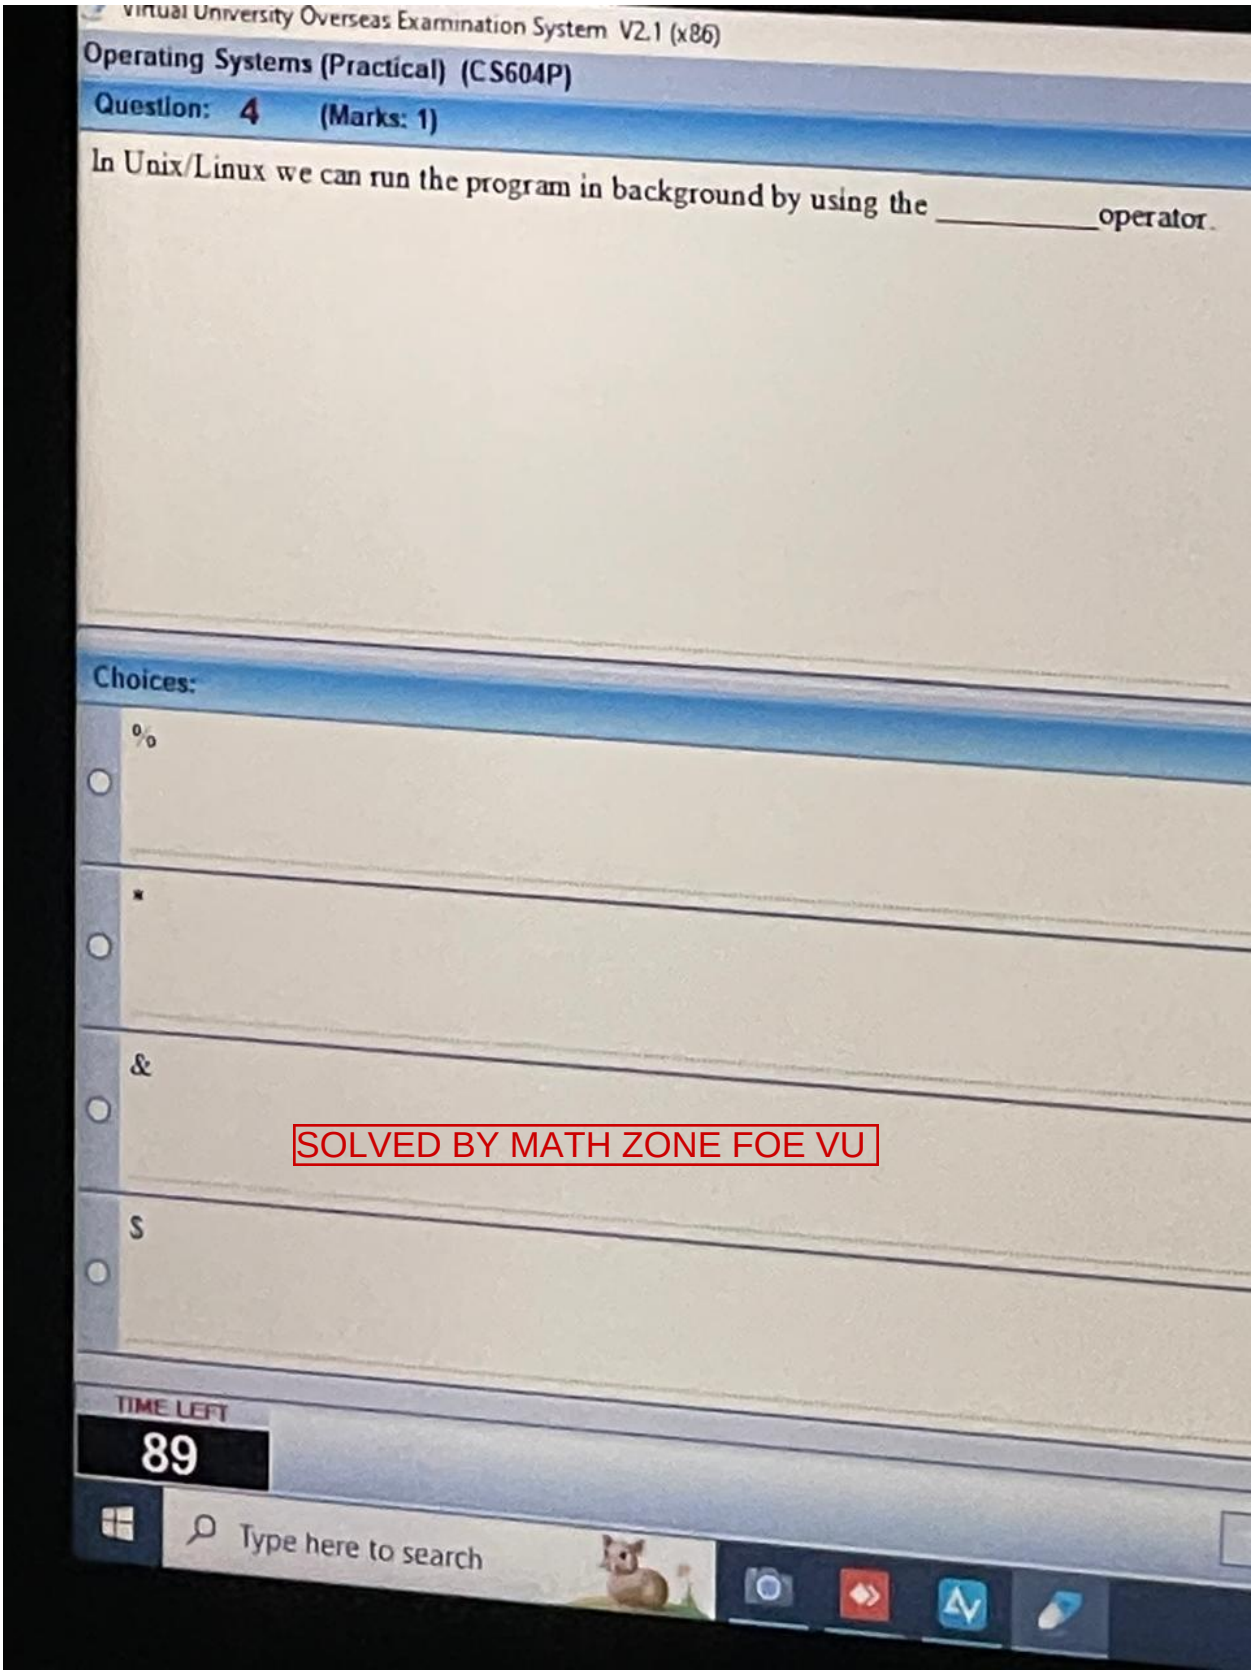


CS604P FINAL TERM BY IQRA AZHAR 2

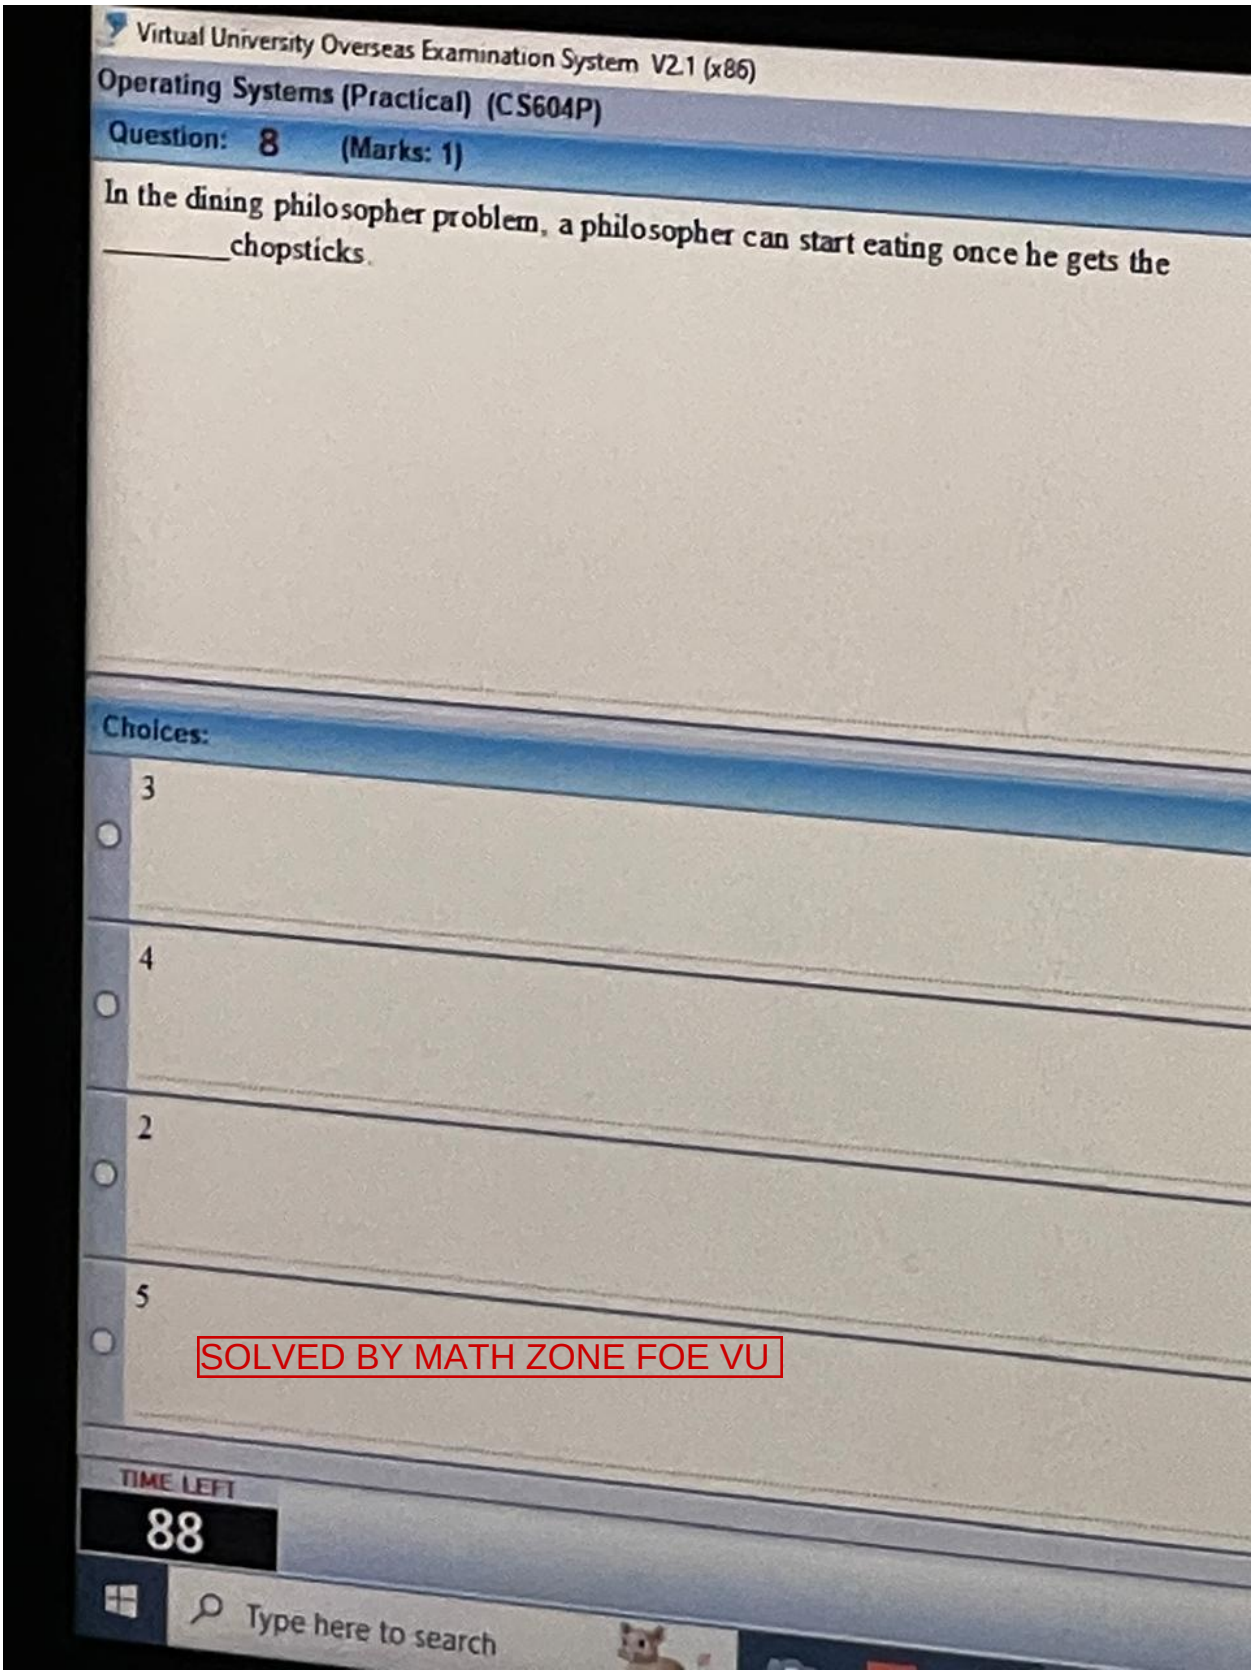


CS604P FINAL TERM BY IQRA AZHAR 2

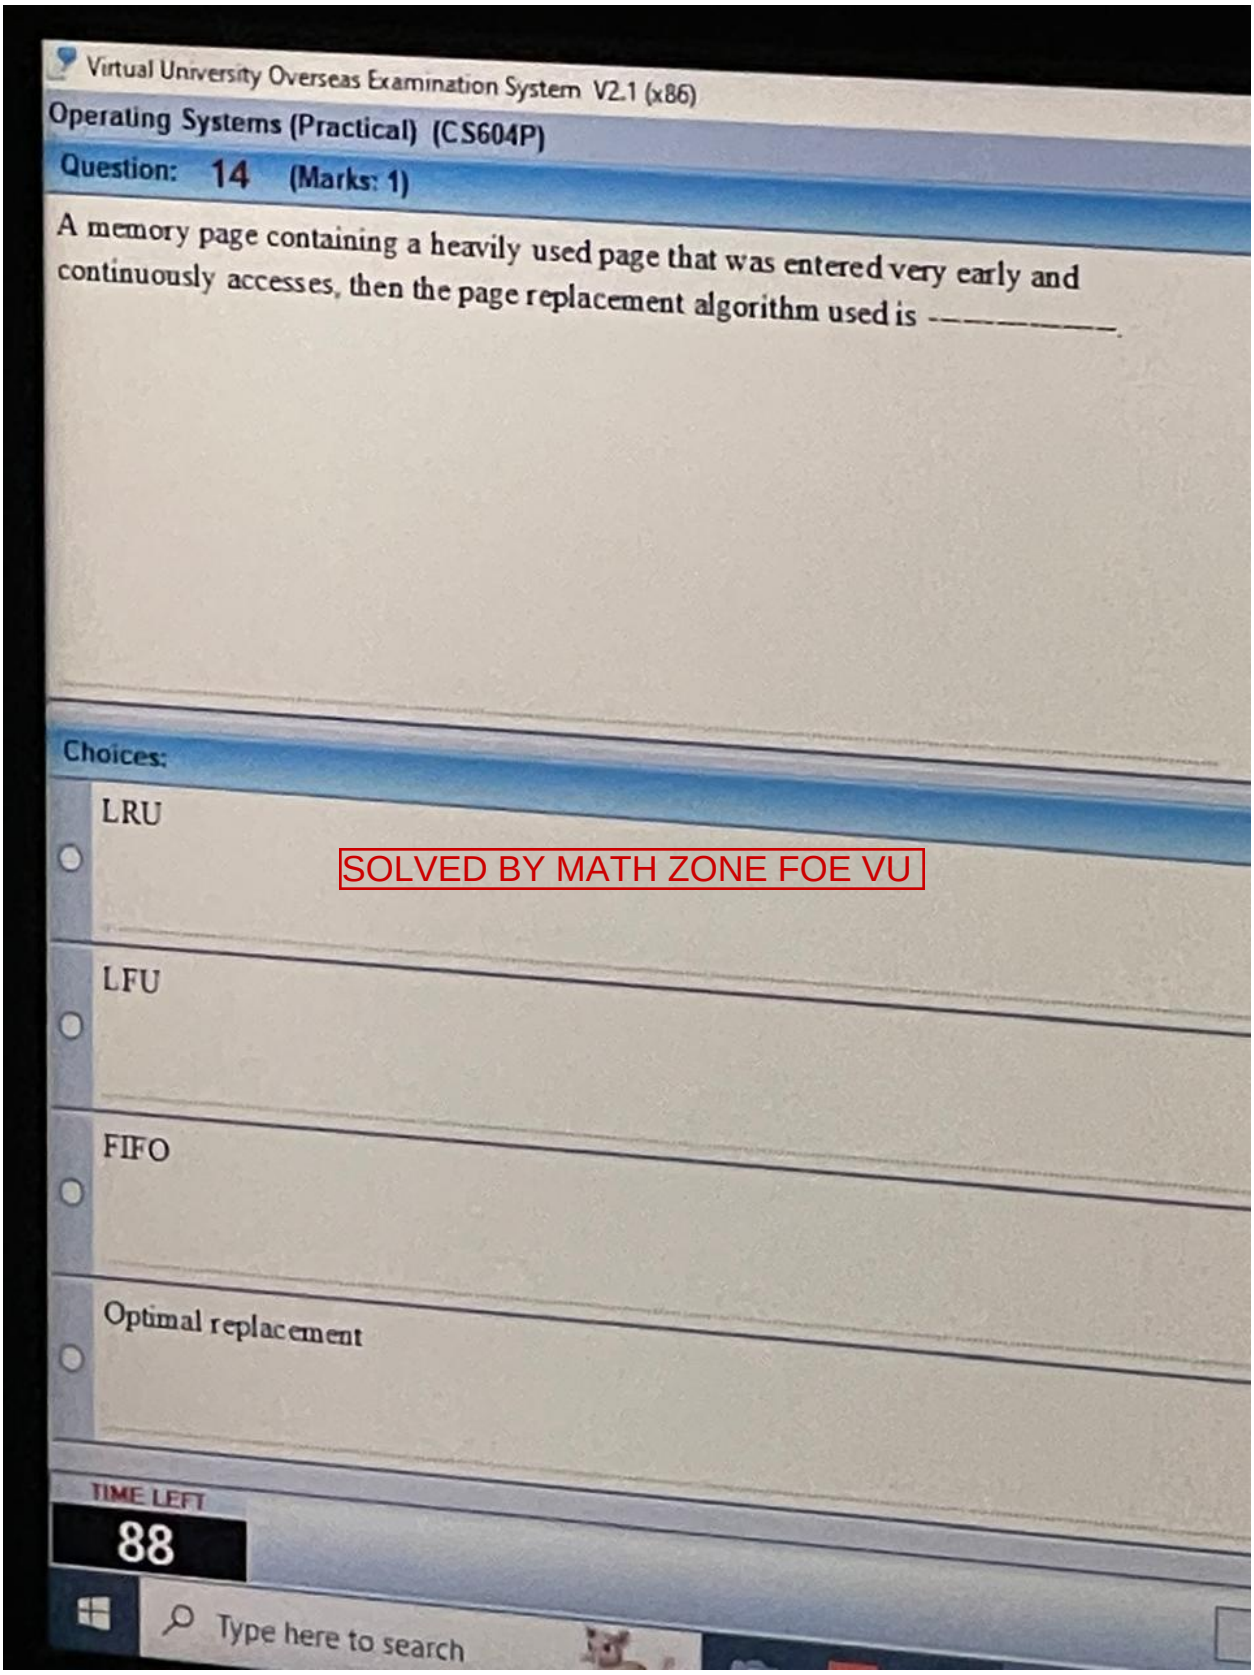


CS604P FINAL TERM BY IQRA AZHAR 2

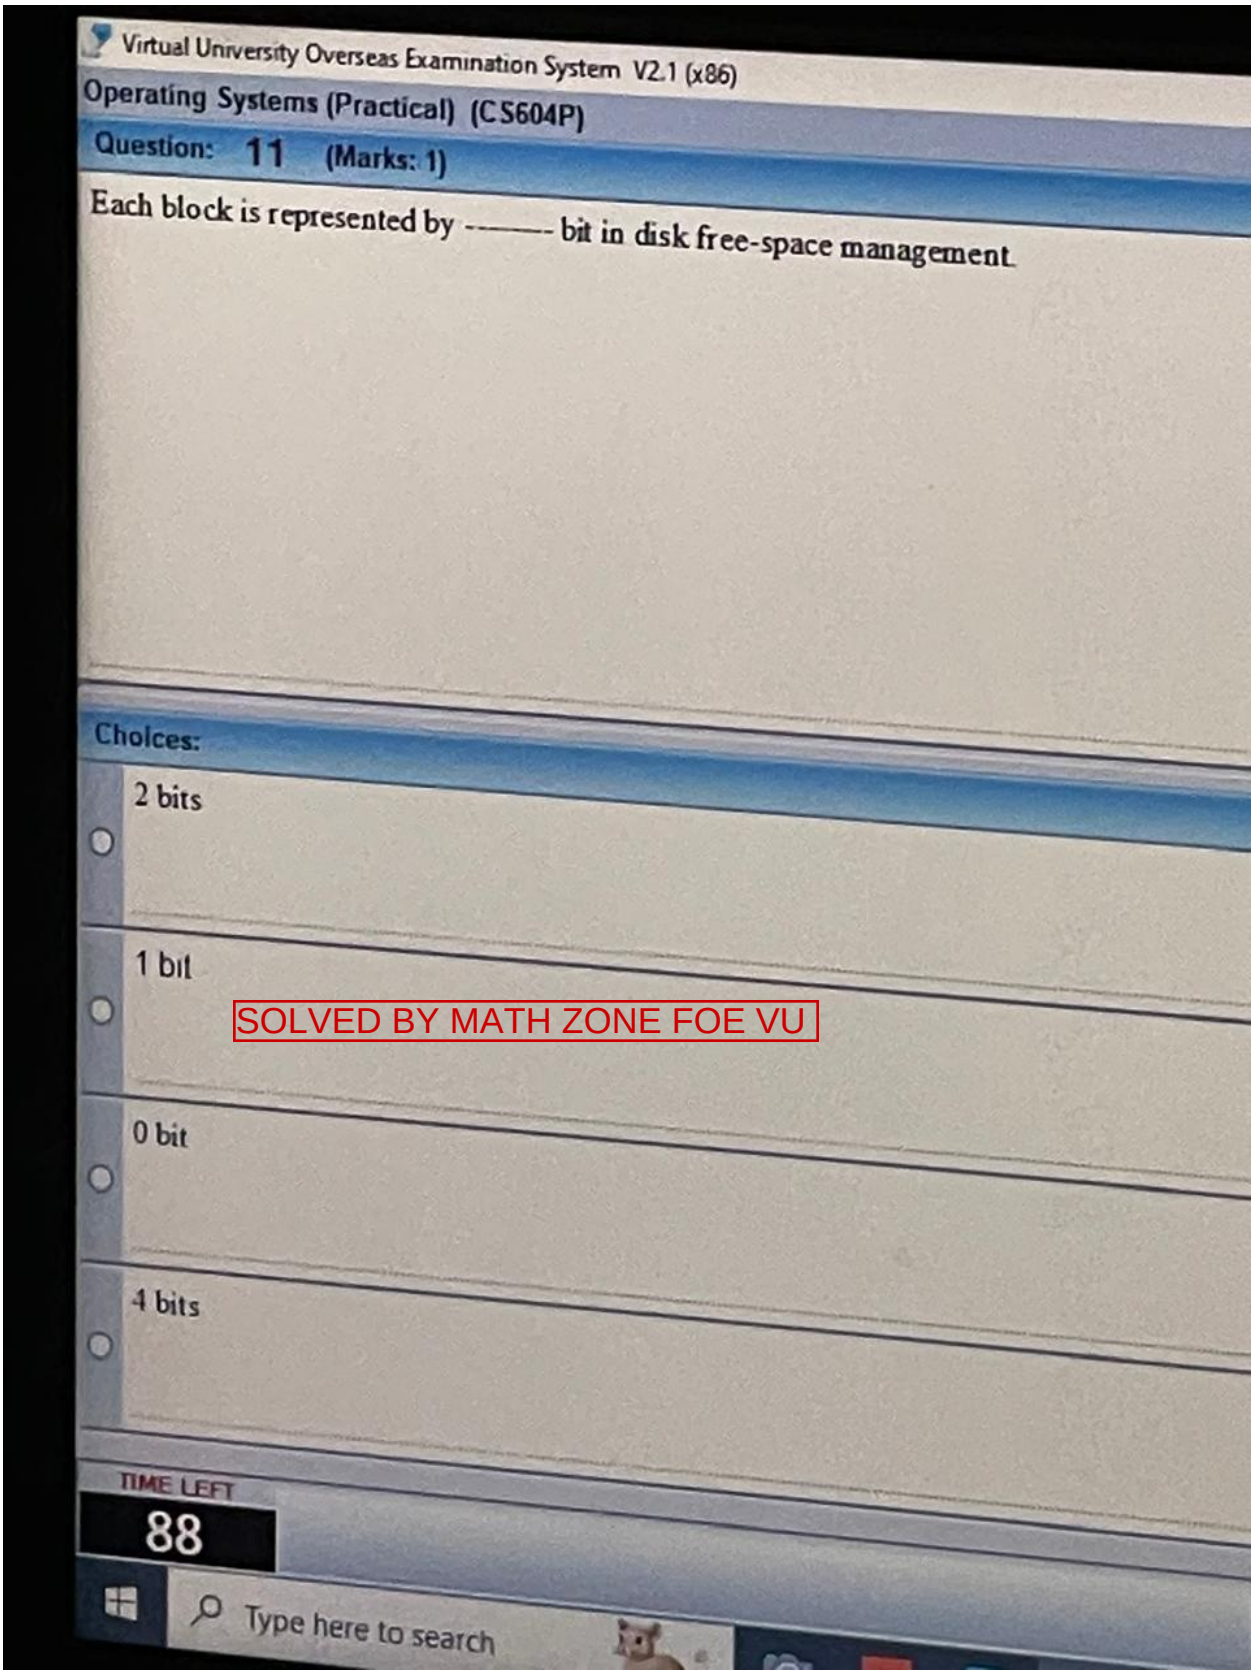


CS604P FINAL TERM BY IQRA AZHAR 2

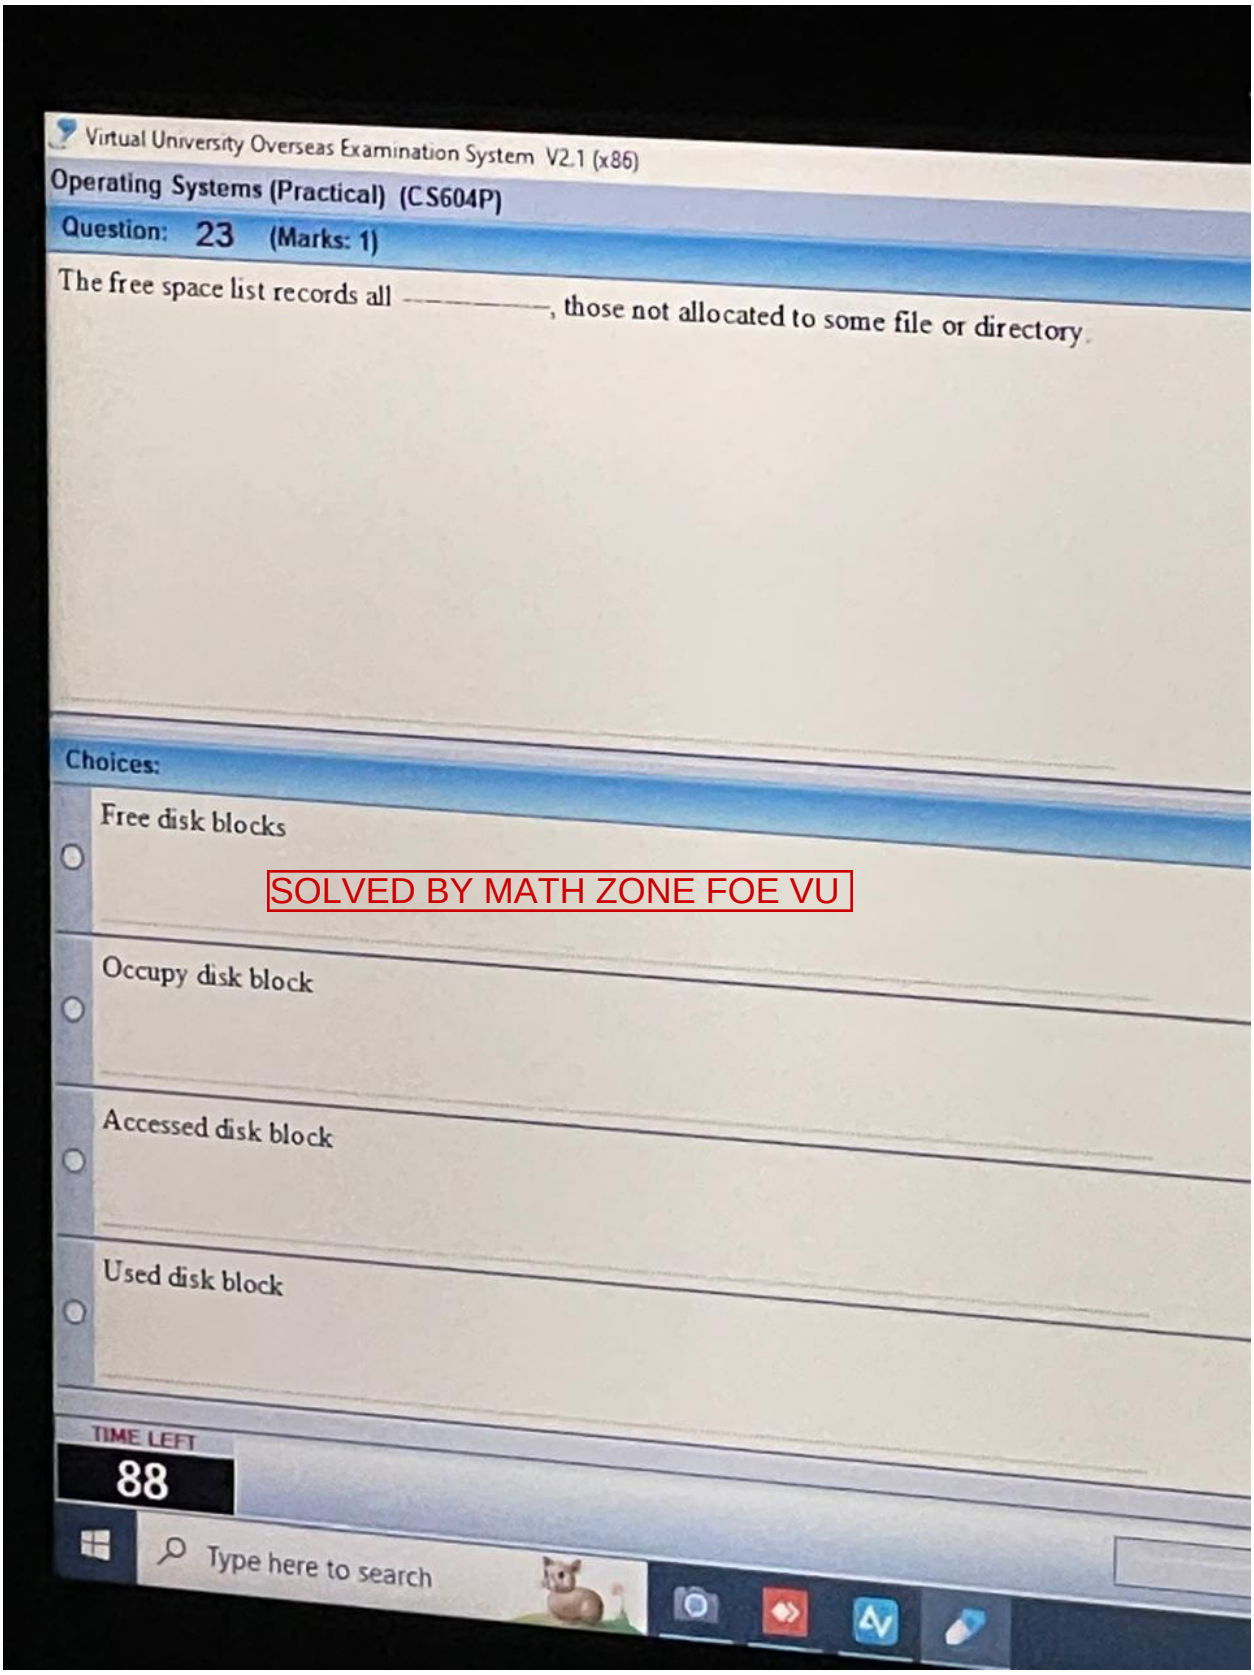


CS604P FINAL TERM BY IQRA AZHAR 2

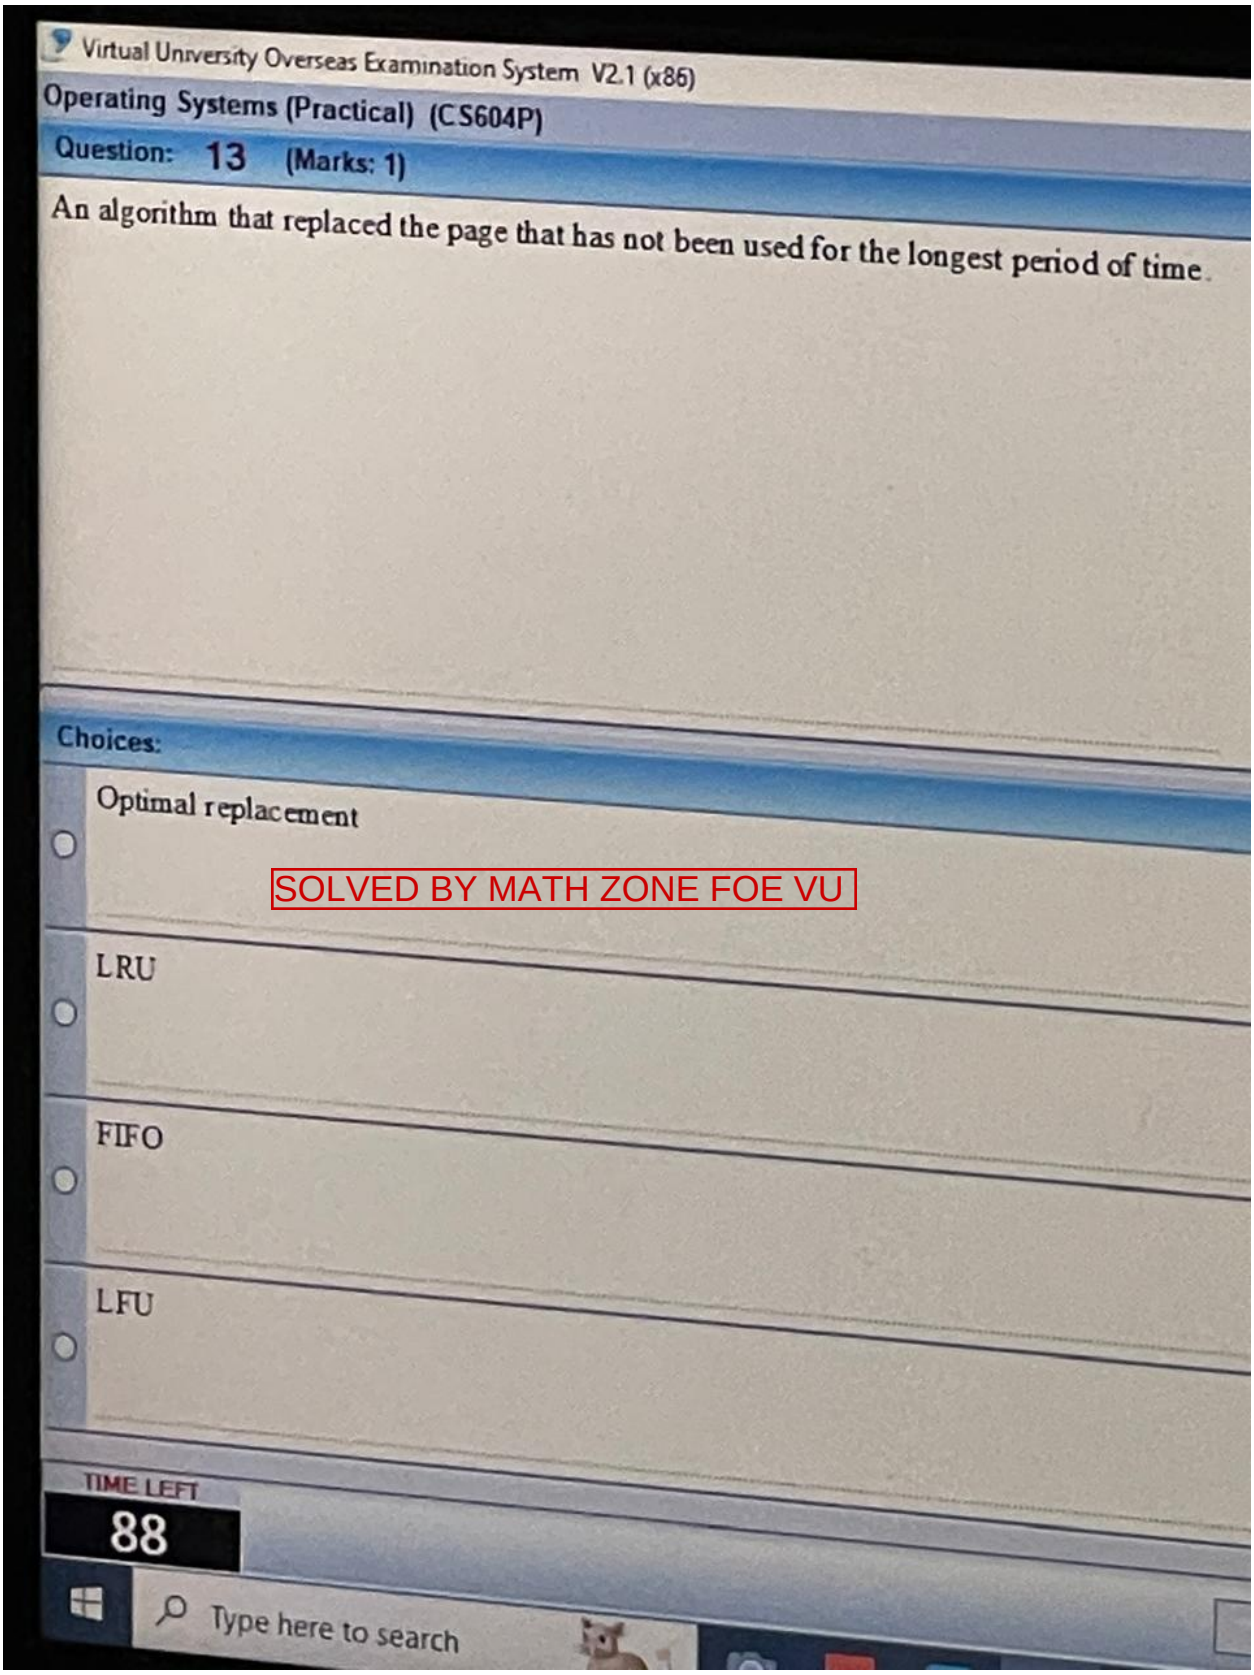


CS604P FINAL TERM BY IQRA AZHAR 2

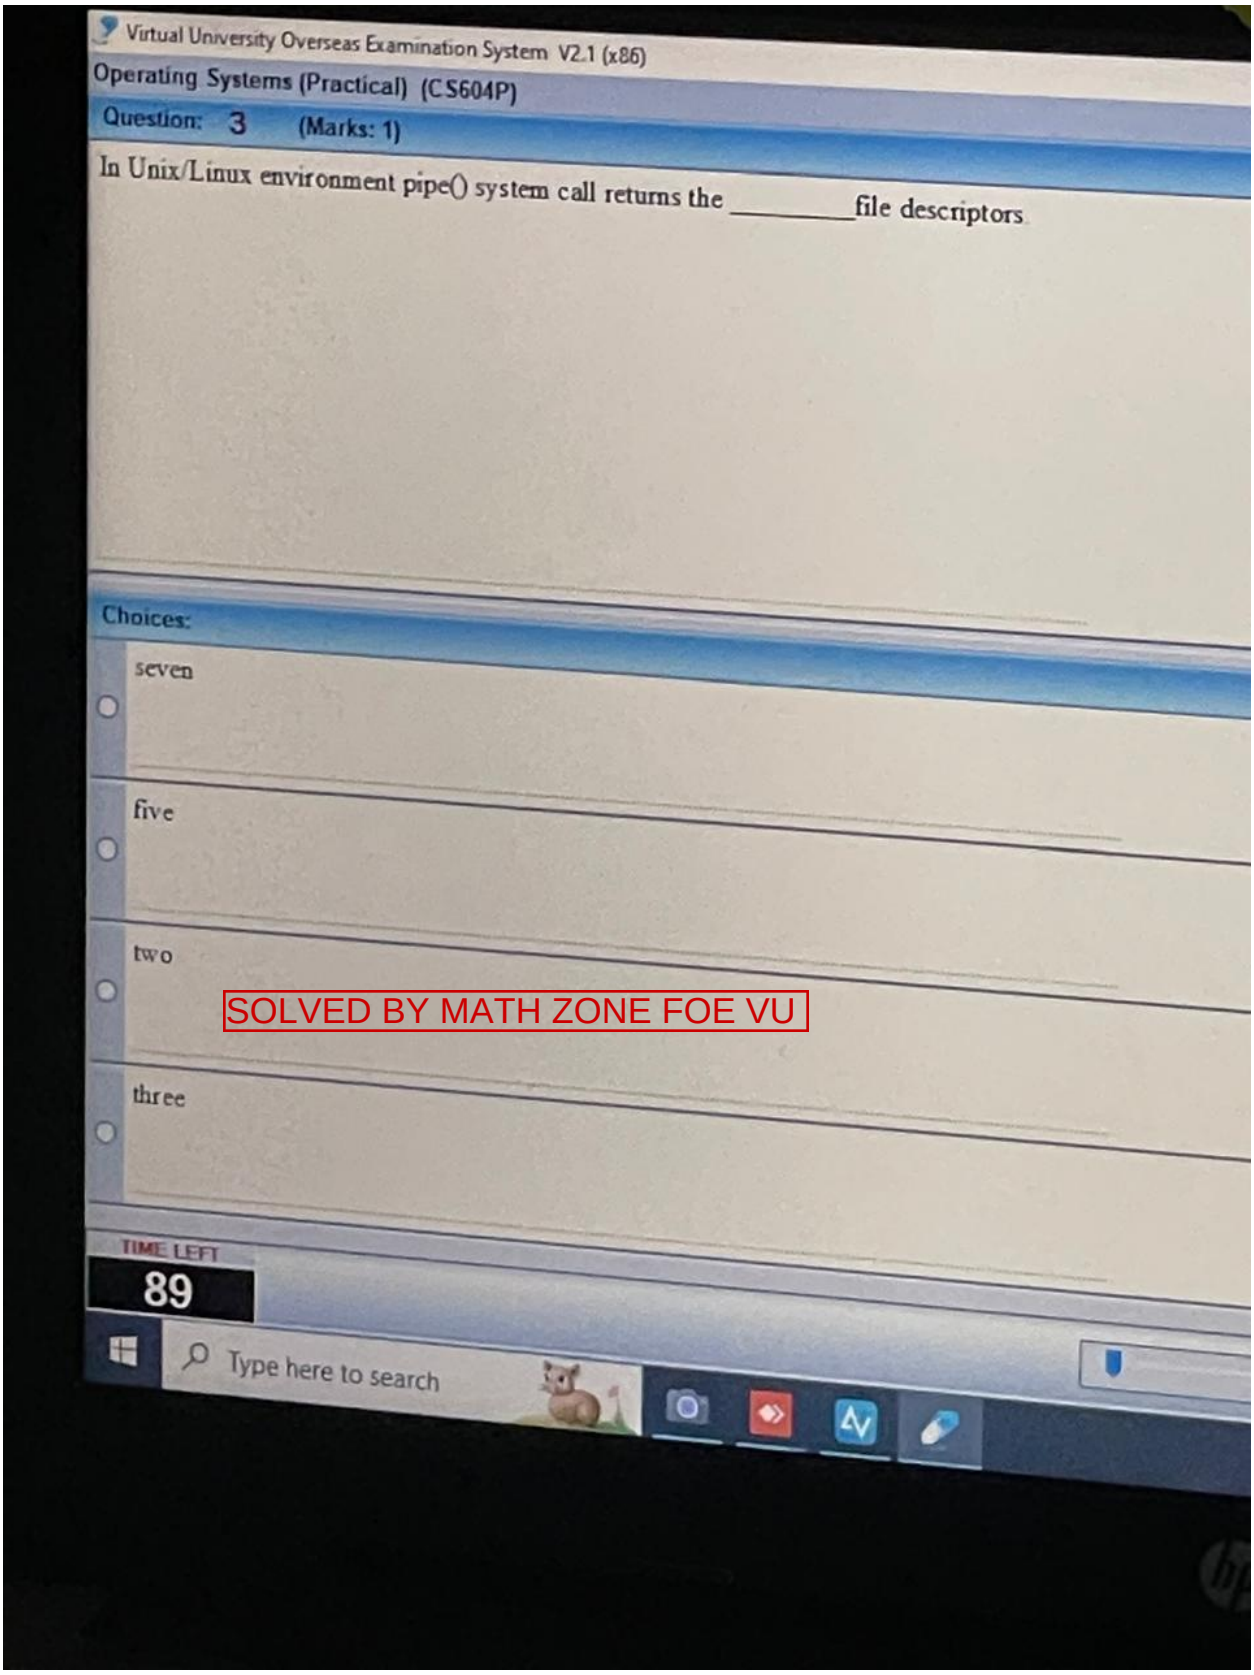

CS604P FINAL TERM BY IQRA AZHAR 2

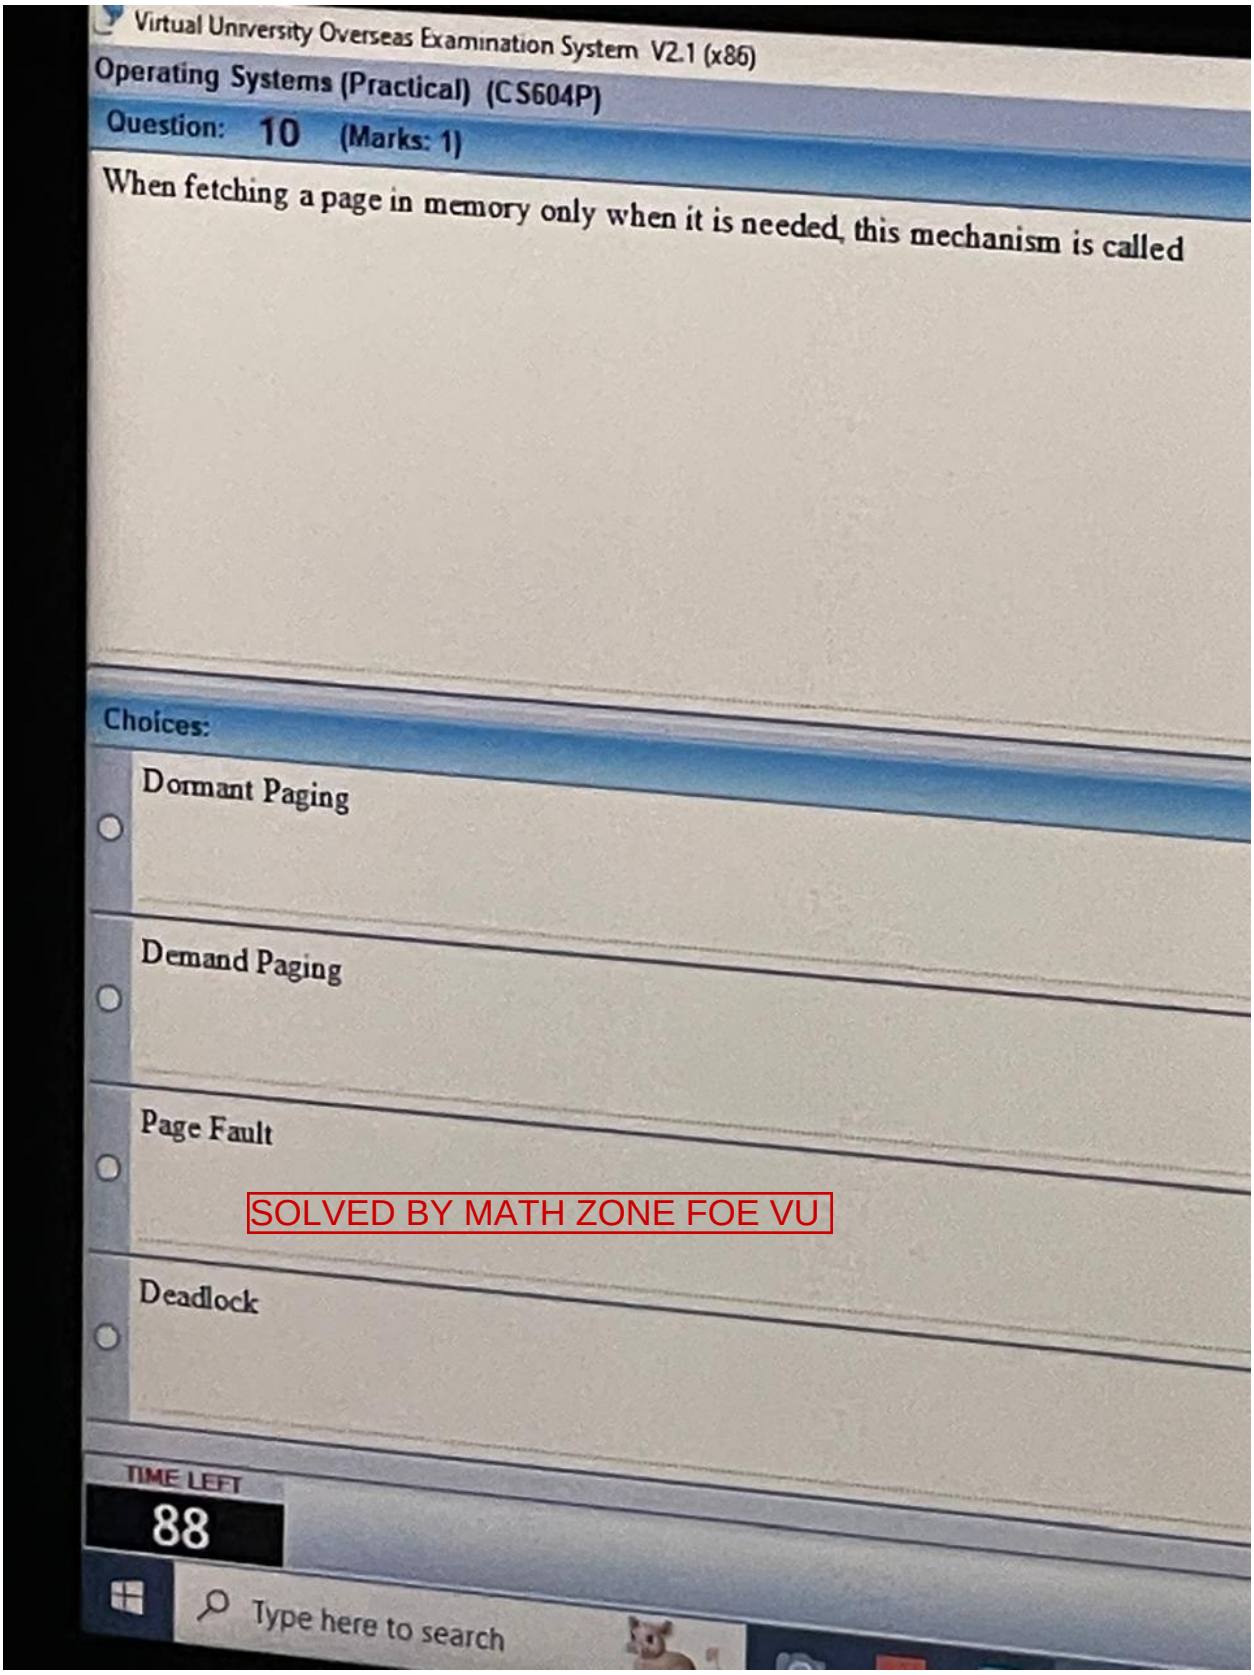


CS604P FINAL TERM BY IQRA AZHAR 2

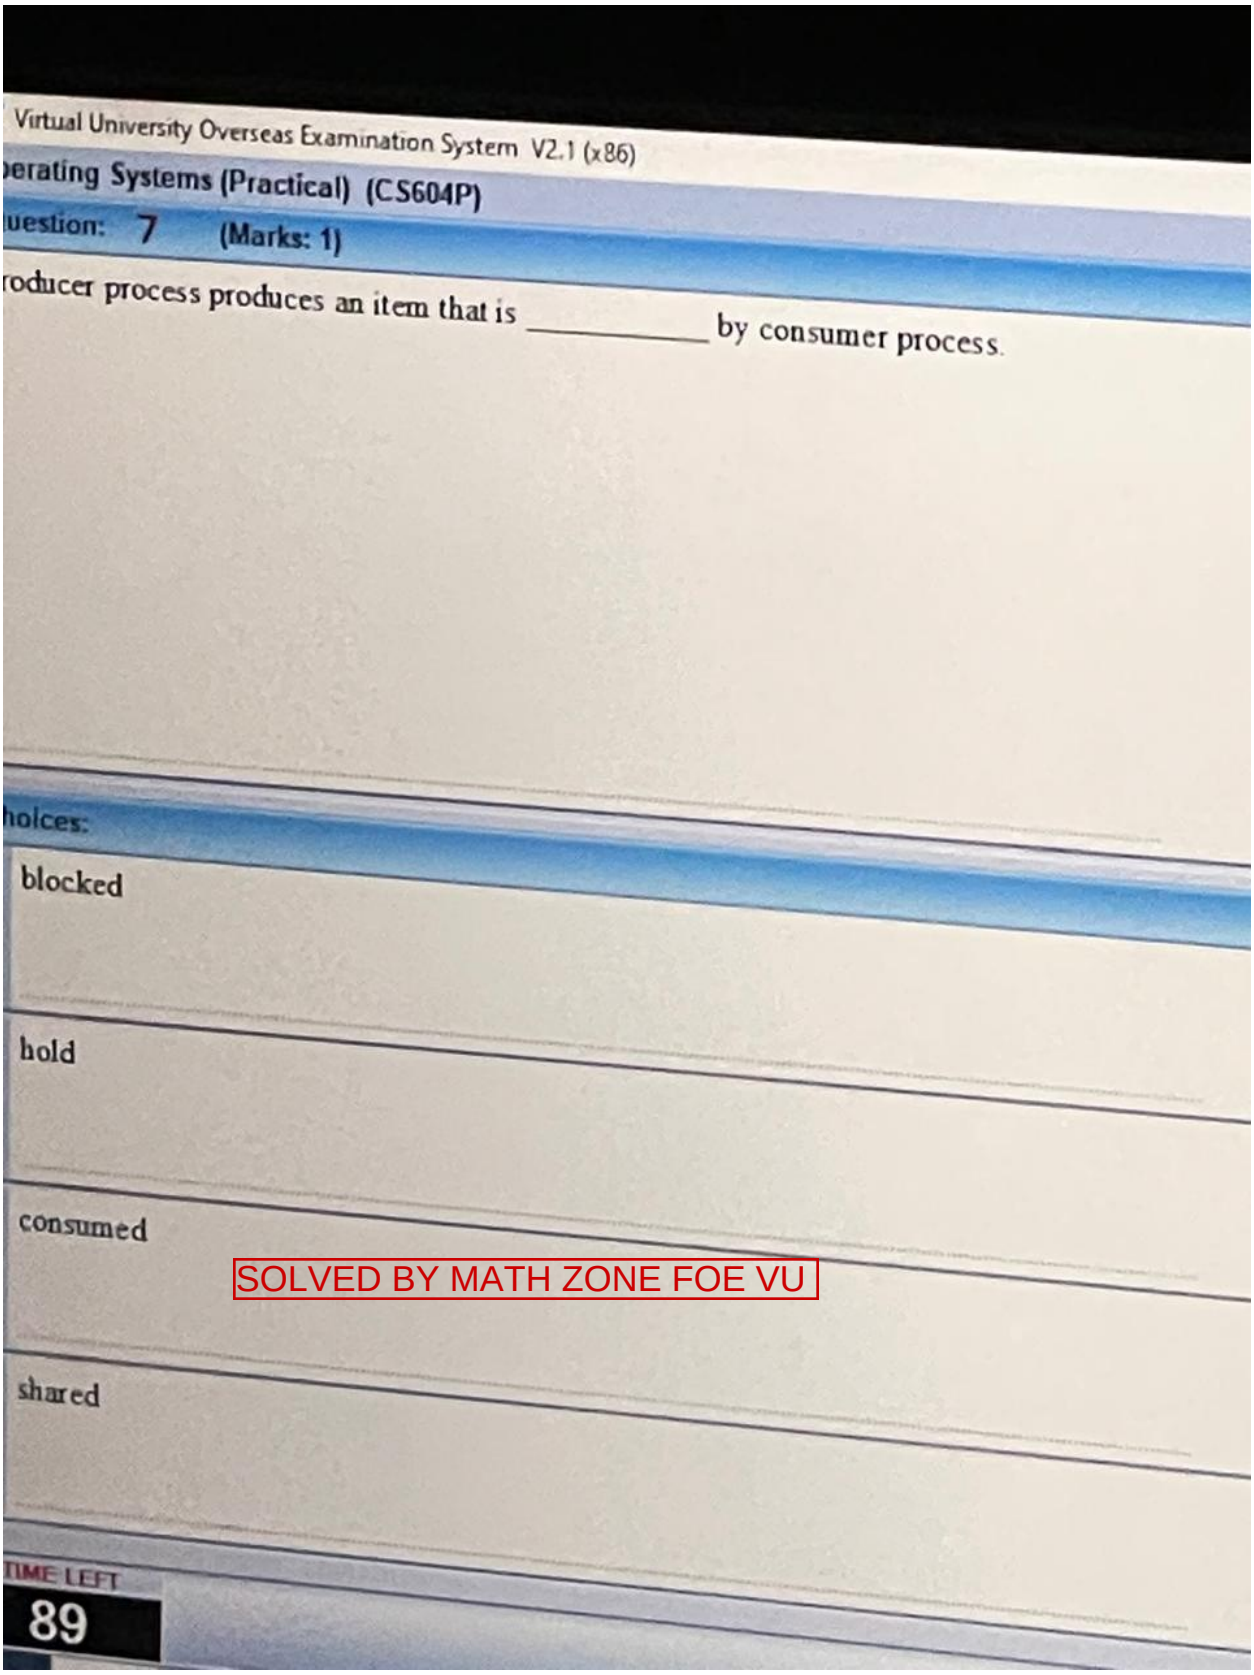


SOLVED BY MATH ZONE FOE VU

CS604P FINAL TERM BY IQRA AZHAR 2

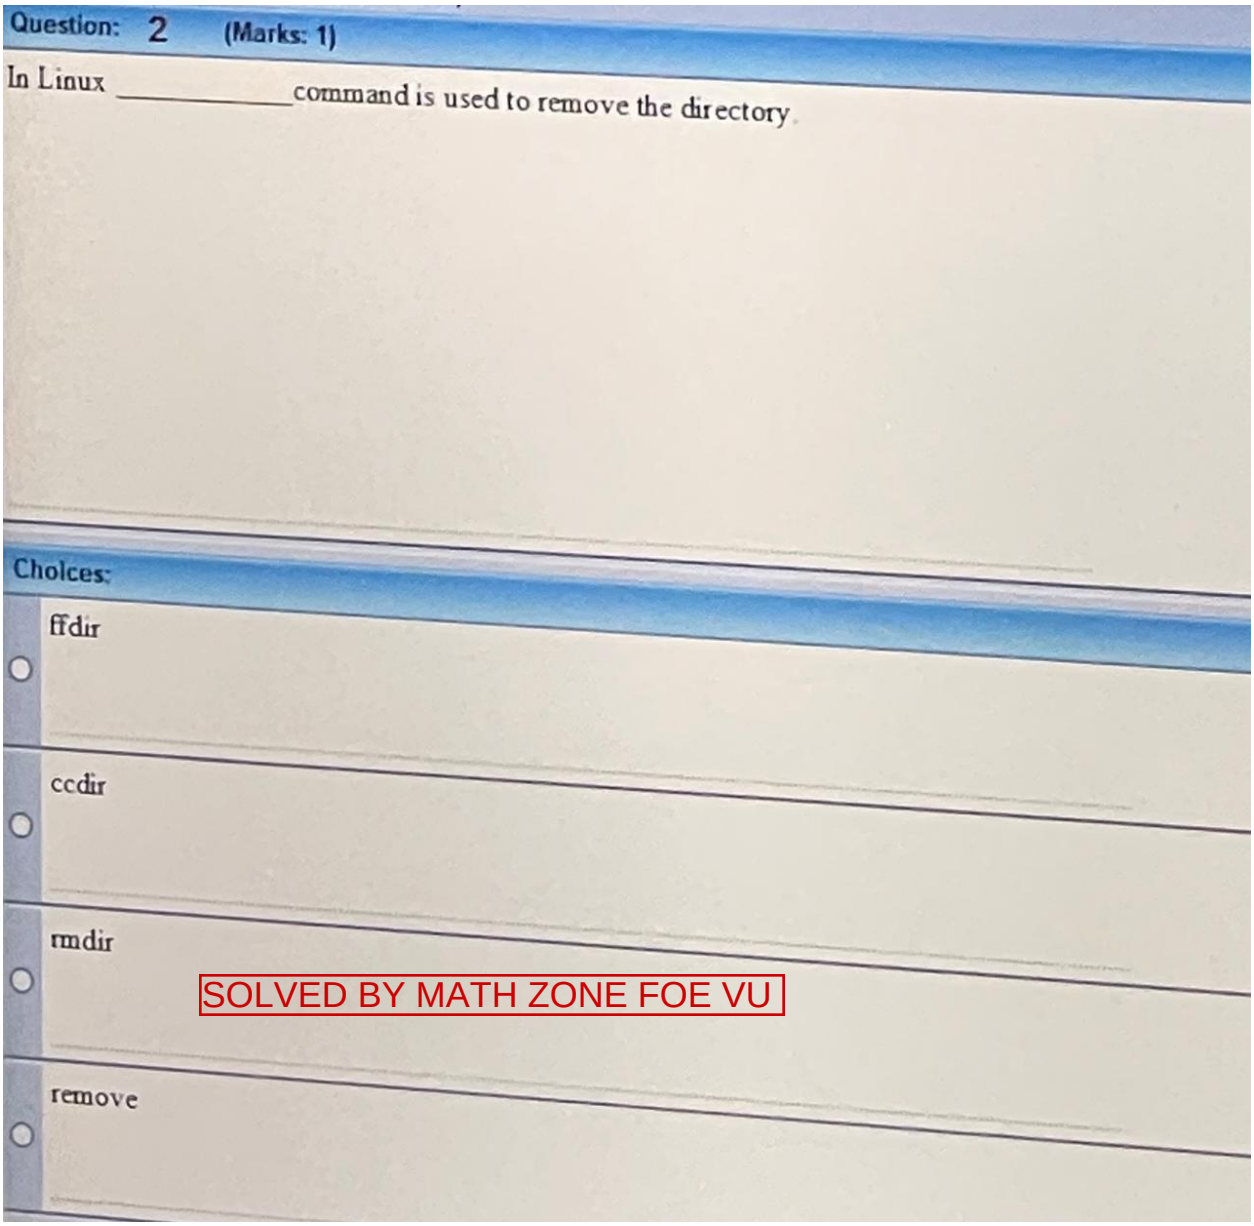


SOLVED BY MATH ZONE FOE VU


CS604P FINAL TERM BY IQRA AZHAR 2

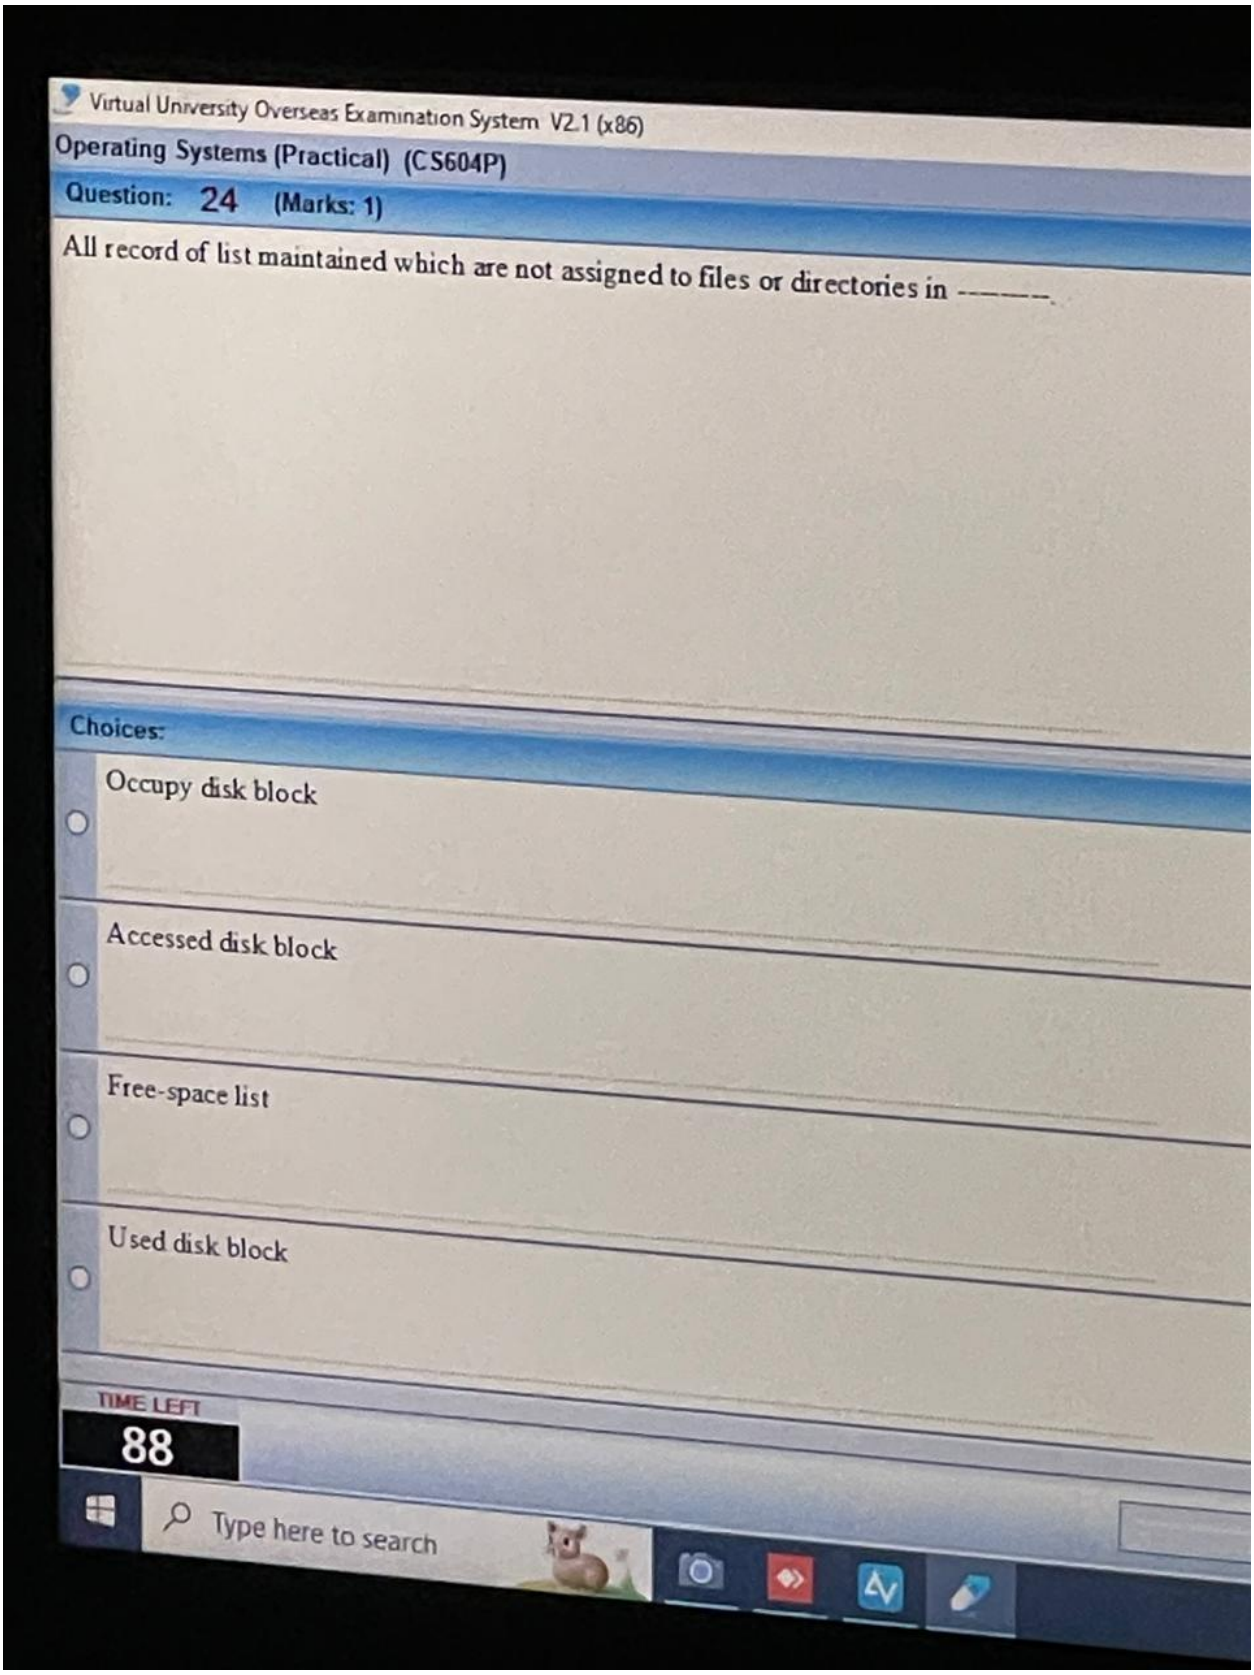


CS604P FINAL TERM BY IQRA AZHAR 2

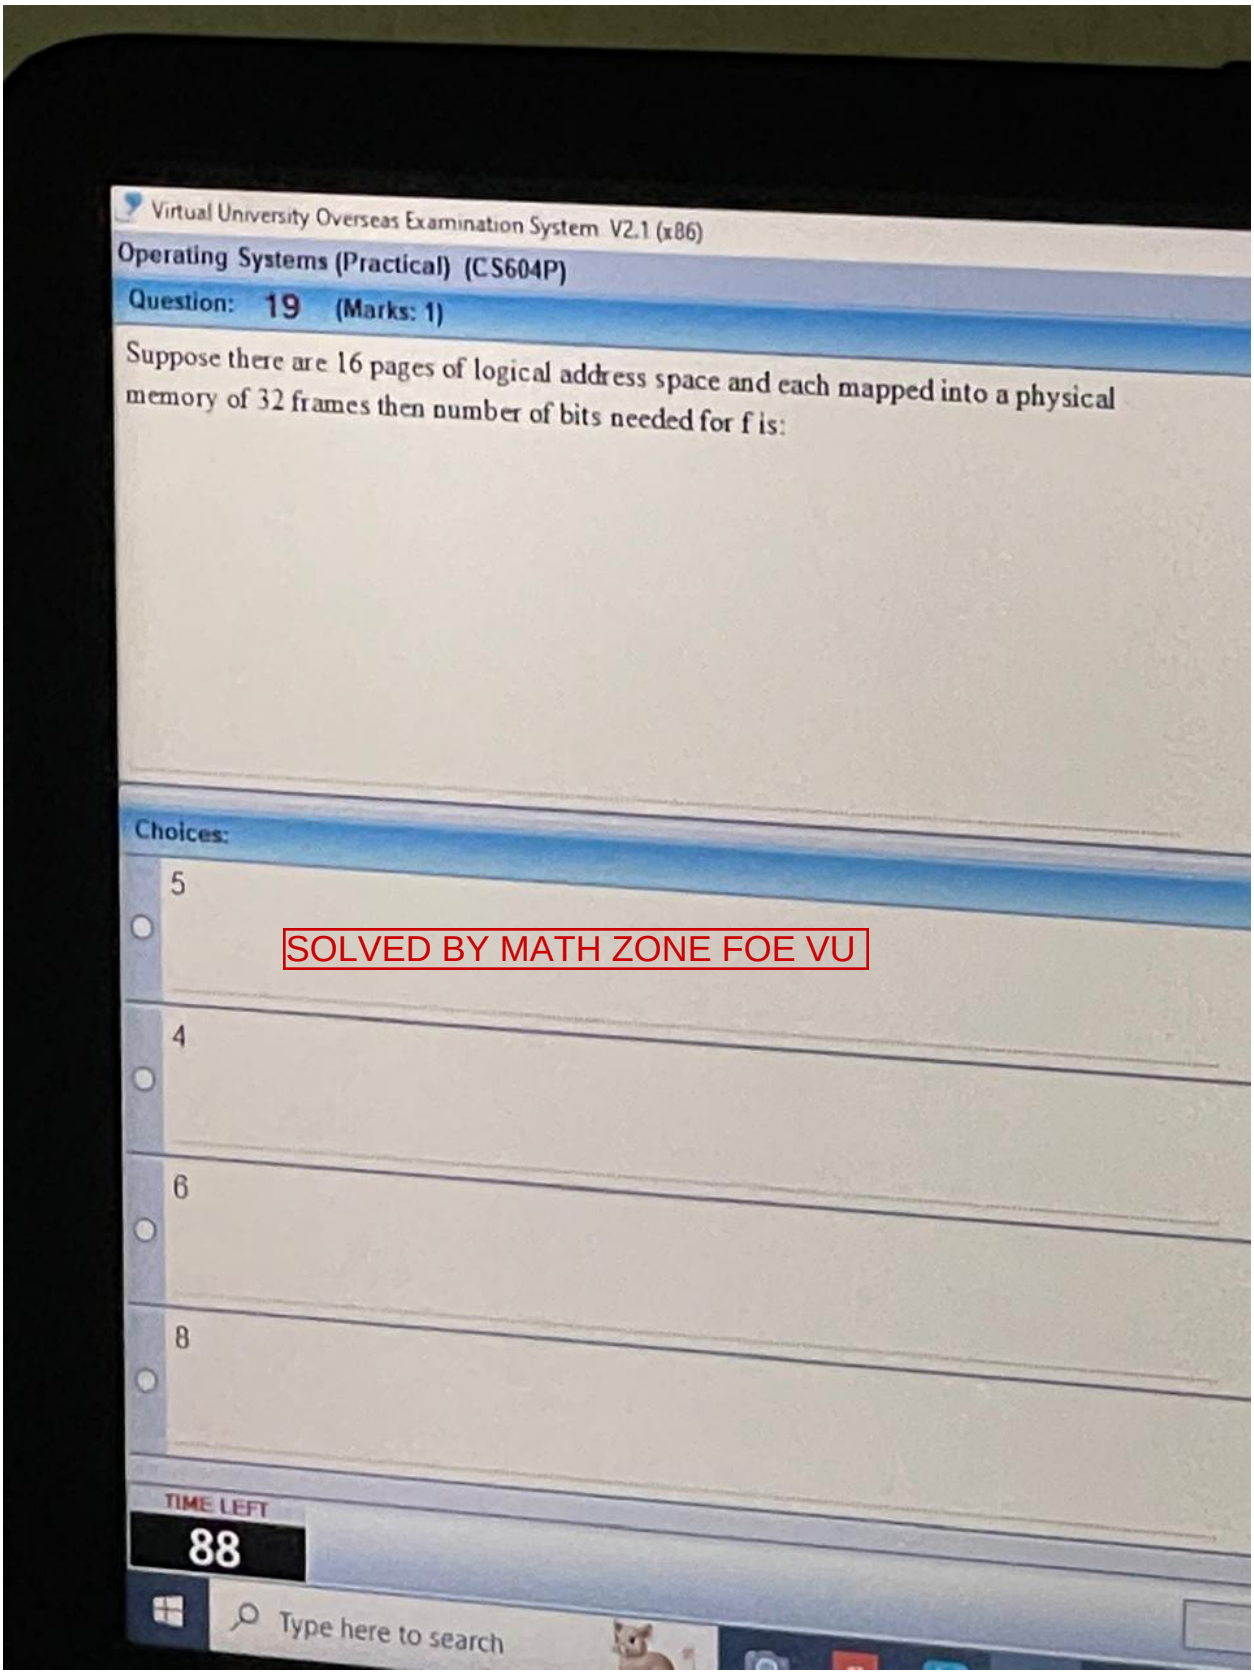


CS604P FINAL TERM BY IQRA AZHAR 2

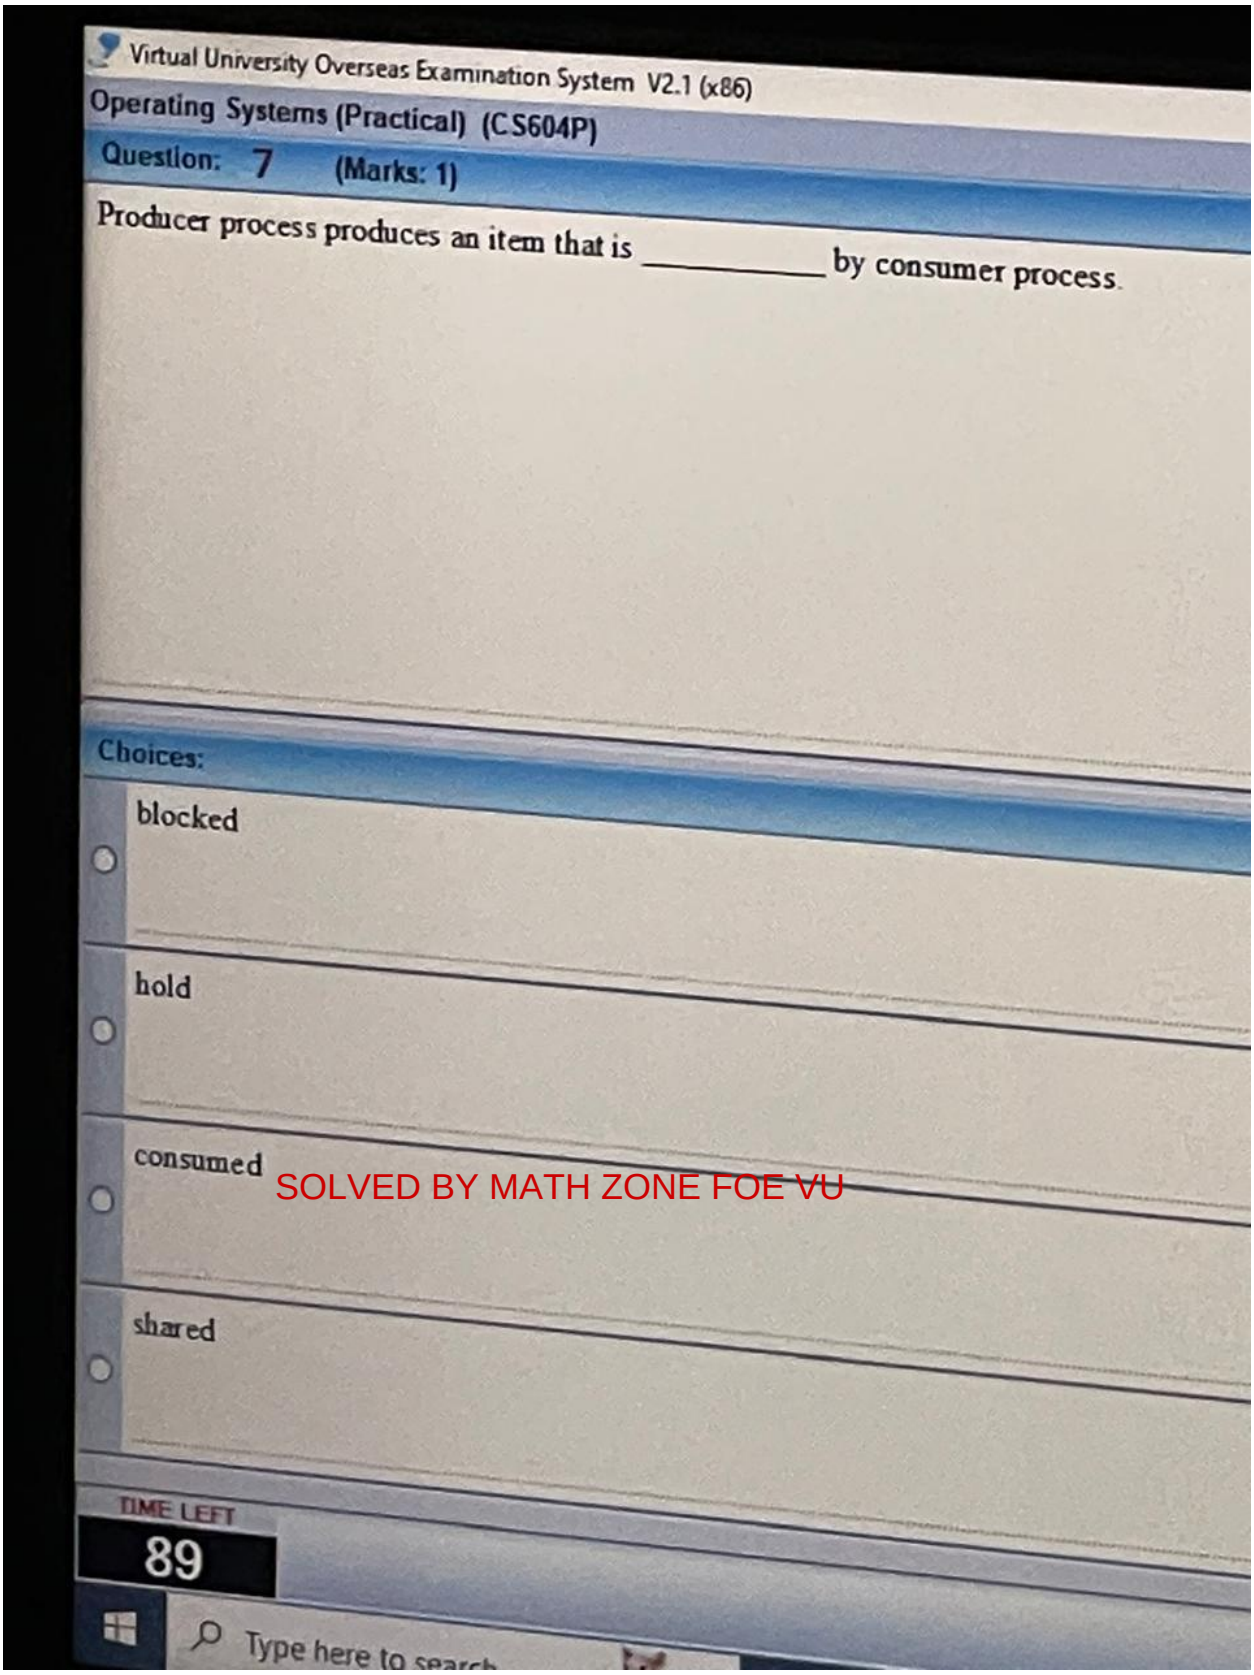

CS604P FINAL TERM BY IQRA AZHAR 2

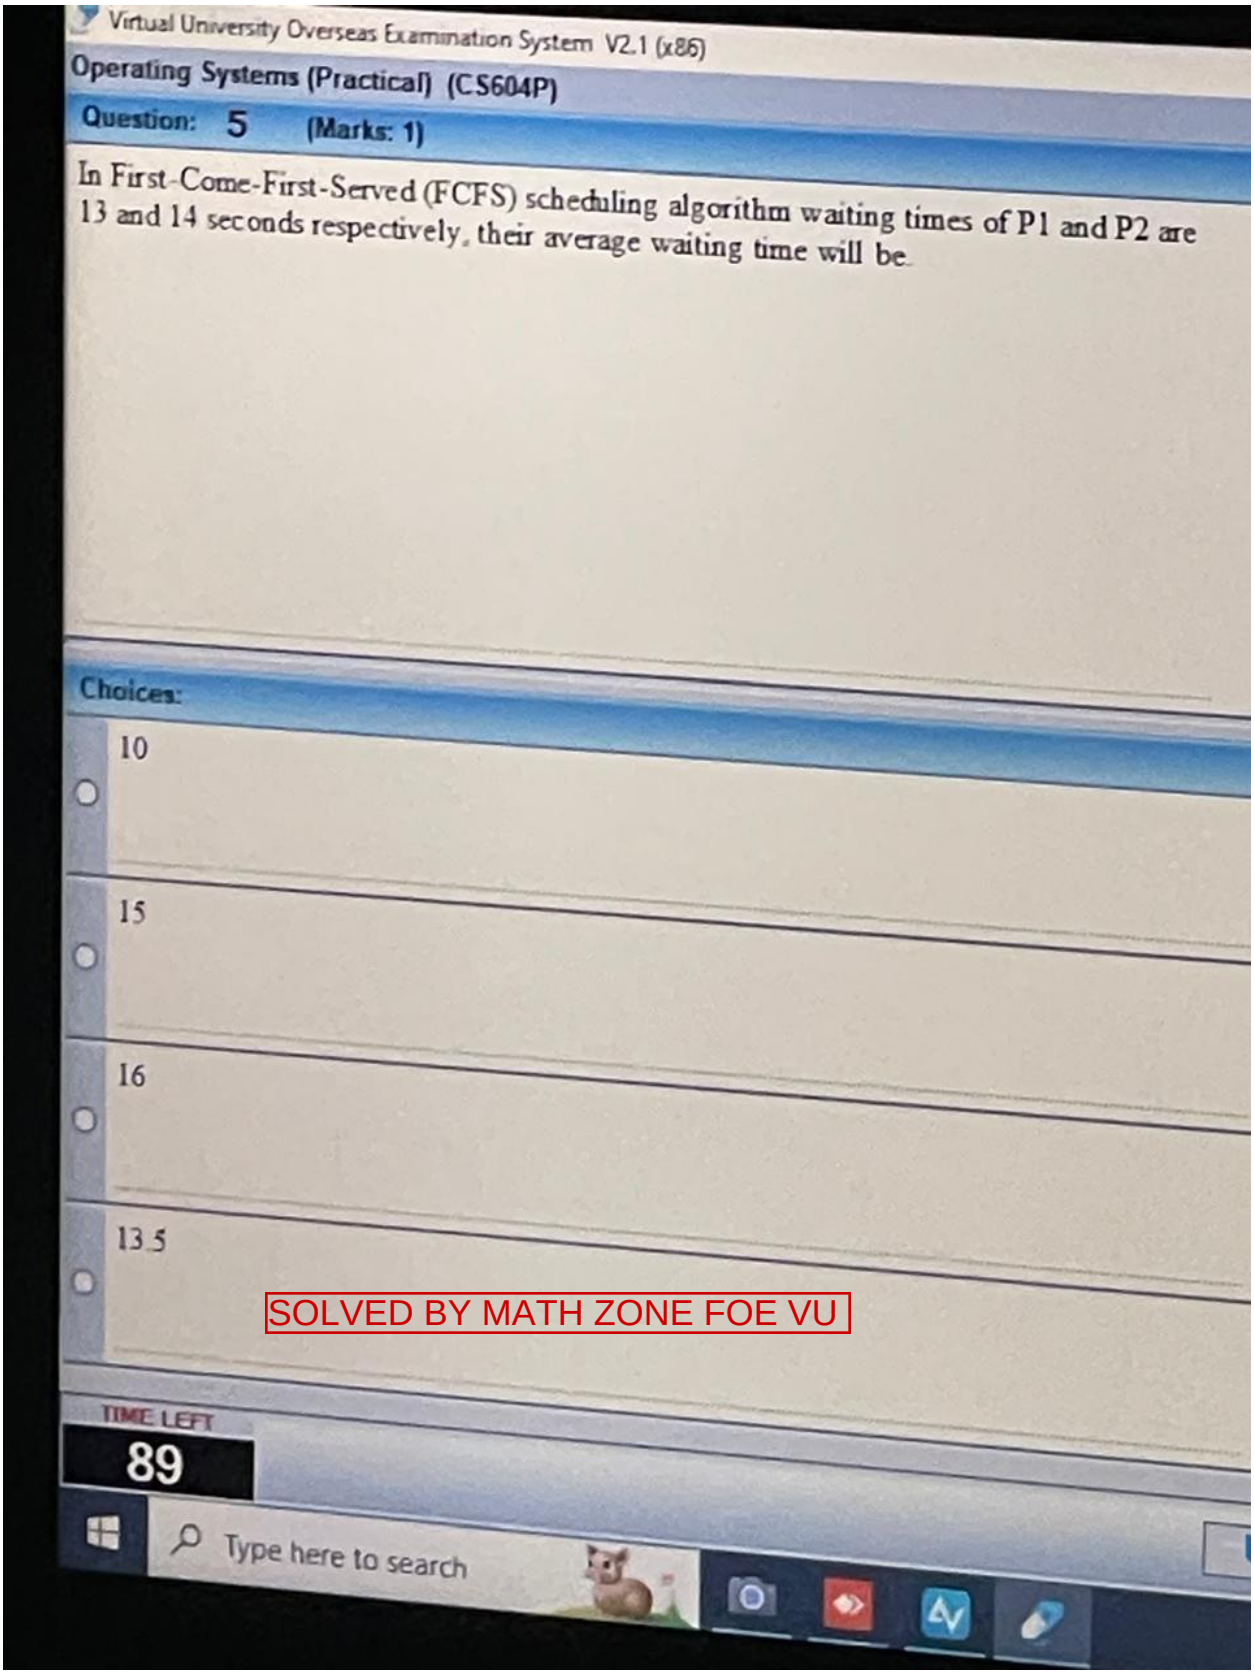


CS604P FINAL TERM BY IQRA AZHAR 2

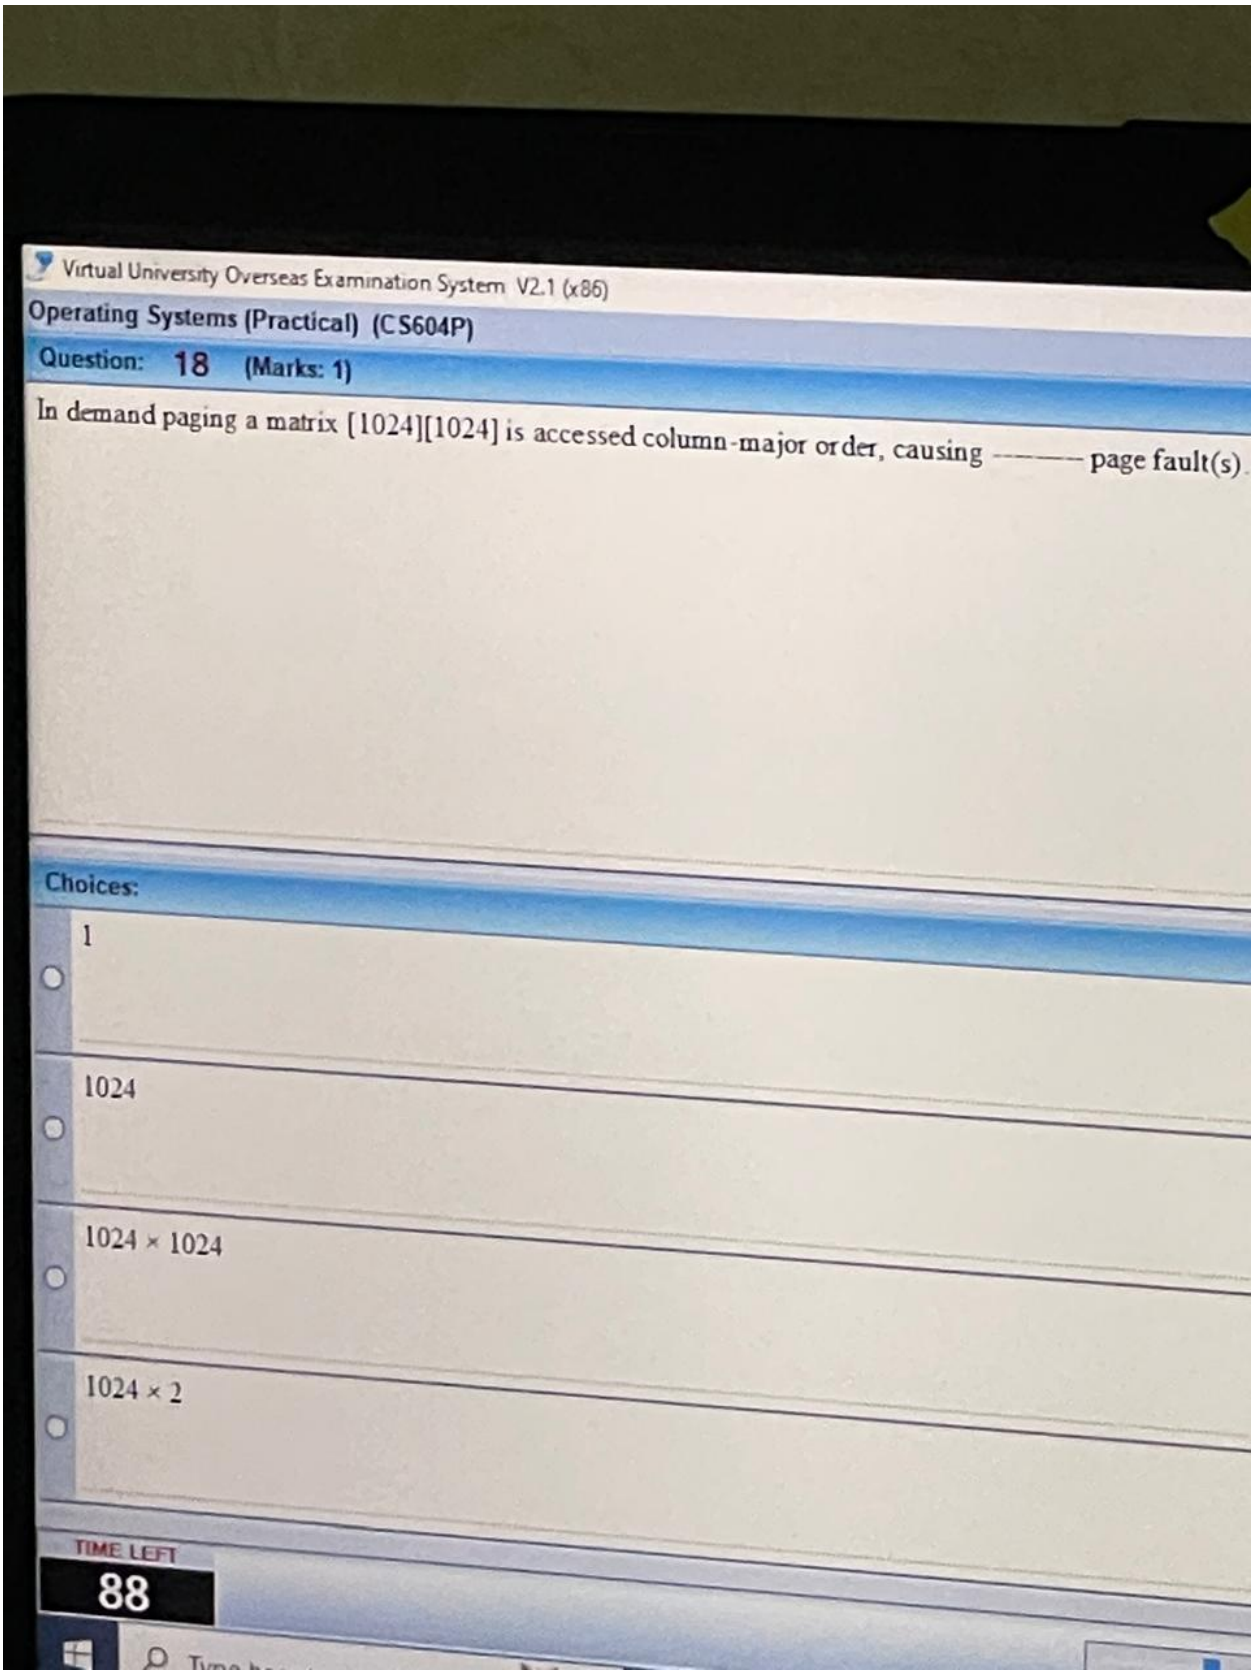

Subjective part

CS604P FINAL TERM BY IQRA AZHAR 2

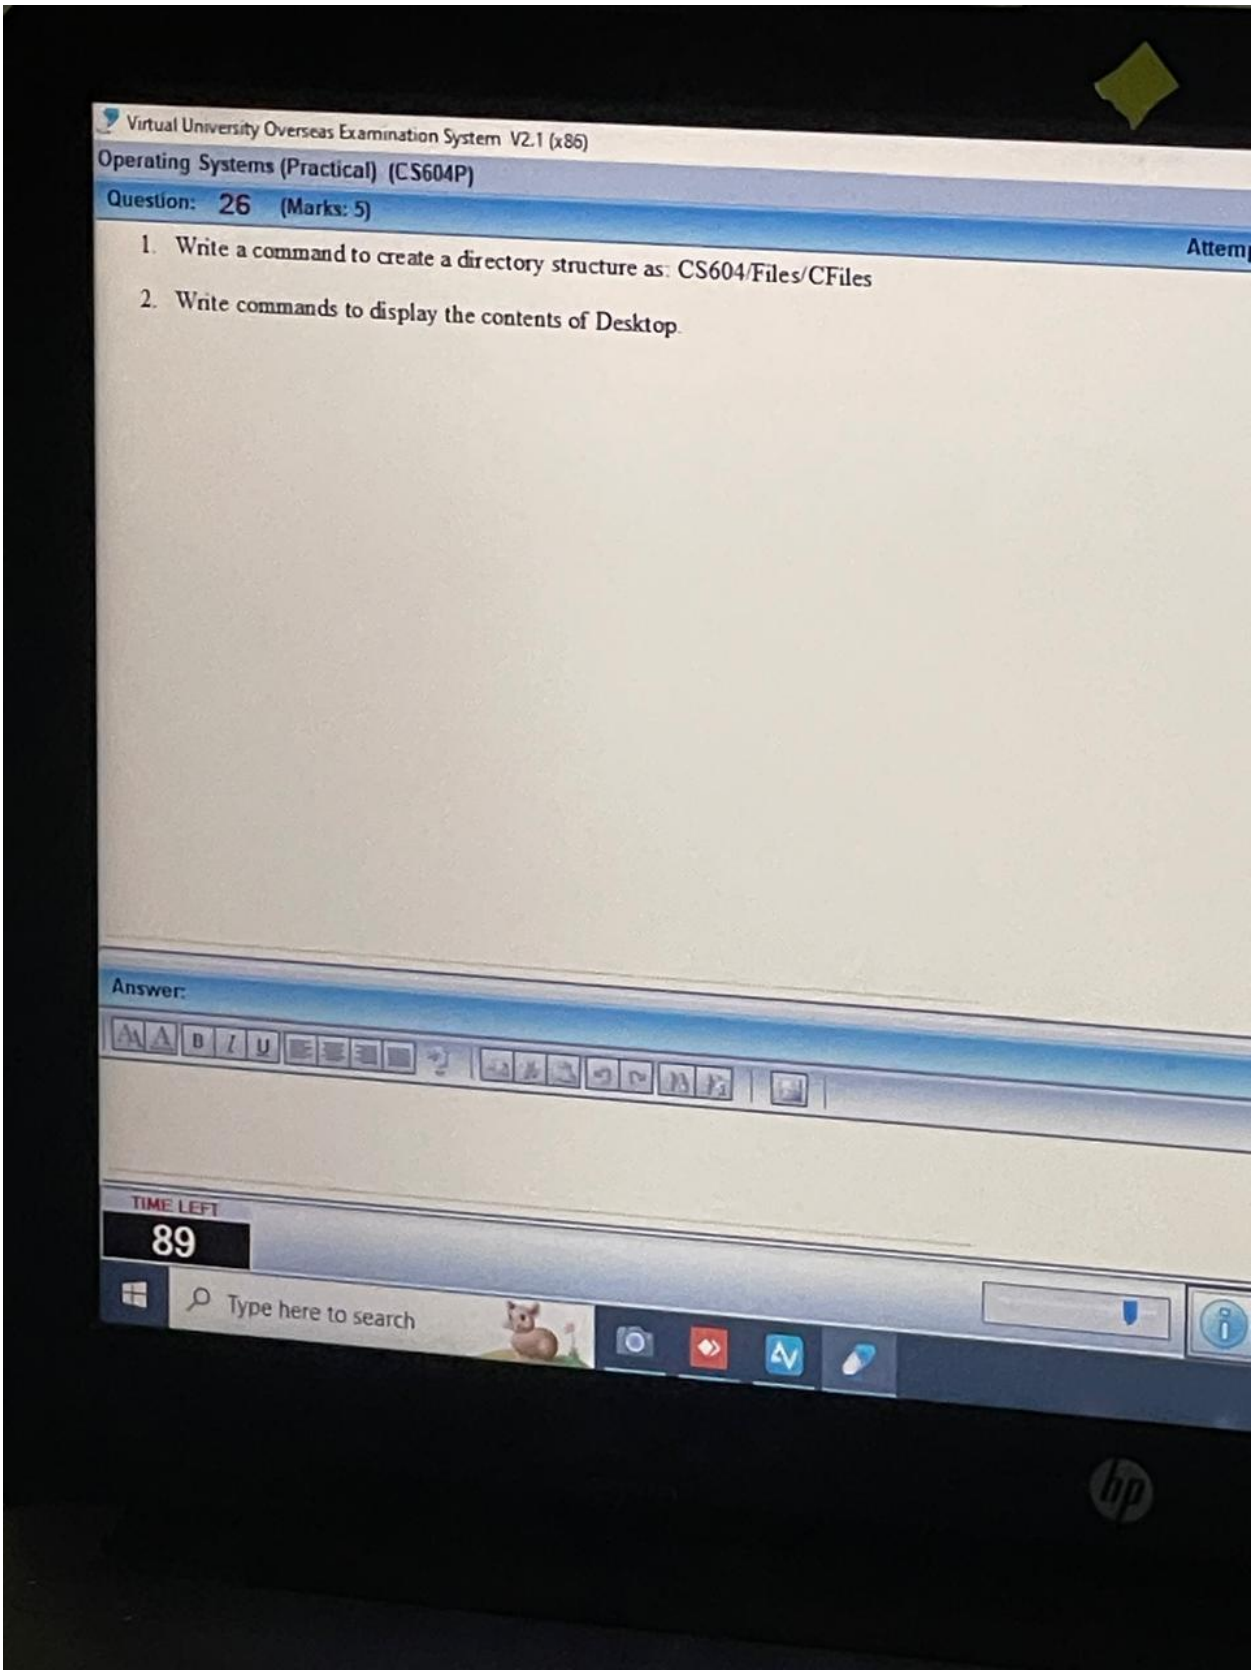

CS604P FINAL TERM BY IQRA AZHAR 2

Q 26


part 1

mkdir -p cs604/files/cfiles


part 2

dir %USERPROFILE%\Desktop

CS604P FINAL TERM BY IQRA AZHAR 2

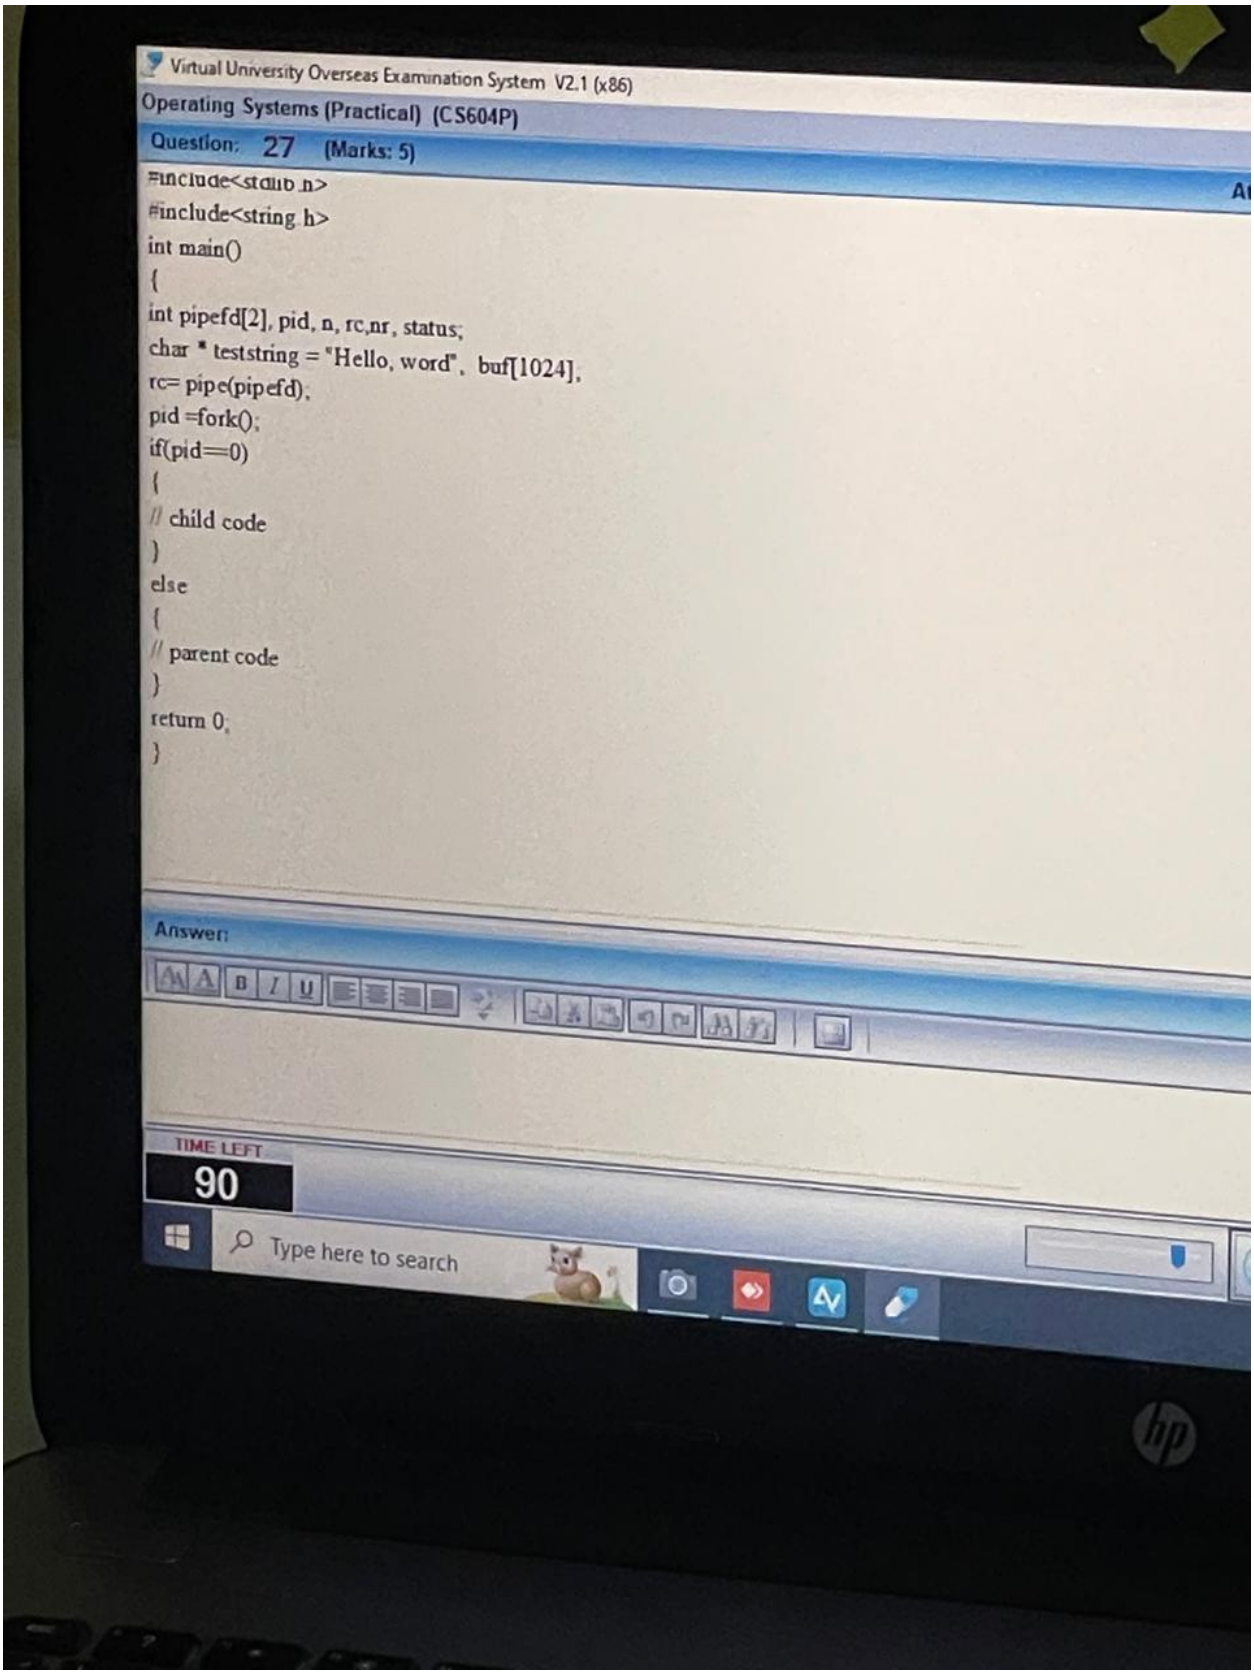

CS604P FINAL TERM BY IQRA AZHAR 2

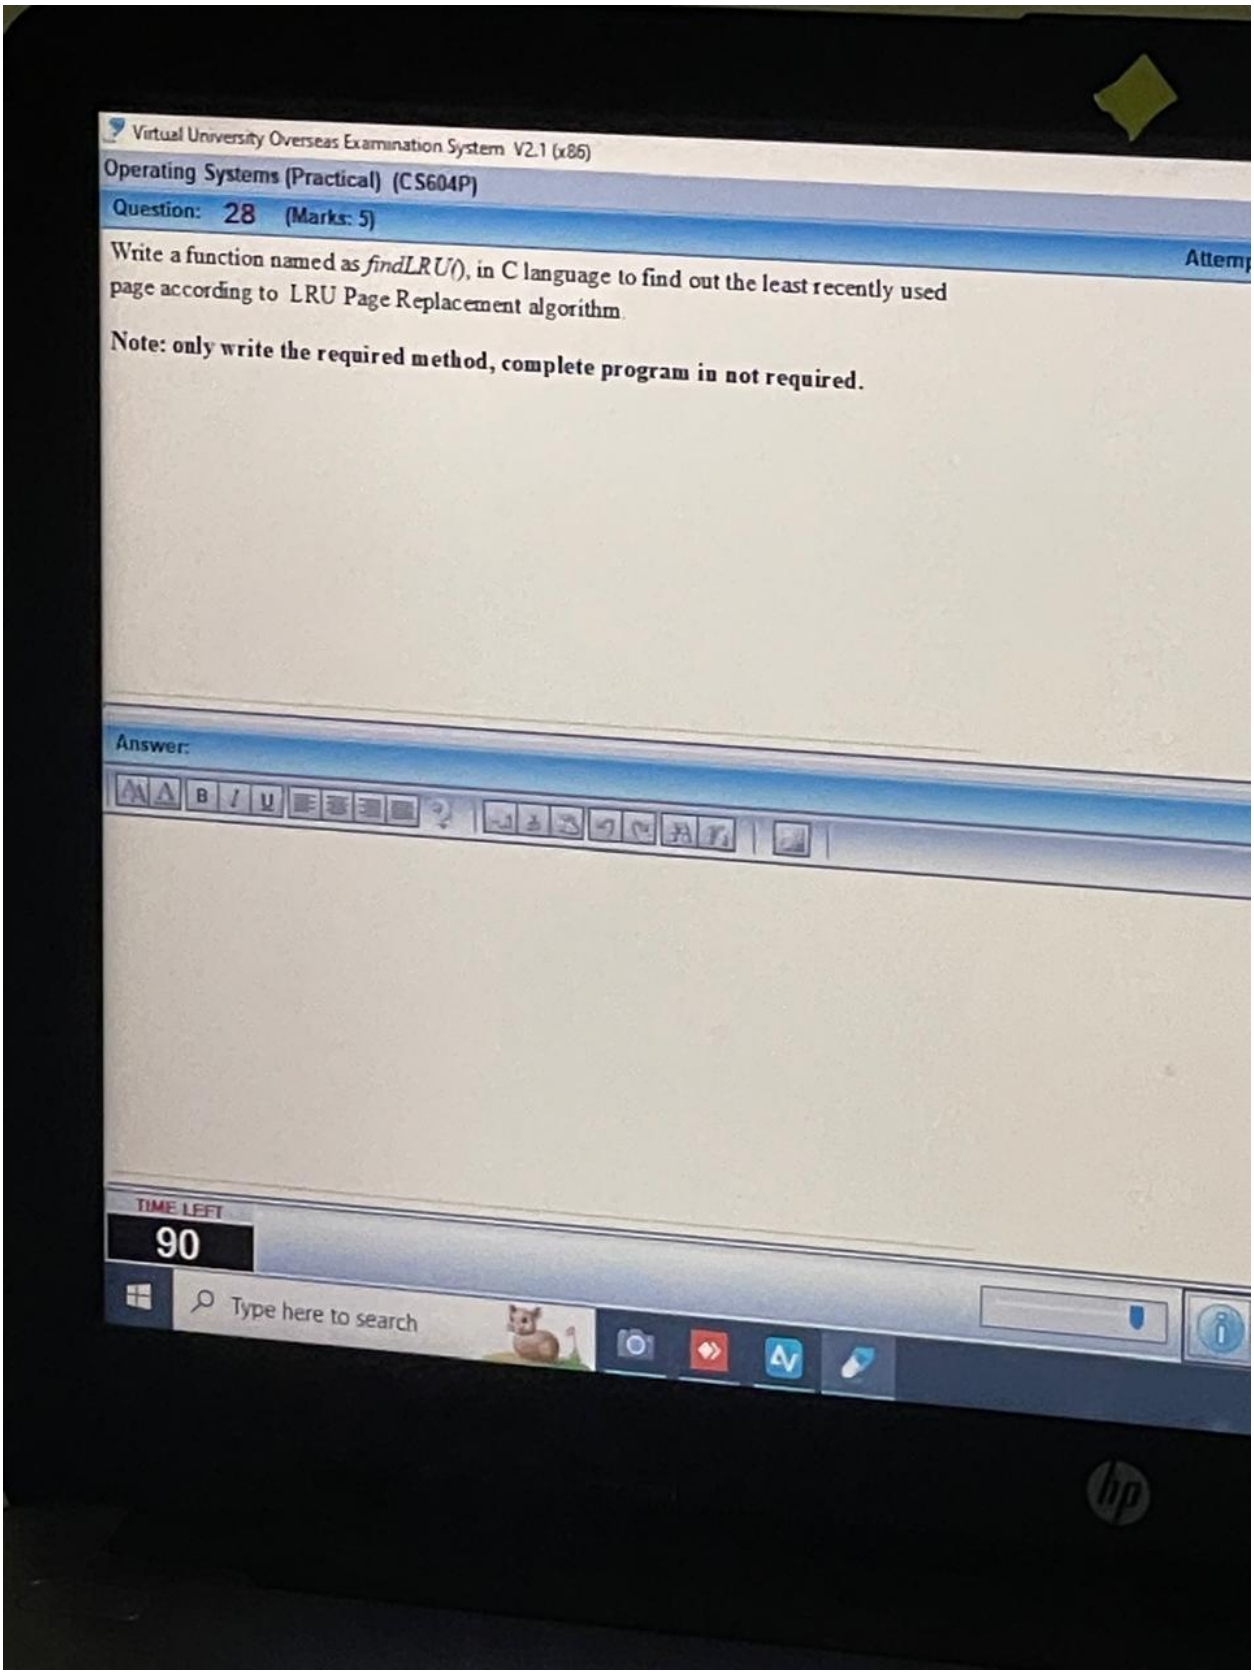

Q28

```
#include <limits.h>

int findLRU(int time[], int n) {

int i, minimum = time[0], pos = 0;

for (i = 1; i < n; i++) {

if (time[i] < minimum) {


 minimum = time[i];


pos = i; } } return pos;

 }
```

This function would be used within a larger context of a page replacement algorithm where the `time[]` array is updated each time a page is accessed to reflect the current time or step count.

CS604P FINAL TERM BY IQRA AZHAR 2

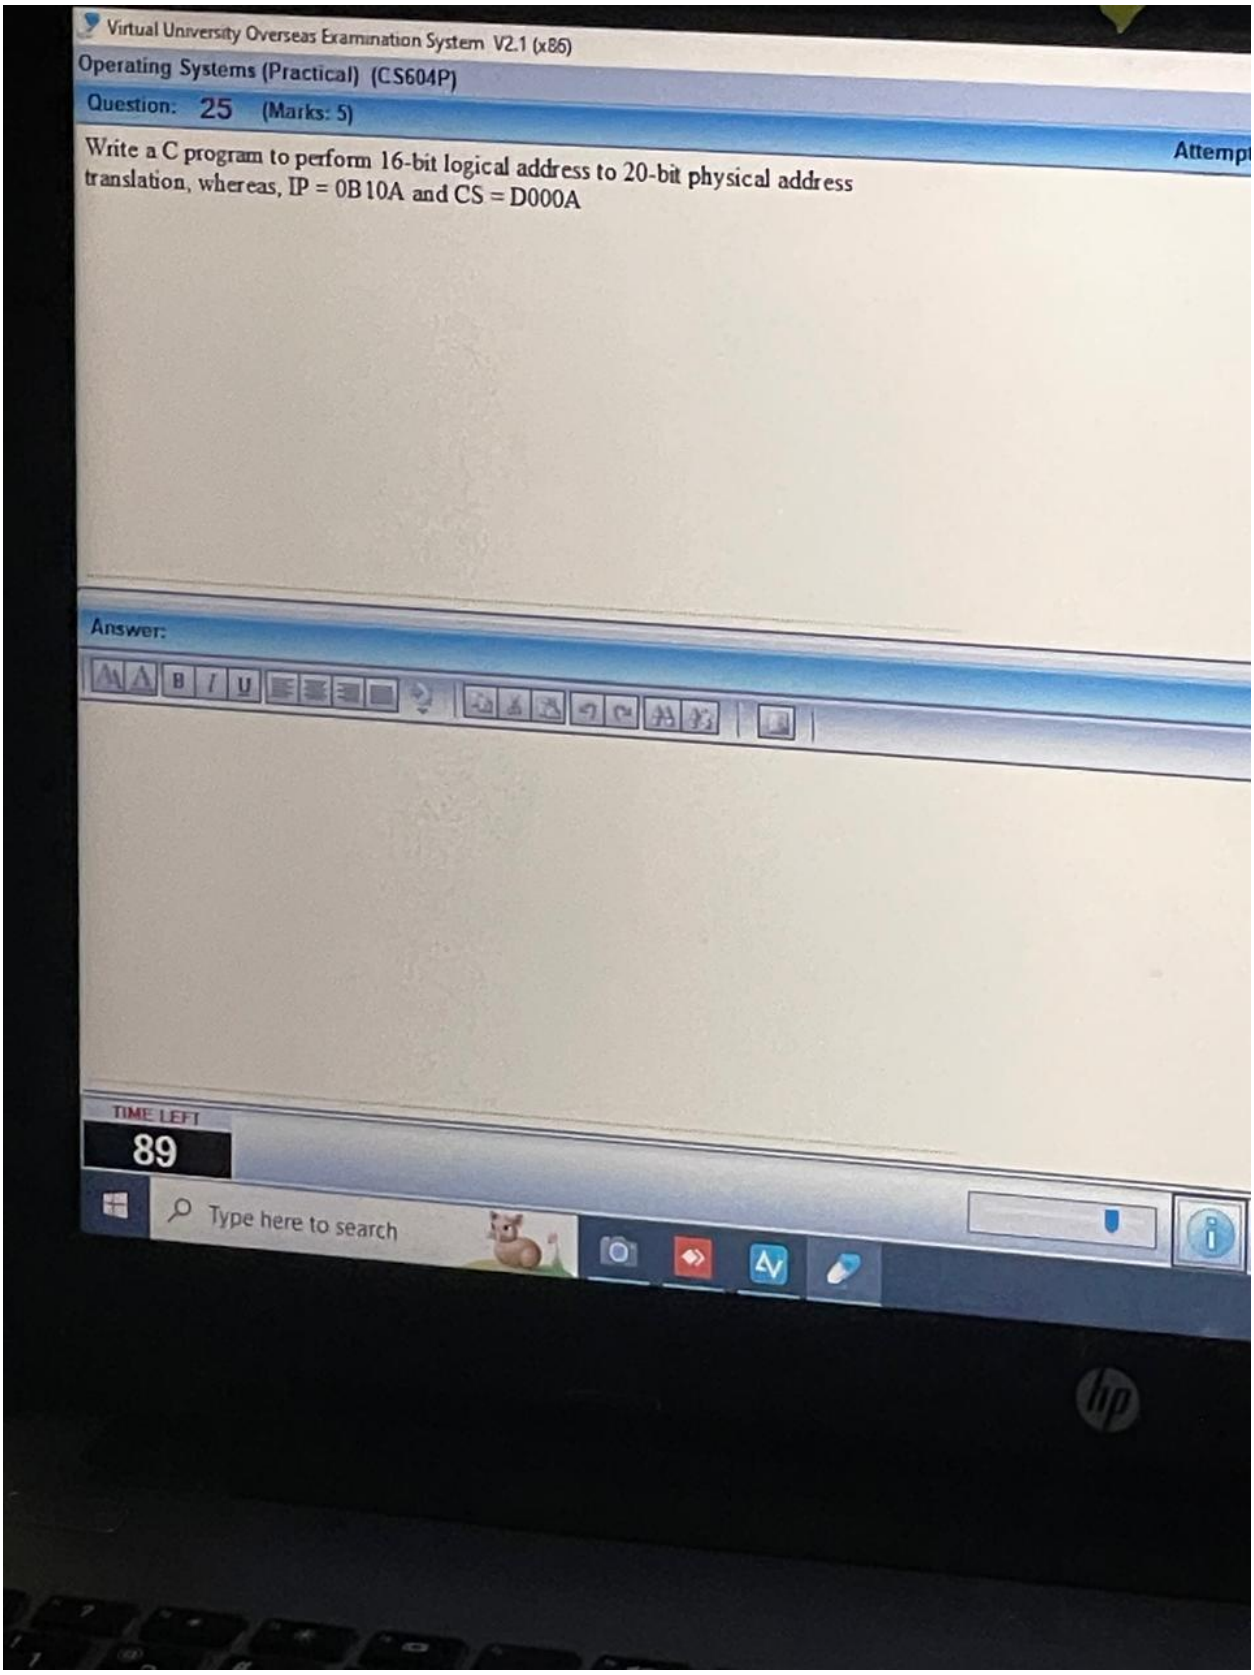

CS604P FINAL TERM BY IQRA AZHAR 2

Q25

```
#include <stdio.h>

 int main() {

unsigned int IP = 0x0B10A;              // 16-bit offset unsigned

 int CS = 0xD000A;                        // 16-bit segment

// Calculate the physical address

unsigned long physicalAddress = (CS * 16) + IP;

 // Print the result


 printf("Logical Address: CS:IP = %X:%X\n", CS, IP);

 printf("Physical Address: %lX\n", physicalAddress);


 return 0;

 }
```


CS604P FINAL TERM BY IQRA AZHAR 2

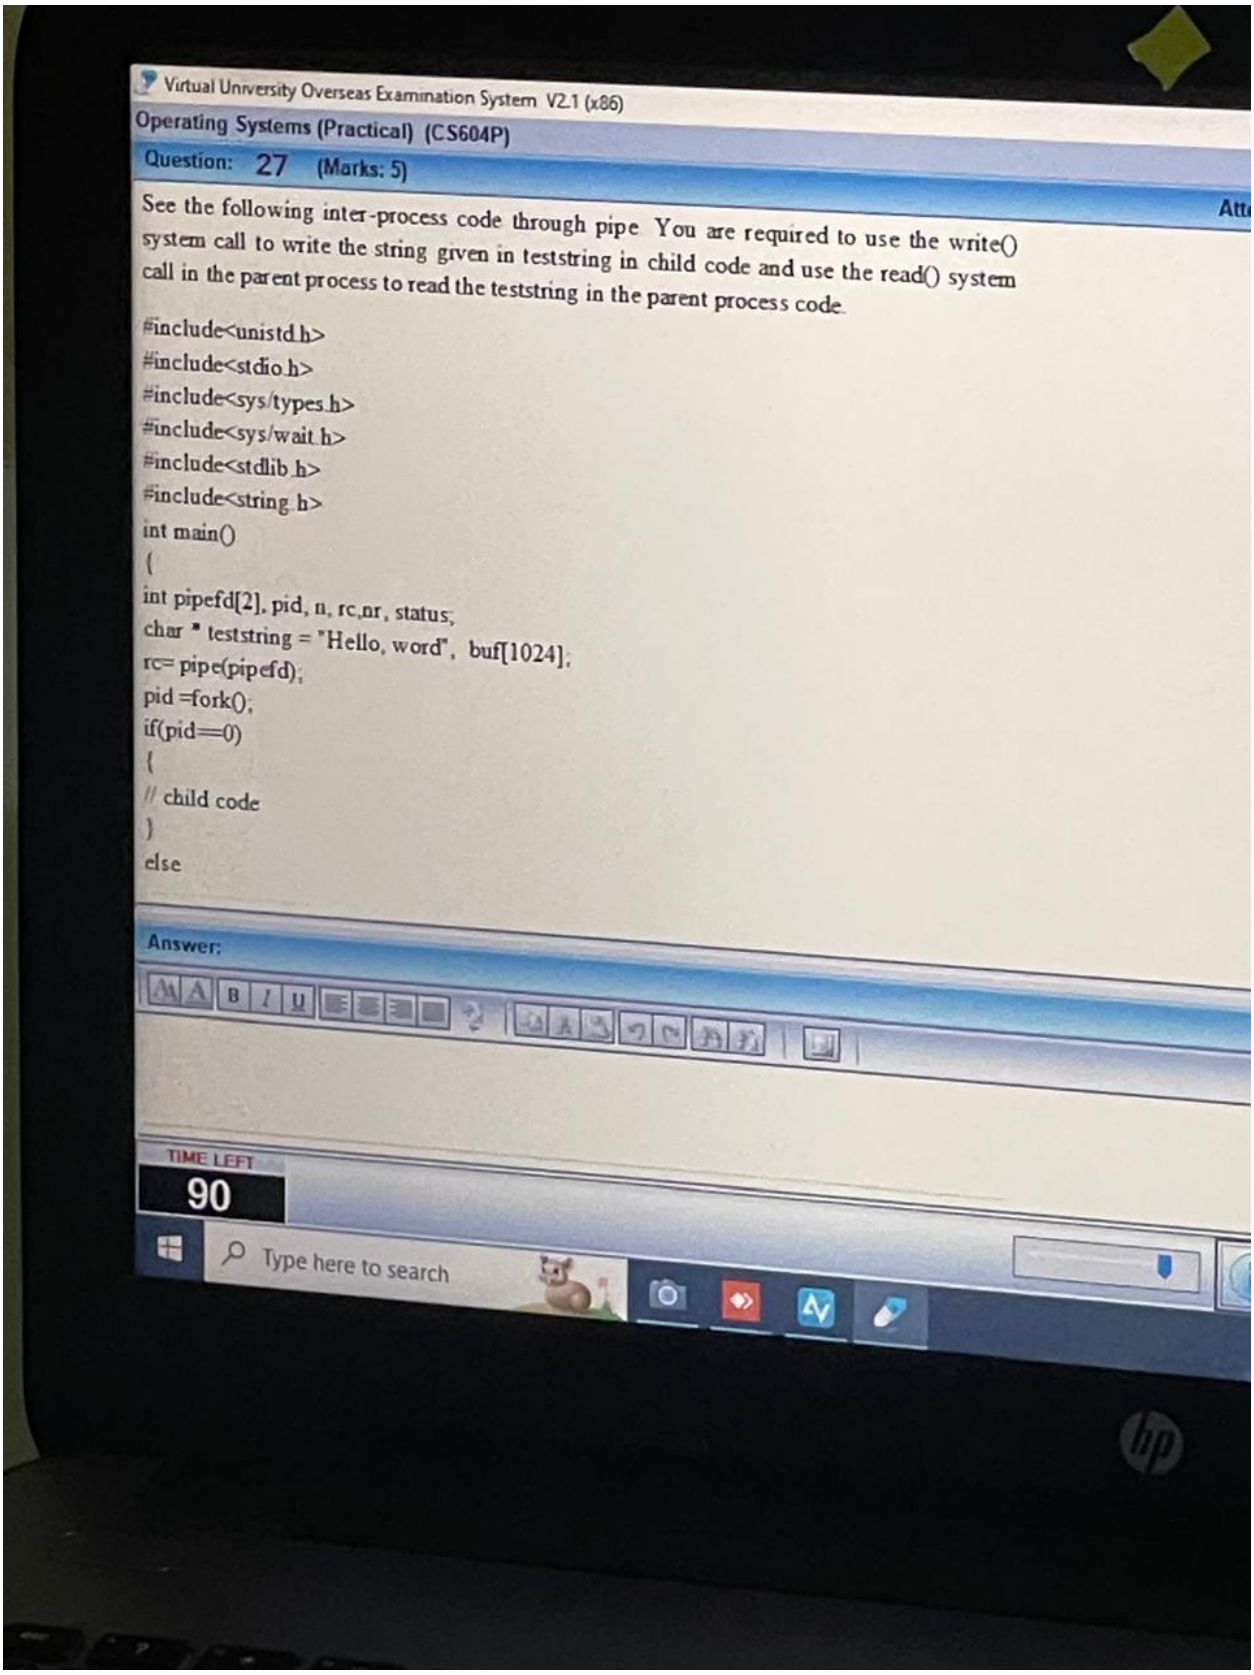

CS604P FINAL TERM BY IQRA AZHAR 2

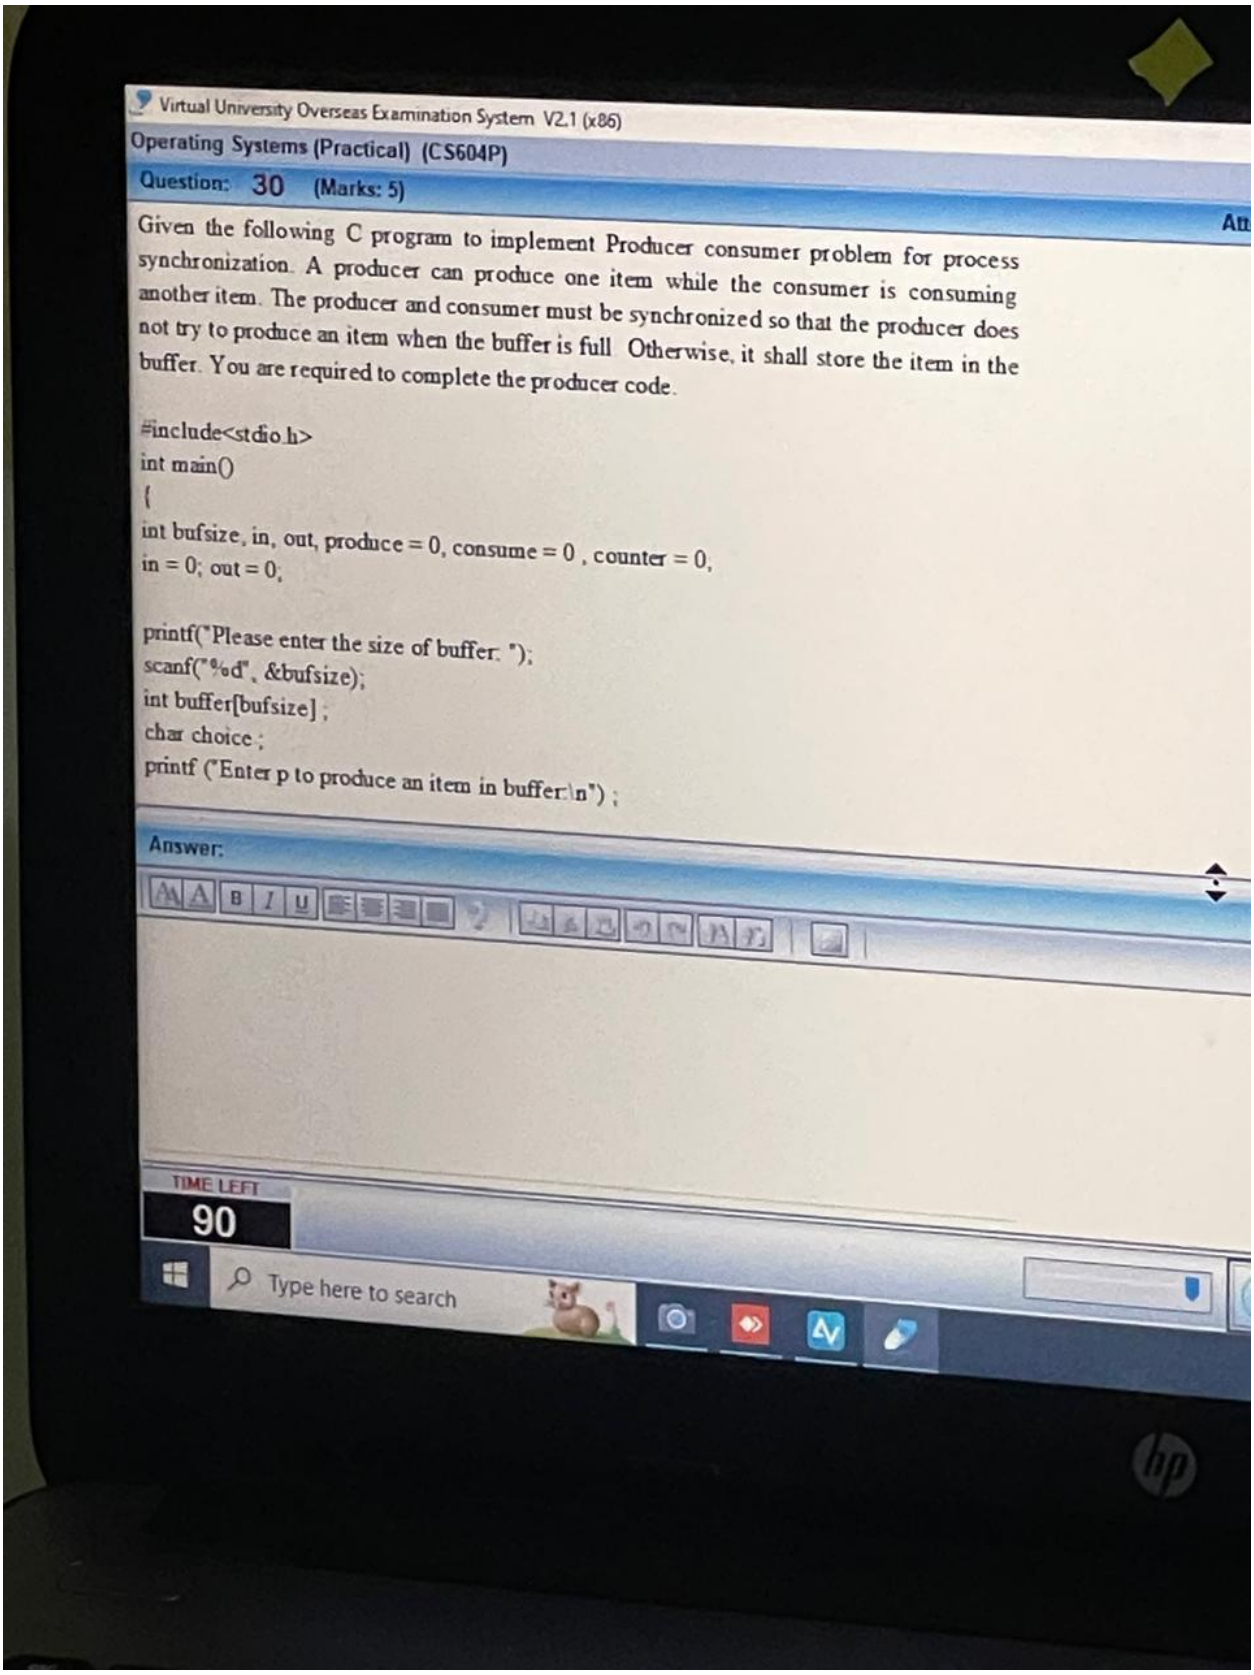

CS604P FINAL TERM BY IQRA AZHAR 2

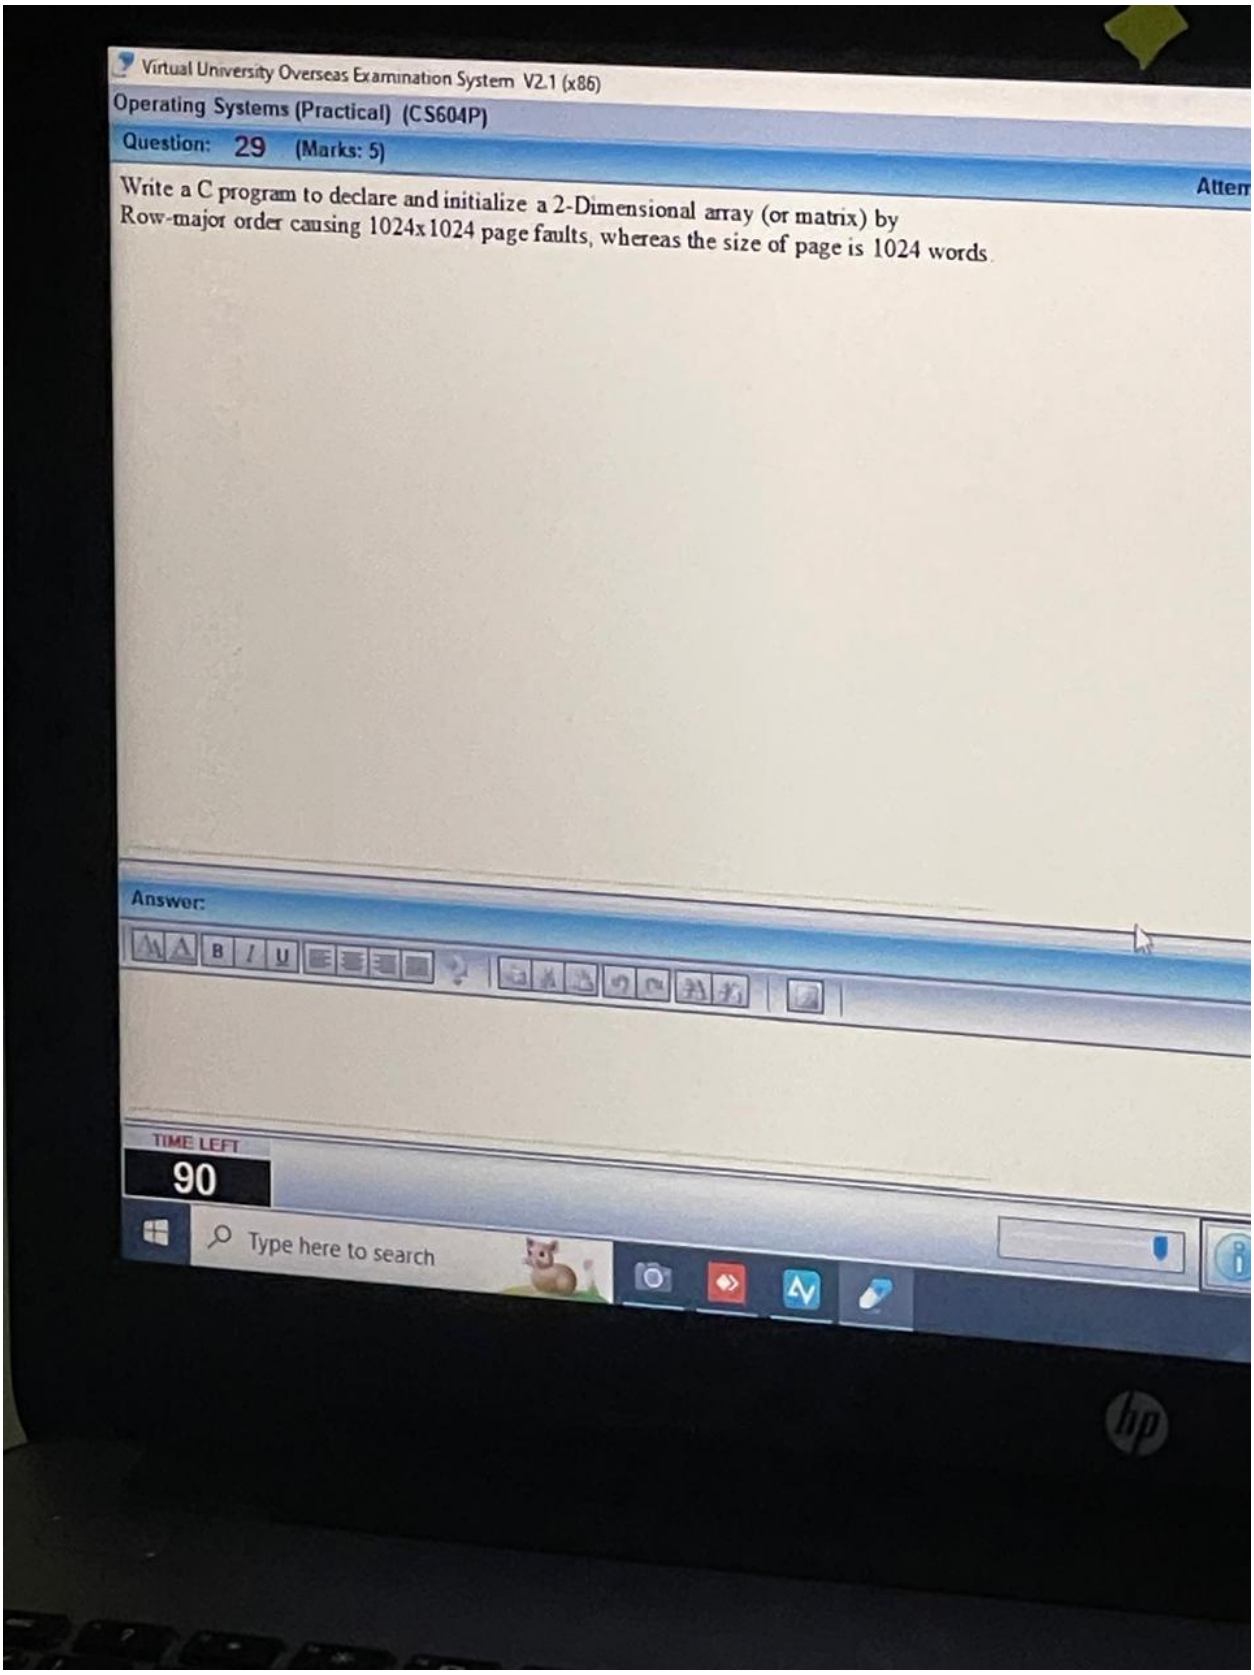

CS604P FINAL TERM BY IQRA AZHAR 2

Q30

Code

```
#include <stdio.h>

int main() {
    int bufsize, in = 0, out = 0, counter = 0;
    int produce = 0, consume = 0;
    char choice;

    printf("Please enter the size of buffer: ");
    scanf("%d", &bufsize);

    int buffer[bufsize];


    printf("Enter 'p' to produce an item in buffer.\n");
    printf("Enter 'q' to Quit.\n");

    do {
        scanf(" %c", &choice);
        switch(choice) {
            case 'p':
                if (counter < bufsize) { // Check if buffer is not full
                    produce = produce + 1; // Produce an item
                    buffer[in] = produce;
                    in = (in + 1) % bufsize; // Circular increment
                    counter++;
                    printf("Produced item: %d\n", produce);
                } else {
                    printf("Buffer is full. Cannot produce item.\n");
                }
                break;
            case 'c':
                if (counter > 0) { // Check if buffer is not empty
                    consume = buffer[out];
                    out = (out + 1) % bufsize; // Circular increment
                    counter--;
                    printf("Consumed item: %d\n", consume);
                } else {
                    printf("Buffer is empty. Cannot consume item.\n");
                }
                break;
            case 'q':
                printf("Exiting...\n");
                break;
            default:
                printf("Invalid choice. Enter 'p' to produce, 'c' to consume,
or 'q' to quit.\n");
                break;
        }
    } while(choice != 'q');

    return 0;
```

```
}
```

CS604P FINAL TERM BY IQRA AZHAR 2

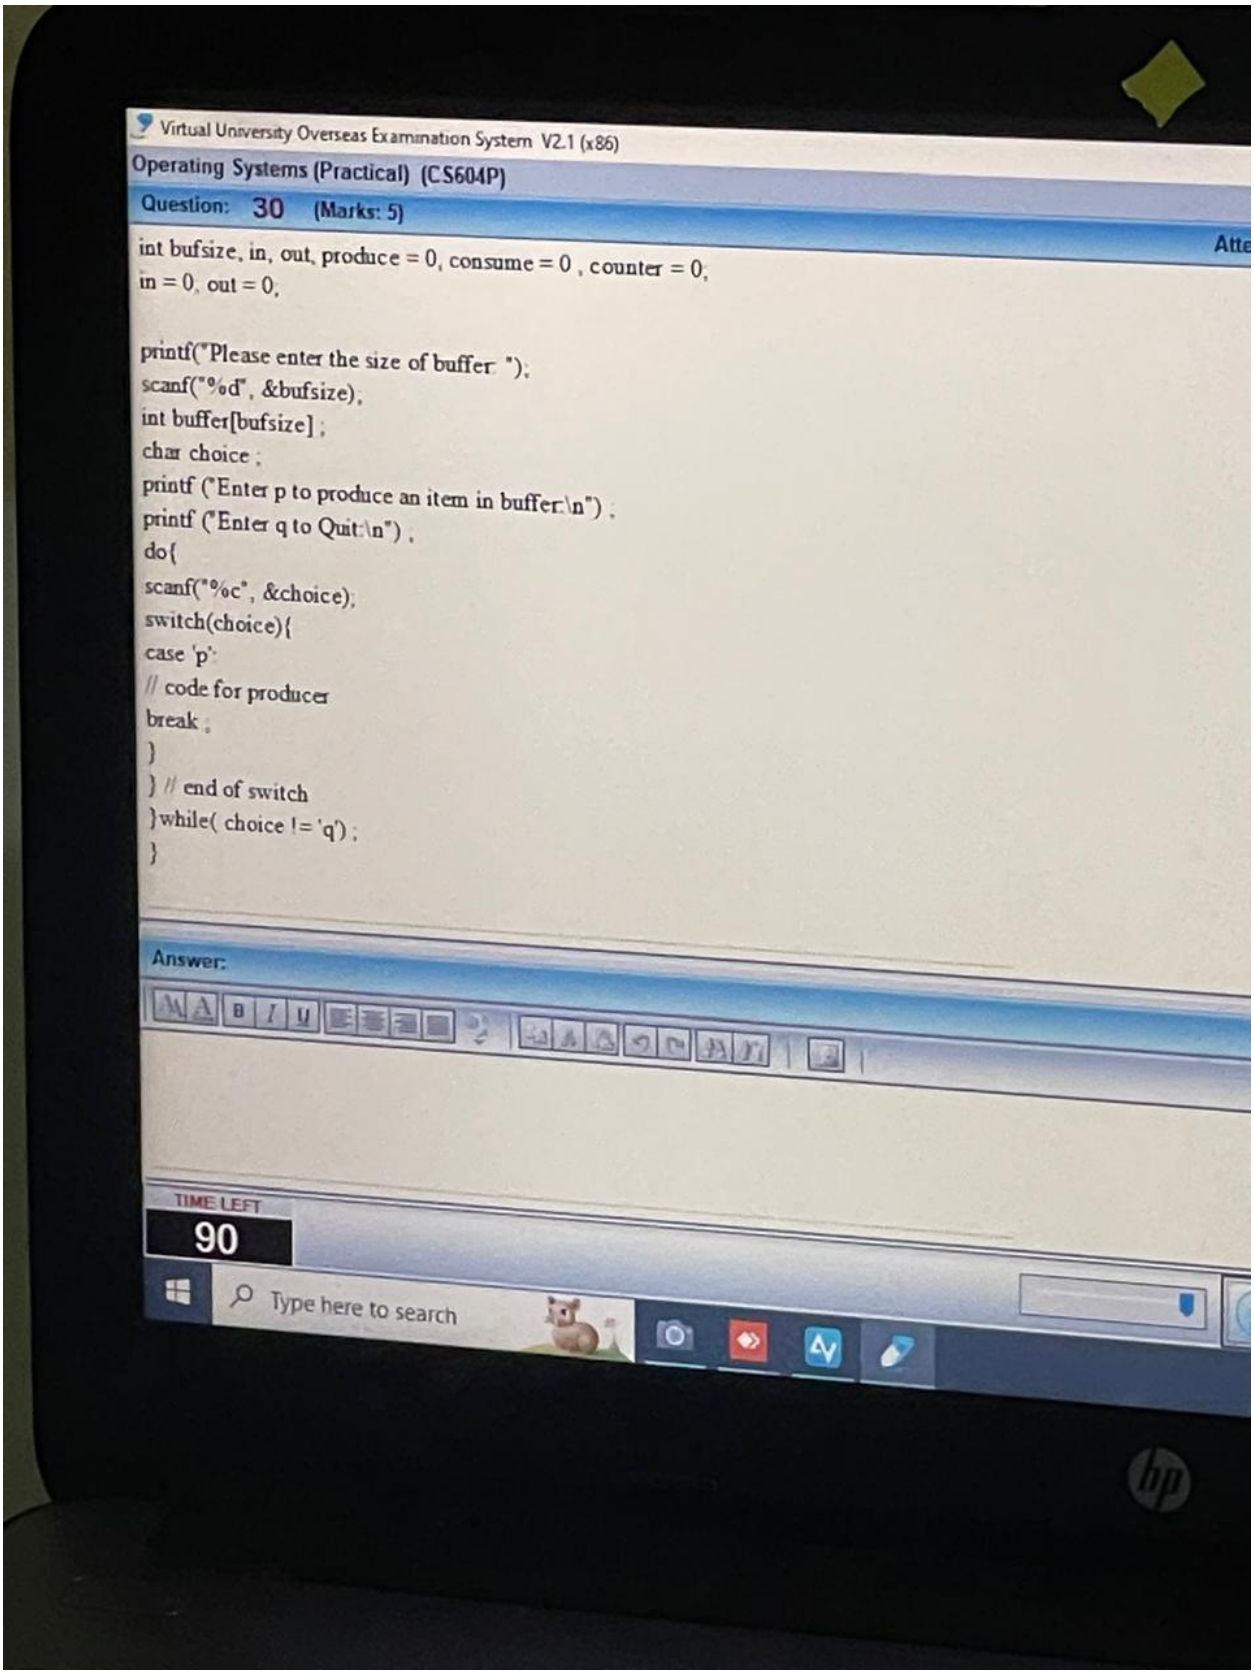

CS604P FINAL TERM BY IQRA AZHAR 2

Q30

Code

```
#include <stdio.h>

int main() {
    int bufsize, in = 0, out = 0, counter = 0;
    int produce = 0, consume = 0;
    char choice;

    printf("Please enter the size of buffer: ");
    scanf("%d", &bufsize);

    int buffer[bufsize];

    printf("Enter 'p' to produce an item in buffer.\n");
    printf("Enter 'q' to Quit.\n");

    do {
        scanf(" %c", &choice);
        switch(choice) {
            case 'p':
                if (counter < bufsize) { // Check if buffer is not full
                    produce = produce + 1; // Produce an item
                    buffer[in] = produce;
                    in = (in + 1) % bufsize; // Circular increment
                    counter++;
                    printf("Produced item: %d\n", produce);
                } else {
                    printf("Buffer is full. Cannot produce item.\n");
                }
                break;
            case 'c':
                if (counter > 0) { // Check if buffer is not empty
                    consume = buffer[out];
                    out = (out + 1) % bufsize; // Circular increment
                    counter--;
                    printf("Consumed item: %d\n", consume);
                } else {
                    printf("Buffer is empty. Cannot consume item.\n");
                }
                break;
            case 'q':
                printf("Exiting...\n");
                break;
            default:
                printf("Invalid choice. Enter 'p' to produce, 'c' to consume,
or 'q' to quit.\n");
                break;
        }
    } while(choice != 'q');

    return 0;
```

```
}
```