Rashid Hussain

Q1) MATLAB is a proprietary multi-paradigm programming language and numeric computing environment developed by Math Works, which is stand for:

A) Matrix Laboratory

B) Math Laboratory

C) Main Math Lab

D) Math Works


ANS) A

5:46 AM • 896 B/s 100

Dec 23, 2022
PM 11:24

c).Simulink
d).None

MATLAB Desktop

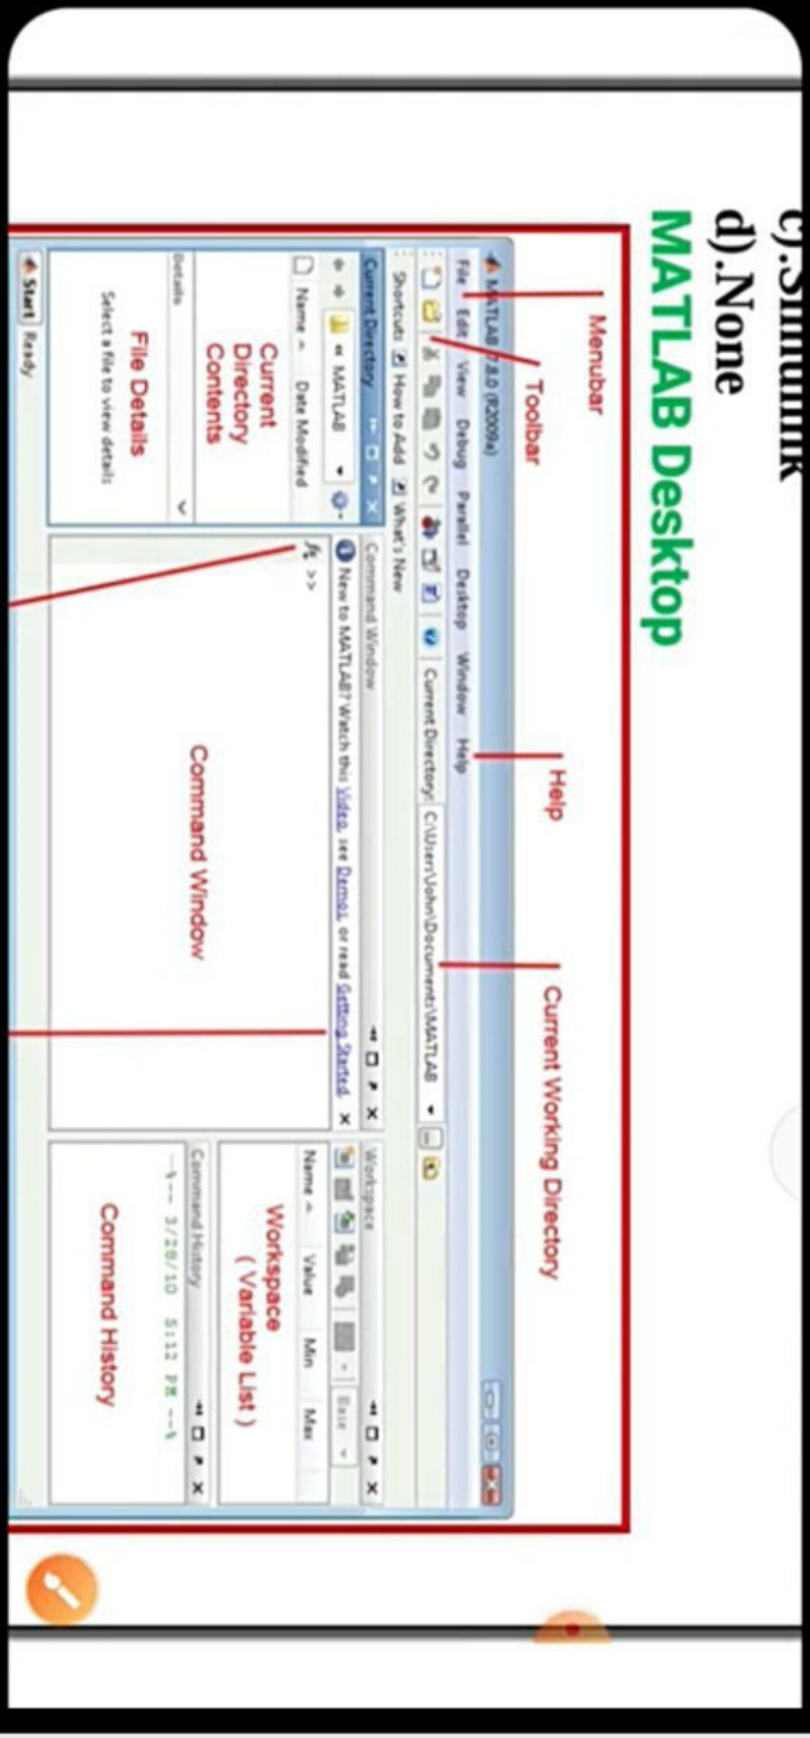

Share Edit Delete More

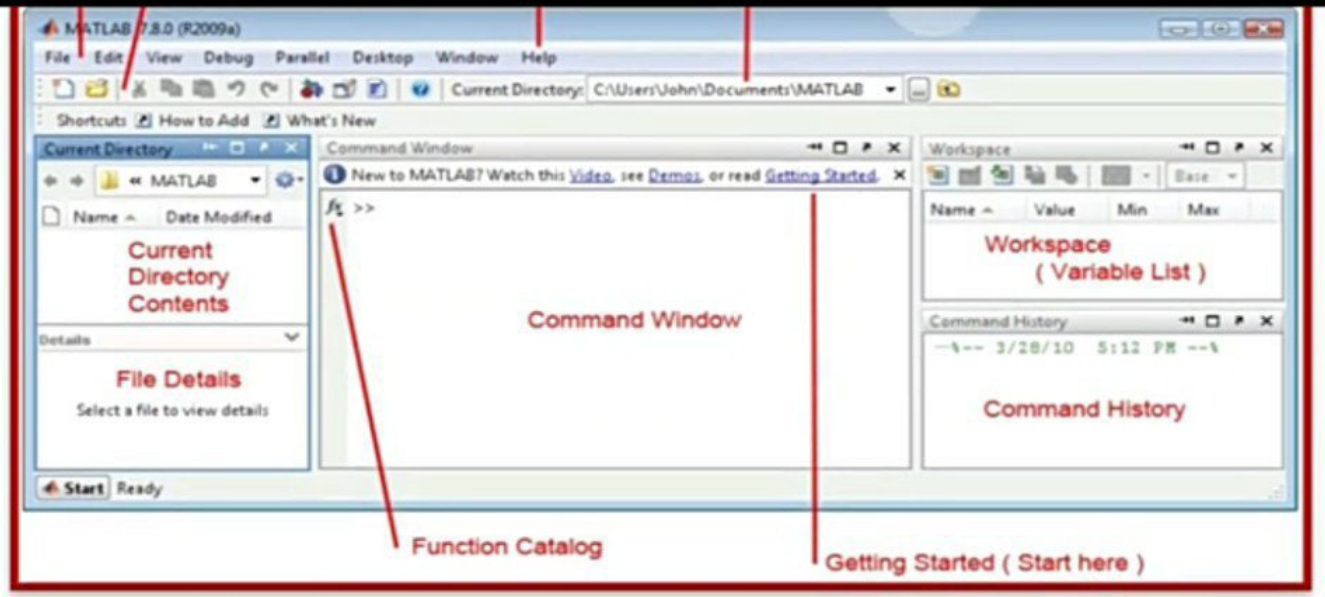


Fig-: MATLAB Desktop

Q3- MATLAB is developed by-------(V.VImp.)

MATLAB Windows and Functions	
⇨ Command Window	Main window, enters variables, runs programs.
⇨ Figure Window	Contains output from graphic commands.
⇨ Editor Window	Creates and debugs script and function files.
⇨ Help Window	Provides help information.
⇨ Launch Pad Window	Provides access to tools, demos, and documentation.
⇨ Command History Window	Logs commands entered in the Command Window.
⇨ Workspace Window	Provides information about the variables that are used.
⇨ Current Directory Window	Shows the files in the current directory.

Command	Description
cd	– Change current directory
clc	– Clear the Command Window
clear (all)	– Removes all variables from the workspace
clear x	– Remove x from the workspace
copyfile	– Copy file or directory
delete	– Delete files
dir	– Display directory listing
exist	– Check if variables or functions are defined
help	– Display help for MATLAB functions
lookfor	– Search for specified word in all help entries
mkdir	– Make new directory
movefile	– Move file or directory
pwd	– Identify current directory
rmdir	– Remove directory
type	– Display contents of file
what	– List MATLAB files in current directory
which	– Locate functions and files
who	– Display variables currently in the workspace

Elementary Functions in MATLAB

⇨ cos(x)	Cosine	⇨ abs(x)	Absolute value
⇨ sin(x)	Sine	⇨ sign(x)	Signum function
⇨ tan(x)	Tangent	⇨ max(x)	Maximum value
⇨ acos(x)	Arc cosine	⇨ min(x)	Minimum value
⇨ asin(x)	Arc sine	⇨ ceil(x)	Round towards +∞
⇨ atan(x)	Arc tangent	⇨ floor(x)	Round towards -∞
⇨ exp(x)	Exponential	⇨ round(x)	Round to nearest integer
⇨ sqrt(x)	Square root	⇨ rem(x)	Remainder after division
⇨ log(x)	Natural logarithm	⇨ angle(x)	Phase angle
⇨ log10(x)	Common logarithm	⇨ conj(x)	Complex conjugate



Q1) MATLAB is a proprietary multi-paradigm programming language and numeric computing environment developed by Math Works, which is stand for:

A) Matrix Laboratory

B) Math Laboratory

C) Main Math Lab

D) Math Works

ANS) A

Q2) Which is not a pre-defined variable in MATLAB:

A) inf

B) pi

C) i

D) Gravity

Q2) Which is not a pre-defined variable in MATLAB:

A) inf

B) pi

C) i

D) Gravity

ANS) D

Q3) MATLAB allows the modeling of different control systems using:

A) Simulink

B) Control system toolbox

C) ez-plot

D) None of the above

Simulink is separate the platform for Model-Based Design that supports system-level design, simulation, automatic code generation, and continuous test and verification of embedded systems. Key capabilities include: A graphical editor for modeling all components of a system.

Q3) MATLAB allows the modeling of different control systems using:

A) Simulink

B) Control system toolbox

C) ez-plot

D) None of the above

ANS) A

Simulink is separate the platform for Model-Based Design that supports system-level design, simulation, automatic code generation, and continuous test and verification of embedded systems. Key capabilities include: A graphical editor for modeling all components of a system.

Q4) MATLAB was originally written to provide easy access to matrix software developed by:

A) LINPACK and EISPACK

B) LINPACK

C) EISPACK

D) None of the above

ANS) A

MATLAB STAND FOR MATRIX LABORATORY.

MATLAB WAS DEVELOPED BY PROGRAMMER CLEVE MOLER.

MATLAB was originally written to provide easy access to matrix software developed by the LINPACK and EISPACK projects, which together represent the state-of-the-art in software for matrix computation.

LINPACK: Linear system package

EISPACK: Eigen system package

Q5) Which of the following window in MATLAB provide information about variables:

A) Figure window

B) Command window

C) Workspace window

D) Editor Window

ANS) C

Q6) What are the function of MAX files in MATLAB:

A) Help analyze the command in MATLAB

B) Nothing of MAX files in MATLAB

C) Allows the user to combine C source files with MATLAB files

D) Same as MATLAB files

ANS) C

Q7) Which window of MATLAB is used to create and debugs scripts function files:

A) Figure window

B) Command window

C) Editor Window

D) Workspace window

ANS) C

Q8) Which of the following is used for Logic OR operation in MATLAB:

A) ~

B) &

C) |

D) *

ANS) C

MATLAB Order of Precedence

1.	Parentheses	( )
2.	Exponent	^
3.	Logical 'NOT'	~
4.	Multiply, Divide	* /
5.	Add, Subtract	+ -
6.	Relational Operators	< > <= >= == ~=
7.	Logical 'AND'	&
8.	Logical 'OR	|

Q10) In MATLAB which command is used to remove all variables from workspace:

A) clc

B) dir

C) clear (all)

Q11) To display the comments of M-file in MATLAB we use:

A) comment on

B) echo on

C) show%

D) disp

Q12) Which of the following is not the valid Elementary Function in MATLAB:

A) Cos(x)

B) Sin(x)

C) exp(x)

D) acs(x) ✓

Q14) Which of the following is invalid variable name in MATLAB:

A) X^6

B) .last

C) .6x

D) .z

ANS) C

Q15) Which of the following is the disadvantage of Matlab:

A) Matlab is a fourth-generation high-level language

B) Being compiler independent makes Matlab more efficient and productive

C) Matlab codes are written in sentences and executed one by one

D) Matlab is an interpreted language thus it can be very slow

1. What does Matlab stand for?

A. Math Laboratory

B. Matrix Laboratory

C. Mathworks

D. Nothing

E. none of the above

1. What does Matlab stand for?

A. Math Laboratory

B. Matrix Laboratory

C. Mathworks

D. Nothing

E. none of the above

2. What symbol precedes all comments in Matlab?

A. “

B. %

C. //

D. <

E. none of the above

3. Which of the following is not a pre-defined variable in Matlab.

A. pi

B. inf

C. i

D. gravity

E. j

3. Which of the following is not a pre-defined variable in Matlab.

A. pi

B. inf

C. i

D. gravity

E. j

4. This Matlab command clears all data and variables stored in memory:

A. clc

B. clear

C. delete

D. deallocate

E. none of the above

5. Characters in Matlab are represented in their value in memory.

A. decimal

B. ASCII

C. hex

D. string

E. none of the above



6. Which is these is not an aspect of a for/while loop:

A. update

B. initialization

C. runner

D. condition

E. all are aspects of loops

7. To better manage memory and prevent unnecessary memory allocations, Matlab uses:

A. vectors

B. scalars

C. matrix math

D. delayed copy

E. licenses

8. To print a newline in a fprintf statement, you must use the following escape character:

A. \t

B. \nl

C. \nxt

D. \n

E. none of the above



10:57 PM • 4G 0 B/s 80

B. \nl
C. \nxt
D. \n
E. none of the above

9. In Matlab, this keyword immediately moves to the next iteration of the loop:
A. update
B. goto
C. continue
D. break
E. none of the above

10. Which of the following will correctly define x, y, and z as symbols?
A. sym (x, y, z)
B. syms x y z
C. syms x, y, z
D. sym x, y, z
E. none of the above

11. Which of these is the way to access the first element in a vector named v (assuming there is at least one element in the vector)?
A. v(0)
B. v(1)
C. v



9. In Matlab, this keyword immediately moves to the next iteration of the loop:

A. update

B. goto

C. continue

D. break

E. none of the above

10. Which of the following will correctly define x, y, and z as symbols?

A. sym (x, y, z)

B. syms x y z

C. syms x, y, z

D. sym x, y, z

E. none of the above

11. Which of these is the way to access the first element in a vector named v (assuming there is at least one element in the vector)?

A. v(0)

B. v(1)

C. v

D. v(: , 0)

E. none of the above



10:59 PM • 466 B/s 80

E. none of the above

12. Which of the following is used to see if two elements are equal in MATLAB?

A. !=

B. ==

C. isequal

D. =

E. none of the above

13. If vector = [1 2 3 4; 11 24 92 100; 345 65 90 1]. What will the value of a be equal to if this code is entered into MATLAB >>[a b] = size (vector)?

A. 1 2 3 4

B. 12

C. 1

D. 4

E. 3

14. What is the value of ans that is printed when the following code is run: isnumeric(32)

A. 1

B. 0

C. 32

D. yes

E. true



15. If I want to save a formatted string to memory, but don't want to print it out, which command should I use?

A. fprintf

B. sprintf

C. disp

D. echo

16. To add a comment to the mfile, the MATLAB command is

A. %

B. ;

C. comment(' ')

D. &

17. When used in the fprintf command, the %g is used as the

A. single character display

B. fixed point display

C. string notation display

D. default number display



18. When used in the fprintf command, the \n is used to

A. add a space between any two characters

B. add a line space (enter key)

C. place a number into the comment

D. clear the comment

19. To display 'Question 2' in the command window, the correct command is

A. disp(Question 2)

B. display('Question 2')

C. disp('Question 2')

D. Question 2

20. The clc command is used to

A. clear the command window

B. erase everything in the mfile

C. clean the desktop

D. save the existing mfile

21. The num2str command

A. converts a number to string

B. converts string to a number

C. concatenates numbers and st

D. concatenates strings



20. The clc command is used to

A. clear the command window

B. erase everything in the mfile

C. clean the desktop

D. save the existing mfile

21. The num2str command

A. converts a number to string

B. converts string to a number

C. concatenates numbers and strings

D. concatenates strings

22. The output of the last line is

aa=2

as=num2str(aA.

cat=[‘cat’ as]

A. cat2

B. cat 2

C. ??? Undefined function or variable ‘as’

D. cat aa

MTH643 Quiz # 1

Question # 7 of 10 (Start time: 03:26 PM, 23 December 2020)

Total Marks: 1

Matlab array index starts from

Select the correct option

- 0
- 1
- any number which you defined
- none of these



Question # 3 of 10 (Start time: 03:30:22 PM, 23 December 2020) **Total Marks:** 1

Which of the following is correct command to reduce the following expressions in simple form

$$\frac{(x-y)^3}{(x-y)}$$

Select the correct option

Reload Math Equations

- syms x y; solve((x-y)^3/(x-y))
- syms x y; simplify((x-y)^3/(x-y))
- syms x y; expansion((x-y)^3/(x-y))
- syms x y; factorize((x-y)^3/(x-y))

ONLINE STUDY OLS SIR NAIMAT ULLAH

MTH643 Quiz # 1

Quiz Start Time: 03:27 PM, 23 December 2020

Question # 9 of 10 (Start time: 03:37:54 PM, 23 December 2020)

Total Marks: 1

Which of the following command correctly calculate the value of cos(pi/2)

Select the correct option

- cos(pi/2)
- cos(22/7/2)
- cos(sym(pi/2))
- none of these



MTH643 Quiz # 1

Quiz Start Time: 03:27 PM, 23 December 2020

Question # 2 of 10 (Start time: 03:28:59 PM, 23 December 2020)

Total Marks: 1

Which operator is used to check if two elements are equal in MATLAB?

Select the correct option

- =
- ==
- !=
- Isequal



MTH643 Quiz # 1

Quiz Start Time: 03:27 PM, 23 December 2020

Question # 1 of 10 (Start time: 03:28:09 PM, 23 December 2020)

Total Marks: 1

Which of the following MATLAB command clears all data and variables stored in memory?

Select the correct option

- clear
- clc
- delete
- None of these



Question # 10 of 10 (Start time: 03:38:57 PM, 23 December 2020) Total Marks: 1

Which command can be used to generate multiple graphs in the same window?

Select the correct option

- hold on
- wait
- hold multiple
- none of these



MTH643 Quiz # 1

Quiz Start Time: 03:27 PM, 23 December 2020

Question # 10 of 10 (Start time: 03:38:57 PM, 23 December 2020)

Total Marks: 1

Which command can be used to generate multiple graphs in the same window?

Select the correct option

- hold on
- wait
- hold multiple
- none of these



Which of the following command is used to clear command window in Matlab?

Select the correct option

- clear
- clear all
- close
- clc



MTH643 Quiz # 1

Quiz Start Time: 03:27 PM, 23 December 2020

Question # 9 of 10 (Start time: 03:34:16 PM, 23 December 2020)

Total Marks: 1

Which of the following will be the output of the command
a = [1 0 2]; b = [3 0 7];
c=a*b

Select the correct option

- [3 0 14]
- [4 0 9]
- this command will give the error message
- None of these



MTH643 Quiz # 1

Quiz Start Time: 03:27 PM, 23 December 2020

Question # 5 of 10 (Start time: 03:32:36 PM, 23 December 2020)

Total Marks: 1

Which of the following command is used to substitute a value in the expression

Select the correct option

- put
- subs
- exact
- none of these



Which command can be used to generate multiple graphs in the same window?

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- ○ hold on
- ○ wait
- ○ hold multipl
- ○ none of the:

Graphs of Multiple Curves

Example:

- Plot the graphs of e^{-x} and $sin(x)$ on the interval $[0; 8]$ using the ezplot, hold on, and hold off commands.
- Label the horizontal axis with x and vertical axis with y.
- Finally, gives the title "Multiple Graphs".

Which command can be used to generate multiple graphs in the same window?

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- hold on (Lecture No.4, Pg.19)
- wait
- hold multiple
- none of these

For More Quiz Subscribe our Channel TALEEMI MARKAZ

Which of the following will be the output of the command a=[1 0 2], b=[3 0 7], c=a*b

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- [3 0 14]
- [4 0 9]
- this command will give the error message
- none of these

Errors in input

If you make an error while entering input in a Command Window, MATLAB will beep and print an

Which of the following will be the output of the command a=[1 0 2], b=[3 0 7], c=a*b

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- [3 0 14]
- [4 0 9]
- this command will give the error message

(Lecture No.2, Pg.17)

- none of these

Which of the following command is used to clear command window in Matlab?

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- clear
- clear all
- close
- clc

clc command is used to clears all input and output from the Command Window display and provide a "clean screen".

Enter To Learn

Which of the following command is used to clear command window in Matlab?

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- clear
- clear all
- close
- clc

(CONCEPTUAL)

Which of the following MATLAB command clears all data and variables stored in memory?

Select the correct o

PRESENTED BY: TALEEMI MARKAZ

- clear
- None of the
- delete
- clc

- Make sure that your current MATLAB session is not affecting by other variables that had been defined in the last session. That is make sure that your present Script M–File is self contained, unaffected by other variables, and uncorrupted by left over graphics.
- For this ensuring, *clear all* command should be used. Thi-

Which of the following MATLAB command clears all data and variables stored in memory?

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- clear (Lecture 6, Pg.17)
- None of these
- delete
- clc

Matlab array index starts from

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- ○ 0
- ○ None of the
- ○ 1
- ○ any number which you defined

In most programming languages, the first element of an array is element 0. In MATLAB, indexes start at 1. Arrays can be sliced by using another array as an index.

Matlab array index starts from

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- 0
- None of these
- 1 (Conceptual)
- any number which you defined

Which of the following command correctly calculate the value of cos(pi/2)

Select the correct o

PRESENTED BY: TALEEMI MARKAZ

- cos(pi/2)
- cos(22/7/2)
- cos(sym(pi/
- none of these

For example, the floating point format of cos(pi=2) in MATLAB is 6:1232e - 17. However, it is known that cos(pi=2) is really equal to zero.

The inaccuracy is due to the fact that typing pi in MATLAB gives an approximation to π accurately to about 15 digits. But sym command gives accurate value of π.

Which of the following command correctly calculate the value of cos(pi/2)

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- cos(pi/2)
- cos(22/7/2)
- cos(sym(pi/2))

(Lecture No.2, Pg.13)

- none of these

Which operator is used to check if two elements are equal in MATLAB?

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- ○ =
- ○ ==
- ○ !=
- ○ Isequal

== command is used to compare two variables (numbers, arrays, etc.) and say whether they match or not. This is different than a single = sign, which is an assignment. In a==b you'll get a single true or false value, or an array of them if a and b are arrays.

Which operator is used to check if two elements are equal in MATLAB?

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- =
- ==
- !=
- Isequal

(Conceptual)

Which of the following command is used to substitute a value in the expression

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- put
- subs
- exact
- none of thes

Substitution in Symbolic Expressions

- While working with symbolic expressions, some times it is necessary to substitute a numerical value, or even another symbolic expression, for one or more of the original variables in the expression.
- subs command is used for this purpose.

Which of the following command is used to substitute a value in the expression

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- put
- subs
- exact
- none of these

(Lecture No.2, Pg.15)

Which of the following is correct command to reduce the following expressions in simple form

$$\frac{(x-y)^3}{(x-y)}$$

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- syms x y:so[illegible]
- syms x y:sin[illegible]
- syms x y:expansion((x-y)^3/(x-y))
- syms x y:factorize((x-y)^3/(x-y))

To solve the Algebraic equations in MATLAB. The command solve or fzero is used for this purpose.

Which of the following is correct command to reduce the following expressions in simple form

$$\frac{(x-y)^3}{(x-y)}$$

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- syms x y:solve((x-y)^3/(x-y)) (Lecture No.3, Pg.19)
- syms x y:simplify((x-y)^3/(x-y))
- syms x y:expansion((x-y)^3/(x-y))
- syms x y:factorize((x-y)^3/(x-y))

What is the error in the following code x=-10:1:10; y=10:2:10. Plot(x,y)

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- ○ syntax of plo
- ○ plot comma
- ○ length of x a
- ○ none of these

It is highly important that the length of the variables, between which we need to plot a graph, be same. This is a pre-defined syntax of MATLAB so MATLAB will return an error if the lengths are not same.

What is the error in the following code x=-10:1:10; y=10:2:10. Plot(x,y)

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- ○ syntax of plot is not corrects
- ○ plot command cannot be used with two variables
- ● length of x and y should be same (Conceptual)
- ○ none of these

Which of the following will be the output of the command a=[1 0 2], b=[3 0 7], c=a*b

Select the correct option

- [3 0 14]
- [4 0 9]
- this command will give the error message
- none of these

Which command can be used to generate multiple graphs in the same window?

Select the correct option

- hold on
- wait
- hold multiple
- none of these

Which of the following command is used to clear command window in Matlab?

Select the correct option

- clear
- clear all
- close
- clc



What is the error in the following code x=-10:1:10; y=10:2:10. Plot(x,y)

Select the correct option

- ○ syntax of plot is not corrects
- ○ plot command cannot be used with two variables
- ● length of x and y should be same
- ○ none of these

Which of the following is correct command to reduce the following expressions in simple form

$$\frac{(x-y)^3}{(x-y)}$$

Select the correct option

- syms x y:solve((x-y)^3/(x-y))
- syms x y:simplify((x-y)^3/(x-y))
- syms x y:expansion((x-y)^3/(x-y))
- syms x y:factorize((x-y)^3/(x-y))

Which of the following command is used to substitute a value in the expression

Select the correct option

- put
- subs
- exact
- none of these

Which operator is used to check if two elements are equal in MATLAB?

Select the correct option

- =
- ==
- ! =
- Isequal

Which of the following command correctly calculate the value of cos(pi/2)

Select the correct option

- ○ cos(pi/2)
- ○ cos(22/7/2)
- ● cos(sym(pi/2))
- ○ none of these

Matlab array index starts from

Select the correct option

- 0
- 1
- any number which you defined
- none of these

Which of the following MATLAB command clears all data and variables stored in memory?

Select the correct option

- clear
- clc
- delete
- None of these

Which of the following MATLAB command clears all data and variables stored in memory?

Rashid hussain

Select the correct option

- clear
- clc
- delete
- None of these

Which of the following MATLAB command clears all data and variables stored in memory?

Select the correct o

PRESENTED BY: TALEEM MARKAZ

○	clear
○	None of the
○	delete
○	clc

- Make sure that your current MATLAB session is not affecting by other variables that had been defined in the last session. That is make sure that your present Script M–File is self contained, unaffected by other variables, and uncorrupted by left over graphics.
- For this ensuring, *clear all* command should be used. This command ensure that previous definitions of variables do not affect the results.

Which of the following MATLAB command clears all data and variables stored in memory?

Select the correct option

PRESENTED BY: TALEEMI MARKAZ

- clear

(Lecture 6, Pg.17)

- None of these
- delete
- clc

Which of the following MATLAB command clears all data and variables stored in memory?

Rashid hussain

Select the correct option

- ○ clear
- ◉ clc
- ○ delete
- ○ None of these

Which of the following MATLAB command clears all data and variables stored in memory?

Rashid hussain

Select the correct option

All ✓

- clear
- clc
- delete
- None of these