بِسۡمِ ٱللَّهِ ٱلرَّحۡمَٰنِ ٱلرَّحِيمِ

CS201P Personal File Quiz

Sr	Questions	Verified	Google/ Unverified
1	What is a user-defined data type in C++? **Select the correct option** **A)** Constructor **B)** Class **C)** Pointer **D)** Function		Class
2	Which function is automatically called when an object of a class is initiated? **Select the correct option** **A)** Friend function **B)** Destructor **C)** Utility function **D)** Constructor		Constructor
3	What do we call the data members that are visible only from inside the class and hidden from the outside? **Select the correct option** **A)** Public **B)** Private **C)** Friend **D)** Private and Public		Private
4	What will be the output of the following code? void sampleFunction(int = 5, float = 4.1, char = 'A');		50, 3.2, A

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	int main(){
	sampleFunction(50, 3.2);
	}
	void sampleFunction(int one, float two, char three) {
	cout << one << ", " << two << ", " << three;
	}
	Select the correct option
	A) 5, 3.2, A
	B) 5, 4.1, A
	C) 50, 3.2, A
	D) 50, 4.1, A		

5	Which of the following is not true about Destructor? **Select the correct option** **A)** Destructors cannot be used for memory manipulation. **B)** Destructors take no arguments. **C)** Destructors cannot be overloaded. **D)** d) Destructors don't return a value.		Destructors cannot be overloaded.
6	In C++, which of the following option is used to declare a class? **Select the correct option** **A)** CLASS **B)** class **C)** cLAss **D)** Class		class

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

7	Which one is correct syntax for declaration of a function which can return a reference? **Select the correct option** **A)** datatype& function_name (parameter list) **B)** &datatype function_name (parameter list) **C)** datatype (parameter list) &function_name **D)** &function_name datatype (parameter list)		datatype& function_name (parameter list)
8	What is a constructor with arguments known as? **A)** Virtual Constructor **B)** Default Constructor **C)** Parameterized Constructor **D)** Destructor		Paramterized Constructor
9	How can data encapsulation be achieved in C++? **A)** Structures **B)** Arrays **C)** Pointers **D)** Classes		Classes
10	In C++, what does the default constructor take? **A)** Only one argument **B)** More than two arguments **C)** Only two arguments **D)** No arguments		No arguments
11	In C++, the name of the _____ is the same as that of a class with a preceding tilde (~) sign. **Select the correct option**		Destructor

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) Friend function **B)** Constructor **C)** Destructor **D)** Utility function		
12	In C++, which operator is used for memory allocation? **A)** Allocate **B)** Allocate_memory **C)** Calloc **D)** New		New
13	In the following code, what will be the output of i? #include<iostream> using namespace std; main() { int i; int &j = i; i = 123; cout<< "\n The value of i =" << i; } **Select the correct option** **A)** 321 **B)** X012345 **C)** 012345x **D)** 123		123
14	In C++, which of the following function causes the full definition of the function to be inserted in each place when it gets called? **Select the correct option** **A)** Inline function **B)** Built-in function **C)** Recursive function **D)** Library function		Inline function

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignments
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

15	In C++, which operator is used to access the data members of the class? **Select the correct option** **A)** And **B)** Not **C)** Plus **D)** Dot		Dot
16	In C/C++ language, memory at runtime is allocated from _____. **Select the correct option** **A)** Stack **B)** Hard disk **C)** ROM **D)** Free store(heap)		Stack
17	Where can we declare a friend function in the class? **Select the correct option** **A)** Main() **B)** Anywhere **C)** Nowhere **D)** Void		Anywhere
18	C/C++ has many libraries which contain variables and function names normally starting with ____. **Select the correct option** Reload Math Equations **A)** Underscore **B)** Semi-Colon **C)** Hash		Underscore

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Per Activites Handling
Quiz
Assignment
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Reviews about activity Results

	D) Hyphen		
19	In C++, cout is known as _____. a) Error stream b) File stream c) Output stream d) Input stream		Output stream

20	User
	What will be the output of the following code?
	int x = 15;
	int y = 10;
	int z = 5;
	cout << x * x - 4 * y * z;
	Select the correct option
	A) -25
	B) 5
	C) -5
	D) 25
			25

21	Suppose we have an integer variable named “num” with 4567 as its value, then what will be the resulting value for the expression “num/100”? **Select the correct option** **A)** 45 **B)** 456 **C)** 456.7 **D)** 4		45

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

22	Learning “how to program” is important, because it develops _____ and problem-solving abilities. **Select the correct option** **A)** Listening **B)** Analytical **C)** Writing **D)** Reading		Analytical
23	Which data type from the following will take lesser space in memory? **Select the correct option** **A)** short **B)** char **C)** float **D)** int		char
24	Short data type store _____ bytes of memory. **Select the correct option** **A)** 1 **B)** 2 **C)** 3 **D)** 4		2
25	Normally, the float data type is half of the size of _____. **Select the correct option** **A)** double **B)** char **C)** int		Double

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
Need Help or VU Info Contact Me
Previous results are available on demand
Orginal Students Reviews about activity Results
80 to 100% Results
Installments Plans

	D) short		
26	Which of the following expression is correct in C/C++ language? **Select the correct option** **A)** X + 5 = Y + 7 **B)** Y + X = 7 **C)** 3 = X + 3 **D)** X = X + 3		X=X+3
27	Normally, the float data type is half of the size of _____. **Select the correct option** **A)** char **B)** int **C)** short **D)** double		float
	The coding of a program is translated into machine language by _____. **A)** Loader **B)** Debugger **C)** Compiler **D)** d) Linker		Compiler
	Which of the following is the correct method to declare an array? **Select the correct option** **A)** data type array name [size]; **B)** [size] array name data type; **C)** array name data type [size]; **D)** array name [size] data type;		data type array name [size];

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Original Students Reviews about activity Results

	What will be the output of the following code?
	int main(){
	int number[5] = {10,20,30,40,50};
	cout << *(number+3);
	}
	Select the correct option
	
	A) 40
	B) 10
	C) 50
	D) 30
			40

	The size variable in the following program is a _____ variable.
	#include<iostream>
	…
	int size;
	…
	int main ()
	{
	…
	}
	Select the correct option
	A) Local
	B) Constant
	C) Static
			Global

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	D) Global		
	In C++, what is the correct syntax for accessing the fifth element of an array? **Select the correct option** **A)** a(4) **B)** a(5) **C)** a[5] **D)** a[4]		a[4]
	Two arrays are equal if _____. **Select the correct option** **A)** Only their values are equal **B)** Both their size and values are equal **C)** Their values are equal but size is not **D)** Only their size is equal		Both their size and values are equal
	To create an output file stream, we must declare the stream to be of class. **Select the correct option** **A)** ifstream **B)** ofstream **C)** iostream **D)** cstream		ofstream
	What will be the output of the following code? int main(){ char str[] = "Hello World"; cout<<str[4]; return 0;		O

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
Previous results are available on demand
Orginal Students Reviews about activity Results
80 to 100% Results
Installments Plans

	} **Select the correct option** **A)** W **B)** O **C)** L **D)** H		
	In the call by reference method, which operator is used to get the address of a variable? **Select the correct option** **A)** @ **B)** & **C)** % **D)** #		&
	In C++, a one-dimensional array inside a one-dimensional array is called _____. **Select the correct option** **A)** Two-dimensional array **B)** One-dimensional array **C)** Three-dimensional array **D)** Multi-casting array		Two-dimensional array
	Suppose we have declared a two-dimensional array "multi". To access its elements using pointer, we should use referencing like _____. **Select the correct option** **A)** multi **B)** *multi **C)** **multi		**multi

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Per Activites Handling
Quiz
Assignment
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03431042669
Need Help or VU Info Contact Me
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	D) *multi + 1		
	A variable declared inside a code block becomes the variable for that block. **Select the correct option** **A)** Global **B)** Constant **C)** Local **D)** Static		Local
	____ character is used to terminate a string. **Select the correct option** **A)** End **B)** Stop **C)** Null **D)** Full		Null
	Which of the following is the correct way to initialize all the elements of array with 0? **Select the correct option** **A)** int arr[5]={5&0} **B)** int arr[5]={0}; **C)** int arr[5]=All_Zero; **D)** int arr[5]={5(0)};		int arr[5]={0};

	What will be the output of the following code?
	int main() {
	int x = 5;
	int * ptr = &x;
			5

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Quiz
Assignment
GDB
CISCO Certificate
Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Original Students Reviews about activity Results

	*ptr + 1;
	cout << (*ptr)++;
	}
	Select the correct option
	A) 8
	B) 7
	C) 6
	D) 5		

	In C/C++ language, the subscript of array starts from _____. **Select the correct option** **A)** 1 **B)** 0 **C)** 2 **D)** 3		0
	In C++, a one-dimensional array inside a one-dimensional array is called _____. **Select the correct option** **A)** Three-dimensional array **B)** Multi-casting array **C)** Two-dimensional array **D)** One-dimensional array		Two-dimensional array
	In C++, to get the value stored at a memory address, we use the _____ operator. **Select the correct option** **A)** dereferencing **B)** logical		Dereferencing

VU Stars Services
CISCO Certificate
Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
Half Semester LMS Handling
Monthly LMS Handling
Quiz
Assignment
GDB
Previous results are available on demand
80 to 100% Results
Installments Plans

	C) arithmetic **D)** bitwise		
	Suppose we have declared a two-dimensional array "multi". To access its elements using pointer, we should use referencing like _____. **Select the correct option** **A)** *multi **B)** **multi **C)** *multi + 1 **D)** multi		**multi
	In C++, a sequence of objects having the same type, is called _____. **Select the correct option** **A)** Operator **B)** Stack **C)** Array **D)** Function		Array
	char name [] = "Hello World"; In the above statement, a memory of ____ characters will be allocated to the array name. **Select the correct option** **A)** 11 **B)** 10 **C)** 12 **D)** 13		12
	In C++, a file can be opened for reading by using the _____ function. **Select the correct option**		open()

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Quiz
Assignment
GDB
Previous results are available on demand
Orginal Students Reviews about activity Results
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans

	A) open() **B)** write() **C)** read() **D)** open_file()		
	In C++, atoi () function is used to convert _____. **Select the correct option** **A)** Character string to long integer **B)** Character string to float **C)** Character string to double **D)** Character string to integer		Character string to integer
	To perform I/O operations on file, we must use _____ header file. **Select the correct option** **A)** fstream **B)** istream **C)** hstream **D)** cstream		Fstream
	Which type of arrays are used while dealing with sentences? **Select the correct option** **A)** Integer arrays **B)** Floating-point arrays **C)** Character arrays **D)** Word arrays		Character arrays
	In C++, the precise way to declare a pointer is. **Select the correct option**		int *ptr;

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) int * ptr; **B)** int ptr; **C)** int ptr*; **D)** int & ptr;		
	Identify the invalid option. **Select the correct option** **A)** int *pi = 0; **B)** char s, *sp = 0; **C)** int i; double* dp = &i; **D)** int *ip;		int i; double* dp = &i;
	Which of the following option gives the [value] stored at the address pointed to by the pointer "ptr"? **Select the correct option** **A)** Value(ptr) **B)** ptr **C)** &ptr **D)** *ptr		yaml Copy code *ptr
	In C++, a one-dimensional array inside a one-dimensional array is called _____. **Select the correct option** **A)** Three-dimensional array **B)** One-dimensional array **C)** Two-dimensional array **D)** Multi-casting array		Two-dimensional array
	In C++, to get the value stored at a memory address, we use the _____ operator.		

VU Stars Services
Complete Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	Select the correct option **A)** arithmetic **B)** logical **C)** dereferencing **D)** bitwise		
	In C++, pointer can be initialized with **Select the correct option** **A)** Dot(.) **B)** Hash(#) **C)** Semicolon(;) **D)** Null		Null
	In C++, what is the correct syntax for accessing the fifth element of an array? **Select the correct option** **A)** a(4) **B)** a(5) **C)** a[5] **D)** a[4]		a[4]

	What will be the output of the following code?
	int main() {
	int x = 5;
	int * ptr = &x;
	*ptr + 1;
	cout << (*ptr)++;
	}
			5

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	Select the correct option **A)** 7 **B)** 6 **C)** 5 **D)** 8		

	What will be the output of the following code?
	int main(){
	char str[] = "Hello World";
	cout<<str[4];
	return 0;
	}
	Select the correct option
	A) W
	B) L
	C) O
	D) H
			o

	Identify the invalid option. **Select the correct option** **A)** int *pi = 0; **B)** int *ip; **C)** char s, *sp = 0; **D)** int i; double* dp = &i;		int i; double* dp = &i;
	What will be the output of the following code? int main(){		o

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	char str[] = "Hello World"; cout<<str[4]; return 0; } **Select the correct option** **A)** L **B)** O **C)** W **D)** H		
	In C++, a sequence of objects having the same type, is called _____. **Select the correct option** **A)** Stack **B)** Array **C)** Function **D)** Operator		Array
	Which of the following option gives the [value] stored at the address pointed to by the pointer "ptr"? **Select the correct option** **A)** *ptr **B)** &ptr **C)** Value(ptr) **D)** ptr		*ptr
	Which of the following shows the memory address of the first element in an array? **Select the correct option**		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	array **A)** array[0] **B)** array(0) **C)** array{0}		
	_____ are a conditional compilation process that is used to replace a piece of code by its definition in a program. **Select the correct option** **A)** Macros **B)** Functions **C)** Arrays **D)** Loops		Macros
	_____ is a useful statement when at a certain stage you do not want to execute the remaining statements inside the loop and want to go to the first statement of loop. **Select the correct option** **A)** Continue **B)** Default **C)** Break **D)** Goto		Break
	The statement char arr [10]; is an example of a type of _____ memory allocation. **Select the correct option** **A)** Dynamic **B)** Built-in **C)** Static **D)** Null Value		Static

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	An entry in an online encyclopedia that refers to another entry whose title has been changed is an example of _____. **Select the correct option** **A)** Reference pointer **B)** This pointer **C)** Dangling pointer **D)** NULL Pointer		Reference pointer
	Where can we declare a friend function in the class? **Select the correct option** **A)** Void **B)** Anywhere **C)** Main() **D)** Nowhere		Anywhere
	In C/C++ language, memory at runtime is allocated from _____. **Select the correct option** **A)** Hard disk **B)** ROM **C)** Free store(heap) **D)** Stack		Free store (heap)
	Which one is correct syntax for declaration of a function which can return a reference? **Select the correct option** **A)** &function_name datatype (parameter list) **B)** &datatype function_name (parameter list) **C)** datatype& function_name (parameter list)		datatype& function_name(parameter list)

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
Previous results are available on demand
Orginal Students Reviews about activity Results
80 to 100% Results
Installments Plans

	D) datatype (parameter list) &function_name		
	calloc() functions allocates multiple blocks of memory and each block have _____? **Select the correct option** **A)** Different size **B)** Same length **C)** Same size **D)** Different length		Same size
	Which one is the correct syntax to declare the friend function? **Select the correct option** **A)** FRIEND friend_function_name(int, char); **B)** Friend return_type (int, char); **C)** friend return_type friend_function_name(int, char); **D)** FRIEND return_type friend_function_name(int, char);		friend return_type friend_function_name(int, char);
	In C++, sizeof operator is used to determine _____. **Select the correct option** **A)** Length of string **B)** Size of data type **C)** Number of words **D)** Length of words		Size of data type
	In the following code, what will be the output of i? #include<iostream> using namespace std; main()		123

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03431042669
Need Help or VU Info Contact Me
Previous results are available on demand
Original Students Reviews about activity Results
80 to 100% Results
Installments Plans

	{
	int i;
	int &j = i;
	i = 123;
	cout<< "\n The value of i =" << i;
	}
	Select the correct option
	A) X012345
	B) 123
	C) 321
	D) 012345x		

	Which of the following is assignment operator? **Select the correct option** **A)** + **B)** = **C)** ^ **D)** -		=
	For overloading minus (-) operator, which member operator function will be correct? **Select the correct option** Complex (-) operator (Complex c) Complex – operator (Complex c) Complex operator (complex c1- complex c2) Complex operator – (Complex c)		Complex operator - (Complex c)
	In the syntax of the overloaded operator function given below:		Copy code

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	Complex operator + (Complex &); What is ‘operator’? **Select the correct option** **A)** Operand **B)** Object **C)** Class **D)** Keyword		
	In the syntax of the overloaded operator function given below: Complex operator + (Complex &); What is ‘operator’? **Select the correct option** **A)** Operand **B)** Object **C)** Class **D)** Keyword		Keyword
	What is the right syntax of the buf for calling object by using this pointer? **Select the correct option** **A)** *this.(buf) **B)** (*this).buf		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand

	C) *this.buf **D)** this*buf		
	In C++, when accessing files randomly, which function is used to get current pointer position inside a file? **Select the correct option** **A)** tellp() **B)** seekp() **C)** tellg() **D)** seekg()		tellg()
	In C++, which operator is used to access the data members of the class? **Select the correct option** **A)** Dot **B)** Not **C)** And **D)** Plus		Dot
	In C++, which operator is used while accessing through the pointer to structure? **Select the correct option** **A)** ->**B)** & **C)** _ **D)** =	->	
	What would be the output of the following statement? c = 13 % 2; **Select the correct option**	1	

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) 1 **B)** 2 **C)** 3 **D)** 0		
	A constructor with arguments is known as. **Select the correct option** **A)** Virtual Constructor **B)** Paramterized Constructor **C)** Destructor **D)** Default Constructor		Parameterized Constructor
	Dynamic memory allocation uses memory from the _____. **Select the correct option** **A)** Heap **B)** Array **C)** Stack **D)** Mulit-dimensional Array		Heap
	Which function is automatically called in C++ if we do not define it in a class? **Select the correct option** **A)** Default Constructor **B)** Parametrized Constructor **C)** Inline function **D)** Default and Parametrized Constructor		Default Constructor
	In C++, which of the following function causes the full definition of the function to be inserted in each place when it gets called?		Inline function

VU Stars Services
Complete Semester LMS Handling
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
03066295623
REGISTER NOW
03431042669
Need Help or VU Info Contact Me
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	Select the correct option **A)** Recursive function **B)** Inline function **C)** Built-in function **D)** Library function		
	Macro is defined by _____ preprocessor directive. **Select the correct option** **A)** #else **B)** #endif **C)** #if **D)** #define		#define
	In C++, the default constructor takes _____. **Select the correct option** **A)** More than two arguments **B)** Only one argument **C)** Only two arguments **D)** No arguments		No arguments
	Where to put inline function during the frequent calling inside the program from multiple source files? **Select the correct option** **A)** Inside the class **B)** Header File **C)** Outside the class **D)** Main()		Header File

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	In C++, the name of the _____ is the same as that of a class with a preceding tilde (~) sign. **Select the correct option** **A)** Destructor **B)** Utility function **C)** Friend function **D)** Constructor		Destructor
	Functions seekg () and seekp () require an argument of type ____ to let them know how many bytes to move forward or backward. **Select the correct option** **A)** double **B)** long **C)** float **D)** int		long
	The statement char arr [10]; is an example of a type of _____ memory allocation. **Select the correct option** **A)** Built-in **B)** Null Value **C)** Dynamic **D)** Static		Static
	In C++, combination of _____ and _____ functions are used to determine the actual data length of a file. **Select the correct option** **A)** seekg(), tellg()		seekg(), tellg()

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand

	B) seekp(), tellp() **C)** putc(), getc() **D)** getc(), putc()		
	Which is not a preprocessor directive of C-language? **Select the correct option** **A)** #startif **B)** #endif **C)** #else **D)** #if		#startif

	What will be the output of the given program?
	int main(){
	void * p;
	p = calloc(10,sizeof(int));
	cout<<"The number of bytes reserved are " << 10*sizeof(int);
	free (p);
	return 0;
	}
	Select the correct option
	A) A compile error
	B) The number of bytes reserved are 20
	C) Memory error
	D) The number of bytes reserved are 40
			The number of bytes reserved are 40

	The bit manipulation operator _____ is used to check whether a specific bit is set or not.		& (bitwise AND)

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	Select the correct option **A)** ^ **B)** & **C)** | **D)** *		
	In C++, when accessing files randomly, which function is used to get current pointer position inside a file? **Select the correct option** **A)** seekp() **B)** tellp() **C)** tellg() **D)** seekg()		tellg()
	Which of the following statement is true regarding structures? **Select the correct option** **A)** All data members must have the same memory space **B)** All data members must have the same data type **C)** Variables which are part of a structure are called Member Functions **D)** Variables which are part of a structure are called Data Members		Variables which are part of a structure are called Data Members

	What will be the output of the following code?
	int num = 2;
	int count=0;
	while(num!= 0)
	{
			1


بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Per Activites Handling
Quiz
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	if (num & 01)
	count ++;
	num >>=1;
	}
	cout<< count;
	return 0;
	Select the correct option
	A) 3
	B) 4
	C) 1
	D) 2		

	Trying to use getch() function without including #include<conio.h> header file in the program is a _____ error. **Select the correct option** **A)** Compilation **B)** RunTime **C)** Logical **D)** Arithmetic		Compilation
	_____ is a user-defined data type. **Select the correct option** **A)** Class **B)** Constructor **C)** Pointer **D)** Function		Class

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	In bit manipulation of binary systems, if we shift a bit towards right then it means we are _____ that binary value with '2' **Select the correct option** **A)** Multiplying **B)** Dividing **C)** Subtracting **D)** Adding		Dividing
	To understand programming concepts, _____ programming language is being used as a vehicle in CS201- "Introduction to Programming" course. **Select the correct option** **A)** Java **B)** B **C)** C# **D)** C/C++		C/C++
	Representing logical depiction of the solution to the problem is known as a _____. **Select the correct option** **A)** Flowchart **B)** Sequence **C)** Loop **D)** Structure		Flowchart
	The bit manipulation operator _____ is used to set a specific bit. **Select the correct option** **A)** &		| (bitwise OR)

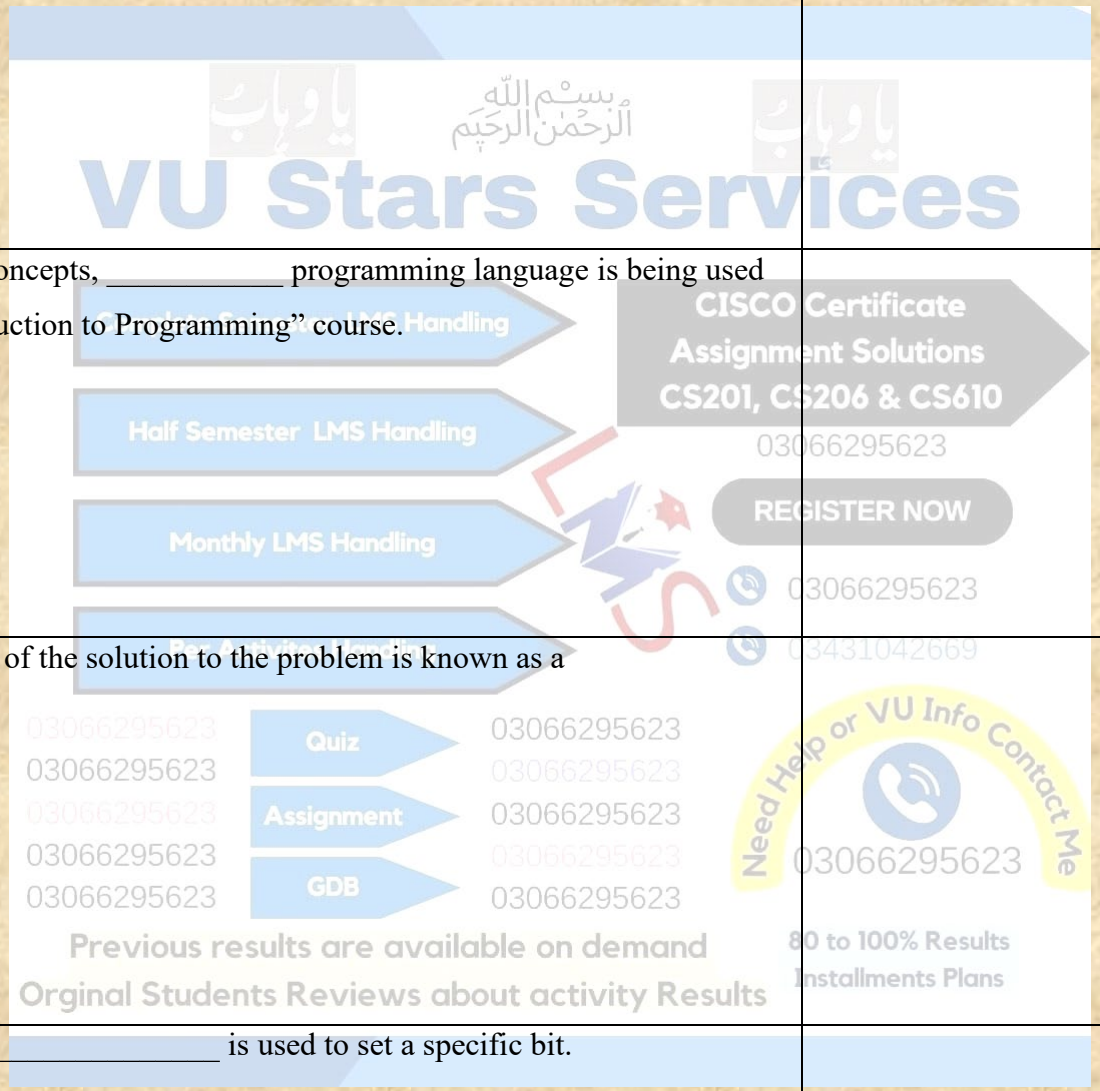

	B) * **C)** ^ **D)** |		
	In C++, which of the following function causes the full definition of the function to be inserted in each place when it gets called? **Select the correct option** **A)** Built-in function **B)** Library function **C)** Inline function **D)** Recursive function		Inline function
	The bit manipulation operator _____ is used to check whether a specific bit is set or not. **Select the correct option** **A)** ^ **B)** & **C)** * **D)** |		& (bitwise AND)
	In C++, the default constructor takes _____. **Select the correct option** **A)** More than two arguments **B)** No arguments **C)** Only two arguments **D)** Only one argument		No arguments

بسم اللہ الرحمن الرحیم
یاوہاب
VU Stars Services
Complete Semester LMS Handling
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
Half Semester LMS Handling
03066295623
REGISTER NOW
Monthly LMS Handling
03066295623
03431042669
Per Activites Handling
Quiz
Assignment
GDB
Need Help or VU Info Contact Me
03066295623
Previous results are available on demand
Orginal Students Reviews about activity Results
80 to 100% Results
Installments Plans

	In C++, which operator is used while accessing through the pointer to structure? **Select the correct option** **A)** = **B)** ->**C)** & **D)** _		->
	_____ is a useful statement when at a certain stage you do not want to execute the remaining statements inside the loop and want to go to the first statement of loop. **Select the correct option** **A)** Continue **B)** Break **C)** Default **D)** Goto		Break
	A constructor with arguments is known as. **Select the correct option** **A)** Default Constructor **B)** Virtual Constructor **C)** Paramterized Constructor **D)** Destructor		Parametrized Constructor
	Functions declared with the _____ specifier in a class member list are called friend functions of that class. **Select the correct option** **A)** private		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
Previous results are available on demand
Original Students Reviews about activity Results
80 to 100% Results
Installments Plans

	B) public **C)** protected **D)** friend		
	With the use of dynamic allocation of memory, the system resources can be _____. **Select the correct option** **A)** all of the given options **B)** used efficiently **C)** wasted **D)** used carelessly		used efficiently
	A file opened with the help of _____ can be used for both input and output. **Select the correct option** **A)** iostream **B)** ifstream **C)** ofstream **D)** fstream		
	We cannot increment _____. **Select the correct option** **A)** variables **B)** references **C)** arrays **D)** pointers		arrays
	int &i; It means that i is a _____to an integer. **Select the correct option**		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) reference **B)** constant pointer **C)** data type **D)** pointer		
	Structures use _____ for memory allocation. **Select the correct option** **A)** Stack **B)** Heap **C)** Cache **D)** Queue		Stack
	Object code is machine code but it is not _____ and _____. **Select the correct option** **A)** compiled ,debugged **B)** faster , efficient **C)** tested , compiled **D)** relocatable , executable		
	The function overloading requires_____. **Select the correct option** **A)** the arguments of integer type only **B)** the argument list to be the same **C)** no arguments **D)** the argument list to be different.		
	Structures are syntactically defined with the word_____. **Select the correct option**		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results


	A) None of the given **B)** struc **C)** structure **D)** struct		
	We should not use such variable names that are starting with _____ because in C++, there are lots of internal constants and symbolic names that start with it. **Select the correct option** **A)** upper case alphabets **B)** double underscore **C)** none of the given options **D)** lower case alphabets		double underscore
	Constructor is a special function, called whenever we _____. **Select the correct option** **A)** instantiate an object of a class **B)** create a function **C)** create a class **D)** destroy an object		instantiate an object of a class
	Which of the following code segment represents a left shift operator? **Select the correct option** **A)** cin >> number ; **B)** result = number << 1 ; **C)** cout<<1; **D)** result = number >> 1 ;		result = number << 1 ;
	Friend function declaration can go _____ the class		

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	Select the correct option **A)** only within **B)** in the member function of **C)** only outside **D)** anywhere in		
	Programmer should be very careful about the memory management because it can _____. **Select the correct option** **A)** create problems of NULL pointers **B)** cause problems of memory leakage and dangling pointers **C)** affect the logic of the program **D)** return void pointers		cause problems of memory leakage and dangling pointers
	The constructor contains _____. **Select the correct option** **A)** classes **B)** objects **C)** no return type **D)** return type		
	_____data isn't accessible by non-member functions or outside classes **Select the correct option** **A)** Globally declared **B)** Static **C)** private **D)** Public		private

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A reference cannot be _____. **Select the correct option** **A)** Integer **B)** 1 **C)** zero **D)** NULL		NULL
	The function will return a reference to the global variable that exists throughout the program and thus there will be no danger of _____. **Select the correct option** **A)** system crash **B)** wastage of memory **C)** garbage collection **D)** dangling reference.		dangling reference.
	Name the function whose definition can be substituted at a place where its function call is made _____. **Select the correct option** **A)** friend function **B)** inline function **C)** volatile function **D)** static function		
	If the request of new operator is not fulfilled due to insufficient memory in the heap _____. **Select the correct option** **A)** the operator returns 0		

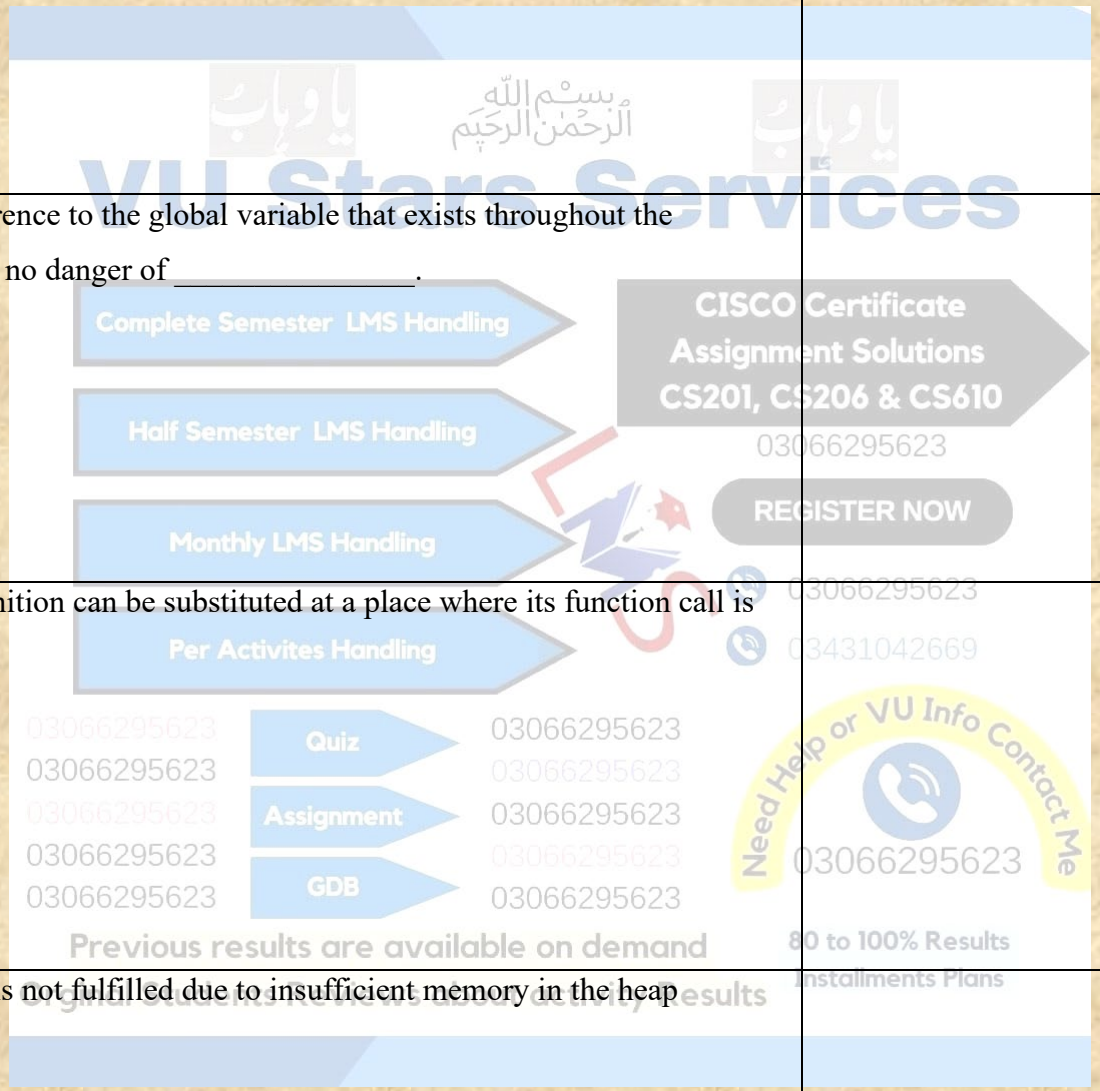

	B) the new operator returns 1 **C)** the new operator returns 2 **D)** free operator returns nothing		
	Select the correct option **A)** local variables **B)** non static variable **C)** global variables **D)** automatic variables		
	malloc function returns _____ to the _____ from the available memory. **Select the correct option** **A)** NULL pointer, end of the chunk of memory allocated from the stack **B)** void pointer, starting of the chunk of memory allocated from the array **C)** integer pointer, middle of the chunk of memory allocated from the heap **D)** void pointer , starting of the chunk of memory allocated from the heap		
	Macros are categorized into _____ type(s). **Select the correct option** **A)** three **B)** one **C)** four **D)** two		
	The data, contained in the structure, is defined in the _____. **Select the correct option** **A)** none		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activity Handling
Quiz
Assignment
GDB
CISCO Certificate
Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	B) inverted commas **C)** curly braces **D)** parenthesis		
	The heap memory structure _____. **Select the correct option** **A)** remains constant **B)** constantly changes in size **C)** is just like stack **D)** contains no space		
	In shifting operations if zero is inserted at the left most bit, the negative number will become a _____ number. **Select the correct option** **A)** Positive **B)** Negative **C)** Smaller **D)** Greater		
	Encapsulation means _____. **Select the correct option** **A)** that the data of a class can be accessed from outside **B)** that the data can be accessible anywhere within a main program **C)** that data becomes public **D)** that the data of a class cannot be accessed from outside		
	The friend functions are _____. **Select the correct option**		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) not member of a class **B)** void functions **C)** member of a class **D)** inline functions		
	The memory allocation functions return a chunk of memory with a pointer of type_____. **Select the correct option** **A)** integer **B)** void **C)** ptr **D)** float		
	An integer uses four bytes and the integer calculations occur in _____ bytes. **Select the correct option** **A)** 3 **B)** 4 **C)** 2 **D)** 8		
	_____data isn't accessible by non-member functions or outside classes **Select the correct option** **A)** private **B)** Globally declared **C)** Public **D)** Static		
	Constructor is special type of function :		

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	Select the correct option **A)** which has no return type **B)** which returns NULL pointer **C)** which returns zero **D)** which returns integer type data		
	Look at the program code and identify the error. #include<iostream> using namespace std; #define PI 3.1415926; main() { int radius = 5; cout << "Area of circle with radius " << radius << " = " << PI * radius * radius; } **Select the correct option** **A)** It will be compiled and returns nothing **B)** It will be compiled successfully and will not generate error **C)** The value of PI cannot be defined in the beginning **D)** Error exists in line number 2. Semi colon is not allowed with define directive		
	Windows operating system may itself takes memory from _____. **Select the correct option** **A)** stack **B)** array **C)** heap **D)** lists		
	What will be the output of the following c++ code? #include<iostream.h> #define max 100 main()		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Quiz
Assignment
GDB
Need Help or VU Info Contact Me
80 to 100% Results Installments Plans
Previous results are available on demand
Reviews about activity Results

	{
	#ifdef max
	Cout<<"Hellow;
	}
	Select the correct option
	A) Error
	B) Hello
	C) Max is 100
	D) "Hellow"		

	The constructor contains _____. **Select the correct option** **A)** return type **B)** objects **C)** no return type **D)** classes		
	Which one is the correct example of a unary operator? **Select the correct option** **A)** - **B)** & **C)** / **D)** ==		
	We cannot use _____ pointer for storing and reading data from it. **Select the correct option** **A)** zero		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	B) double **C)** integer **D)** NULL		
	You cannot overload the _____ operator **Select the correct option** **A)** * **B)** ? : **C)** ++ **D)** /		
	_____data isn't accessible by non-member functions or outside classes **Select the correct option** **A)** Globally declared **B)** Static **C)** Public **D)** private		
	Once the _____ are created, they exist for the life time of the program **Select the correct option** **A)** non static variables **B)** automatic variables **C)** global variables **D)** local variables		
	In a class we can have _____ constructor(s). **Select the correct option** **A)** two		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	B) only one **C)** many **D)** no		
	Which of the following header file deals with stream extraction? **Select the correct option** **A)** fstream.h **B)** string.h **C)** manipio.h **D)** iostream.h		
	Which statement about pointer is not true? **Select the correct option** **A)** Pointer can be 'void' **B)** Pointer contains a memory address **C)** Pointer contains a value **D)** Points to an area in memory		
	'endl' is a type of ____ manipulator. **Select the correct option** **A)** User-defined **B)** Parameterized **C)** Class **D)** Parameter-less		
	In function calling, by which method you can call the copy constructor? **Select the correct option** **A)** Reference		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	B) Value **C)** Call by value **D)** Pointer		
	We cannot declare a function as a friend of _____class. **Select the correct option** **A)** doublestream **B)** istream or ostream **C)** Istream **D)** ostream only		
	Which of the following statement is not true about overloading stream extraction operator (>>)? **Select the correct option** **A)** It can be a member operator. **B)** First parameter is of type 'istream &' **C)** Returns an object of type 'istream &' **D)** Second parameter is passed by reference		
	Which statement about manipulator is not true? **Select the correct option** **A)** The left-hand side is ostream object. **B)** It automatically gets that object as parameter passed in to the function. **C)** Stream insertion operator is on the right-hand side. **D)** They return a reference to insertion operator.		
	Stream insertion (<<) and extraction operators (>>) are always implemented as _____ functions.		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
about activity Results

	Select the correct option **A)** Friend **B)** Non-member **C)** Member		
	‘endl’ is a type of ____ manipulator. **Select the correct option** **A)** Parameter-less **B)** User-defined **C)** Parameterized **D)** Class		
	Automatic variables are created constantly and destroyed_____. **Select the correct option** **A)** Often **B)** All the time **C)** Never **D)** Sometime		
	Variables defined in the main function are____ to the function main(). **Select the correct option** **A)** Global **B)** Private **C)** Local **D)** Static		
	In class, if we have to use dynamic memory allocation, we must define a _____ for it.		

VU Stars Services
Complete Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	Select the correct option **A)** Pointer **B)** Reference **C)** Destructor **D)** Constructor		
	Which of the following statement is not true about overloading stream extraction operator (>>)? **Select the correct option** **A)** It can be a member operator. **B)** Returns an object of type 'istream &' **C)** Second parameter is passed by reference **D)** First parameter is of type 'istream &'		
	When we call a function and pass an argument, an object or variable to the function, it is called? **Select the correct option** **A)** Reference **B)** Call by value **C)** Call by reference **D)** Pointer		
	Which one is the correct syntax to declare the friend function? **Select the correct option** **A)** FRIEND return_type friend_function_name(int, char); **B)** FRIEND friend_function_name(int, char); **C)** friend return_type friend_function_name(int, char);		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
Previous results are available on demand
Orginal Students Reviews about activity Results
80 to 100% Results
Installments Plans

	D) Friend return_type (int, char);		
	Complex cadd (Complex c1, Complex c2) ; Which statement is true for above code? **Select the correct option** **A)** Define the function named Complex. **B)** Class with name of Complex has been created. **C)** It accepts two complex numbers as parameters and returns back the resultant complex number. **D)** Creating object of class Complex with name cadd with parameters.		
	Bool data type takes _____ values. **Select the correct option** **A)** 3 **B)** 0 **C)** 1 **D)** 2		
	What is the right syntax of the buf for calling object by using this pointer? **Select the correct option** **A)** (*this).buf **B)** this*buf **C)** *this.buf **D)** *this.(buf)		
	Which of the following options not a source of the output stream? **Select the correct option**		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) simple variable **B)** screen **C)** file **D)** region in the memory		
	Correct syntax of the prototype of the overloaded operator function is _____. **Select the correct option** **A)** operator operator-symbol return type (no parameter); **B)** return type operator-symbol operator (parameter); **C)** return type operator (operator-symbol) **D)** return-type **E)** operator operator-symbol		
	Which header file is used for file manipulation? **Select the correct option** **A)** iostream.h **B)** iomanip.h **C)** fstream.h **D)** filestream.h		
	Which one is correct syntax for declaration of a function which can return a reference? **Select the correct option** **A)** &function_name datatype (parameter list) **B)** &datatype function_name (parameter list) **C)** datatype& function_name (parameter list) **D)** datatype (parameter list) &function_name		
	calloc() functions allocates multiple blocks of memory and each block have _____?		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous Results are available on demand
Original Students Reviews about activity Results

	Select the correct option **A)** Same size **B)** Different length **C)** Same length **D)** Different size		
	In C/C++ language, memory at runtime is allocated from _____. **Select the correct option** **A)** Hard disk **B)** Stack **C)** Free store(heap) **D)** ROM		
	If the memory in the free store is not sufficient enough to fulfill the request, malloc () function returns _____. **Select the correct option** **A)** -1 **B)** NULL **C)** 1 **D)** 0		
	Which of the following is assignment operator? **Select the correct option** **A)** ^ **B)** = **C)** -		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
Previous results are available on demand
Orginal Students Reviews about activity Results
80 to 100% Results
Installments Plans

	D) +		
	if (day == daysOfMonth (*this)) { } In above code, *this refers to: **Select the correct option** **A)** Today Date and Time **B)** Current Object **C)** Any Object **D)** Current Class		
	Which of the following operator can be overloaded? **Select the correct option** **A)** .* **B)** . **C)** ? **D)** delete[]		
	Data encapsulation can be achieved through _____. **Select the correct option** **A)** Arrays **B)** Structures **C)** Pointers **D)** Classes		
	An entry in an online encyclopedia that refers to another entry whose title has been changed is an example of _____. **Select the correct option**		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Quiz
Assignment
GDB
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) This pointer **B)** Reference pointer **C)** Dangling pointer **D)** NULL Pointer		
	Which option will be correct in order to free the space of memory allocated to a buffer (buf)? **Select the correct option** **A)** free buf **B)** strcpy buf **C)** remove buf **D)** delete buf		
	The data members that are visible only from inside the class and hidden from the outside known as. **Select the correct option** **A)** Private and Public **B)** Public **C)** Private **D)** Friend		
	Which of the following option returns the state of end of file? **Select the correct option** **A)** cin.endof(); **B)** cin.endoffile(); **C)** cin.enof(); **D)** cin.eof();		

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	In C++, sizeof operator is used to determine _____. **Select the correct option** **A)** Number of words **B)** Size of data type **C)** Length of string **D)** Length of words		

	What is the output of this program?
	#include < iostream >
	using namespace std;
	main ()
	{
	int num;
	cout << "Please enter an integer value: ";
	cin >> num + 4;
	}
	Select the correct option
	A) Add number+4
	B) 4+1
	C) Error
	D) 4		

	if (day == daysOfMonth (*this)) { } In above code, *this refers to: **Select the correct option**		

بسم اللہ الرحمن الرحیم
یا وہاب
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) Current Class **B)** Any Object **C)** Current Object **D)** Today Date and Time		
	Where can we declare a friend function in the class? **Select the correct option** **A)** Void **B)** Main() **C)** Nowhere **D)** Anywhere		
	Which one is not the member function of input stream? **Select the correct option** **A)** get(); **B)** cin.getline(); **C)** cin.read(); **D)** cin.get();		
	In C++, which operator is used for memory allocation? **Select the correct option** **A)** New **B)** Allocate_memory **C)** Allocate **D)** Calloc		
	Which of the following is a destination of cout stream? **Select the correct option**		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) Variable **B)** Constant **C)** Data type **D)** Printer		
	If we have a program that writes the output data(numbers) to the disc ,and if we collect the output data and write it on the disc in one write operation instead of writing the numbers one by one. In the above situation the area where we will gather the number is called **Select the correct option** **A)** Buffer **B)** Stack **C)** Cache **D)** Heap		
	When an array of object is created dynamically then there is no way to provide parameterized constructors for array of objects. **Select the correct option** **A)** True **B)** False		
	Which one of the following is not a possible state for a pointer? **Select the correct option** **A)** hold the address of the specific object **B)** point one past the end of an object **C)** point to a type **D)** zero		

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03431042669
Need Help or VU Info Contact Me
80 to 100% Results
Installments Plans
Previous results are available on demand
Students Reviews about activity Results

	What does STL stand for? **Select the correct option** **A)** Standard temporary library **B)** Stream template library **C)** Source template library **D)** Standard template library		
	When new operator is overloaded at global level then corresponding built-in new operator will also be visible to whole of the program. **Select the correct option** **A)** False **B)** True		
	Which value can we not assign to reference? **Select the correct option** **A)** null **B)** integer **C)** floating **D)** unsigned		
	What is the use of function call operator? **Select the correct option** **A)** overloading the string **B)** overloading the parameters **C)** overloading the objects **D)** overloading the methods		
	The endl and flush are _____		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Original Students Reviews about activity Results

	Select the correct option **A)** Functions **B)** Manipulators **C)** Objects **D)** Operators		
	When a variable is defined as static in a class then _____. **Select the correct option** **A)** A copy of this variable is created for only static objects. **B)** Only one copy is created for all objects of this class **C)** None of the given options **D)** Separate copy of this variable is created for each object		
	When operator function is implemented as member function then return type of function _____. **Select the correct option** **A)** Must be built-in data type **B)** Must be an object of same class **C)** Must be user-defined data type **D)** Can be any data type		
	If we use cin stream to read some value and store it in some integer variable and press some alphabet key instead of numeric keys. then what will happen? **Select the correct option** **A)** Its binary representation will be ignored and the value will be stored **B)** Its ASCII code will be stored inside the computer **C)** Some error will occur and cin stream will detect this error.		

بسم الله الرحمن الرحيم
VU Stars Services
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous Results are available on demand
Orginal Students Reviews about activity Results

	D) Its binary representation will be ignored and the character will be stored		
	What is the sequence of event(s) when deallocating memory of an object using delete operator? **Select the correct option** **A)** Memory is deallocated first before calling destructor **B)** Destructor is called first before deallocating memory **C)** Only block of memory is deallocated for object **D)** Only destructor is called for object		
	When operator function is implemented as member function then return type of function _____. **Select the correct option** **A)** Must be an object of same class **B)** Must be user-defined data type **C)** Must be built-in data type **D)** Can be any data type		
	In overloading the assignment (=) operator, which object will be passed as an argument(s) in the operator function? **Select the correct option** **A)** Right object of the assignment operator **B)** No objects will be passed **C)** Both objects will be passed **D)** Left object of the assignment operator		
	_____ variables are defined in the main. **Select the correct option**		

بسم اللہ الرحمن الرحیم
VU Stars Services
CISCO Certificate
Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Original Students Reviews about activity Results

	A) Global **B)** All **C)** Dynamic **D)** Local		
	What is a copy constructor? **Select the correct option** **A)** A constructor to check the whether to objects are equal or not **B)** A constructor to kill other copies of a given object **C)** A constructor that allows a user to move data from one object to another **D)** A constructor to initialize an object with the values of another object		
	What is the use of function call operator? **Select the correct option** **A)** overloading the string **B)** overloading the methods **C)** overloading the objects **D)** overloading the parameters		
	The statement cin.get (); is used to_____. **Select the correct option** **A)** Read a character from file **B)** Read a string from keyboard **C)** Read a String from file **D)** Read a character from the keyboard		
	:: is called _____. **Select the correct option**		

بسم اللہ الرحمن الرحیم
VU Stars Services
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
Need Help or VU Info Contact Me
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	A) condition operator **B)** scope resolution operator **C)** bitwise OR **D)** one's complement operator		
	endl is a parameter-less _____manipulator that inserts the new line besides flushing the buffer. **Select the correct option** **A)** both **B)** built-in **C)** user-defined **D)** none		
	The stream insertion and extraction operators are not already overloaded for _____ **Select the correct option** **A)** Built-in data types **B)** Both built-in and user-defined types **C)** None of the given options **D)** User-defined data types		
	What will be the output of following statement? cout << setfill('0') << setw(7) << 128 ; **Select the correct option** **A)** 0128128 **B)** 0012800 **C)** 0000128 **D)** 1280000		

VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	Which of the following cannot act as data member of class? **Select the correct option** **A)** Structures **B)** Functions **C)** Objects **D)** Unions		
	The behaviour of the compiler in _____classes is the same as in template functions. **Select the correct option** **A)** Abstract **B)** Template **C)** Nested **D)** Outer		
	Declaration and definition of a template function should be in the ___ file. **Select the correct option** **A)** Same **B)** Multiple **C)** Different **D)** Distinct		
	For template function, we must have at least ___ generic argument. **Select the correct option** **A)** Two **B)** Three **C)** One		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
Previous results are available on demand
Orginal Students Reviews about activity Results
80 to 100% Results
Installments Plans

	D) Zero		
	Which of the following is not an advantage of templates? **Select the correct option** **A)** Provide code reusability. **B)** Templates are not type-safe. **C)** Helps in compiler optimizations. **D)** Easy to understand.		
	Which of the following is the correct definition of streams? **Select the correct option** **A)** It is an unordered sequence of bytes **B)** It is an ordered sequence of bytes **C)** It is an unordered sequence of bits **D)** It is an ordered sequence of bits		
	We cannot define friends for the _____ that are already written and not in our control. **Select the correct option** **A)** destructors **B)** classes **C)** functions **D)** constructors		
	The return type of the operator function for << operator is _____. **Select the correct option** **A)** reference of istream class (istream&) **B)** void		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03431042669
Need Help or VU Info Contact Me
80 to 100% Results
Installments Plans
Previous results are available on demand
Original Students Reviews about activity Results

	C) reference of ostream class (ostream&) **D)** class for which we overload operator		
	When new operator is overloaded at global level then corresponding built-in new operator will also be visible to whole of the program. **Select the correct option** **A)** True **B)** False		
	Which one of the following is the declaration of overloaded pre-increment operator implemented as member function? **Select the correct option** **A)** Class-name operator ++(); **B)** Class-name operator +() ; **C)** Class-name operator ++(int) ; **D)** Class-name operator +(int) ;		
	How many destructors are allowed in a Class? **Select the correct option** **A)** 1 **B)** 2 **C)** 3 **D)** Any number		
	The statement cin.get (); is used to_____. **Select the correct option** **A)** Read a character from the keyboard		

بسم الله الرحمن الرحيم
VU Stars Services
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
Need Help or VU Info Contact Me
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	B) Read a character from file **C)** Read a String from file **D)** Read a string from keyboard		
	Types of templates in C++ Language are _____. **Select the correct option** **A)** Three **B)** Two **C)** One **D)** Four		
	Below is given a code snippet char name[50]; cin>>name; cout<<name; Now if user enters the name, for example "Sohail Aslam" than what will be the output of the code ? **Select the correct option** **A)** Aslam Sohail **B)** Aslam **C)** Sohail Aslam **D)** Sohail		
	In statement Matrix m2 = m1 ; **Select the correct option** **A)** None of the given options **B)** Assignment operator is being used		

بسم اللہ الرحمن الرحیم
یاوہاب
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	C) Copy constructor is being used. **D)** Statement has syntax error		
	_____ variables are defined in the main. **Select the correct option** **A)** Dynamic **B)** Global **C)** Local **D)** All		
	new operator allocates memory from free store and returns _____. **Select the correct option** **A)** a reference **B)** a pointer **C)** a float number **D)** an integer number		
	When an object of a class is defined inside another class then, **Select the correct option** **A)** Constructor and Destructor will be called simultaneously **B)** Destructor of inner object will be called first **C)** Destructor of enclosing class will be called first **D)** None of the given options		
	_____ operators are the ones that require only one operator to work. **Select the correct option** **A)** Single **B)** Binary		

بسم اللہ الرحمن الرحیم
VU Stars Services
LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Quiz
Assignment
GDB
CISCO Certificate
Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand

	C) Unit **D)** Unary		
	The get member function, when passed no arguments, inputs an entire stream and returns it as the value of the function call. **Select the correct option** **A)** False **B)** True		
	Which of the following syntax is best used to delete an array of 5 objects named 'string' allocated using new operator. **Select the correct option** **A)** delete string[] ; **B)** delete string[5] ; **C)** delete []string ; **D)** delete string ;		
	The return type of the overloaded new operator must be? **Select the correct option** **A)** object pointer **B)** void pointer **C)** void (nothing) **D)** int pointer		
	Which one of the following is the correct statement about operator overloading? **Select the correct option** **A)** Precedence of operators are changed after overloading.		

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	B) N-arithmetic operators can be overloaded only. **C)** Associativity and precedence of operators do not change. **D)** Arithmetic operators can be overloaded only.		
	‘T’ is ___ data type in “template <class T>. **Select the correct option** **A)** Double **B)** Specific **C)** Generic **D)** Float		
	For template function, we must have at least ___ generic argument. **Select the correct option** **A)** Two **B)** One **C)** Zero **D)** Three		
	Which of the following cannot act as data member of class? **Select the correct option** **A)** Structures **B)** Objects **C)** Functions **D)** Unions		
	The behaviour of the compiler in _____classes is the same as in template functions. **Select the correct option** **A)** Template		

بسم اللہ الرحمن الرحیم
یا وہاب
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	B) Abstract **C)** Outer **D)** Nested		
	We can always specify a member initializer to call a _____constructor. **Select the correct option** **A)** Copy **B)** Parameterized **C)** Non-parameterized **D)** Default		
	The second parameter of operator function for >> operator must always be passed **Select the correct option** **A)** By value **B)** By reference **C)** None of the given options **D)** Function takes no argument		
	The first parameter of operator function for << operator _____. **Select the correct option** **A)** Can be passed by value or reference **B)** Must be passed by reference **C)** Must be passed by value **D)** Must be object of class		
	What will be the output of the following code segment? float pi=32.3996; cout<<fixed;		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions
CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	cout << setprecision (2) << pi ; **Select the correct option** **A)** 32.40 **B)** 32.39 **C)** 32.00 **D)** 32.310		
	When an array of object is created dynamically then there is no way to provide parameterized constructors for array of objects. **Select the correct option** **A)** False **B)** True		
	Ternary operator is shown as _____. **Select the correct option** **A)** === **B)** ||| **C)** && **D)** ?:		
	_____ operators are the ones that require two operands on both sides of the operator. **Select the correct option** **A)** Binary **B)** Double **C)** Tow sided **D)** Unary		

بسم اللہ الرحمن الرحیم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

	When we used eof (end of file) with the file reading than which of the following is a true statement? **Select the correct option** **A)** This is way to check source of the stream **B)** This is way to check state of the stream **C)** This is way to check destination of the stream **D)** This is way to check type of the stream		
	What is the sequence of event(s) when deallocating memory of an object using delete operator? **Select the correct option** **A)** Destructor is called first before deallocating memory **B)** Memory is deallocated first before calling destructor **C)** Only destructor is called for object **D)** Only block of memory is deallocated for object		Destructor is called first before deallocating memory
	What is the sequence of event(s) when allocating memory to an object using new operator? **Select the correct option** **A)** Only constructor is called for object **B)** Only block of memory is allocated for object **C)** Memory is allocated first before calling constructor **D)** Constructor is called first before allocating memory		

1. To create an output file stream, we must declare the stream to be of class.

VU Stars Services
Complete Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Original students reviews about activity Results

A) cstream

B) iostream

C) ifstream

D) ofstream ✅

2. char name[] = "Hello World";

   In the above statement, a memory of ____ characters will be allocated to the array name.

   A) 10

   B) 11

   C) 12 ✅

   D) 13

3. Which of the following is the default function calling mechanism of C/C++?

   A) Call by Variable Address

   B) Call by Value ✅

   C) Call by Reference

   D) Call by Function Memory

4. The size variable in the following program is a _____ variable.

   #include<iostream>

   int size;

   int main() { }


   A) Global ✅

   B) Constant

   C) Local

   D) Static

5. Which of the following is the correct way to initialize all the elements of an array with 0?

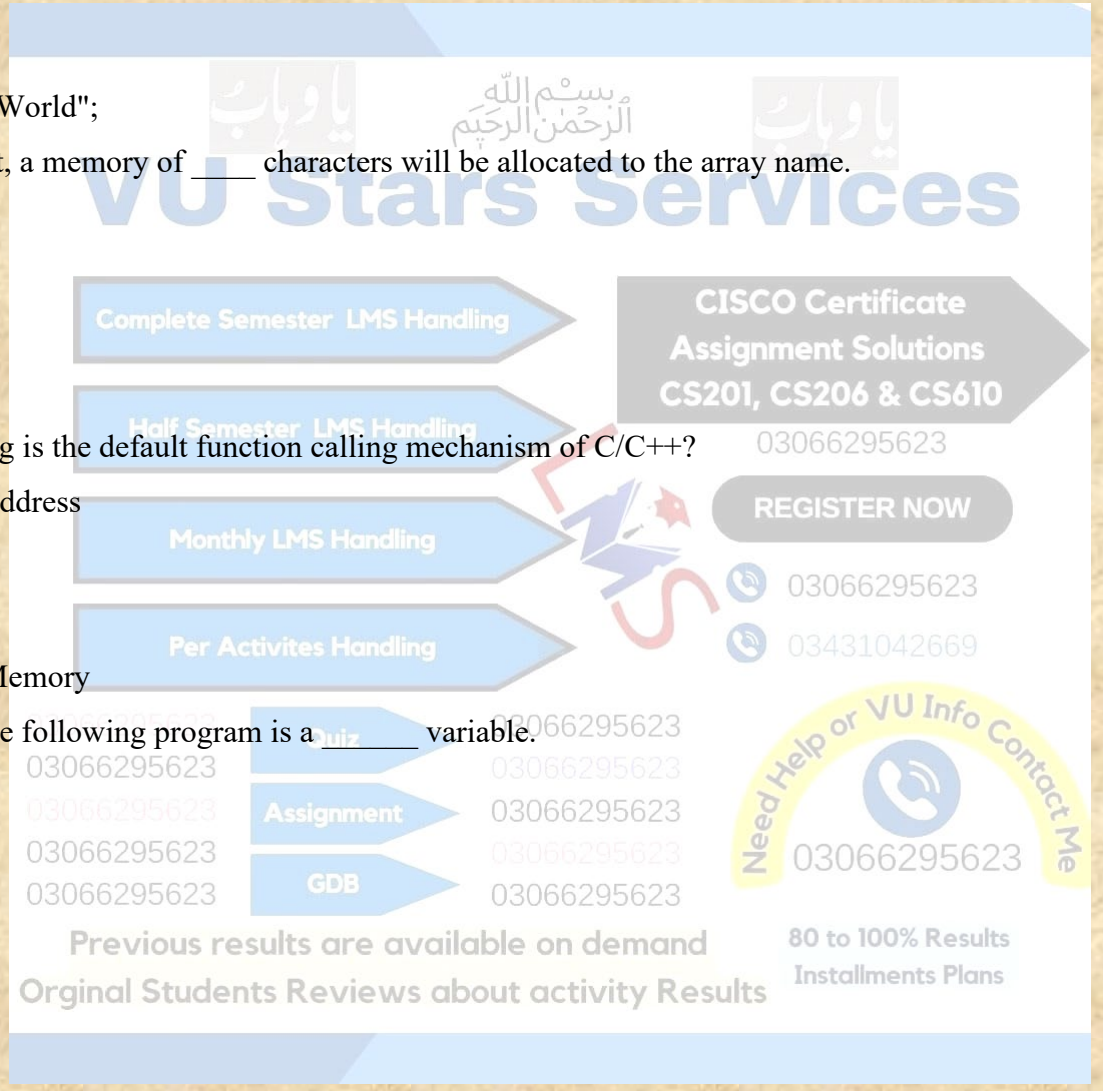

A) int arr[5]={5&0}

B) int arr[5]=All_Zero

C) int arr[5]={0} ✅

D) int arr[5]={5(0)}

6. ____ character is used to terminate a string.

A) Stop

B) End

C) Null ✅

D) Full

7. In the call by reference method, which operator is used to get the address of a variable?

A) @

B) #

C) %

D) & ✅

8. Two arrays are equal if _____.

A) Only their values are equal

B) Only their size is equal

C) Their values are equal but size is not

D) Both their size and values are equal ✅


9. Which type of arrays are used while dealing with sentences?

A) Integer arrays

B) Floating-point arrays

C) Character arrays ✅

D) Word arrays

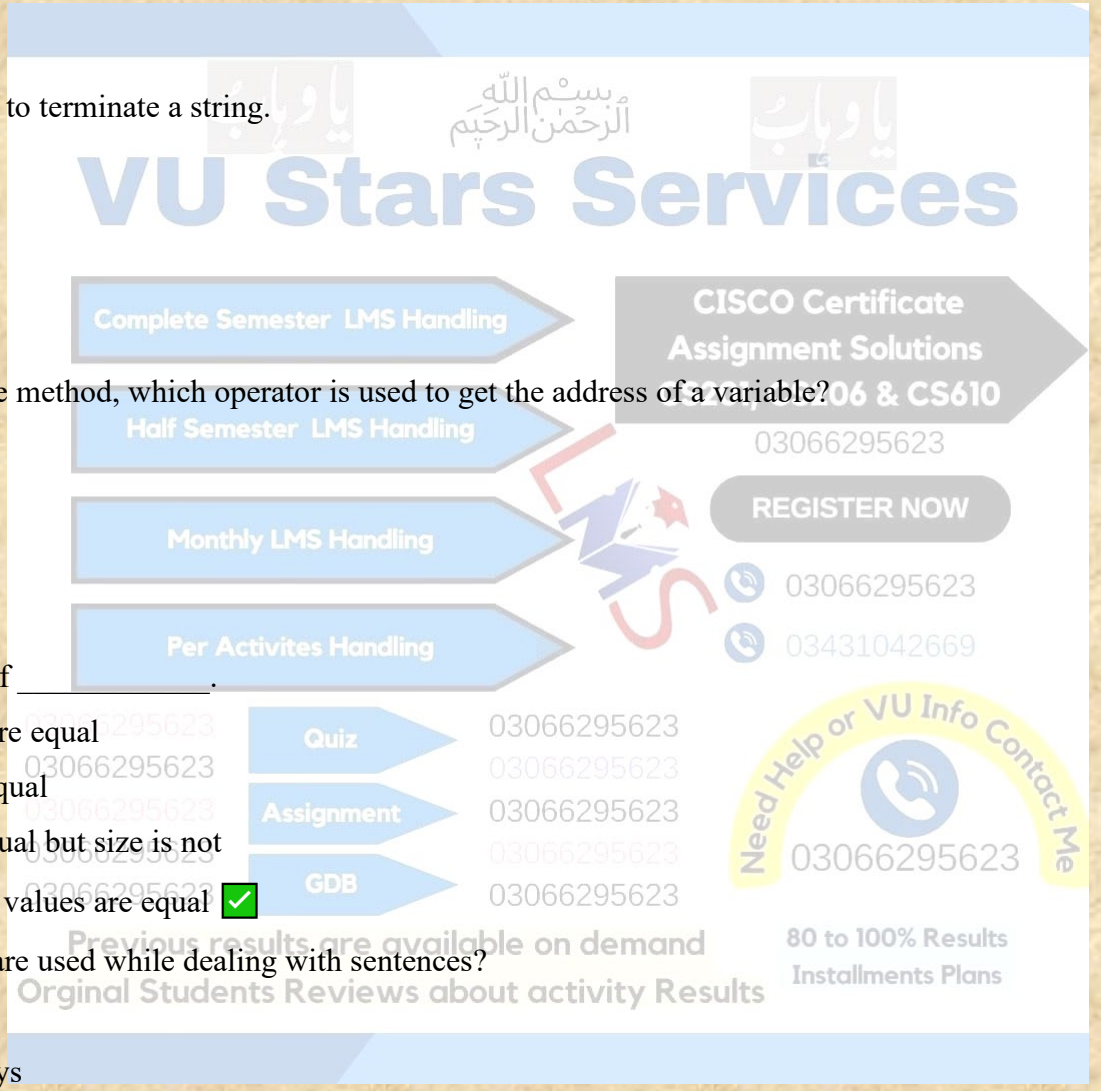

10. In C/C++ language, the subscript of array starts from _____.

A) 1

B) 0 ✅

C) 2

D) 3

11. Which of the following is the correct method to declare an array?

A) data type array_name[size]; ✅

B) [size] array_name data type

C) array_name data type [size]

D) array_name [size] data type

12. In C++, combination of _____ and _____ functions are used to determine the actual data length of a file.

A) putc(), getc()

B) getc(), putc()

C) seekg(), tellg() ✅

D) seekp(), tellp()

13. In C++, which operator is used while accessing through the pointer to structure?

A) &

B) -> ✅

C) =

D) _

14. The bit manipulation operator used to set a specific bit is _____.

A) *

B) ^

بسم اللہ الرحمن الرحیم
یا وہاب
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Assignment
GDB
CISCO Certificate
Assignment Solutions
CS201, CS206 & CS610
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results
Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

C) &

D) | ✅

15. Right shift (>>) operation means we are _____ the number by 2.

A) Adding

B) Subtracting

C) Dividing ✅

D) Multiplying

16. What will be the output?

```
int num = 2, count = 0;
while(num != 0){
 if(num & 01) count++;
 num >>= 1;
}
cout << count;
```

A) 1 ✅

B) 2

C) 3

D) 4

17. In C++, _____ function is used to write a character into a file while _____ is used to read a character.


A) tellg(), seekg()

B) putc(), getc() ✅

C) getc(), putc()

D) seekg(), tellg()

18. In C++, default visibility of structure is _____.

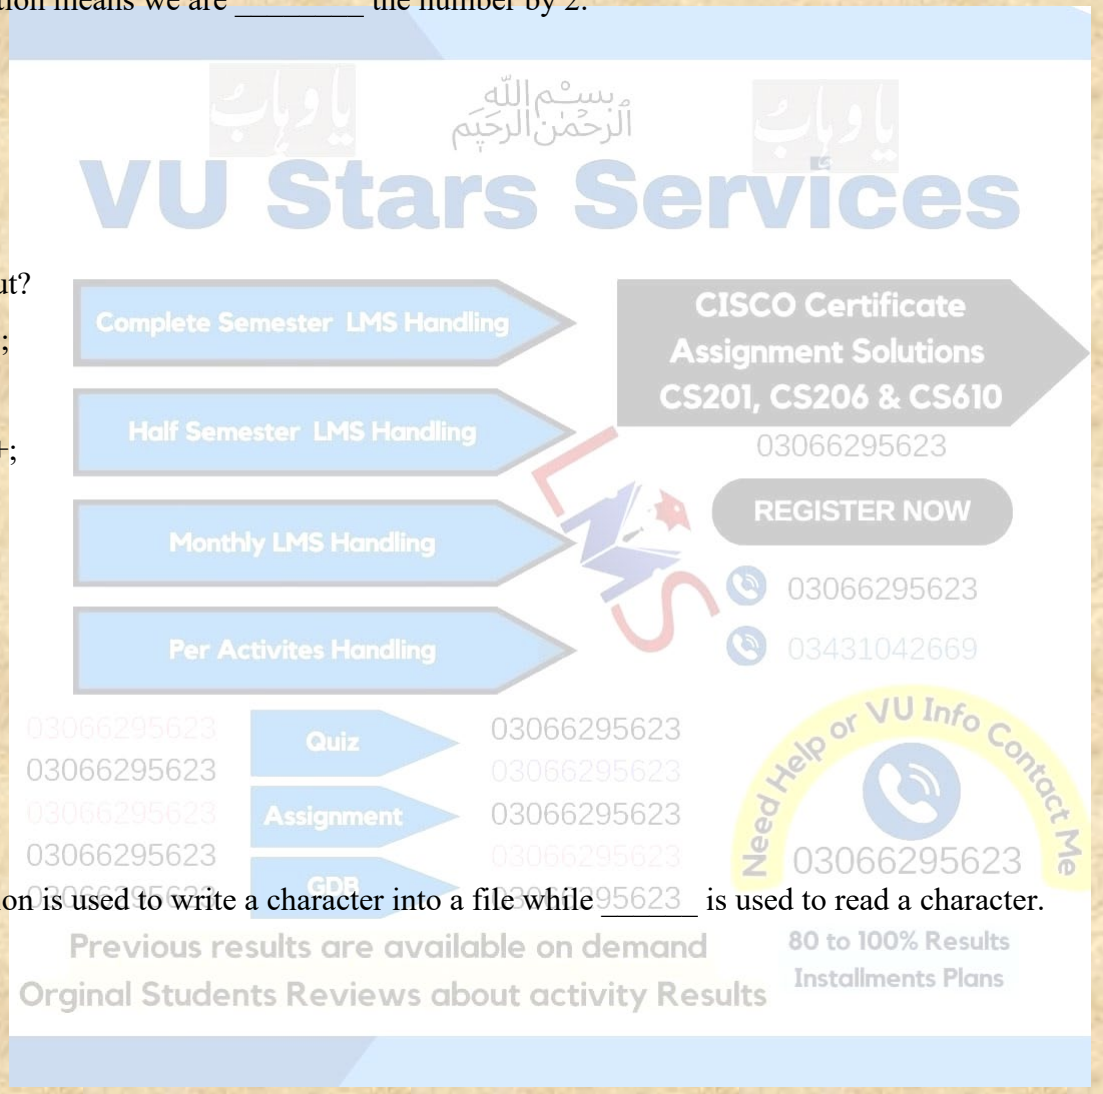

A) Pass

B) Protected

C) Private

D) Public ✅

19. The bitwise operator used to check whether a specific bit is set or not is _____.

A) ^

B) *

C) |

D) & ✅

20. Variables which are part of a structure are called _____.

A) Member Functions

B) Data Members ✅

C) Same memory variables

D) Same data type variables

21. In C++, atoi() function converts _____.

A) Character string to float

B) Character string to double

C) Character string to integer ✅

D) Character string to long


22. In C++, atof() function converts _____.

A) Character string to integer

B) Character string to float ✅

C) Character string to short

D) Character string to long

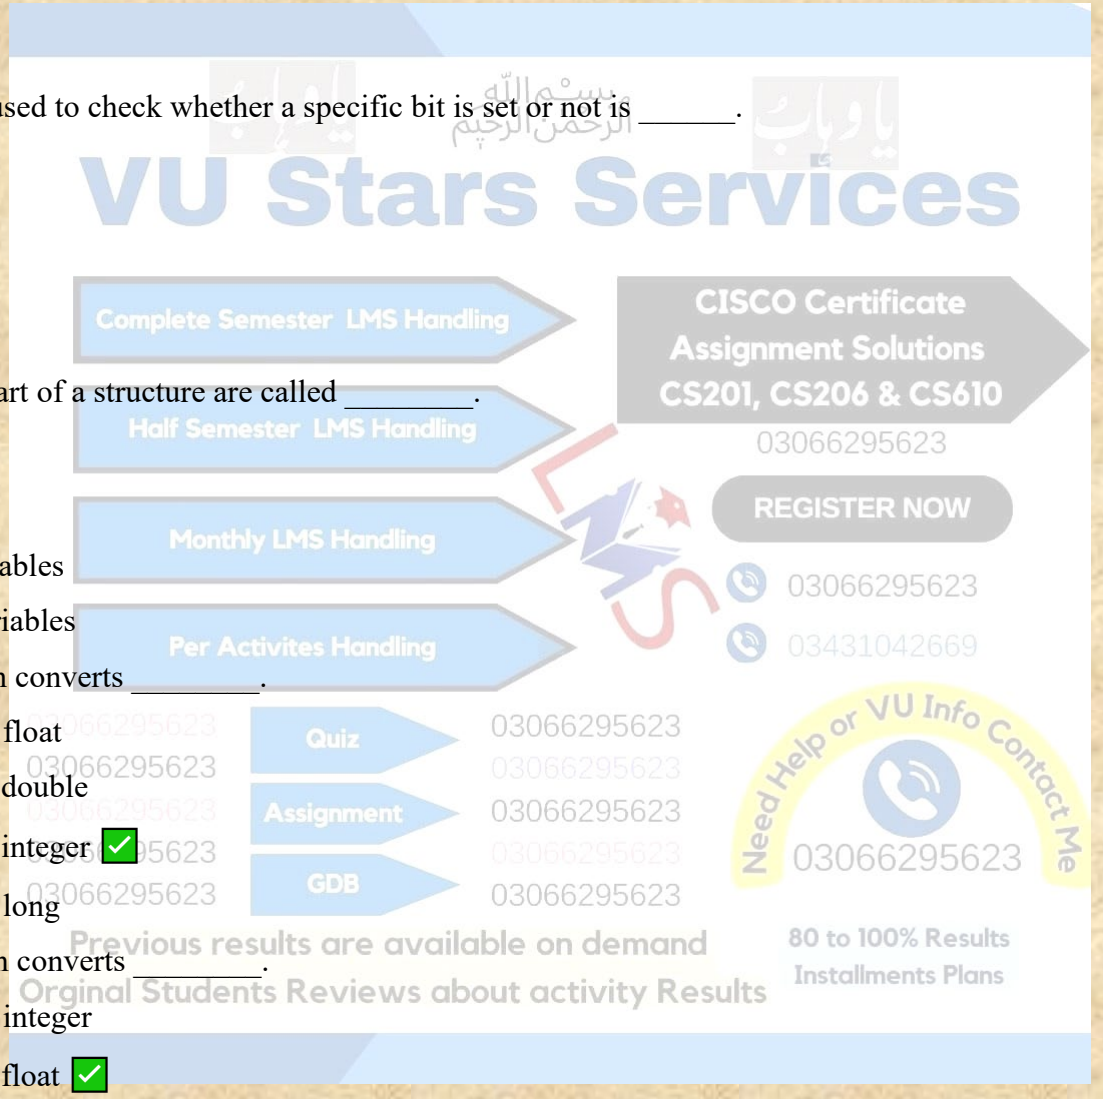

23. In C++, a one-dimensional array inside another one-dimensional array is called _____.

A) One-dimensional array

B) Three-dimensional array

C) Two-dimensional array ✅

D) Multi-casting array

24. In C++, string manipulation functions are defined in _____ header file.

A) conio.h

B) iostream

C) stdio.h

D) string.h ✅

25. Dynamic memory allocation uses memory from the _____.

A) Stack

B) Array

C) Heap ✅

D) Multidimensional array

26. Trying to use getch() without including <conio.h> results in a _____ error.

A) Runtime

B) Logical

C) Arithmetic

D) Compilation ✅

27. c = 13 % 2; Output will be _____.

A) 0

B) 2

بسم اللہ الرحمن الرحیم
یا وہاب
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

C) 3

D) 1 ✅

28. Which statement skips remaining loop statements and moves to the next iteration?

A) Break

B) Goto

C) Default

D) Continue ✅

29. Which of the following shows the memory address of the first element in an array?

A) array[0]

B) array(0)

C) array{0}

D) array ✅

30. Identify the invalid statement.

A) char s, *sp = 0;

B) int *pi = 0;

C) int *ip;

D) *int i; double dp = &i; ✅

31. In C++, the precise way to declare a pointer is:

A) int ptr*;

B) int &ptr;

C) int ptr;

D) *int ptr; ✅

32. In C++, a sequence of objects having the same type is called _____.

بسم الله الرحمن الرحيم
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
Quiz
Assignment
GDB
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Need Help or VU Info Contact Me
03066295623
80 to 100% Results Installments Plans
Previous results are available on demand
Orginal Students Reviews about activity Results

A) Stack

B) Array ✅

C) Operator

D) Function

33. What will be the output?

int a[4]={1,2,3,4};

cout << a[2];

A) 1

B) 2

C) 3 ✅

D) 4

34. To open a file for reading in C++, which function is used?

A) write()

B) read()

C) open() ✅

D) open_file()

35. What will be the output?

int x = 5;


int *ptr = &x;

*ptr + 1;

cout << (*ptr)++;

A) 6

B) 7

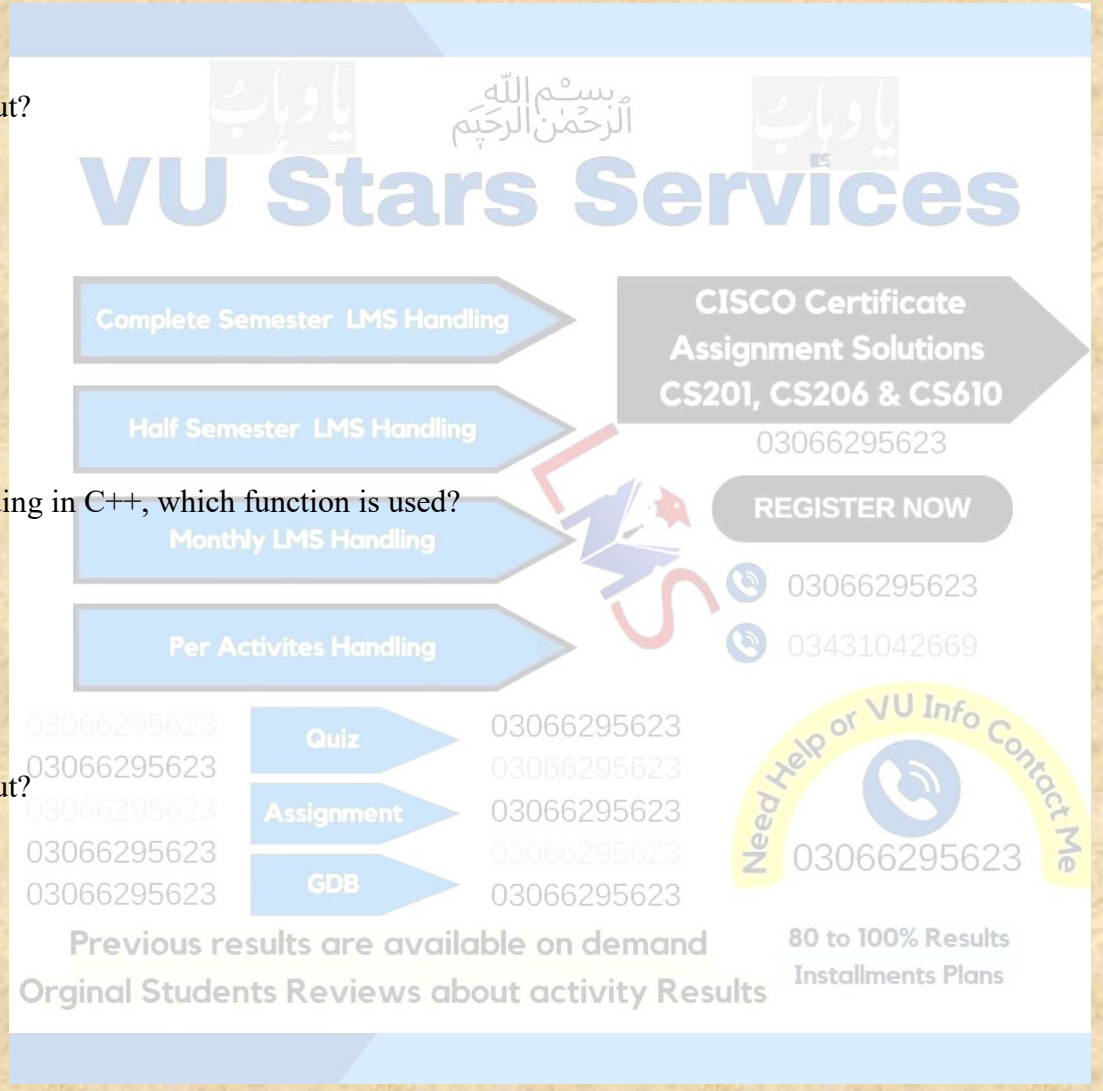

C) 8

D) 5 ✅

36. Which operator is used to dereference a pointer?

A) &

B) * ✅

C) ->

D) %

37. Which operator accesses a structure using a pointer?

A) .

B) &

C) -> ✅

D) *

38. calloc() allocates memory and initializes it with _____.

A) Garbage values

B) Random values

C) Zero ✅

D) One

39. The statement char arr[10]; is an example of _____ memory allocation.


A) Dynamic

B) Built-in

C) Static ✅

D) Heap

40. Which is NOT a preprocessor directive?

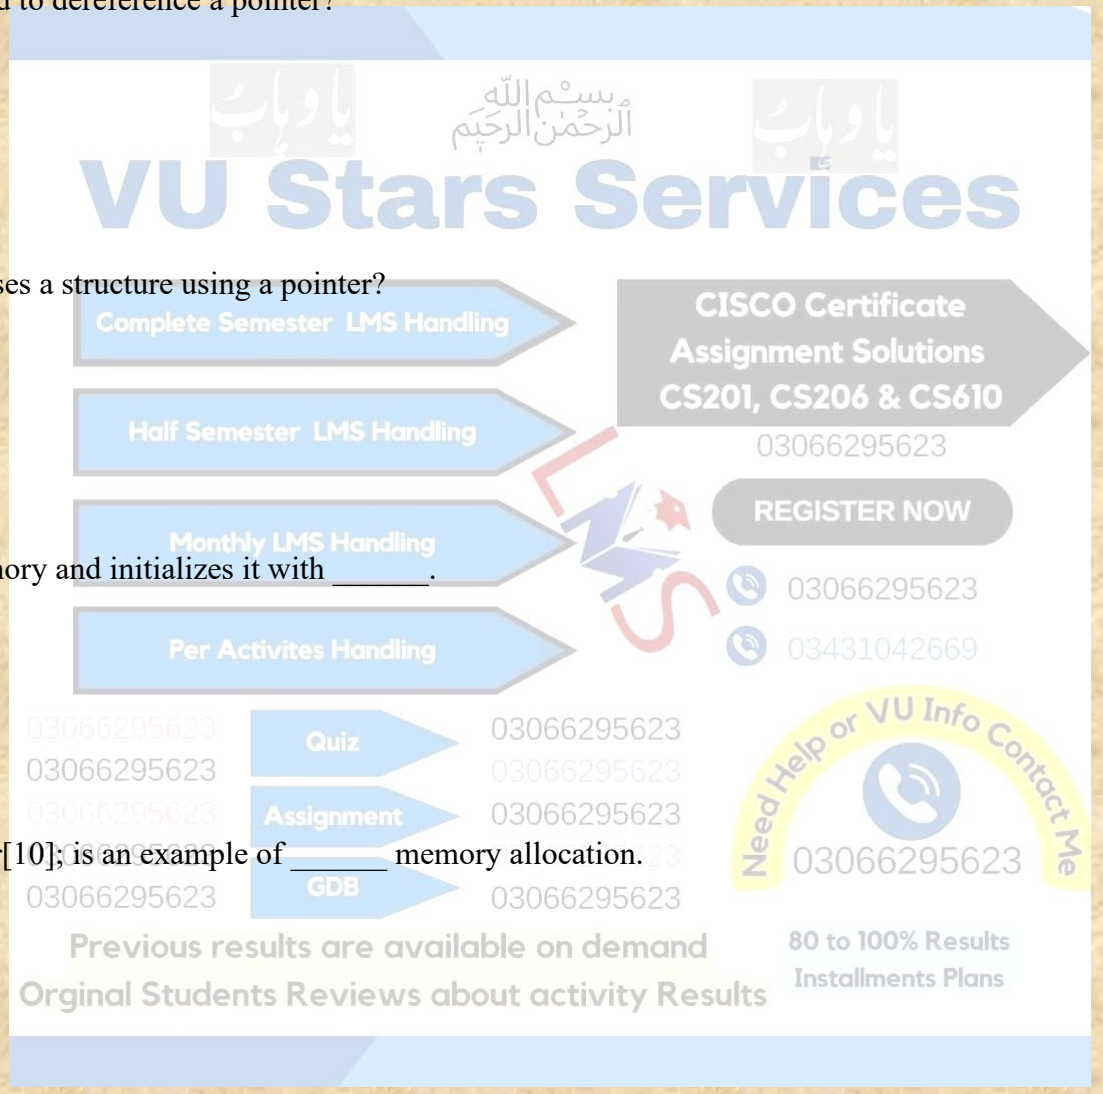

A) #if

B) #else

C) #endif

D) #startif ✅

41. Which programming language is used as a vehicle in CS201?

A) Java

B) C#

C) B

D) C/C++ ✅

42. _____ are used for conditional compilation.

A) Loops

B) Functions

C) Arrays

D) Macros ✅

43. Right shift operator >> performs _____ operation.

A) Multiplication by 2

B) Division by 2 ✅

C) Addition

D) Subtraction


44. Which bitwise operator checks whether a bit is set?

A) |

B) ^

C) *

D) & ✅

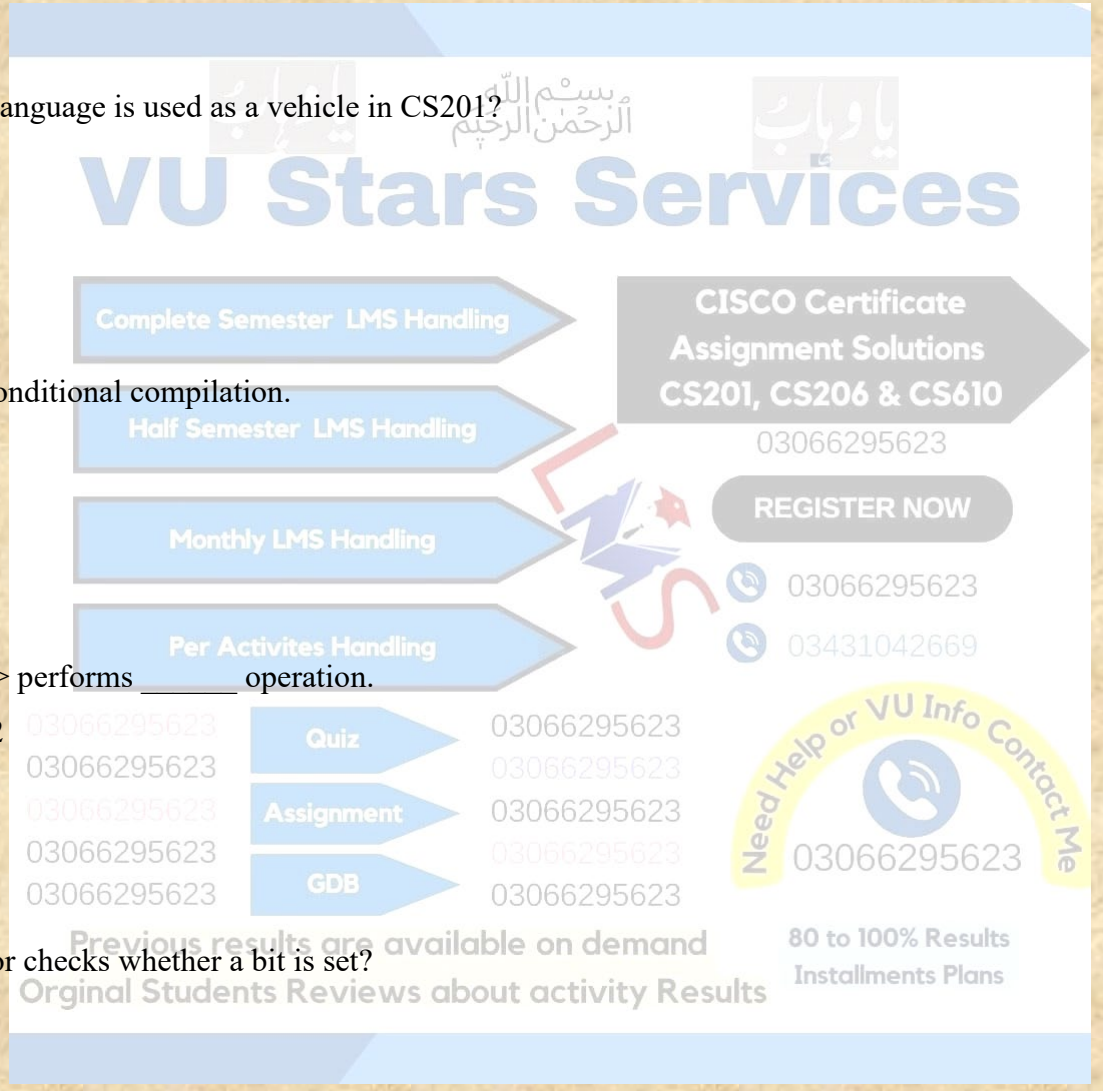

45. c = 13 % 2; Output will be _____.

A) 0

B) 2

C) 3

D) 1 ✅

46. Which statement skips the remaining loop body and continues with next iteration?

A) break

B) goto

C) default

D) continue ✅

47. Which function returns the current file pointer position?

A) seekg()

B) tellg() ✅

C) seekp()

D) open()

48. atoi() converts string to _____.

A) Float

B) Double


C) Long

D) Integer ✅

49. atof() converts string to _____.

A) Integer

B) Long

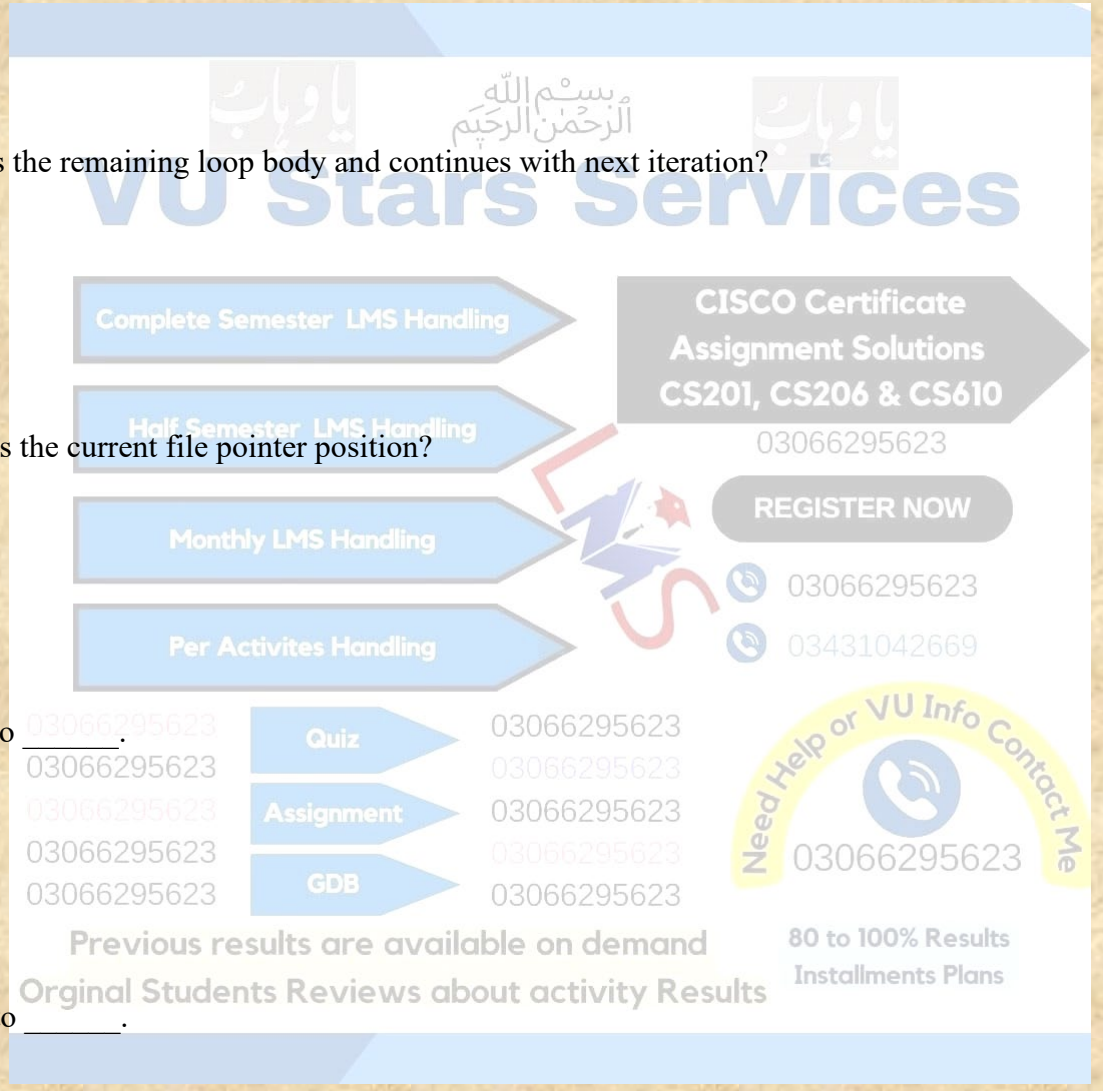

C) Float ✅

D) Short

50. In C++, default visibility of class members is _____.

A) Public

B) Protected

C) Private ✅

D) Pass

51. In C++, default visibility of structure members is _____.

A) Private

B) Protected

C) Pass

D) Public ✅

52. Which function writes a character to a file?

A) getc()

B) read()

C) putc() ✅

D) tellg()

53. Which function reads a character from a file?

A) putc()

B) write()

C) getc() ✅

D) seekg()

54. A two-dimensional array is also known as _____.

بسم اللہ الرحمن الرحیم
یا وہاب
یا وہاب
VU Stars Services
Complete Semester LMS Handling
Half Semester LMS Handling
Monthly LMS Handling
Per Activites Handling
CISCO Certificate Assignment Solutions CS201, CS206 & CS610
03066295623
REGISTER NOW
03066295623
03431042669
Quiz
Assignment
GDB
Need Help or VU Info Contact Me
03066295623
Previous results are available on demand
Orginal Students Reviews about activity Results
80 to 100% Results
Installments Plans

A) Jagged array

B) Linear array

C) Array of arrays ✅

D) Pointer array

55. free() function is used to _____.

A) Allocate memory

B) Reallocate memory

C) Initialize memory

D) Deallocate memory ✅

