Common DBMS Questions.

10- What is DCL (Data Control Language) also enlist DCL Commands..

Answer:

Data Control Language (or DCL) consists of statements that control security and concurrent access to table data. DCL Commands are given below;

i. COMMIT
ii. CONNECT
iii. GRANT (Database Privileges, Sequence Privileges & privileges on a user-defined sequence)
iv. REVOKE (Database Privileges, Sequence Privileges & privileges on a user-defined sequence)
v. LOCK TABLE
vi. ROLLBACK
vii. UNLOCK TABLE
viii. Removes table locks.

Common DBMS Questions.

9- What is DML (Data Manipulation Language) also Enlist Commands.

Answer:

A data manipulation language (DML) is a computer programming language used for adding (inserting), deleting, and modifying (updating) data in a database. DML Commands are given below;

i. Insert into
ii. Update
iii. Delete
iv. Select

Tuts by InfoPalacess .com

Common DBMS Questions.

7- What De-Normalization?

Answer:

Denormalization is the process of trying to improve the read performance of a database, at the expense of losing some write performance, by adding redundant copies of data or by grouping data.

8- What is DDL (Data Definition Language) Enlist DDL Commands.

Answer: DDL refers to the set of SQL commands that can create and manipulate the structures of a database. DDL statements are used to create, change, and remove objects including indexes, triggers, tables, and views. Common DDL statements include:

CREATE (generates a new table)
ALTER (alters table)
DROP (removes a table from the database)

Common DBMS Questions.

7- What De-Normalization?

Answer:

Denormalization is the process of trying to improve the read performance of a database, at the expense of losing some write performance, by adding redundant copies of data or by grouping data.

8- What is DDL (Data Definition Language) Enlist DDL Commands.

Common DBMS Questions.

6- What Normalization?

Answer:

Normalization is a database design technique that reduces data redundancy and eliminates undesirable characteristics like Insertion, Update and Deletion Anomalies. Normalization rules divides larger tables into smaller tables and links them using relationships.

7- How many types of Normalization?

Answer:

There are 6 types of Normalization techniques i.e. 1NF, 2NF, 3NF, 4NF, 5NF & 6NF.

For detail example search on Web LINK

Common DBMS Questions.

6- What Normalization?

Answer:

Normalization is a database design technique that reduces data redundancy and eliminates undesirable characteristics like Insertion, Update and Deletion Anomalies. Normalization rules divides larger tables into smaller tables and links them using relationships.

Common DBMS Questions.

4- What are joins and why we use?

Answer:

Joins are used to merge two or more than two tables data.

5- How many types of Joins?

Answer:

There are 4 common types i.e. Inner Join, Outer Join, Left Join, Right Join.

Common DBMS Questions.

6- Alternate Key: a table can have multiple choices for a primary key; however, it can choose only one. So, all the keys which did not become the primary Key are called alternate keys.

7- Composite Key is a set of two or more attributes that help identify each tuple in a table uniquely. The attributes in the set may not be unique when considered separately. However, when taken all together, they will ensure uniqueness.

Common DBMS Questions.

3- Unique Key is a column or set of columns that uniquely identify each record in a table. All values will have to be unique in this Key. A unique Key differs from a primary key because it can have only one null value, whereas a primary Key cannot have any null values.

4- Super Key is the set of all the keys which help to identify rows in a table uniquely. This means that all those columns of a table than capable of identifying the other columns of that table uniquely will all be considered super keys.

5- Candidate keys are those attributes that uniquely identify rows of a table. The Primary Key of a table is selected from one of the candidate keys. So, candidate keys have the same properties as the primary keys explained above. There can be more than one candidate keys in a table.

Common DBMS Questions.

3- How many types of keys used in Database?

Answer:

Primary Key, Foreign Key, Unique Key, Super Key, Candidate Key, Alternate Key & Composite Key.

1-Primary key is a column of a table or a set of columns that helps to identify every record present in that table uniquely. There can be only one primary Key in a table. Also, the primary Key cannot have the same values repeating for any row. Every value of the primary key has to be different with no repetitions.

Common DBMS Questions.

1- What is Relational Database (RDBMS?

Answer:

it is common type of database which stores data in tables or in shape of columns and rows.

2- Name of Relational Database (RDBMS?

Answer:

RDMS mySQL, SQL, MS Access.

Member access modifiers


All classes have different access levels depending on the access modifier (visibility). Here are the access levels with their corresponding symbols:


- Public (+)
- Private (-)
- Protected (#)
- Package (~)
- Derived (/)
- Static (underlined)

Relationships



Class/Class Notation Explanation

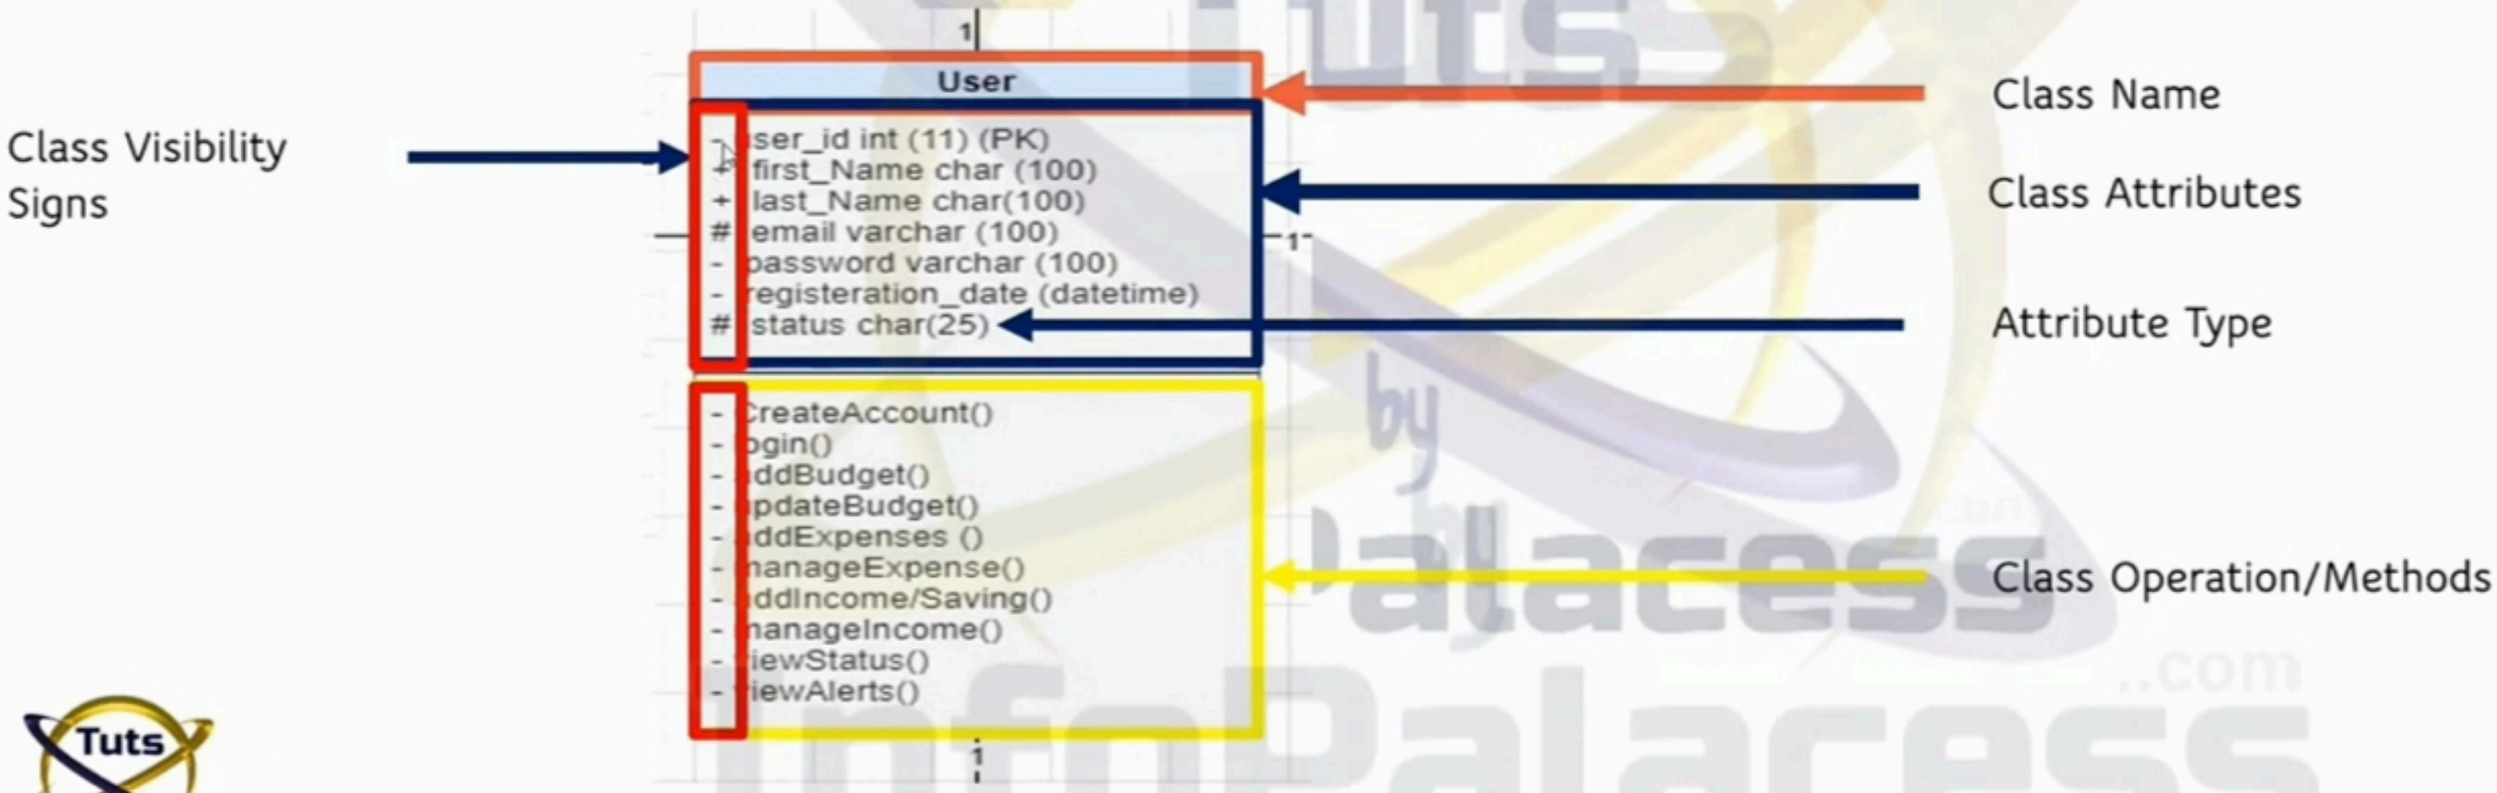

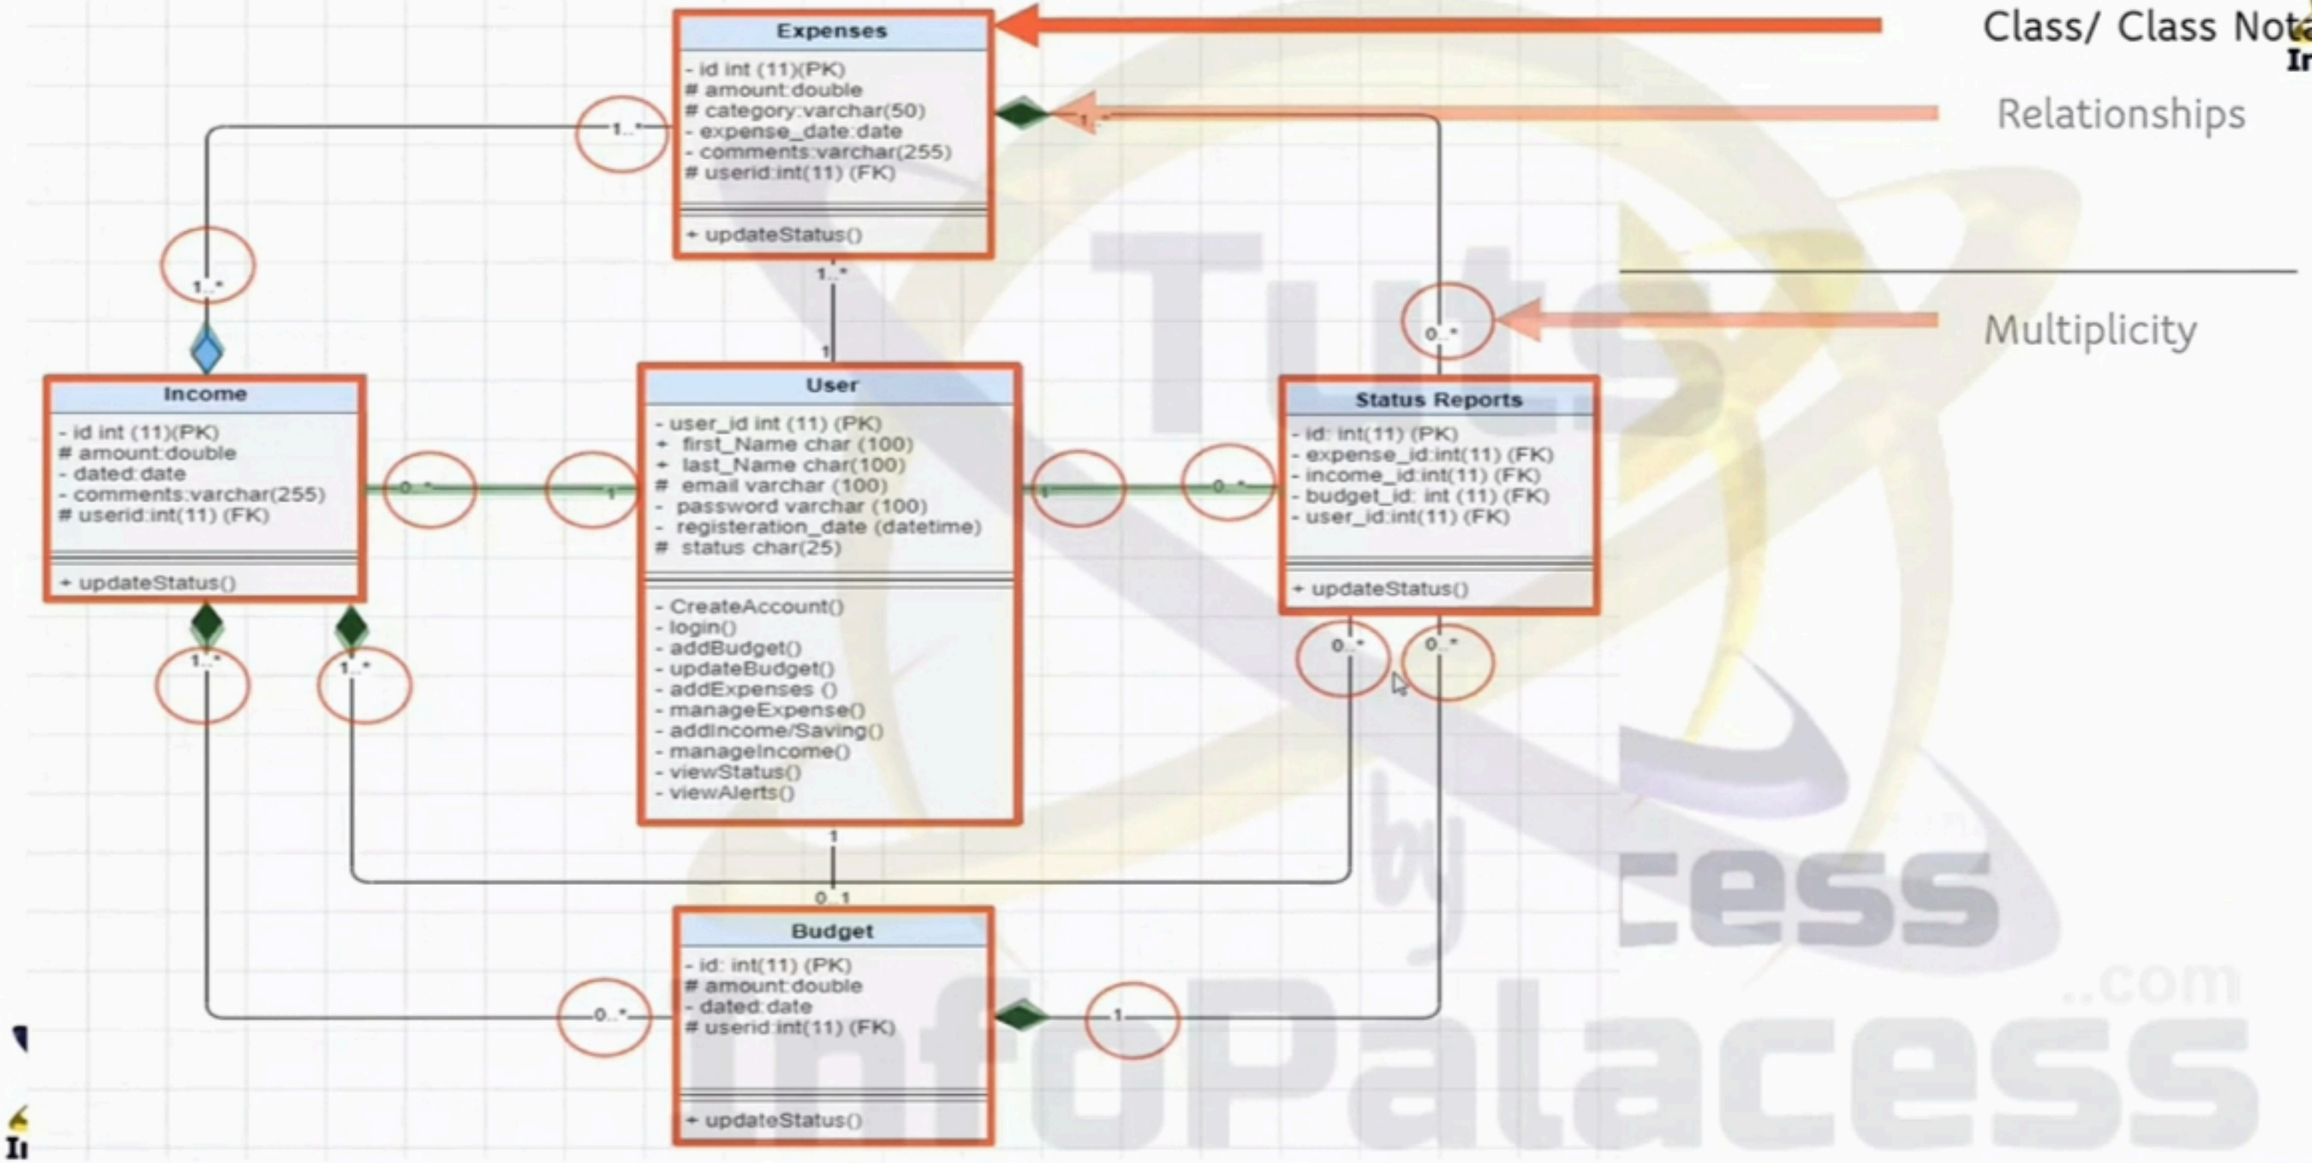


lines with online classes and 24/7 help to get higher CGPA in

ERD Attributes Types

3- Multivalued Attribute


More than one attribute value is denoted, such as multiple phone numbers for a person

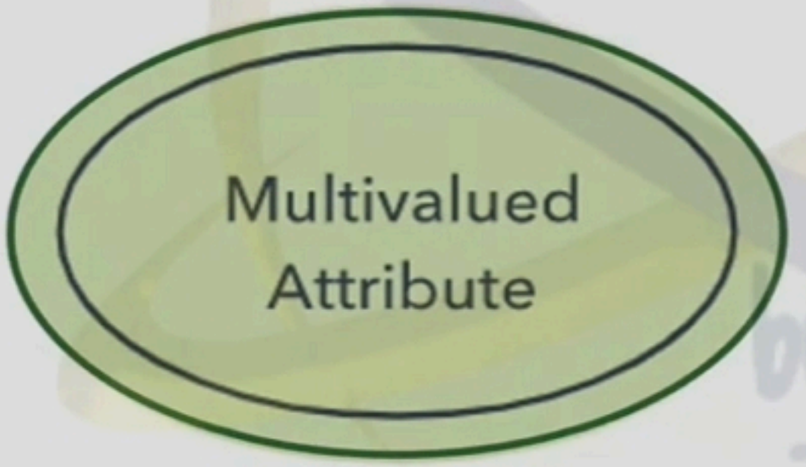

ERD Attributes Types

2- Derived Attribute

Attributed is calculated or otherwise derived from another attribute, such as age from a birthdate

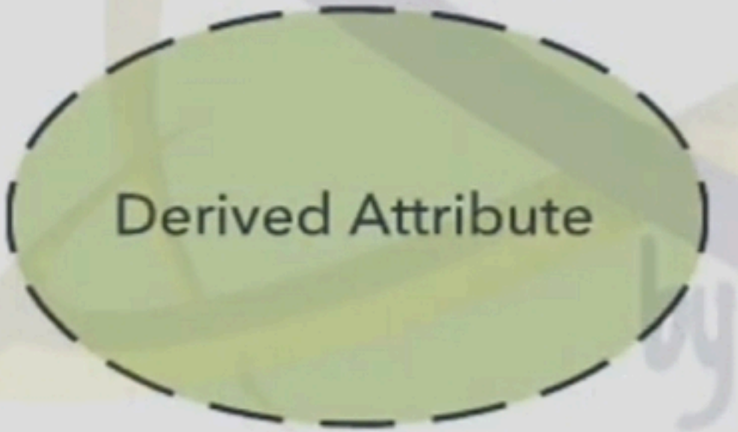

Cardinality Styles

3- Chen Style

Chen Style

Ordinality - describes the minimum (optional vs mandatory)


M:N

Cardinality - describes the maximum

1:N (n=0,1,2,3...)
one to zero or more

M:N (m and n=0,1,2,3...)
zero or more to zero or more
(many to many)

1:1
one to one

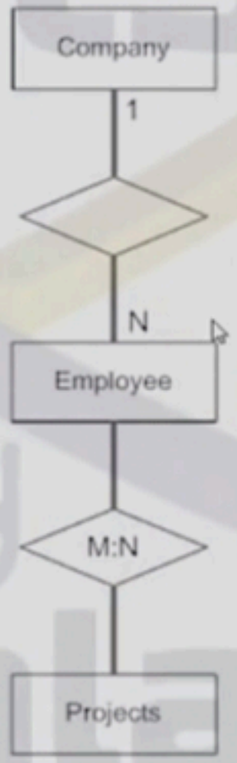

Tuts by InfoPalaces
InfoPalaces.com

Cardinality Styles

2- Martin Style

Martin Style

1 - one, and only one (mandatory)

* - many (zero or more - optional)

1...* - one or more (mandatory)


0...1 - zero or one (optional)

(0,1) - zero or one (optional)

(1,n) - one or more (mandatory)


(0,n) - zero or more (optional)

(1,1) - one and only one (mandatory)

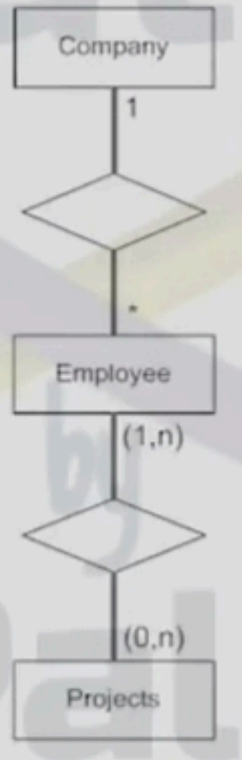


Cardinality Styles

1- Information Engineering Style




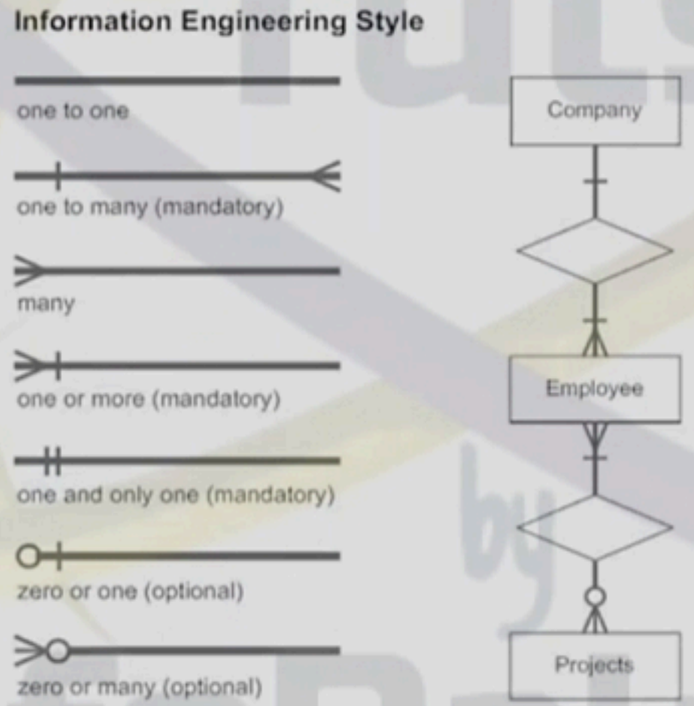


Entity Relationship Diagram

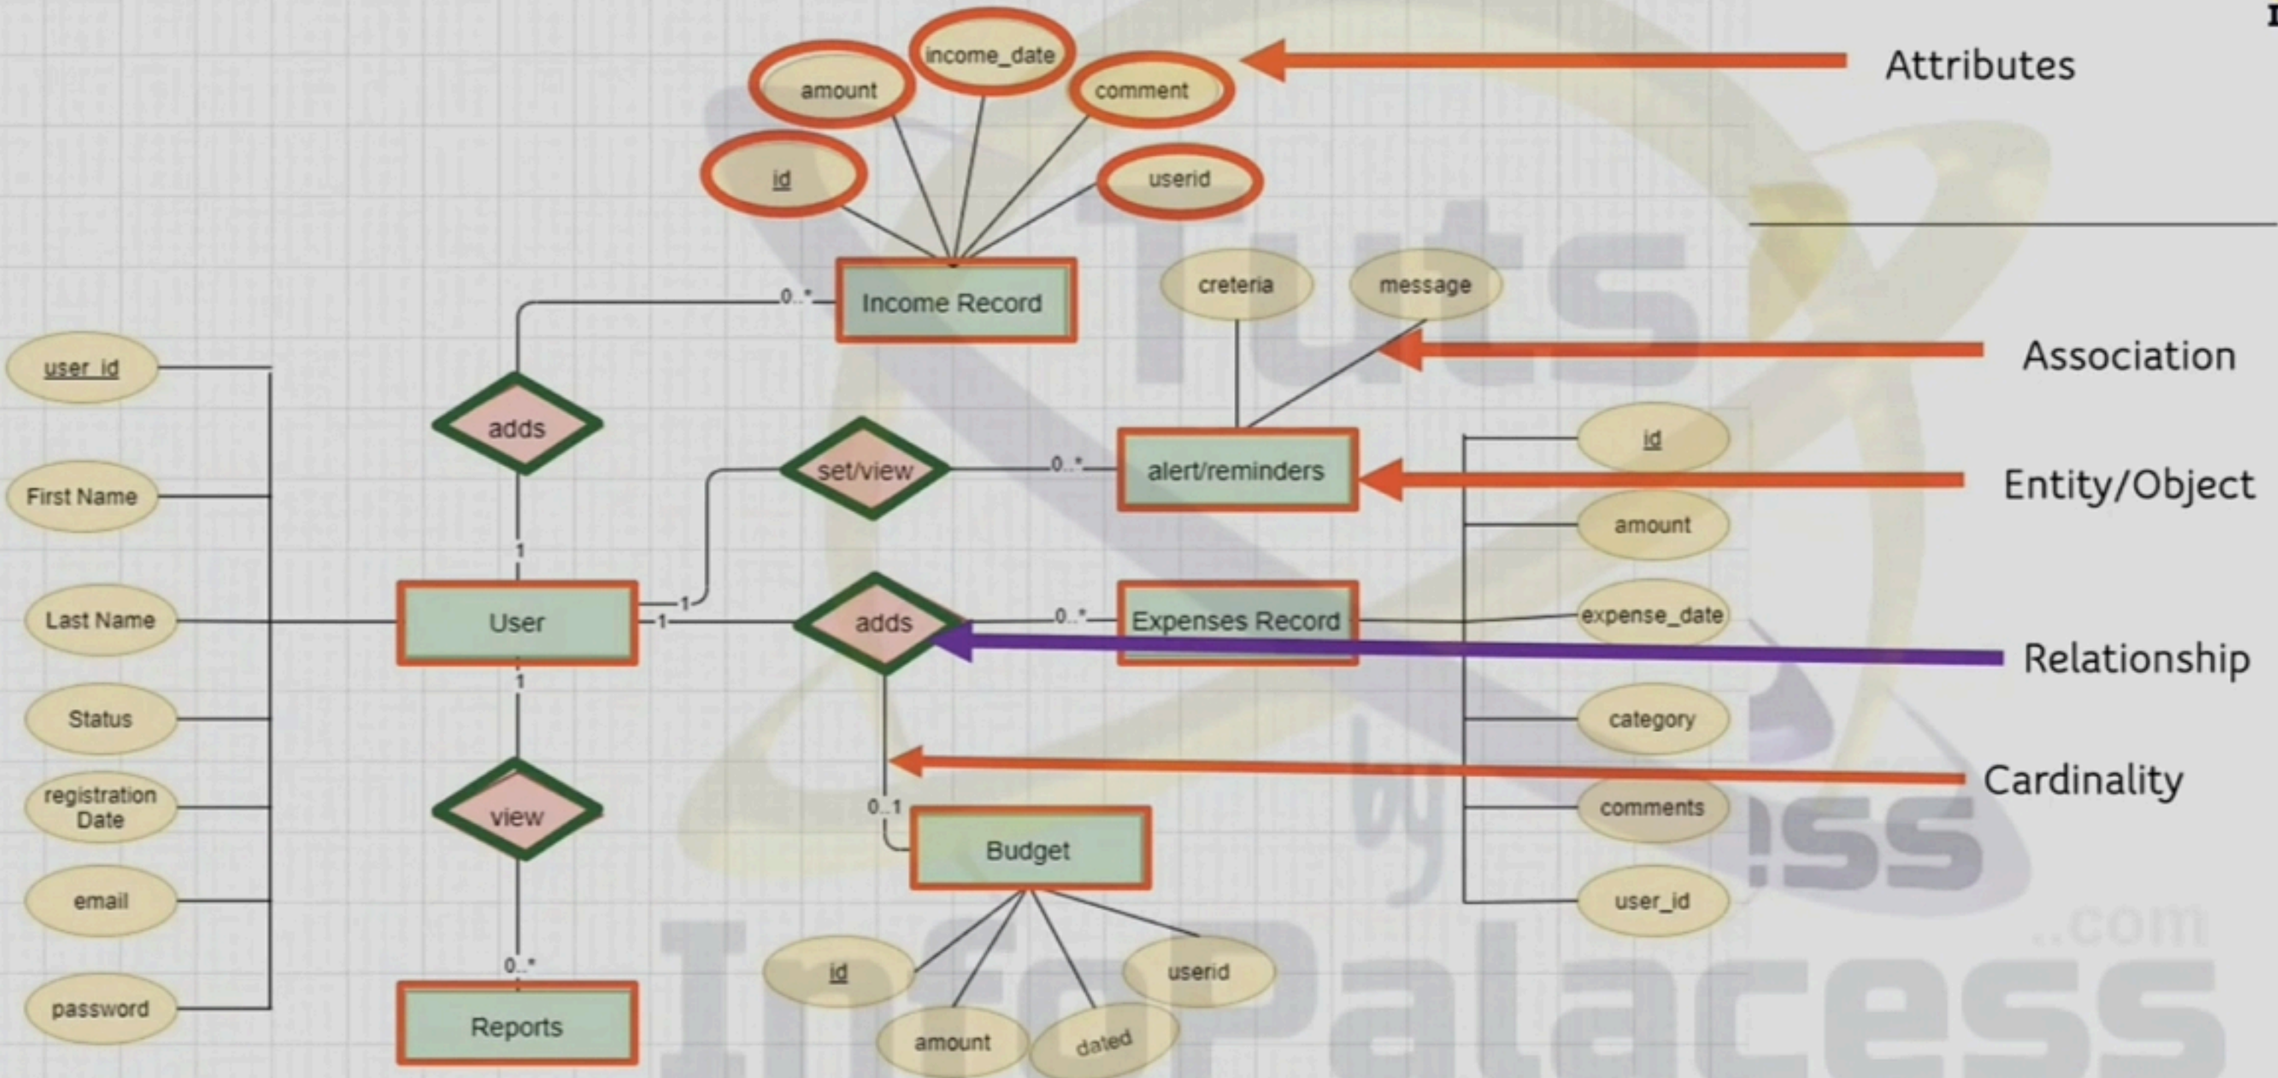


...on guidelines with online classes and 24/7 help to get higher

Sequence Diagram Messages Types

Symbol	Name	Description
	Synchronous message symbol	Represented by a solid line with a solid arrowhead. This symbol is used when a sender must wait for a response to a message before it continues. The diagram should show both the call and the reply.
	Asynchronous message symbol	Represented by a solid line with a lined arrowhead. Asynchronous messages don't require a response before the sender continues. Only the call should be included in the diagram.
	Asynchronous return message symbol	Represented by a dashed line with a lined arrowhead.
	Asynchronous create message symbol	Represented by a dashed line with a lined arrowhead. This message creates a new object.
	Reply message symbol	Represented by a dashed line with a lined arrowhead, these messages are replies to calls.
	Delete message symbol	Represented by a solid line with a solid arrowhead, followed by an X. This message destroys an object.

Tuts by InfoPalacess

Sequence Diagram

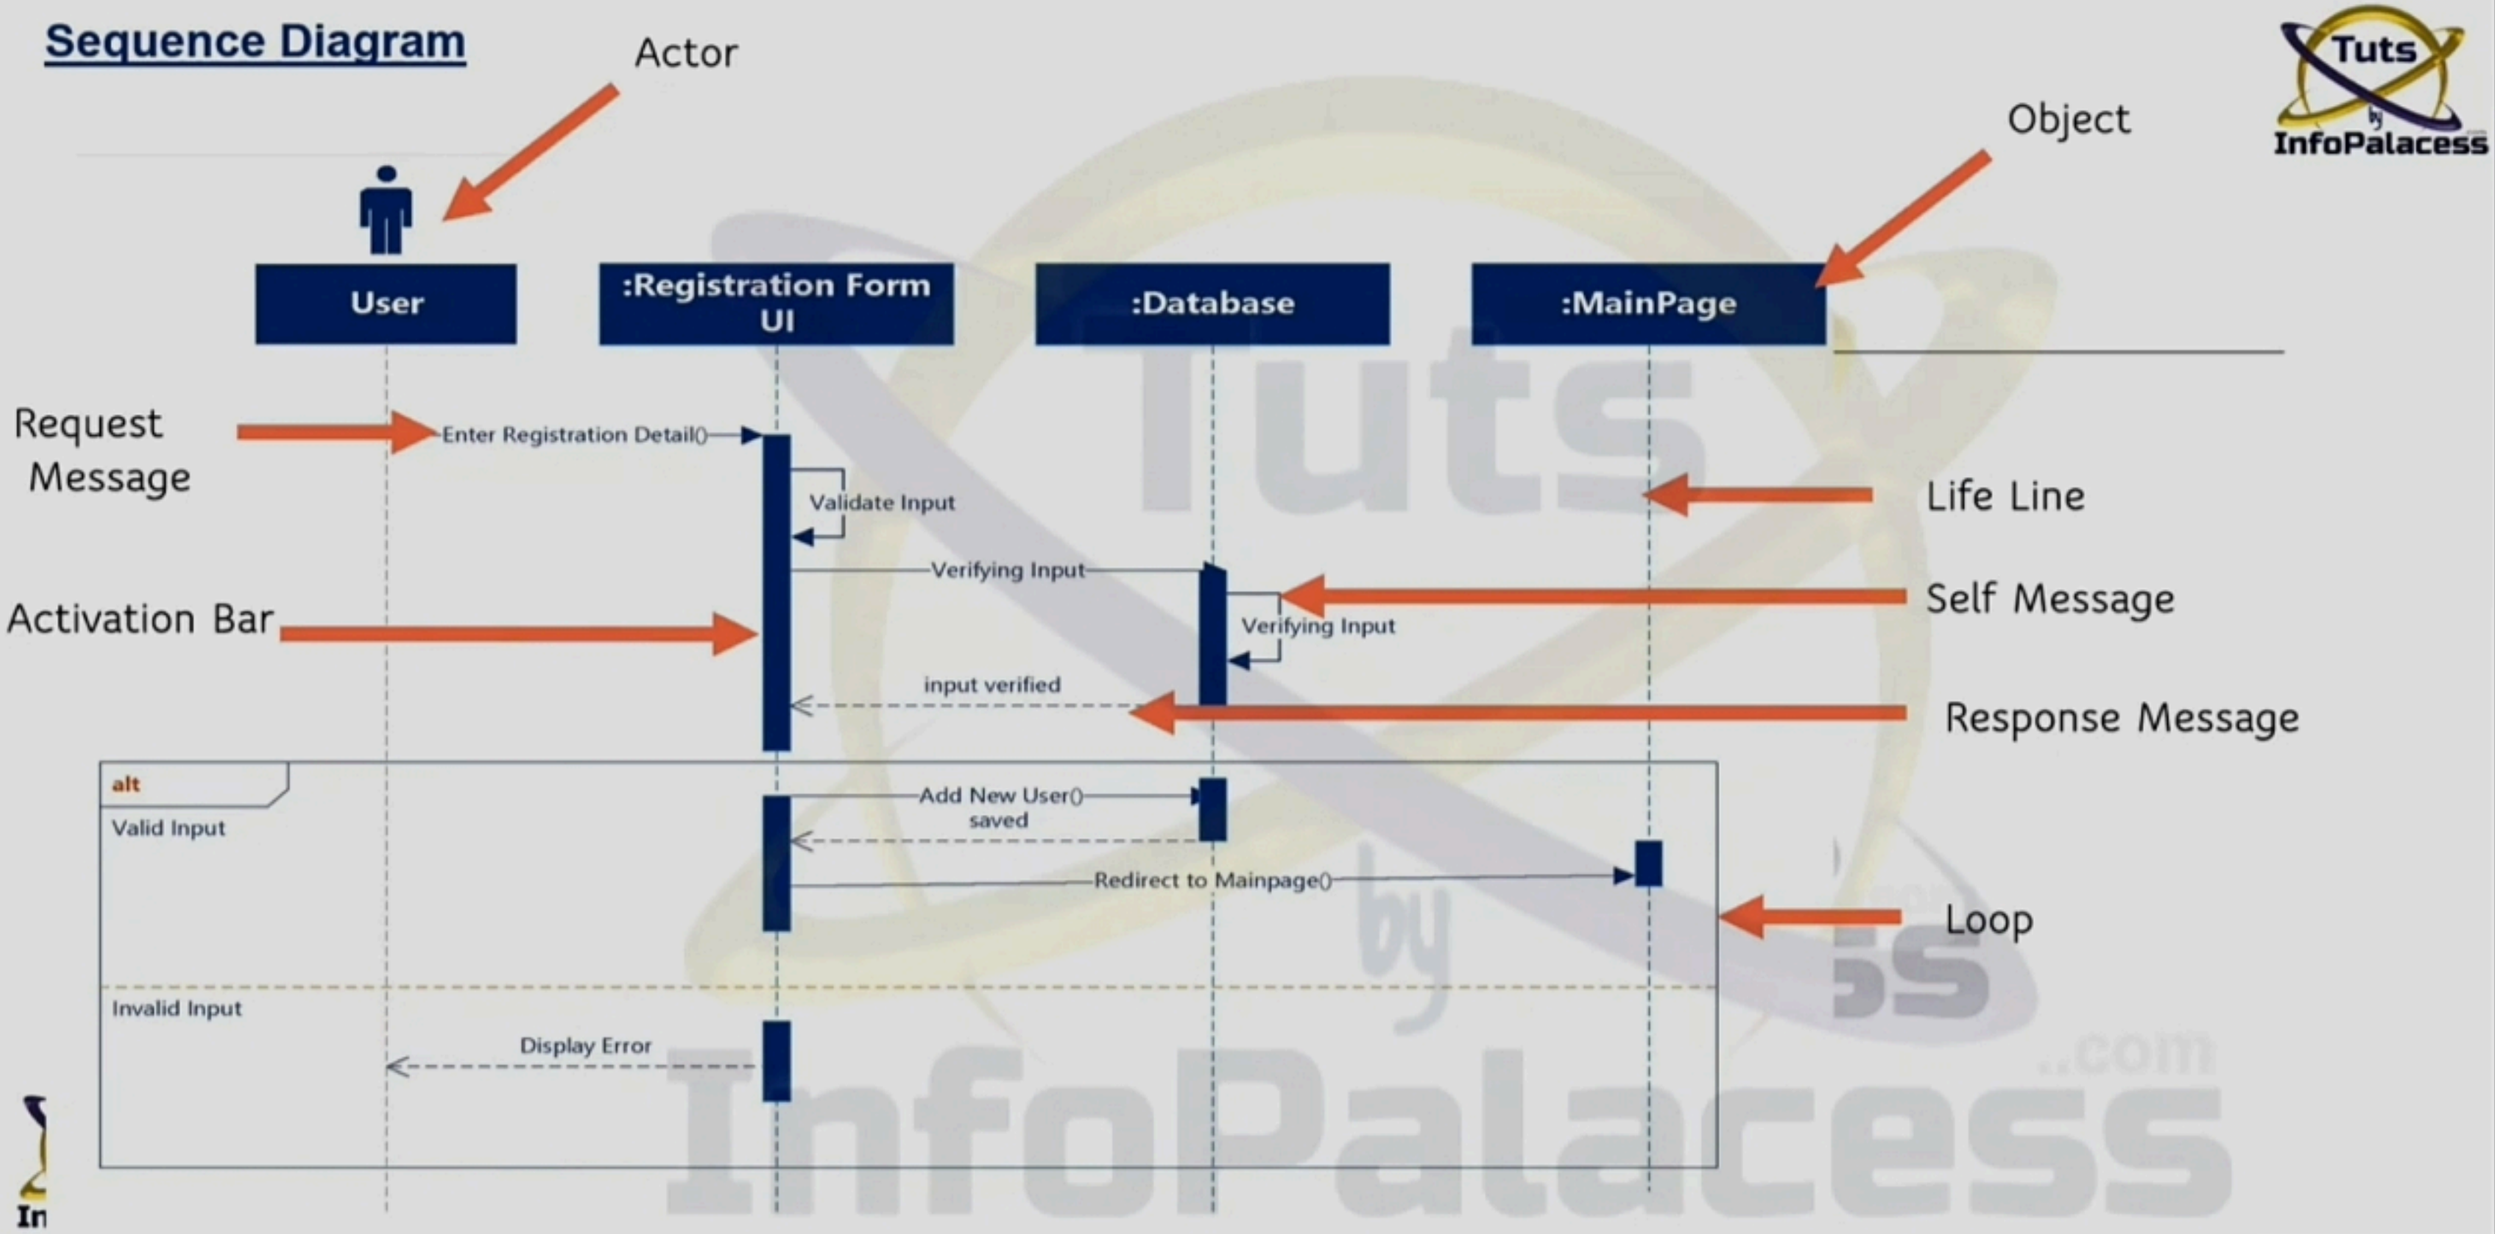


Use Case Relationship

Generalization Relationship

A generalization relationship means that a child use case inherits the behavior and meaning of the parent use case. The child may add or override the behavior of the parent.

Example

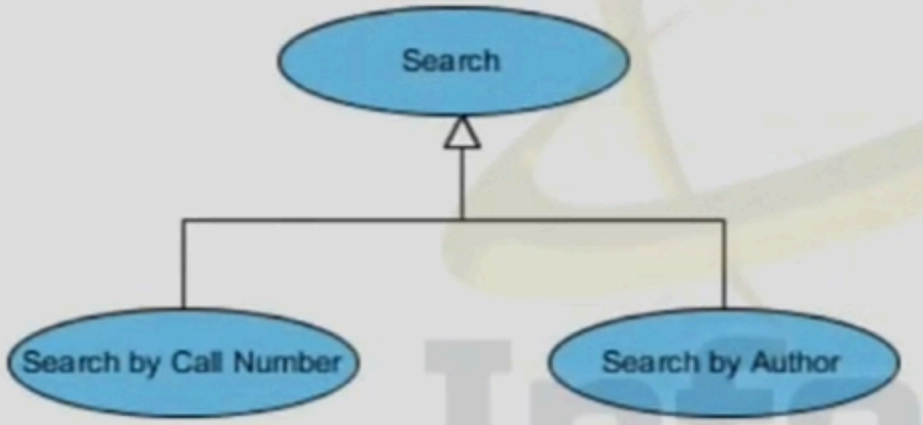


Tuts by InfoPalacess
Tuts by InfoPalacess
Tuts by Palacess .com
InfoPalacess
n or contact me at WhatsApp +92-3100-494928. I am providi

Use Case Relationship

Extend Relationship

The extend relationships are important because they show optional functionality or system behavior. The <<extend>> relationship is used to include optional behavior from an extending use case in an extended use case.

Example

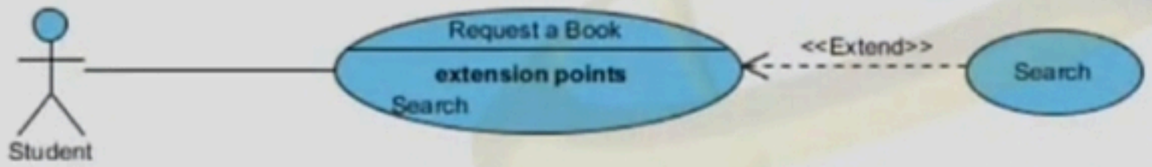

Use Case Relationship

Extend Relationship


The extend relationships are important because they show optional functionality or system behavior. The <<extend>> relationship is used to include optional behavior from an extending use case in an extended use case.

Tuts by InfoPalacess .com


Use Case Relationship

Include Relationship

The <<Include>> relationship is used to include common behavior from an included use case into a base use case in order to support the reuse of common behavior

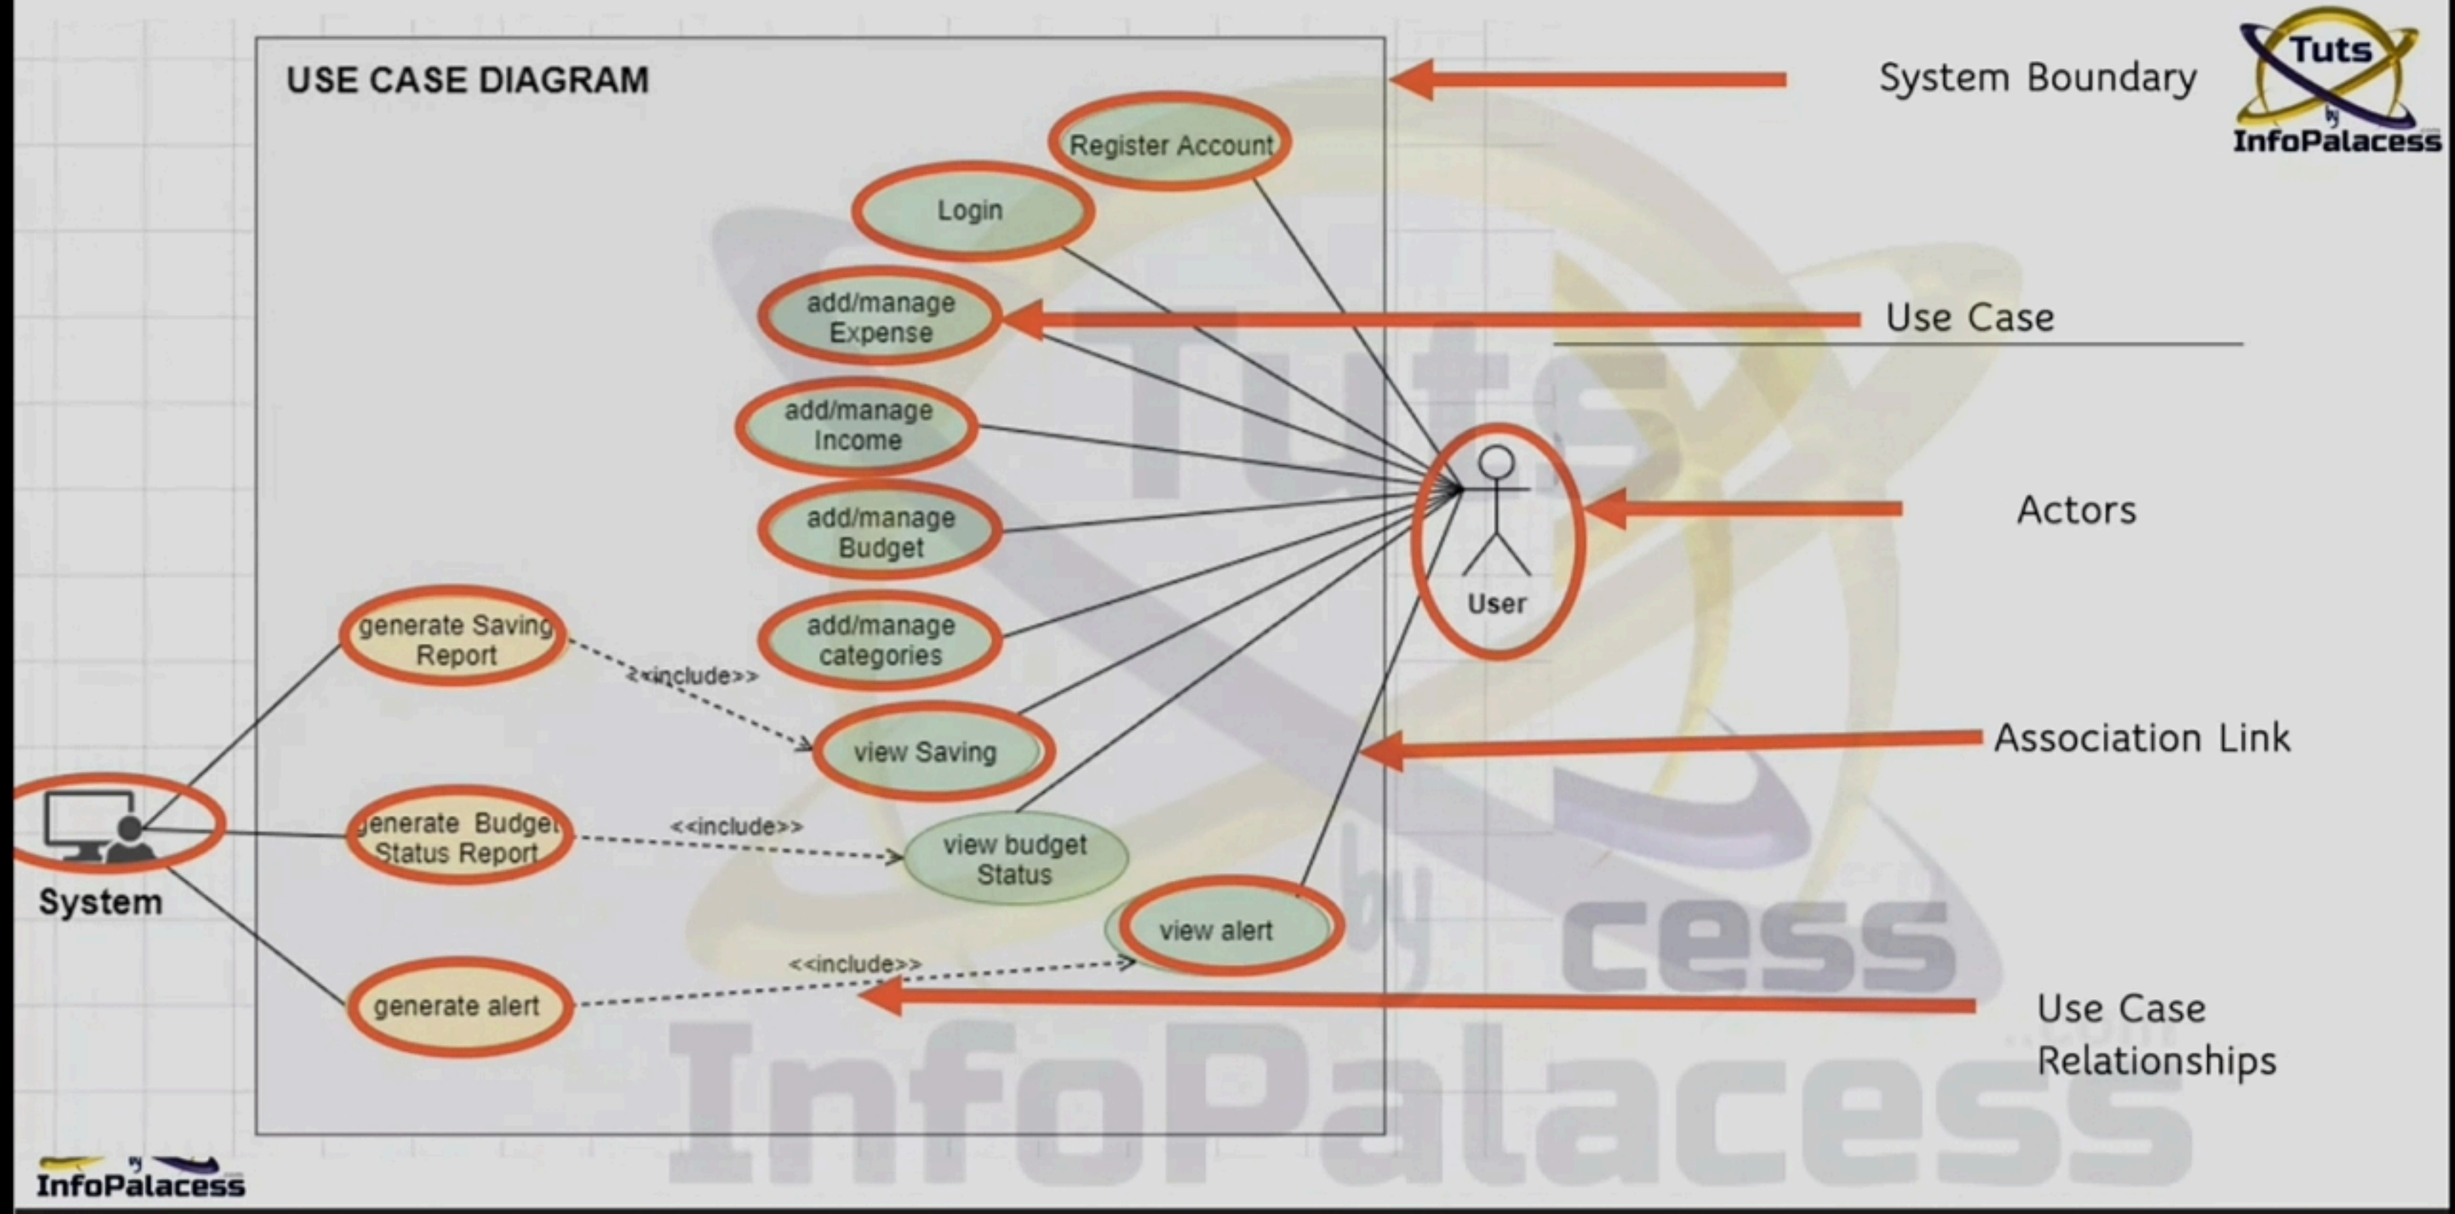
USE CASE DIAGRAM
Register Account
Login
add/manage Expense
add/manage Income
add/manage Budget
add/manage categories
generate Saving Report
view Saving
generate Budget Status Report
view budget Status
view alert
generate alert
<<include>>
<<include>>
<<include>>
User
System
System Boundary
Use Case
Actors
Association Link
Use Case Relationships
Tuts
InfoPalacess

Architecture Diagram

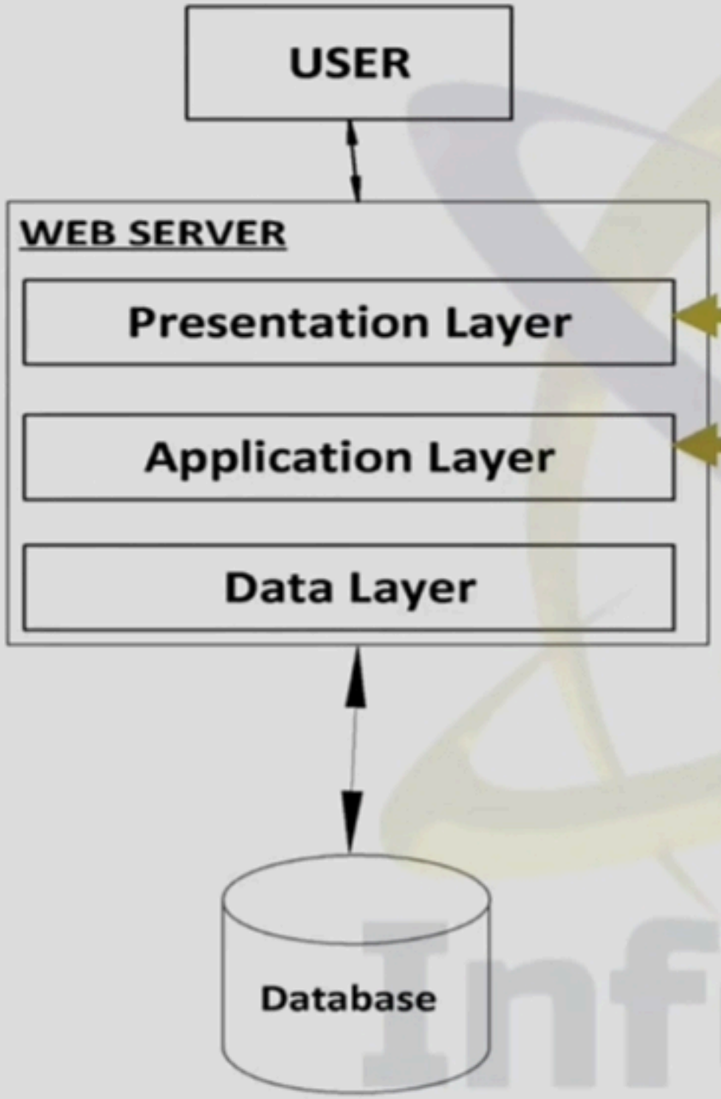


It is **front End** UI of Application/Software.

It is also called Business Layer. It accepts user requests from the browser, processes them, and determines the routes through which the data will be accessed /Software. **In short it perform backend functionalities.**

Tuts by InfoPalacess
Tuts by InfoPalacess
by InfoPalacess.com
InfoPalacess.com
ramming in web development, android development (PHP, C

VU PROCESS MODEL

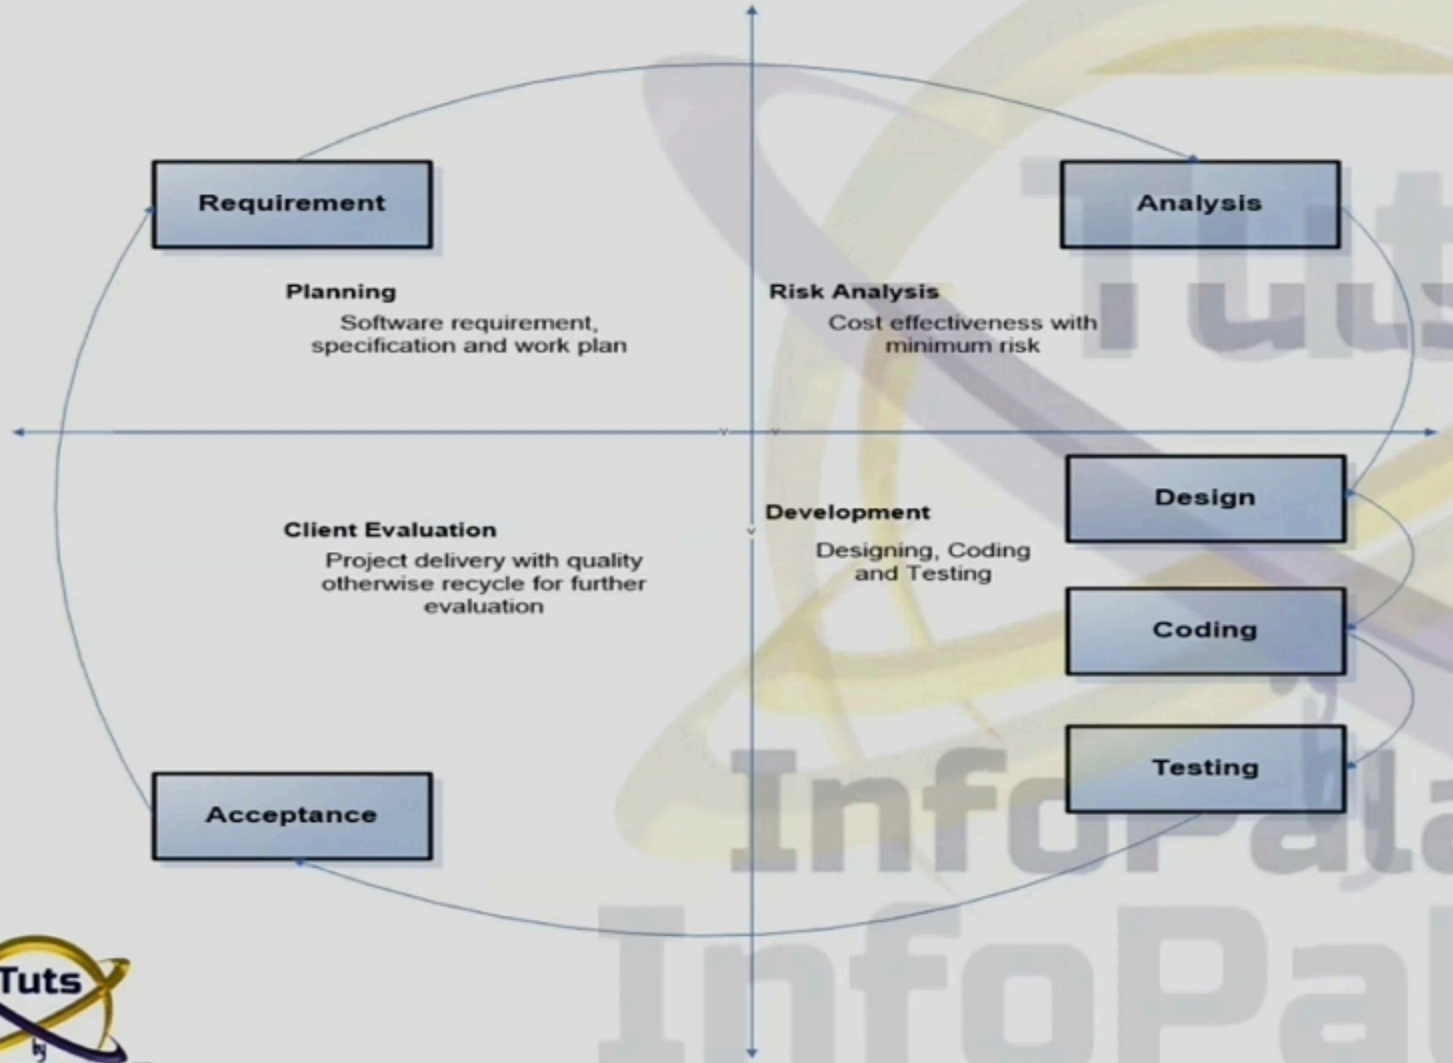

VU PROCESS MODEL is recommended by VU. Because this is combination of **Water Fall Model** and **Spiral Model.**

Tuts by InfoPalacess
InfoPalacess
InfoPalacess
InfoPalacess.com