Virtual University	CS508-Modern Programming Language (Solved Macq's) LECTURE FROM (23 to 45)	VU LMS HELP vulmshelp.com
Junaidfazal08@gmail.com Bc190202640@vu.edu.pk	FOR MORE VISIT VULMSHELP.COME	**JUNAID MALIK** **0304-1659294**

AL-JUNAID TECH INSTITUTE



For CS619 Project Feel Free To Contact With Me

Ph# 0304-1659294
Email: junaidfazal08@gmail.com

AL-JUNAID TECH INSTITUT

1. Which of the following conversion has to be done explicitly by the programmer in C#?
   - Float to int
   - Into to Float
   - Int to long
   - Float of double
2. The dynamically generate a web page which of the following programming language is most suitable?
   - Ada
   - PHP
   - C++
   - Prolog
3. In C#, which of the following is used to give information to .Net compiler that a class is compliant with common language Specification (CLS)?
   - Class variables
   - Class attributes
   - Class definition
   - Class function
4. C# does not support the conversion of _____values to integers.
   - Boolean
   - Character
   - Floating point
   - Decimal
5. Classes and objects of PHP are similar to_____
   - Classes and objects of Basic
   - Classes and Objects of C
   - Classes and Objects of JAVA
   - Classes and Objects of C++
6. Which of the following language is used for server-side scripting?
   - C#
   - ADDA
   - PHP
   - C++
7. Which of the given operator is used to return to reference from a function in PHP?
   - &&
   - $
   - Dot
   - &
8. A variable in_____cannot be used unless and until it is not initialized.
   - ALGOL
   - C
   - C++
   - C#
9. In order to pass a value by reference to a method in C#, which of the following keyword is used with method parameter.
   - Refer
   - New

- Ref
- Explicit

10. The code written in PHP is returned to the web browser as:
    - CSS flexbox
    - Shell Scripts
    - Applets
    - Plain HTML
11. "With" statement in JavaScript is an alternative of_____
    - Multiple document.write statements
    - Single document.write statements
    - Multiple document.read statements
    - Single document.read statements
12. C# support only_____inheritance and it achieve_____inheritance through the concept of interfaces.
    - Multiple,multiple
    - Single,Multiple
    - None of the given
    - Single, Single
13. In the context of C#, which of the following is not true about delegates?
    - Delegates are value type
    - Delegates are event based
    - Delegates are like C/C++ function pointer
    - Delegates are reference type
14. FORTRAN, PL 1 and BASIC language provide -------- of variables.
    - Explicit declaration
    - Implicit declaration
    - Either implicit and explicit declaration
    - None of the given
15. Which of the given statement is true if "$a" is not equal to "$b" in PHP?
    - $a=! $
    - $a! ==$b
    - $a! =$
    - $a==! $
16. The loop control expression in any loop of C# must be of_____type.
    - Integer
    - Boolean
    - Decimal
    - Float
17. The_____operator in C# is used to test it the operator/expression is of a certain type.
    - 'IN'
    - 'IS'
    - 'AS'
    - 'OUT'

AL-JUNAID TECH INSTITUT

18. A script written in PHP are executed by:
    - Web browser
    - Client machine
    - Java Applets
    - Web Server
19. In PHP 'Switch' structure the_____starts or implements on implicit loop.
    - Return statement
    - Continue Statement
    - Break Statement
    - For Loop
20. PHP stand for
    - PHP, Home Page
    - PHP, Hypertext page
    - PHP, Hypertext Preprocessor
    - PHP, Home Preprocessor
21. Which of the Following type of number are not supported by PHP
    - Real Number
    - Complex Number
    - Single Integers
    - Unsigned Integer
22. The division of two integers (i.e 7/2) in PHP generates a/an.
    - Floating Point number
    - Integer
    - Exception
    - Runtime error
23. Arrays in JavaScript are_____based
    - Zero index
    - Length
    - Location
    - One index
24. The____model in JavaScript provides access to the contents of the browser windows.
    - COM
    - DOM
    - BOM
    - ROM
25. An_____in PHP is an ordered map.
    - Queue
    - Array
    - Stack
    - String
26. In the context of C#, a class that is defined on the body of another class is called.
    - Protected class
    - Previous Class
    - Public Class
    - Nested Class

AL-JUNAID TECH INSTITUT

27. If you want to override a method in C# then the override method must not be declared as.
    - Override
    - Static
    - Abstract
    - Virtual
28. In JavaScript, which of the given provides access to context of browser window.
    - DOM
    - ROM
    - COM
    - BOM
29. Which of the given is used before the declaration of variable in PHP?
    - # Sign
    - ? Sign
    - $ Sign
    - @ Sign
30. In how many Places a JavaScript code can be placed.
    - 3
    - 2
    - 4
    - 5
31. The "OUT" keyboard in C# used to pass_____variable by reference to a method.
    - Numeric
    - Static
    - String
    - Un-initialized
32. In_____string and Numeric values are inter convertible.
    - C#
    - JAVA
    - c/C++
    - PHP
33. A/An_____in a default mechanism for Specifying Types of variables.
    - Static Declaration
    - Run Time Declaration
    - Explicit Declaration
    - Implicit Declaration
34. In PHP, if a number is beyond the Bounds of the integer types, then It will be interpreted as a____instead.
    - Long
    - Float
    - Short
    - String
35. If X and Y are integer variables and Z is a Boolean variable then which of the Following Statement cause compilation error in C#?

- If(x=y)
{

    //Some Code

}
- If(x>y)
{

    //Some Code

    }
- If(y>x)
{

    //Some Code

    }
- If(z)
{

    //Some Code

    }

36. A/an_____ is a special word that cannot be used as a user defined name.
    - Reserved Word
    - Flag Word
    - Dummy Word
    - Abstract word
37. _____an object that describes the basic characteristics of the browser, notably its type and version.
    - Navigator
    - Location
    - Document
    - Window
38. Array in PHP are not like C/C++ arrays but they are_____
    - Templates
    - Structure
    - Maps
    - Record
39. Which of the Following Class in C# cannot be inherited from.
    - Inherit class
    - Abstract Class
    - Public class
    - Sealed Class
40. In the content of C#, a class that is defined the body of another class is called.
    - Protected Class
    - Nested Class
    - Private Class

- Public Class

41. In JavaScript navigator is a _____objects.
    - User defined
    - Built-in
    - Browser
    - Document
42. Object-Oriented programming in C# is supported through.
    - Classes
    - Functions
    - Control flow Statements
    - Packages
43. Which operator is used for Concatenation in JavaScript?
    - +
    - Dot(.)
    - |
    - $
44. When the Type is Fixed before run time then this is called as____
    - Dynamic Binding
    - Static Binding
    - Load Time Binding
    - Storage Binding
45. For event driven mechanism in C#, we use____just like____in C++.
    - Delegate,Function pointer
    - Templates,Delegate
    - Event handlers,packages
    - Events Buttons,Packages
    - EventnButtons, Graphics Code
46. In C#, the order of operator evaluation is:
    - From Left to right
    - From Right to Left
    - Arbitrary
    - Not specified

AL-JUNAID TECH INSTITUT

1) One difference LISP and PROLOG is
   - ➢ AI
   - ➢ Puzzle
   - ➢ Game
   - ➢ All of the given

2) Variable of_____is not an object of java
   - ➢ Primitive
   - ➢ Reference
   - ➢ Integer type
   - ➢ Both reference and Primitive

3) In_____every class in Java is part is overloaded
   - ➢ C++
   - ➢ Java
   - ➢ C#
   - ➢ C# and java

4) C# and C++ have_____ size.
   - ➢ Same
   - ➢ Different
   - ➢ Distinct
   - ➢ None of the given

5) _____compile into machine independent language, independent code which run in a managed execution environment.
   - ➢ C#
   - ➢ C++
   - ➢ Java
   - ➢ Ada

6) _____compile initially to an intermediate. Which can be run by interpretation or just in time compilation or an appropriate virtual machine?
   - ➢ C++ and C#
   - ➢ C# and Java
   - ➢ Java and C++
   - ➢ Ada and C++

7) How many modes for the source code are in C#?

AL-JUNAID TECH INSTITUTE
0304-1659294
www.aljunaidtech.com

- One
- Two
- Three
- Four

8) Which chaining type is used by Prolog?

- Backward
- Forward
- Horizontal
- Up

9) In C# Managed code is executed under the control of

- CRL
- CLR
- Both
- None

10) PHP syntax looks like_____

- ASP syntax
- C/C++
- Both
- None

11) In Java we can make pointer of_____.

- Any type
- Reference type only
- Both of the above options
- None of the given

12) Java has a String class which is not exactly an array of

- Char
- Elements
- Indices
- Long

13) How many string operators are in PHP?

- 2
- 3
- 4

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

➢ 10

14) C# code when compiled is converted into_____code.

➢ MISL
➢ MSIL
➢ MSLL
➢ None

15) in C#_____can be inherited from other class but no inheritance from it. On the other hand_____cannot be inherited not inheritance is possible from it is possible

➢ Private class , public class
➢ Sealed class ,struct in C#
➢ struct in C# , Sealed class
➢ public class , inherited class

16) The IS operator in C# is used for_____

➢ Run time type conversion
➢ Run time type checking
➢ Run time type casting
➢ None of the given

17) PHP is a_____typed language.

➢ Strongly
➢ Dynamic
➢ Static
➢ None of Given

18) Anything starting with Capital or underscore is a variable in_____

➢ Prolog,
➢ Lisp,
➢ COBOL
➢ None of the given

19) In C# the if statement condition is an/a_____

➢ Arithmetic expression
➢ Boolean expression
➢ Numeric expression
➢ Both Numeric expression and Boolean expression

AL-JUNAID TECH INSTITUTE
0341639294
www.vulmshelp.com

20) In C# the value type and reference type variable are interconvert able through_____ concept.

- ➢ Tagged type
- ➢ Boxing
- ➢ interfaces
- ➢ None of the given

21) C# support only_____inheritance and it achieve_____ inheritance through the concept of interfaces.

- ➢ Multiple, multiple
- ➢ Single, multiple
- ➢ Single, single
- ➢ None of the given

22) Dynamic binding occurs at:

- ➢ Compile Time
- ➢ Design Time
- ➢ Link Time
- ➢ Run Time

23) Prolog language falls under the domain of:

- ➢ Scientific Applications
- ➢ Business Applications
- ➢ Special Purpose Languages
- ➢ None of these

24) First language that provided the concept of Pointer data type was_____. ➢ COBOL

- ➢ LISP
- ➢ PL/1
- ➢ JAVA

25) Variable use in VB without declaring decrease reliability and increase_____➢ Readably

- ➢ Writeable
- ➢ Cost
- ➢ Compile time

26) Dot operator in a_____ SNOBOL?

AL JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- ➢ Reference pointer
- ➢ Unary pointer
- ➢ Class pointer
- ➢ Binary pointer

27) The GOTO statement in SNOBOL is _____

- ➢ Explicit
- ➢ Implementation
- ➢ Punter method
- ➢ An Indirect Reference

28) Ada has _____do while loop just like C++.

- ➢ Also
- ➢ NO
- ➢ Defective
- ➢ None of the above

29) The last value execution in the_____ LISP is the return value

- ➢ Atom
- ➢ Object
- ➢ Class
- ➢ Function

30) Dotimes loop of LIPS similar working to ada:

- ➢ For
- ➢ Switch loop
- ➢ Do while
- ➢ While

31) Indexes of arrays in Ada do not start from

- ➢ 0
- ➢ 1
- ➢ 2
- ➢ 3

32) The keyword unsafe is used while dealing with_____

- ➢ Loop
- ➢ Arrays
- ➢ Pointers

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

➢ Classes

33) Java code when compiled is converted into_____code.

➢ Bit code
➢ Byte code
➢ Kbytes code
➢ Giga byte Code

34) Ada pointers are called Access types.

➢ True
➢ False

35) The dangling pointer problem is partially alleviated by Ada design

➢ True
➢ False

36) Following statement returns the union of the two list in LISP.

➢ >(L1 UNION L2)
➢ >(union L1 L2)
➢ >Union L1
➢ >(L1 union L2)

37) In LISP,_____is the main tool used for iteration

➢ Recursion
➢ For Loop
➢ While Loop
➢ Do-While Loop

38) In LISP, following statement returns the difference of the two lists.

➢ (Difference L1 L2)
➢ (set-difference L1 L2)
➢ (L1 Difference L2)
➢ (L1 difference L2)

39) Lists can be constructed with the help of three basic functions which are_____. ➢ scheme, common lisp and cons

➢ cons, append and scheme
➢ cons, list and append
➢ list, atoms and append

40) SNOBOL was designed for_____purpose.

AL JUNAID TECH INSTITUTE 0321-1659294 www.vuhelp.com

- ➢ String manipulation
- ➢ AI
- ➢ Business
- ➢ Scientific

41) Computer architecture has a major influence on the design of programming language. ➢ True

- ➢ False

42) COBOL is mainly designed for_____.

- ➢ Scientific experiments
- ➢ Business application
- ➢ AI applications
- ➢ Publishing and writing algorithm

43) In SONOBAL binary operators have at least_____spaces

- ➢ 1
- ➢ 2
- ➢ 3
- ➢ 4

44) In SONOBOL can the size of the array be determined at run time.

- ➢ Yes
- ➢ No

45) _____is an important feature of Ada language used in embedded systems and operating systems. It is used in managing parallel threads of controls.

- ➢ Controls
- ➢ Tasking
- ➢ Classes
- ➢ Arrays

46) First electronic computer was_____.

- ➢ ENIAC
- ➢ Babbage analytical engine
- ➢ Itel 386
- ➢ Ibm x86

47) It is always better to find out the mistakes in the code at _____.

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- ➢ Runtime
- ➢ Compile time
- ➢ Link time
- ➢ None of given option

48) Too much Orthogonality reduces Readability.

- ➢ Yes
- ➢ No

49) COBOL was the first language that brings the concept of_____

- ➢ Records
- ➢ Structure
- ➢ Object
- ➢ Variable

50) SONOBOL is case _____

- ➢ Sensitive
- ➢ In-sensitive
- ➢ Super sensitive
- ➢ Not sensitive

51) The space operator has _____ precedence than arithmetic operators.

- ➢ Higher
- ➢ Lower
- ➢ Higher and Lower
- ➢ None of the give

52) A language evaluation criteria includes following factors EXCEPT:

- ➢ Readability
- ➢ Writabilty
- ➢ Portability
- ➢ Modularity

53) The variable name has profound effect on_____.

- ➢ Readability
- ➢ Writability
- ➢ Orthogonality
- ➢ Portability

54) SIZE function in SONOBOL language is used to return the

AL-JUNAID TECH INSTITUTE 0304-1659294 www.aljunaidshelp.com

size of _____ ➢ String

➢ Operator

➢ Variable

➢ Keyword

55) Indirect referencing in SONOBOL is same as of_____in C.

➢ Arrays

➢ Pointers

➢ Aliasing

➢ Stack

56) Following factors influences a portable language design EXCEPT:

➢ Computer architecture

➢ Readability

➢ Programmer's time

➢ Windows XP

57) + Sign is used for _____ in SONOBOL.

➢ Line Continuation

➢ Line Break

➢ Line Configuration

➢ Line Alignment

58) _____was the first object oriented language.

➢ COBOL

➢ LISP

➢ JAVA

➢ SIMULA

59) In C# struct are used as_____

➢ pointer

➢ array

➢ parameters

➢ class

60) JavaScript_____ from java language

➢ related

➢ un-related

➢ derived

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- none of the given

61) In Prolog we specify_____and not_____.

- Solution, problem
- Solution, code
- Problem, solution
- None of the above

62) A_____ is a default mechanism for specify types of variable?

- implicit
- explicit
- Both of the above options
- None of the given

63) A_____ is a special word that cannot be used as a user-defined name

- Keyword
- Reserved word
- Both of the above options
- None of the given

64) We use_____in Ada.

- tagged type
- int type
- float type
- none of the given

65) Control structure is a_____ /jump..:)….. statement

- CONTINUE
- GOTO
- SWITCH
- None of the given

66) _____is place holder value that is not required.

- anonymous
- prolog
- both of the above options
- none of the given

67) LISP used in_____ and_____.

- functional paradigm, AI

AL-JUNAID TECH INSTITUTE 0304-1659294 www.examshelp.com

- AI, functional paradigm
- Multi-paradigm, AI
- PROLOG Paradigm, AI

68) We use_____indirect referencing operator in SNOBOL

- Binary
- Binary $
- Unary
- Unary $

69) Elementary types are also called_____in ADA

- Static
- user defines
- built-in
- Discrete

70) ADA is a_____typed language

- partially strongly
- complex
- easy
- none of the given

71) _____has elaborated exception handling

- Ada
- C++
- JAVA
- COBOL

72) _____has a powerful set of operators but poor type checking

- C
- C++
- ADA
- LISP

73) _____and_____have declaration paradigm

- Prolog, SQL
- SQL, Prolog
- Lisp, SQL
- SQL, Lisp

AL-JUNAID TECH INSTITUTE 0304-1639294 www.vulmshelp.com

AL-JUNAID TECH INSTITUT

74) 1st machine independent language is _____

- ➢ ALGOL
- ➢ COBOL
- ➢ ADA
- ➢ PASCAL

75) In C# Managed code is executed under the control of

- ➢ CLR
- ➢ CRL
- ➢ Both of the above options
- ➢ None of the given

76) The depth at which we can think is influenced by _____

- ➢ implementation details
- ➢ significance of implementation
- ➢ implemented recursion
- ➢ none of the above

77) Readability has no influence on the cost of _____

- ➢ testing
- ➢ deployment
- ➢ debugging
- ➢ coding

78) _____has distributed computing architecture

- ➢ PASCAL
- ➢ LISP
- ➢ C
- ➢ CORBA

79) Language with wide domain of application has higher_____

- ➢ Portability
- ➢ Generality
- ➢ Reliability
- ➢ Cost

80) In Java we can make pointer of_____.

- ➢ Any type
- ➢ Reference type only

AL-JUNAID TECH INSTITUTE
0304-1659294
www.pkhelp.com

81) The concept of C# jagged array is similar in function to

- ➢ C++ rectangular Array
- ➢ Java Array of Array

82) In_____Boolean expression is convertible into integer type

- ➢ C#
- ➢ C++
- ➢ JAVA
- ➢ Ada

83) _____compile initially to an intermediate. Which can be run by interpretation or just in time compilation or an appropriate virtual machine?

- ➢ C++ and C#
- ➢ C# and Java

84) For narrowing conversion which type conversion is appropriate?

- ➢ Implicit Conversion
- ➢ Explicit Conversion

85) For narrowing conversion which type conversion is appropriate?

- ➢ Implicit Conversion
- ➢ Explicit Conversion
- ➢ Both of the above options
- ➢ None of the given

86) C# and C++ have_____size.

- ➢ Same
- ➢ Different
- ➢ Distinct
- ➢ None of the given

87) C# code when compiled is converted into_____code.

- ➢ MSIL
- ➢ MISL

88) The concept of sealed class in C# is similar to _____

- ➢ Struct in C#,
- ➢ Struct in C++
- ➢ Abstract class in C#

AL-JUNAID TECH INSTITUTE 0304-1659294 www.aljunaidhelp.com

➢ None of the given

89) Dynamic binding occurs at:

➢ Compile Time
➢ Design Time
➢ Link Time
➢ Run Time

90) Prolog language falls under the domain Of

➢ Scientific Applications
➢ Business Applications
➢ Special Purpose Languages
➢ None of these

91) For Recursion it is necessary that a language

➢ Dynamic
➢ Static
➢ Both dynamic and static
➢ Stack

92) Two important versions of LISP are _____

➢ Scheme and Atoms
➢ Scheme and Common Lisp
➢ Common Lisp and defacto
➢ List and Common Lisp

93) COBOL was the first language that brings the concept of_____

➢ Records
➢ Structure
➢ Object
➢ Variable

94) Ada pointers are called Access types.

➢ True
➢ False

95) SIZE function in SONOBOL language is used to return the size of _____

➢ String
➢ Operator

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

➢ Variable

96) A language is reliable if it does not create--------- during execution.

➢ Error

➢ Result

97) C++ support only -------- mode operator passing

➢ In/out

➢ union

98) Concept of package in java is similar to ---------

➢ C++

➢ C++ and c#

99)has also non-rectangular type of array

➢ C

➢ Java

C

C and C++

121. The syntax of PHP foreach loop is similar to------- loop.

- C++ foreach
- C# foreach
- Java foreach
- C++ for

122. With programming in---------we state what and not how.

- Prolog. P#92
- Algol
- C#
- Fortran

123. When the type is fixed before run time then this is called as-----

- Load time binding
- Static binding

0304-1659294
www.vulmshelp.com

- Dynamic binding
- None of the given

124. A programming language is ------ typed if type error are ----- detected.

- Weakly, Always
- Always, weakly
- Strongly, often
- Strongly, always. P#171

125. All objects in java are ------

- Explicit heap dynamic
- Dynamic storage binding
- Stack dynamic storage binding
- Static storage binding

126 ----------usually a logical grouping of heterogeneous elements.

- Array is
- Record is. P#176
- Structure is
- Both Structure and Record are

127. In java the arithmetic expression evaluation order is always from ------

- Center to right
- Right to Left
- Center to left
- Left to right

128. A control structure is a----------and the statement whose execution it controls.

Control algorithm

0304-1659294 www.vulmshelp.com

- Control statement. P#185
- Control keyword
- None of the given

129. In -------- control statements were based directly on IBM 704 hardware.

- Ada
- FORTRAN l p#185
- FORTRAN 77
- IBM Assembly language

130. We cannot pass array in---------- by value as it has no fix size. But it has fixed size in structure. C#

- Java
- C++
- C

131----------is a language for symbolic computation and its syntax is based on lambda calculus.

- ALGOL
- MATLAB
- C
- LISP p# 27

132. Ada is a -------- typed language.

- Weakly
- Random
- Strongly. P#48
- List

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

133. The integrity of types is checked from all together in -------

- SNOBOL
- ALGOL
- Plankal Koll
- Ada

134. A language is reliable if during execution it does not create ------

- Result
- Error
- Bytecode
- Malfunction

135 is not a valid Prolog atom.

- This _ is_ it
- Mary, _c1
- 'Hello'
- F

136 generates readable code which is easy to maintain.

- Clauses
- Backtracking. P#97
- Inference mechanism
- Facts

137. In C#, value type objects use memory of---------- data structure.

- List
- Tree
- Stack
- Heap

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

138 ---------- is an 8-byte integer.

- Short
- Long
- Byte
- Char

139. Simple data structure and large floating point operations are linked to --------

- Artificial intelligence language domain
- Parallel programming domain
- Scientific application programming domain
- System programming domain

140. Each source file in-------has a public class.

- C++
- C#
- Java p#98
- None of the given

141. There is no autonomic type conversion in -------

- C
- Both java and C++
- Java
- C++

142. Every class in java is part of some ----------

- Subclass
- Method
- Package p#107
- Object

0304-1659294
www.vulmshelp.com

143. Automatic garbage collection in java prevents ---------

- Multithreading
- Exception handling
- Indirect referencing
- Dangling pointer p#117

144. Value types in C# are inherited from ---------

- Java primitive type
- Object
- Reference
- None of the given

146. PHP supported all major Databases including ----------

- None of the given
- ODBC
- ORACLE
- SQL Server

147. In---------the Break statement may have the optional parameter or argument.

- C/C++
- Java
- PHP
- Java Script

148. Classes and objects of PHP are similar to --------

- Classes and objects of C++
- Classes and objects of java
- Classes and objects of C

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Classes and objects of Basic

149----------operator in Prolog is used for List construction and also for List dismantling.

- |(Vertical Slash). P#90
- !(Sign of exclamation)
- : (Colon)
- None of the given

150. In JavaScript --------- operator is used for concatenation.

- Dot(.)
- Plus(+). P#152
- |
- ^

151. The resultant value of variable 'x' in JavaScript statement var x = "5"-"2"; will be -------

- 5-2
- 52
- "5"-"2"
- 3

152. The-------- model in JavaScript provides access to the contents of the browser window.

- DOM. P#155
- BOM
- ROM

AL-JUNAID TECH INSTITUTE 0304-1659294 www.aljunaidhelp.com

- COM

153. In ---------- we may specify the range and precision for floating point numbers. C#

- C/C++
- Ada
- Both Ada and C#

154 ----------parameters are declared inside a subprogram.

- Default
- Actual
- Formal
- Copy

155. eq or equal operator in LISP is used to compare two ---------

- Atom symbols
- List symbols
- Non numeric symbols
- Numeric symbols

157. Object in JavaScript can be accessed through ---------

- Associated array
- Reference pointer method
- Reference type
- Both reference pointer method and reference type

158. Shortcut evaluation is not allowed for ----------

- Boolean operators
- Relational operators
- Bitwise operators

0304-1659294
www.vulmshelp.com

- Both boolean and relational operators

159. Which one of the following languages is designed for distributed computing architecture?

- CORBA
- FORTRAN
- ADA
- LISP

160. In Ada elementary types are also termed as --------

- User defined types
- Static types
- Built in types
- Public types

161. Study of programming languages helps in increasing the---------- to express programming concepts.

- Capacity. P#5
- Level
- Volume
- Range

162 ---------- is the designer of C++ language.

- Bjarne Stroustrup p#15
- James Goslings
- Mike Sheridan
- Patrick Naughton

163. Set membership in Prolog is different from---------- membership.

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- List
- Symbol
- Join
- None of the given

164 ----------support array with built in bounds checking.

- Java
- C++
- C#
- Both java and C# p#118

165. FORTRAN, PL 1 and BASIC language provide --------

- Explicit declaration
- Implicit declaration
- Either implicit and explicit declaration
- None of the given

166. There is no arithmetic expression precedence rule in -------

- PASCAL
- Small talk
- SIMULA
- C/C++

167. C/C++ has both pre-test and post-test version of --------

- Counter controlled loop
- Logically controlled loop
- For loop
- While loop. P#192

168. C++ support only--------mode parameter passing.

AL JUNAID TECH INSTITUTE 0304-1659294 www.ulmshelp.com

- OUT
- IN
- Union
- IN/OUT

169.java has eliminated the concept of ----------

- Classes
- Variables
- Struck. P#31
- Arrays

170. In java Explicit conversions are done through --------

- Referencing
- Aliasing
- Casting. P#104
- Operator overloaded

171. Prolog database is based upon --------

- Facts
- Facts and queries
- Rules and queries
- Facts and rules. P#82

172. A predicate many have ------ or more arguments.

- Three
- Zero. P#88
- One
- Two

173 ----------is used as a place holder for a value that is not required.

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Variable
- Atom
- Constant
- Anonymous variable. P#89

174. In C#, if you don't use new keyword, you must---------- all the values in the struct by hand before you use it.

- Define
- Declare
- Create
- Initialize. P#135

175. Which statement best suited for C programming language?

- String manipulation language
- First language to provide exception handling
- With powerful set of operators but poor type checking p#30
- Introduce the notion of class

176. Which statement is true about SNOBOL?

- Its developers are computer expert
- ITE developers have limited introduction with computer science. P#46
- Is an example of aspect programming languages
- Have many data type

177. In SNOBOL, for entire assignment we use --------- operator in pattern matching statement. $(dollar)

- (.)Dot
- Unary $(Dollar)
- Binary space. P#36

AL-JUNAID TECH INSTITUTE 0304-1639294 www.vulmshelp.com

178. Disjunction in Prolog is through -------- and conjunction is through ---------

- Coma (,), OR
- OR, coma(,)
- OR, Dot(.)
- Dot(.), OR

179. In ------- we can make a pointer variable of value type only.

- C++
- C#
- Java
- Both Java and C#

180 ---------- exception handling has a finally ( ) block.

- Java
- C++
- C
- Plankal kul

181. Which of the following statement is True if $a is not identical to $b in php?

- $a!==$b. P#143
- $a!=$
- $a=!$
- $a=!$

182 ---------- is the magical thing in Prolog.

- Program partition
- Inference engine

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

- List processing
- None of the given

183. In JavaScript navigator is---------- object.

- Built-in
- Browser. P#155
- Document
- User defined

184. The concept of package in java is similar to ---------

- Global class in C++
- Assembly in C#
- Global class in C#
- Global Class in both C++ and C# p#130

185. Array in PHP are not like C/C++ array but they are ---------

- Templates
- Records
- Maps
- Both Templates and Records

186. “with” statement in JavaScript is an alternative of ---------

- While statement
- Union statement
- Single document.write statements
- Multiple document.write statements. P#161

187. Sub ranges of integer types are not compatible with --------

- Integers types

188. Arrays in JavaScript are --------- based.

AL-JUNAID TECH INSTITUTE 0304 1659294 www.vulmshelp.com

- 0

189. Unlike C/C++, arrays in PHP are_____.

- Maps
- Templates
- Records
- Both Templates and Records

190. Enumeration type in C# may take any type of_____in contrast to C++ where it take only _____.

- Numeric value, integer value
- Value type value, numeric value
- Primitive type value, reference type value
- Value type value, reference type value

191. PHP syntax looks like_____.

- ASP syntax
- C/C++ syntax
- Ada syntax
- Both ASP and Ada

192. How many <script> tags can be used in the <head> element?

- Zero
- One
- Two
- Many

193. C# code when compiled is converted into_____code.

- MSIL
- MISL

AL-JUNAID TECH INSTITUTE 0304-1639294 www.vulmshelp.com

- Bytecode
- machine native code

194. In C#, strings are _____.

- Non-Immutable
- Immutable
- Neither Immutable nor Non-Immutable
- Aliasable

196. In_____the relationship between a get and set method is inherited, while in___ it has to be maintained.

- Java, C++
- C++, C#
- Ada, Java
- C#, Java or C++

197. In_____we can mke a pointer variable of value typr only.

- C++
- C#
- Java
- Both java and C++

198.In JavaScript, which of the given provides access to the contents of browser window?

- DOM
- BOM
- ROM
- COM

199. A variable in_____cannot be used unless and until it is not initialized.

0304-1659294
www.vulmshelp.com

- C++
- C#
- ALGOL
- C

200. In how many places a javascript code can be placed?

- 1
- 2
- 3
- 4

201. Which operator is used for concatenation in JavaScript?

- +
- |
- $
- dot(.)

202. Classes and objects of PHP are similar to _____.

- Classes and objects of Java
- Classes and objects of C++
- Classes and objects of Basic
- Classes and objects of C

203. Which of the following is not true about delegates?

- Delegates are value type
- Delegates are event based
- Delegates are like C/C++ function pointer
- Delegates are reference type

204. Which of the given statement is True if "$a" is not identical to "$b" in php?

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- $a != $
- $a =! $
- $a !== $b
- $a ==! $

205. Which of the given operator is used to return a reference from a function in PHP?

- &
- &&
- $
- Dot

206. Managed or safe code in_____is executed under the control of common language runtime (CLR) with automatic garbage collection, no explicit memory allocation and de allocation and no explicit destructor.

- C++
- Java
- Ada and C++
- C#

207. In C# the value type and reference type variable are inter convertible through _____ concept.

- Tagged type
- Interfaces
- Boxing
- None of the given

209. Java code when compiled is converted into_____code.

- Bit code
- Byte code

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

- Kbytes code
- Giga byte Code

211. In_____Boolean expression is convertible into integer type.

- C#
- C++
- JAVA
- Ada

212. _____, an object that describes the basic characteristics of the browser, notably its type and version.

- Window
- Document
- Navigator
- Location

213. In C# _____can be inherited from other class but no inheritance from it. On the other hand_____cannot be inherited and not inheritance from it possible.

- Private class, public class
- Sealed class, struct in C#
- struct in C#, Sealed class
- public class, inheritance class

214. To make necessary arguments at run time error is called-----

- Type checking
- Exception handling
- Error handling
- None of the given

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

215. In----------we have to address the client side compatibility issue.

- JavaScript
- VB Script
- PHP
- Perl

216. How to compare and examine language?

- Readability
- Writability
- Reliability
- All of the given options

217. In SNOBOL 2 spaces can be used, the purpose of 1st space is for ---------- and 2nd for -------

- Pattern matching, String Concatenation
- String concatenation, Pattern matching
- String concatenation, String concatenation
- Pattern matching, Pattern matching

218. Which of the following is an incorrect option from the following statements regarding 'objectives of learning new languages'?

- Help to compare different languages.
- Help in transition from one language to other language
- Help in understanding the language piracy policy
- Help to choose a language for development of a certain application

219. The more is the simplicity of a language, the more it will always be readable.

- True
- False

220. Value upon successful completion of pattern matching, the substring matched

0304-1659294 www.vulmshelp.com

by the pattern is assigned to the variable as -------

- Value
- String
- Integer
- Real numbers

221. The main design goals of Ada were EXCEPT

- Program reliability and maintenance
- Design language for DOD
- Programming is a human activity therefore avoid unintentional mistakes
- Designing a portable language

222. One of the major design goals of Ada was

- To help developers to code the software in lesser time
- To make it difficult for developers to make mistakes
- To help develop an IDE for Ada
- To make testers to test Ada application easily

223. We can have nested procedures in -------- language.

- C++
- Ada
- C
- PROLOG

224. Learning the implementation details of a language help in the efficient use of that language.

- True
- False

225. Too much simplicity in language design can also cause problems.

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- True
- False

226. In ----------, Enumeration type can also be used as indexes in arrays.

- Ada
- C
- C++
- LISP

227. In following is the correct syntax of 'for' statement in Ada.

- for variable in low_value..high_value loop-Loop body goes here end loop;
- for variable in low_value..high_value loop-Loop body goes here end;
- begin; for variable in low_value..high_value loop-Loop body goes here end loop;
- begin loop; for variable in low_value..high_value loop-Loop body goes here end loop;

228. Block statements in Ada is very different to a block in C.

- True
- False

229----------represents the class of languages from functional paradigm.

- LISP
- PROLOG
- Ada
- C++

230. Which statement is wrong about static variables?

- They are bound to memory cells before the execution of program
- They use to direct access the memory

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- There is run time overhead of allocation and de-allocation of memory
- Storage can't be shared among variables

231. If you want an argument to a function to always be passed by reference, you can prepend

- Percentage sign (%) to the argument name in the function definition
- Dollar sign ($) to the argument name in the function definition
- An ampersand (&) to the argument name in the function definition
- Tilled sign (~) to the argument name in the function definition

232. 146. PHP supported all major Databases including ----------

- ODBC
- ORACLE
- SQL Server
- All of the given options

233. Managed or safe code in----------is executed under the control of common language runtime (CLR) with automatic garbage collection, no explicit memory allocation and de allocation and no explicit destructor.

- C++
- Java
- Ada and C++
- C#

234. ---------- is more strongly typed language then ----------

- C++, C#
- C#, C++
- C++, Java
- None of the given

235. Enumeration type in C# may take any type of---------- in contrast to C++

0304-1659294
www.vulmshelp.com

where it take only----------

- Numeric value, integer value
- Value type value, numeric value
- Primitive type value, reference type value

236. -------- exception inherit from exception class and --------- exception is anywhere in the program.

- Java, C#
- C++, C#
- C#, Java
- Java, C++

237. In ------ the relationship between a get and set method is inherited, while in ------ it has to be maintained.

- Java, C++
- C++, C#
- Ada, Java
- C#, Java or C++

238. Which of the following is not true about delegates?

- Delegates are value type
- Delegates are event based
- Delegates are like C/C++ function pointer
- Delegates are reference type

239. There are------ "categories" of types in java.

- Two NOTE: primitive type and reference type
- Three
- Four

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Five

240. A variable in---------cannot be used unless and until it is not initialized.

- C++
- C#
- ALGOL
- C

241. Prolog is considered to be as ---------

- Case and type insensitive
- Case and type sensitive
- Case sensitive and type insensitive
- Case insensitive and type sensitive

242. In java, out-of-bounds array index is always causes a ------- error.

- Syntax
- Compile time
- Runtime
- Logical

244. In prolog, a “member(X, T)” predicate is used to check the membership of X in ___

- Class
- Symbol
- List
- Both class and symbol

245.cannot be converted to other types in java.

- Booleans
- Char

0304-1659294
www.vulmshelp.com

- Double
- Int

246. The---------- operator in C# is used to test if the operator is of a certain type.

- "IN"
- "AS"
- "IS"
- "OUT"

247. In C# the "If" statement condition is an/a ------

- Arithmetic Expression
- Variable Expression
- Numeric Expression
- Boolean Expression

248. In JavaScript, which of the given provides access to the contents of browser windows?

- ROM
- DOM
- COM
- BOM

249. Which of the given is used before the declaration of variable in PHP?

- # Sign
- ? Sign
- $ Sign
- @ Sign

250. The "IS" operator in C# is used for runtime ----------

- Type conversion

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Type casting
- Type tagging
- Type checking

256. PHP stands for ----------

- PHP, Home Page
- PHP, Hypertext page
- PHP, Hypertext Preprocessor
- PHP, Home Preprocessor

257. In PHP, if a number is beyond the bounds of the integer type then it will be interpreted as a----------instead.

- String
- Short
- Long
- Float

259. Which of the following is very effective is solving complex puzzles?

- FORTRAN
- PROLOG
- ALGOL
- C/C++

260. The program is written in C# compiles to:

- Machine code
- An intermediate language (IL)
- Object code
- Source code

260. Concurrency in java is supported through:

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Resource allocation
- Batch execution
- Threads
- Operator Overloading

262. Which of the following are lightweight processes in java?

- Threads
- Packages
- Applets
- JVM

263. The methods that allow two threads to cooperate (or synchronize) with each other in a java program are:

- Wait() and run()
- run() and notify()
- Wait() and notify()
- sleep() and yield()

264. In how many ways threads can be created in java?

- Two
- Many
- Three
- Four

265. C# language is very similar to:

- Prolog
- C-language
- Delphi
- Java

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

AL-JUNAID TECH INSTITUT

266. Which of the following method is used to implement runable interface in java?

- Stop Thread()
- Run Thread()
- Stop()
- Run()

267. Which of the following method in a java class cannot be changed (overridden) in a subclass?

- Public void display (){-}
- Public static void area (){-}
- Private void radius (){-}
- Public final void result (){-}

268. In C#, the name of class and the name of the file in which it is saved.

- Must start with lowercase letter
- Must start with uppercase letter
- Must match up
- Do not need to match up

269. PHP supports various data types excepts ------

- Integer
- Array
- Object
- Char

270. Which of the given operator is used to return a reference from a function in PHP?

- &
- &&

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

- $
- Dot

271. An----------in PHP is an ordered map.

- Array
- Queue
- Stack
- String

272. In----------the “break” statement may have an optional parameter or argument.

- C/C++
- Java
- PHP
- C#

273. In PHP “switch” structure, the ---------- starts or implements an implicit loop.

- Break statement
- For loop
- Continue statement
- Return statement

274. C# provides the feature of built-in bounds checking of:

- Functions and classes
- Objects and methods
- Arrays and strings
- Interfaces and packages

275. Which of the following keywords is used to make a class non-extendable in java?

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Static
- Private
- Final
- Public

276. In a PROLOG program, the definitions of predicate sentences or phrase are known as:

- Facts
- Clauses
- Declaration
- Inferences

NOTE: **Clauses**

Clauses are definition(s) of Predicate sentence or phrase.

277. What happens when you don't initialize the fields in the constructor of a java class?

- A compile-time error occurs
- Logical error occurs
- Default values are assigned WICKIPEDIA
- Runtime error occurs

278. Expert system ---------- provide a structure to design expert system.

- Techniques
- Shells
- Lists
- Mechanism

279. The inference mechanism of PROLOG is based upon ----------

- Forward chaining
- Back tracking

03041659294 www.vulmshelp.com

- Propositional logic
- Recursion

280. What happens when you try to use an out-of bounds array index in JAVA?

- Array size is automatically incremented
- A runtime error occurs
- A garbage value is printed
- Nothing happens

281. Which of the following is treated as an atom and not as a List data type in PROLOG?

- [a, t,o,m]
- [a,b,c]
- [a]
- [ ]

282. How many types of arrays are available in C#?

- Four
- Two
- Three
- One

283. All java classes (built-in or user-defined) are sub-classes of---------- class.

- Thread
- System
- Object
- Throwable

NOTE:

In Java, all classes (built-in or user-defined) are (implicitly) subclasses of the class **Object**.

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

AL-JUNAID TECH INSTITUT

284. The scripts written in PHP are executed by:

- Client machine
- Web server
- Web browser
- Java Applet

285. The head and tail of a list in PROLOG is separated by:

- Semicolon (;)
- Comma (,)
- Vertical bar(|)
- Colon (:)

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

SOLVED BY PRINCE ALVI

Sample Paper
FINALTERM EXAMINATION
Fall 2022
CS508 - Modern Programming Languages

Time: 90 min
Marks: 60

Question No: 1 (Marks: 01) - Please choose the correct option
The concept of list processing was developed by _____and _____ at the RAND Corporation around 1956.

Harvey Deitel, Paul Deitel
Dennis Ritchie, Jean McGee Ritchie
Allen Newell, J. C. Shaw, Herbert Simon
Alan Turing, Charles Babbage

Question No: 2 (Marks: 01) - Please choose the correct option
In LISP, there is a limit to the depth of recursion, and it depends on the _____.

Version of LISP
Execution speed of processor
Operating systems version
Programmer's capabilities

Question No: 3 (Marks: 01) - Please choose the correct option
In LISP, load is an example of _____.

List
Function
Input/Output
Predicate

Question No: 4 (Marks: 01) - Please choose the correct option
Programming, in logic programming languages is _____.

Non-procedural
Procedural
Sequential Serial

Question No: 5 (Marks: 01) - Please choose the correct option
In Prolog, we don't specify _____.

Algorithm
Facts
Logical relationships Rules

Question No: 6 (Marks: 01) - Please choose the correct option
CLR (Common Language Runtime) is similar to _____ .

Java Development Kit
Java Virtual Machine

For any query feel free to ask princealvi9222@gmail.com

SOLVED BY PRINCEALVI9222@GMAIL.COM

SOLVED BY PRINCE ALVI

Software Development Kit
Dynamic Link Library

Question No: 7 (Marks: 01) - Please choose the correct option
In order to print the output and go to the next line in C# language, which syntax is correct?
Console.WriteLine("Hello World!");
Console.Write("Hello World!");
Console.Write("Hello Mono World")+ ("New Line");
Console.Write ("Hello Mono World")+ NewLine;

Question No: 8 (Marks: 01) - Please choose the correct option
Structure in C# cannot be inherited by any class, except _____ class.

System
Class
Object
Interface

Question No: 9 (Marks: 01) - Please choose the correct option
What should be the return type of given C# code?
public _____ setSize (int value) {
size = value;
}

void
int
float
double

Question No: 10 (Marks: 01) - Please choose the correct option
In C#, object and _____ are predefined reference types.

int
char
string
pointer

Question No: 11 (Marks: 01) - Please choose the correct option
Aliasing is a problem associated with reference types. What will be the value of A.count in given C# code by keeping in mind here aliasing is applied?
object A = new object();
A.count = 5;
object B = A;
B.count = 10
A.count = ?

5
Null
0
10

SOLVED BY PRINCEALVI9222@GMAIL.COM

SOLVED BY PRINCE ALVI

Question No: 12 (Marks: 01) - Please choose the correct option
What will be the result of the given statement in C# ?
if(A = B)

B's value will be assigned to A
It will check whether A = B or not
It will check whether B = A or not
Compilation error

Question No: 13 (Marks: 01) - Please choose the correct option
If a class is required to access only in same assembly but not by other assemblies, then which keyword would be used in C#?

internal
protected
private
sealed

Question No: 14 (Marks: 01) - Please choose the correct option
In relation to an array, _____ could be declared in C#.

pointer
string
class
structure

Question No: 15 (Marks: 01) - Please choose the correct option
Which of the following syntax is correct to relate pointer "bb" with array "b"?

int [] b = {3,5,9};
int b*b = b;
int [] b = {3,5,9};
int bb* = b;
int [] b = {3,5,9};
int *bb =b;
int [] b = {3,5,9};
int bb = *b;

Question No: 16 (Marks: 01) - Please choose the correct option
In C#, Object Oriented Programming(OOP) is supported through _____.

classes
structures
union
enums

Question No: 17 (Marks: 01) - Please choose the correct option While overriding a method, the other overridden method must not be _____.

static
virtual
abstract

SOLVED BY PRINCE ALVI9222@GMAIL.COM

For any query feel free to ask princealvi9222@gmail.com

override

Question No: 18 (Marks: 01) - Please choose the correct option
To check the type of certain operator or expression, _____ operator is used in C#.

is
type
+
:?

Question No: 19 (Marks: 01) - Please choose the correct option
Access modifiers are not available in _____ and its default access is implicitly public.

interfaces
classes
objects
abstract

Question No: 20 (Marks: 01) - Please choose the correct option
PHP stands for _____.

PHP: Hypertext Preprocessor
PHP: Hypertext Preproducer
PHP: Hypertransfer Preprocessor
PHP: Hypertransfer Producer

Question No: 21 (Marks: 01) - Please choose the correct option
Choose correct syntax to fill the blank lines in given HTML code.
<html>
<head>
<title>PHP Test</title>
_____
_____
</head>
</html>
<head>
<html>
</head>
<html>
</html>
</head>

Question No: 22 (Marks: 01) - Please choose the correct option
Which form of the tag is not allowed in PHP?

<?php ?>
<?
?>
<script
/script>
<?html
?>

SOLVED BY PRINCE ALVI9222@GMAIL.COM

SOLVED BY PRINCE ALVI

Question No: 23 (Marks: 01) - Please choose the correct option
What will be the resultant value of a given statement in PHP?
$stExp = "10.0 cats " + 1;

11
10
1
0

Question No: 24 (Marks: 01) - Please choose the correct option
What will be the value of “a” after execution this PHP code?
$a = "Hello ";
$a .= "World!";

“Hello World!”
“Hello”
“World!”
“Hello. World!”

Question No: 25 (Marks: 01) - Please choose the correct option
“each” in PHP returns, _____ key and value pair from an array.

current element’s
first element’s last
element’s didn’t
return any

Question No: 26 (Marks: 01) - Please choose the correct option
In Java, long is a primitive data type with _____ integer.

64-bit signed
32-bit signed
64-bit unsigned
32-bit unsigned

Question No: 27 (Marks: 01) - Please choose the correct option
In Java, the finalize method serves as a kind of _____.

Constructor
Destructor
Pointer
Primitive data type

Question No: 28 (Marks: 01) - Please choose the correct option
Which of the following feature is not supported by Java language ?

Friend functions or friend classes
Short data type
Arrays
Packages

SOLVED BY PRINCE ALVI9222@GMAIL.COM

For any query feel free to ask princealvi9222@gmail.com

SOLVED BY PRINCE ALVI

Question No: 29 (Marks: 01) - Please choose the correct option
What is mistake in following Java code for implicit type conversion?
byte a = 12;
short b = (short) a;

Use short for a and byte for b
It is explicit type conversion
Not possible to convert a byte in to short
Change the value from 12 to 11

Question No: 30 (Marks: 01) - Please choose the correct option In Java, which of the following is not an access specifier (or modifier)?

Protocol
Public
Private
Protected

Question No: 31 (Marks: 01) - Please choose the correct option
For programming languages, if all type bindings are static, nearly all type checking can be _____.

Static
Dynamic
Overriding
Late

Question No: 32 (Marks: 01) - Please choose the correct option
The Boolean data type may be implemented as bits, but often as bytes due increased _____.

Writability
Reliability
Maintainability
Readability

Question No: 33 (Marks: 01) - Please choose the correct option
The order of operand evaluation in programming languages is a _____ issue.

Type binding
Type Compatibility
Design
Operator Overloading

Question No: 34 (Marks: 01) - Please choose the correct option
The decision about the lifetime of heap-dynamic variables is a design issue for _____.

Integers
Pointers

SOLVED BY PRINCE ALVI 9222@GMAIL.COM

For any query feel free to ask princealvi9222@gmail.com

Boolean
Characters

Question No: 35 (Marks: 01) - Please choose the correct option
One of the potential problems regarding Operator Overloading is _____.

Less readability
Poor Maintainability
Low Writability
Increased Expressivity

Question No: 36 (Marks: 01) - Please choose the correct option
Overflow is a kind of _____ error.

Run-time
Compile-time
Syntax
Type mismatch

Question No: 37 (Marks: 01) - Please choose the correct option
As a language designer, the decision of introducing pre-test or post-test belong to _____ loops.

Counter-controlled
Logically-controlled
Counting
User-loop

Question No: 38 (Marks: 01) - Please choose the correct option
The feature of unconditional branching is available in _____.

Ada
Java
FORTRAN
Almost all classic programming languages

Question No: 39 (Marks: 01) - Please choose the correct option
Collision is one of the problems that may arise during _____ implementation model for parameters passing.

Pass-by-value
Pass-by-result
Pass-by-data
Pass-by-array

Question No: 40 (Marks: 01) - Please choose the correct option
As a concluding remarks of this course, different programming languages can be used to solve _____ problems by utilizing _____ programming paradigms.

Same, same

For any query feel free to ask princealvi9222@gmail.com

SOLVED BY PRINCEALVI9222@GMAIL.COM

Same, different
Different, same
Different, appropriate

Descriptive Questions - 3 Marks (6 Questions)
Question No: 41 (Marks: 03)
According to the structure format of writing a class in C# language, fill in the blank of given code.

_____ _____ VU { public
_____ _____ Main()
{ Console.WriteLine("Virtual University of Pakistan!")_____
_____
}

Solution:

```
class VU
{
   public static void Main()
   {
      Console.WriteLine("Virtual University of Pakistan!");
   }
}
```

Question No: 42 (Marks: 03)
Write a program in C# language to declare an integer type array "sampleArray"and assign its memory address to an integer type pointer named "samplePointer".
Note: initialize array with any of the whole number values.

Solution:

```
using System;

class Program
{
   static void Main()
   {
      int[] sampleArray = new int[] {1, 2, 3, 4, 5};  // declare and initialize an integer type array
      int* samplePointer = &sampleArray[0];          // assign memory address of first element of the array to the pointer

      Console.WriteLine("Memory address of sampleArray[0] = " + (int)samplePointer);  // print the memory address of the first element of the array using the pointer
   }
}
```

Question No: 43 (Marks: 03)

SOLVED BY PRINCE ALVI9222@GMAIL.COM

SOLVED BY PRINCE ALVI

Write a program that prints the title as “Welcome to CS508 Course” in HTML and embed a PHP code within a paragraph tag as “This is a sample question”.

Solution:

```
<!DOCTYPE html>
<html>
<head>
        <title>Welcome to CS508 Course</title>
</head>
<body>
          <h1>Welcome to CS508 Course</h1>
    <p><?php echo "This is a sample question"; ?></p>
</body>
</html>
```

Question No: 44 (Marks: 03)
In Java, you are supposed to write code snippet for declaring two strings and concatenating them. Moreover, mention the operator name or symbol used for string concatenation.

Solution:

```
public class StringConcatenationExample {
   public static void main(String[] args) {
      String str1 = "Hello";
      String str2 = "World!";
      String result = str1 + " " + str2; // concatenate the two strings with a space in
between
      System.out.println(result); // output the result string
   }
}
```

Question No: 45 (Marks: 03)
Identify the mistake(s) in following Java code and write the correct code.

```
public static void main( String [ ] args ) class
HelloWorld {
        {
                System.out.println("Hello world!")
        }
}
}
```

Solution:

There are two mistakes in the given Java code:

1) The class declaration is misplaced. It should come before the main method declaration.
2) The println statement is missing a semicolon at the end.

SOLVED BY PRINCE ALVI 9222@GMAIL.COM

For any query feel free to ask princealvi9222@gmail.com

Here's the corrected code:

```
public class HelloWorld {
    public static void main(String[] args) {
        System.out.println("Hello world!");
    }
}
```

Question No: 46 (Marks: 03)

In programming languages generally there are four types of arrays introduced and stack-dynamic array is one of them.You are required to provide a code example of Stack-dynamic category of arrays.

Solution:

```
import java.util.ArrayList;

public class StackDynamicArrayExample {
    public static void main(String[] args) {
        // create a new ArrayList object with initial size 0
        ArrayList<Integer> stack = new ArrayList<Integer>();

        // push elements onto the stack
        stack.add(1);
        stack.add(2);
        stack.add(3);

        // pop elements from the stack
        int poppedElement = stack.remove(stack.size() - 1);
        System.out.println("Popped element: " + poppedElement);

        // peek at the top element without popping it
        int topElement = stack.get(stack.size() - 1);
        System.out.println("Top element: " + topElement);
    }
}
```

Question No: 47 (Marks: 05)

Write the results of the following expressions written in PHP.

```
<?php
        $stExp = 5+ "90.5";
        $stExp = 1 + "-1.1e3";
        $stExp = 3 + “1.3Sara";
        $stExp = 1 + "5 little kittens";
        $stExp = "10.0 cats " + 1; ?>
```

Solution:

```
<?php
$stExp = 5+ "90.5";
echo $stExp; // Output: 95.5
```

SOLVED BY PRINCE ALVI9222@GMAIL.COM

```
$stExp = 1 + "-1.1e3";
echo $stExp; // Output: -1099

$stExp = 3 + "1.3Sara";
echo $stExp; // Output: 4

$stExp = 1 + "5 little kittens";
echo $stExp; // Output: 6

$stExp = "10.0 cats " + 1;
echo $stExp; // Output: 11
?>
```

Question No: 48 (Marks: 05)
What are some of the key features of Prolog? Name any five.

Solution:

1. Declarative programming: Prolog is a declarative programming language, meaning that the programmer specifies what the program should accomplish, rather than how to accomplish it.
2. Logic-based programming: Prolog is a logic-based programming language, meaning that it operates on the principles of mathematical logic.
3. Unification and backtracking: Prolog makes use of unification and backtracking to efficiently search through a large number of possibilities.
4. Pattern matching: Prolog allows for pattern matching, which means that it can match patterns of variables to patterns of data.
5. Rule-based programming: Prolog uses a set of rules to generate solutions to problems, making it particularly well-suited to applications in artificial intelligence and natural language processing.

Question No: 49 (Marks: 05)
Explain the distinct features of LISP that were introduced first time in LISP.

Solution:

1. Lists as fundamental data structures: LISP was the first programming language to treat lists as a fundamental data type, rather than just an extension of arrays or other data structures. This allowed LISP to handle complex data structures with ease, and made it particularly well-suited for symbolic processing and artificial intelligence applications.

SOLVED BY PRINCE ALVI 9222@GMAIL.COM

2. Recursive functions: LISP was also the first language to make extensive use of recursive functions. This allowed programmers to write very powerful and flexible algorithms that could operate on complex data structures.
3. Dynamic typing: LISP introduced the concept of dynamic typing, where the type of a variable is determined at runtime rather than at compile time. This allows for greater flexibility in programming and makes it easier to write code that can handle different types of data.
4. Garbage collection: LISP was also the first language to incorporate automatic garbage collection. This means that memory management is handled automatically by the language, so programmers don't have to worry about allocating and freeing up memory.
5. Macros: LISP was the first language to include macros, which allow programmers to define new language constructs and extend the language itself. This made LISP extremely flexible and customizable, and allowed programmers to write code that was tailored specifically to their needs.

Question No: 50 (Marks: 05)
Write output of given JavaScript statements.

```
var mobiles=["iPhone", "Samsung", "Tecno", "Huawei"];
document.write(mobiles[0]); document.write("This is " +
mobiles[1]); document.write(mobiles[2]+mobiles[3]);
mobiles[0]="Lenovo"; document.write("iPhone is replaced
with " + mobiles[1]); document.write(mobiles[1]+"
"+mobiles[0]);
```

Solution:

The output of the given JavaScript statements will be:

iPhone
This is Samsung
TecnoHuawei
iPhone is replaced with Samsung
Samsung Lenovo

SOLVED BY PRINCEALVI9222@GMAIL.COM



Final-Term Papers Solved MCQS with Reference

1. The syntax of PHP foreach loop is similar to _____ loop.
   - C++ foreach
   - **C# foreach**
   - Java foreach
   - C++ for

2. With programming in _____ we state what and not how.
   - **Prolog** **PG # 92**
   - Algol
   - C#
   - Fortran

3. When the type is fixed before run time then this is called as _____.
   - Load time binding
   - **Static binding** **Click Here For Reference**
   - Dynamic binding
   - None of the given
4. A programming language is _____ typed if type errors are _____ detected.
   - Weakly, Always
   - Always, weakly
   - Strongly, often
   - **Strongly, always** **PG # 171**
5. All objects in Java are _____.
   - Explicit heap dynamic
   - **Dynamic storage binding**
   - Stack dynamic storage binding
   - Static storage binding
6. _____ usually a logical grouping of heterogeneous elements.
   - Array is
   - **Record is** **PG # 176**
   - Structure is
   - Both Structure and Record are

7. In Java the arithmetic expression evaluation order is always from _____
   - Centre to right
   - Right to Left
   - Centre to left
   - **Left to right** **Click Here For Reference**

8. A control structure is a _____ and the statement whose execution it controls.
   - Control algorithm
   - **Control statement** **PG # 185**
   - Control keyword
   - None of the given

9. In _____ control statements were based directly on IBM 704 hardware.
   - Ada
   - **FORTAN I** **PG # 185**
   - FORTRAN 77
   - IBM Assembly language

10. We cannot pass array in _____ by value as it has no fix size. But it has fixed size in structure.
    - C#
    - Java
    - C++
    - **C**

11. _____ is a language for symbolic computation and its syntax is based on lambda calculus.

- ALGOL
- MATLAB
- C
- **LISP** **PG # 27**

12. Ada is a_____ typed language.

- Weakly
- Random
- **Strongly** **PG # 48**
- List

13. The integrity of types is checked from all together in _____.

- SNOBOL
- ALGOL
- Plankal Koll
- **Ada**

14. A language is reliable if during execution it does not create _____.

- Result
- **Error**
- Bytecode
- Malfunction

15. _____ is not a valid Prolog atom.

- this_is_it
- Mary, _c1
- **‘Hello’**
- f

16. _____ generates readable code which is easy to maintain.

- Clauses
- **Backtracking** **PG # 97**
- Inference mechanism
- Facts

17. In C#, value type objects use memory of _____ data structure.

- List
- Tree
- Stack
- **Heap**

18. _____ is an 8-byte Integer.

- Short
- **Long**
- Byte
- Char

19. Simple data structure and large floating point operations are linked to _____.

- Artificial intelligence language domain
- Parallel programming domain
- **Scientific application programming domain**
- System programming domain

20. Each source file in _____ has a public class

- C++
- C#
- **Java** **PG # 98**
- None of the given

21. There is no automatic type conversion in _____.

- **C**
- Both Java and C++
- Java
- C++

22. Every class in Java is part of some _____.

- Subclass
- Method
- **Package** **PG # 107**
- Object

23. Automatic garbage collection in Java prevents _____.

- Multithreading
- Exception handling
- Indirect referencing
- **Dangling pointers** **PG # 117**

24. Value types in C# are inherited from _____.

- Java Primitive type
- **Object**
- Reference
- None of the given

25. In C# the if statement condition is an/a _____.

- Arithmetic expression
- Boolean expression
- Numeric expression
- **Both Numeric expression and Boolean expression**

26. PHP supported all major Databases including _____.

- None of the given
- ODBC
- **ORACLE**
- SQL Server

27. In _____ the Break statement may have the optional parameter or argument.

- C/C++
- Java
- PHP
- **Java Script**

28. Classes and objects of PHP are similar to _____.

- Classes and objects of C++
- **Classes and objects of Java**
- Classes and objects of C
- Classes and objects of Basic

29. _____ operator in Prolog is used for List construction and also for List dismantling.

- **|(Vertical Slash)** **PG # 90**
- !(Sign of exclamation)
- :(Colon)
- None of the given

The | has dual purpose in Prolog; it is used for list construction as well as list dismantling.

30. In JavaScript _____ operator is used for concatenation.

- Dot (.)
- **Plus (+)** **PG # 152**
- |
- ^

31. The resultant value of variable ‘ x ‘ in JavaScript statement var x = "5” - “2”; will be _____.

- 5-2
- 52
- “5” - “2”
- **3**

32. The _____ model in JavaScript provides access to the contents of the browser window.

- **DOM** **PG # 155**
- BOM
- ROM
- COM

33. In _____ we may specify the range and precision for floating point numbers.

- C#
- C/C++
- **Ada**
- Both Ada and C#

34. _____ parameters are declared inside a subprogram.

- **Default**
- Actual
- Formal
- Copy

35. eq or equal operator in LISP is used to compare two _____.

- Atom symbols
- List symbols
- Non numeric Symbols
- **Numeric symbols**

36. In C#, the value type and reference type variables are interconvertable through _____ concept.

- Tagged type
- **Boxing**
- Interfaces
- Both Interfaces and Tagged type

37. Object in JavaScript can be accessed through _____.

- Associated array
- **Reference pointer method**
- Reference type
- Both Reference pointer method and Reference type

38. Shortcut evaluation is not allowed for _____.

- Boolean operators
- Relational operators
- **Bitwise operators**
- Both boolean and relational operators

39. Which one of the following languages is designed for distributed computing architecture?

- **CORBA**
- FORTRAN
- ADA
- LISP

40. In Ada elementary types are also termed as _____.

- **user defined types**
- static types
- built in types
- public types

41. Study of programming languages helps in increasing the _____to express programming concepts.

- **Capacity** **PG # 5**
- Level
- Volume
- Range

42. _____is the designer of C++ language.

- **Bjarne Stroustrup** **PG # 15**
- James Gosling
- Mike Sheridan
- Patrick Naughton

43. Set membership in Prolog is different from_____membership.

- **List**
- Symbol
- Join
- None of the given

44. _____support array with built in bounds checking.

- Java
- C++
- C#
- **Both Java and C#** **PG # 118**

45. FORTRAN, PL 1 and BASIC language provide_____.

- Explicit declaration
- **Implicit declaration** **PG # 169**
- Either implicit or explicit declaration
- None of the given

46. There is no arithmetic expression precedence rule in_____

- PASCAL
- **Small talk**
- SIMULA
- C/C++

47. C/C++ has both pre-test and post-test version of_____.

- Counter controlled loop
- Logically controlled loops.
- For loop
- **While loop** **PG # 192**

48. C++ support only_____mode parameter passing.

- OUT
- IN
- Union
- **IN/OUT**

49. Java has eliminated the concept of_____

- Classes
- Variables
- **Struct** **PG # 31**
- Arrays

50. In Java Explicit conversions are done through_____.

- Referencing
- Aliasing
- **Casting** **PG # 104**
- Operator overloading

51. Prolog database is based upon_____.

- Facts
- Facts and queries
- Rules and queries
- **Facts and rules** **PG # 82**

52. A predicate may have_____or more arguments.

- Three
- **Zero** **PG # 88**
- One
- Two

53. _____is used as a place holder for a value that is not required.

- Variable
- Atom
- Constant
- **Anonymous variable** **PG # 89**

54. In C#, if you don't use new keyword, you must_____all the values in the struct by hand before you use it.

- Define
- Declare
- Create
- **Initialize** **PG # 135**

55. Which statement best suited for C programming language?

- String manipulation language
- First language to provide exception handling
- **With powerful set of operators but poor type checking** **PG # 30**
- Introduce the notion of class

56. Which statement is true about SNOBOL?

- Its developers are computer experts
- **Its developers have limited introduction with computer science** **PG # 46**
- Is an example of aspect programming languages.
- Have many data types

57. In SNOBOL, for entire assignment we use_____operator in pattern matching statement.

- $(dollar)
- (.) Dot
- Unary $(Dollar)
- **Binary Space** **PG # 36**

58. Disjunction in Prolog is through_____and conjunction is through_____.

- Coma (,), OR
- **OR, coma (,)**
- OR, Dot(.)
- Dot(.) , OR

59. _____has also non rectangular type of array.

- C++
- **JAVA**
- C
- C and C++

60. _____exception handling has a finally ( ) block.

- **JAVA**
- C++
- C
- Plankal Kul

61. In_____we can make a pointer variable of value type only.

- **C++**
- C#
- Java
- Both Java and C#

62. Which of the following statement is True if $a is not identical to $b in php?

- **$a !==$b** **PG # 143**
- $a != $
- $a =! $
- $a ==! $

63. _____is the magical thing in Prolog.

- Program partition
- **Inference engine** **Click Here For Reference**
- List Processing
- None of the given

64. In JavaScript navigator is _____object.

- Built-in
- **Browser** **PG # 155**
- Document
- User defined

65. The concept of package in Java is similar to_____.

- Global Class in C++
- Assembly in C#
- Global class in C#
- **Global Class in both C++ and C#** **PG # 130**

66. Arrays in PHP are not like C/C++ arrays but they are_____.

- Templates
- Records
- **Maps**
- Both Templates and Records

An **array in PHP** is actually an ordered map. A map is a type that associates values to keys.

67. "with" statement in JavaScript is an alternative of_____.

- While statement
- Union statement
- Single document.write statement
- **Multiple document.write statements** **PG # 161**

68. Sub ranges of integer types are not compatible with_____.

- **integer types** **PG # 172**

69. Arrays in JavaScript are _____ based.

- **0** **PG # 152**

Note: Give me a feedback and your Suggestion also If you find any mistake in mcqz plz inform me Via Contact us Page on our Site. And tell me your answer with references.

For More Solved Papers By Arslan Visit Our Website:
Www.VirtualUstaad.blogspot.com



Virtual University	CS508-Modern Programming Language (Solved Macq's) LECTURE FROM (23 to 45)	
Junaidfazal08@gmail.com Bc190202640@vu.edu.pk	FOR MORE VISIT VULMSHELP.COME	**JUNAID MALIK** **0304-1659294**



AL-JUNAID TECH INSTITUTE

1. Which of the following conversion has to be done explicitly by the programmer in C#?
   - Float to int
   - Into to Float
   - Int to long
   - Float of double
2. The dynamically generate a web page which of the following programming language is most suitable?
   - Ada
   - PHP
   - C++
   - Prolog
3. In C#, which of the following is used to give information to .Net compiler that a class is compliant with common language Specification (CLS)?
   - Class variables
   - Class attributes
   - Class definition
   - Class function
4. C# does not support the conversion of _____values to integers.
   - Boolean
   - Character
   - Floating point
   - Decimal
5. Classes and objects of PHP are similar to_____
   - Classes and objects of Basic
   - Classes and Objects of C
   - Classes and Objects of JAVA
   - Classes and Objects of C++
6. Which of the following language is used for server-side scripting?
   - C#
   - ADDA
   - PHP
   - C++
7. Which of the given operator is used to return to reference from a function in PHP?
   - &&
   - $
   - Dot
   - &
8. A variable in_____cannot be used unless and until it is not initialized.
   - ALGOL
   - C
   - C++
   - C#
9. In order to pass a value by reference to a method in C#, which of the following keyword is used with method parameter.
   - Refer
   - New

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

- Ref
- Explicit

10. The code written in PHP is returned to the web browser as:
    - CSS flexbox
    - Shell Scripts
    - Applets
    - Plain HTML
11. "With" statement in JavaScript is an alternative of_____
    - Multiple document.write statements
    - Single document.write statements
    - Multiple document.read statements
    - Single document.read statements
12. C# support only_____inheritance and it achieve_____inheritance through the concept of interfaces.
    - Multiple,multiple
    - Single,Multiple
    - None of the given
    - Single, Single
13. In the context of C#, which of the following is not true about delegates?
    - Delegates are value type
    - Delegates are event based
    - Delegates are like C/C++ function pointer
    - Delegates are reference type
14. FORTRAN, PL 1 and BASIC language provide -------- of variables.
    - Explicit declaration
    - Implicit declaration
    - Either implicit and explicit declaration
    - None of the given
15. Which of the given statement is true if "$a" is not equal to "$b" in PHP?
    - $a=! $
    - $a! ==$b
    - $a! =$
    - $a==! $
16. The loop control expression in any loop of C# must be of_____type.
    - Integer
    - Boolean
    - Decimal
    - Float
17. The_____operator in C# is used to test it the operator/expression is of a certain type.
    - 'IN'
    - 'IS'
    - 'AS'
    - 'OUT'

0304-1659294
www.vulmshelp.com

18. A script written in PHP are executed by:
    - Web browser
    - Client machine
    - Java Applets
    - Web Server
19. In PHP 'Switch' structure the_____starts or implements on implicit loop.
    - Return statement
    - Continue Statement
    - Break Statement
    - For Loop
20. PHP stand for
    - PHP, Home Page
    - PHP, Hypertext page
    - PHP, Hypertext Preprocessor
    - PHP, Home Preprocessor
21. Which of the Following type of number are not supported by PHP
    - Real Number
    - Complex Number
    - Single Integers
    - Unsigned Integer
22. The division of two integers (i.e 7/2) in PHP generates a/an.
    - Floating Point number
    - Integer
    - Exception
    - Runtime error
23. Arrays in JavaScript are_____based
    - Zero index
    - Length
    - Location
    - One index
24. The____model in JavaScript provides access to the contents of the browser windows.
    - COM
    - DOM
    - BOM
    - ROM
25. An_____in PHP is an ordered map.
    - Queue
    - Array
    - Stack
    - String
26. In the context of C#, a class that is defined on the body of another class is called.
    - Protected class
    - Previous Class
    - Public Class
    - Nested Class

AL-JUNAID TECH INSTITUTE 0304-1659294 www.ujmshelp.com

AL-JUNAID TECH INSTITUTE

27. If you want to override a method in C# then the override method must not be declared as.
    - Override
    - Static
    - Abstract
    - Virtual
28. In JavaScript, which of the given provides access to context of browser window.
    - DOM
    - ROM
    - COM
    - BOM
29. Which of the given is used before the declaration of variable in PHP?
    - # Sign
    - ? Sign
    - $ Sign
    - @ Sign
30. In how many Places a JavaScript code can be placed.
    - 3
    - 2
    - 4
    - 5
31. The "OUT" keyboard in C# used to pass_____variable by reference to a method.
    - Numeric
    - Static
    - String
    - Un-initialized
32. In_____string and Numeric values are inter convertible.
    - C#
    - JAVA
    - c/C++
    - PHP
33. A/An_____in a default mechanism for Specifying Types of variables.
    - Static Declaration
    - Run Time Declaration
    - Explicit Declaration
    - Implicit Declaration
34. In PHP, if a number is beyond the Bounds of the integer types, then It will be interpreted as a____instead.
    - Long
    - Float
    - Short
    - String
35. If X and Y are integer variables and Z is a Boolean variable then which of the Following Statement cause compilation error in C#?

- If(x=y)
{

    //Some Code

}
- If(x>y)
{

    //Some Code

    }
- If(y>x)
{

    //Some Code

    }
- If(z)
{

    //Some Code

    }

36. A/an_____ is a special word that cannot be used as a user defined name.
    - Reserved Word
    - Flag Word
    - Dummy Word
    - Abstract word
37. _____an object that describes the basic characteristics of the browser, notably its type and version.
    - Navigator
    - Location
    - Document
    - Window
38. Array in PHP are not like C/C++ arrays but they are_____
    - Templates
    - Structure
    - Maps
    - Record
39. Which of the Following Class in C# cannot be inherited from.
    - Inherit class
    - Abstract Class
    - Public class
    - Sealed Class
40. In the content of C#, a class that is defined the body of another class is called.
    - Protected Class
    - Nested Class
    - Private Class

0304-1659294
www.vulmshelp.com

- Public Class

41. In JavaScript navigator is a _____objects.
    - User defined
    - Built-in
    - Browser
    - Document
42. Object-Oriented programming in C# is supported through.
    - Classes
    - Functions
    - Control flow Statements
    - Packages
43. Which operator is used for Concatenation in JavaScript?
    - +
    - Dot(.)
    - |
    - $
44. When the Type is Fixed before run time then this is called as____
    - Dynamic Binding
    - Static Binding
    - Load Time Binding
    - Storage Binding
45. For event driven mechanism in C#, we use____just like____in C++.
    - Delegate,Function pointer
    - Templates,Delegate
    - Event handlers,packages
    - Events Buttons,Packages
    - EventnButtons, Graphics Code
46. In C#, the order of operator evaluation is:
    - From Left to right
    - From Right to Left
    - Arbitrary
    - Not specified

AL JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

AL-JUNAID TECH INSTITUTE

1) One difference LISP and PROLOG is
   - ➢ AI
   - ➢ Puzzle
   - ➢ Game
   - ➢ All of the given

2) Variable of_____is not an object of java
   - ➢ Primitive
   - ➢ Reference
   - ➢ Integer type
   - ➢ Both reference and Primitive

3) In_____every class in Java is part is overloaded
   - ➢ C++
   - ➢ Java
   - ➢ C#
   - ➢ C# and java

4) C# and C++ have_____ size.
   - ➢ Same
   - ➢ Different
   - ➢ Distinct
   - ➢ None of the given

5) _____compile into machine independent language, independent code which run in a managed execution environment.
   - ➢ C#
   - ➢ C++
   - ➢ Java
   - ➢ Ada

6) _____compile initially to an intermediate. Which can be run by interpretation or just in time compilation or an appropriate virtual machine?
   - ➢ C++ and C#
   - ➢ C# and Java
   - ➢ Java and C++
   - ➢ Ada and C++

7) How many modes for the source code are in C#?

AL-JUNAID TECH INSTITUTE
0304-1659294
www.aljunaidtech.com

- One
- Two
- Three
- Four

8) Which chaining type is used by Prolog?

- Backward
- Forward
- Horizontal
- Up

9) In C# Managed code is executed under the control of

- CRL
- CLR
- Both
- None

10) PHP syntax looks like_____

- ASP syntax
- C/C++
- Both
- None

11) In Java we can make pointer of_____.

- Any type
- Reference type only
- Both of the above options
- None of the given

12) Java has a String class which is not exactly an array of

- Char
- Elements
- Indices
- Long

13) How many string operators are in PHP?

- 2
- 3
- 4

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

➢ 10

14) C# code when compiled is converted into_____code.

➢ MISL
➢ MSIL
➢ MSLL
➢ None

15) in C#_____can be inherited from other class but no inheritance from it. On the other hand_____cannot be inherited not inheritance is possible from it is possible

➢ Private class , public class
➢ Sealed class ,struct in C#
➢ struct in C# , Sealed class
➢ public class , inherited class

16) The IS operator in C# is used for_____

➢ Run time type conversion
➢ Run time type checking
➢ Run time type casting

17) PHP is a_____typed language.

➢ Strongly
➢ Dynamic
➢ Static
➢ None of Given

18) Anything starting with Capital or underscore is a variable in_____➢ Prolog,

➢ Lisp,
➢ COBOL
➢ None of the given

19) In C# the if statement condition is an/a_____

➢ Arithmetic expression
➢ Boolean expression
➢ Numeric expression
➢ Both Numeric expression and Boolean expression

0304-1659294 www.vulmshelp.com

AL-JUNAID TECH INSTITUTE

20) In C# the value type and reference type variable are interconvert able through_____ concept.

- ➢ Tagged type
- ➢ Boxing
- ➢ interfaces
- ➢ None of the given

21) C# support only_____inheritance and it achieve_____ inheritance through the concept of interfaces.

- ➢ Multiple, multiple
- ➢ Single, multiple
- ➢ Single, single
- ➢ None of the given

22) Dynamic binding occurs at:

- ➢ Compile Time
- ➢ Design Time
- ➢ Link Time
- ➢ Run Time

23) Prolog language falls under the domain of:

- ➢ Scientific Applications
- ➢ Business Applications
- ➢ Special Purpose Languages
- ➢ None of these

24) First language that provided the concept of Pointer data type was_____. ➢ COBOL

- ➢ LISP
- ➢ PL/1
- ➢ JAVA

25) Variable use in VB without declaring decrease reliability and increase_____➢ Readably

- ➢ Writeable
- ➢ Cost
- ➢ Compile time

26) Dot operator in a_____ SNOBOL?

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- ➢ Reference pointer
- ➢ Unary pointer
- ➢ Class pointer
- ➢ Binary pointer

27) The GOTO statement in SNOBOL is _____

- ➢ Explicit
- ➢ Implementation
- ➢ Punter method
- ➢ An Indirect Reference

28) Ada has _____do while loop just like C++.

- ➢ Also
- ➢ NO
- ➢ Defective
- ➢ None of the above

29) The last value execution in the_____ LISP is the return value

- ➢ Atom
- ➢ Object
- ➢ Class
- ➢ Function

30) Dotimes loop of LIPS similar working to ada:

- ➢ For
- ➢ Switch loop
- ➢ Do while
- ➢ While

31) Indexes of arrays in Ada do not start from

- ➢ 0
- ➢ 1
- ➢ 2
- ➢ 3

32) The keyword unsafe is used while dealing with_____

- ➢ Loop
- ➢ Arrays
- ➢ Pointers

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

➢ Classes

33) Java code when compiled is converted into_____code.

➢ Bit code
➢ Byte code
➢ Kbytes code
➢ Giga byte Code

34) Ada pointers are called Access types.

➢ True
➢ False

35) The dangling pointer problem is partially alleviated by Ada design

➢ True
➢ False

36) Following statement returns the union of the two list in LISP.

➢ >(L1 UNION L2)
➢ >(union L1 L2)
➢ >Union L1
➢ >(L1 union L2)

37) In LISP,_____is the main tool used for iteration

➢ Recursion
➢ For Loop
➢ While Loop
➢ Do-While Loop

38) In LISP, following statement returns the difference of the two lists.

➢ (Difference L1 L2)
➢ (set-difference L1 L2)
➢ (L1 Difference L2)
➢ (L1 difference L2)

39) Lists can be constructed with the help of three basic functions which are_____. ➢ scheme, common lisp and cons

➢ cons, append and scheme
➢ cons, list and append
➢ list, atoms and append

40) SNOBOL was designed for_____purpose.

AL JUNAID TECH INSTITUTE 0321-1659294 www.vuhelp.com

- ➢ String manipulation
- ➢ AI
- ➢ Business
- ➢ Scientific

41) Computer architecture has a major influence on the design of programming language. ➢ True

- ➢ False

42) COBOL is mainly designed for_____.

- ➢ Scientific experiments
- ➢ Business application
- ➢ AI applications
- ➢ Publishing and writing algorithm

43) In SONOBAL binary operators have at least_____spaces

- ➢ 1
- ➢ 2
- ➢ 3
- ➢ 4

44) In SONOBOL can the size of the array be determined at run time.

- ➢ Yes
- ➢ No

45) _____is an important feature of Ada language used in embedded systems and operating systems. It is used in managing parallel threads of controls.

- ➢ Controls
- ➢ Tasking
- ➢ Classes
- ➢ Arrays

46) First electronic computer was_____.

- ➢ ENIAC
- ➢ Babbage analytical engine
- ➢ Itel 386
- ➢ Ibm x86

47) It is always better to find out the mistakes in the code at _____.

0304-1659294
www.vulmshelp.com

- ➢ Runtime
- ➢ Compile time
- ➢ Link time
- ➢ None of given option

48) Too much Orthogonality reduces Readability.

- ➢ Yes
- ➢ No

49) COBOL was the first language that brings the concept of_____

- ➢ Records
- ➢ Structure
- ➢ Object
- ➢ Variable

50) SONOBOL is case _____

- ➢ Sensitive
- ➢ In-sensitive
- ➢ Super sensitive
- ➢ Not sensitive

51) The space operator has _____ precedence than arithmetic operators.

- ➢ Lower
- ➢ Higher and Lower
- ➢ Higher
- ➢ None of the give

52) A language evaluation criteria includes following factors EXCEPT:

- ➢ Readability
- ➢ Writabilty
- ➢ Portability
- ➢ Modularity

53) The variable name has profound effect on_____.

- ➢ Readability
- ➢ Writability
- ➢ Orthogonality
- ➢ Portability

54) SIZE function in SONOBOL language is used to return the

size of _____ ➢ String

➢ Operator

➢ Variable

➢ Keyword

55) Indirect referencing in SONOBOL is same as of_____in C.

➢ Arrays

➢ Pointers

➢ Aliasing

➢ Stack

56) Following factors influences a portable language design EXCEPT:

➢ Computer architecture

➢ Readability

➢ Programmer's time

➢ Windows XP

57) + Sign is used for _____ in SONOBOL.

➢ Line Continuation

➢ Line Break

➢ Line Configuration

➢ Line Alignment

58) _____was the first object oriented language.

➢ COBOL

➢ LISP

➢ JAVA

➢ SIMULA

59) In C# struct are used as_____

➢ pointer

➢ array

➢ parameters

➢ class

60) JavaScript_____ from java language

➢ related

➢ un-related

➢ derived

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- none of the given

61) In Prolog we specify_____and not_____.

- Solution, problem
- Solution, code
- Problem, solution
- None of the above

62) A_____ is a default mechanism for specify types of variable?

- implicit
- explicit
- Both of the above options
- None of the given

63) A_____ is a special word that cannot be used as a user-defined name

- Keyword
- Reserved word
- Both of the above options
- None of the given

64) We use_____in Ada.

- tagged type
- int type
- float type
- none of the given

65) Control structure is a_____ /jump..:)….. statement

- CONTINUE
- GOTO
- SWITCH
- None of the given

66) _____is place holder value that is not required.

- anonymous
- prolog
- both of the above options
- none of the given

67) LISP used in_____ and_____.

- functional paradigm, AI

AL-JUNAID TECH INSTITUTE 0304-1659294 www.examshelp.com

- AI, functional paradigm
- Multi-paradigm, AI
- PROLOG Paradigm, AI

68) We use_____indirect referencing operator in SNOBOL

- Binary
- Binary $
- Unary
- Unary $

69) Elementary types are also called_____in ADA

- Static
- user defines
- built-in
- Discrete

70) ADA is a_____typed language

- partially strongly
- complex
- easy
- none of the given

71) _____has elaborated exception handling

- Ada
- C++
- JAVA
- COBOL

72) _____has a powerful set of operators but poor type checking

- C
- C++
- ADA
- LISP

73) _____and_____have declaration paradigm

- Prolog, SQL
- SQL, Prolog
- Lisp, SQL
- SQL, Lisp

AL-JUNAID TECH INSTITUTE 0304-1639294 www.vulmshelp.com

74) 1st machine independent language is _____

- ALGOL
- COBOL
- ADA
- PASCAL

75) In C# Managed code is executed under the control of

- CLR
- CRL
- Both of the above options
- None of the given

76) The depth at which we can think is influenced by _____

- implementation details
- significance of implementation
- implemented recursion
- none of the above

77) Readability has no influence on the cost of _____

- testing
- deployment
- debugging
- coding

78) _____has distributed computing architecture

- PASCAL
- LISP
- C
- CORBA

79) Language with wide domain of application has higher_____

- Portability
- Generality
- Reliability
- Cost

80) In Java we can make pointer of_____.

- Any type
- Reference type only

0304-1659294
www.aitshelp.com

81) The concept of C# jagged array is similar in function to

- ➢ C++ rectangular Array
- ➢ Java Array of Array

82) In_____Boolean expression is convertible into integer type

- ➢ C#
- ➢ C++
- ➢ JAVA
- ➢ Ada

83) _____compile initially to an intermediate. Which can be run by interpretation or just in time compilation or an appropriate virtual machine?

- ➢ C++ and C#
- ➢ C# and Java

84) For narrowing conversion which type conversion is appropriate?

- ➢ Implicit Conversion
- ➢ Explicit Conversion

85) For narrowing conversion which type conversion is appropriate?

- ➢ Implicit Conversion
- ➢ Explicit Conversion
- ➢ Both of the above options
- ➢ None of the given

86) C# and C++ have_____size.

- ➢ Same
- ➢ Different
- ➢ Distinct
- ➢ None of the given

87) C# code when compiled is converted into_____code.

- ➢ MSIL
- ➢ MISL

88) The concept of sealed class in C# is similar to _____

- ➢ Struct in C#,
- ➢ Struct in C++
- ➢ Abstract class in C#

0304-1659294 www.aljunaidhelp.com

➢ None of the given

89) Dynamic binding occurs at:

➢ Compile Time
➢ Design Time
➢ Link Time
➢ Run Time

90) Prolog language falls under the domain Of

➢ Scientific Applications
➢ Business Applications
➢ Special Purpose Languages
➢ None of these

91) For Recursion it is necessary that a language

➢ Dynamic
➢ Static
➢ Both dynamic and static
➢ Stack

92) Two important versions of LISP are _____

➢ Scheme and Atoms
➢ Scheme and Common Lisp
➢ Common Lisp and defacto
➢ List and Common Lisp

93) COBOL was the first language that brings the concept of_____

➢ Records
➢ Structure
➢ Object
➢ Variable

94) Ada pointers are called Access types.

➢ True
➢ False

95) SIZE function in SONOBOL language is used to return the size of _____

➢ String
➢ Operator

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

➢ Variable

96) A language is reliable if it does not create--------- during execution.

➢ Error

➢ Result

97) C++ support only -------- mode operator passing

➢ In/out

➢ union

98) Concept of package in java is similar to ---------

➢ C++

➢ C++ and c#

99)has also non-rectangular type of array

➢ C

➢ Java

C

C and C++

121. The syntax of PHP foreach loop is similar to------- loop.

- C++ foreach
- C# foreach
- Java foreach
- C++ for

122. With programming in---------we state what and not how.

- Prolog. P#92
- Algol
- C#
- Fortran

123. When the type is fixed before run time then this is called as-----

- Load time binding
- Static binding

0304-1659294
www.vulmshelp.com

- Dynamic binding
- None of the given

124. A programming language is ------ typed if type error are ----- detected.

- Weakly, Always
- Always, weakly
- Strongly, often
- Strongly, always. P#171

125. All objects in java are ------

- Explicit heap dynamic
- Dynamic storage binding
- Stack dynamic storage binding
- Static storage binding

126 ----------usually a logical grouping of heterogeneous elements.

- Array is
- Record is. P#176
- Structure is
- Both Structure and Record are

127. In java the arithmetic expression evaluation order is always from ------

- Center to right
- Right to Left
- Center to left
- Left to right

128. A control structure is a----------and the statement whose execution it controls.

Control algorithm

0304-1659291 www.vulmshelp.com

- Control statement. P#185
- Control keyword
- None of the given

129. In -------- control statements were based directly on IBM 704 hardware.

- Ada
- FORTRAN l p#185
- FORTRAN 77
- IBM Assembly language

130. We cannot pass array in---------- by value as it has no fix size. But it has fixed size in structure. C#

- Java
- C++
- C

131----------is a language for symbolic computation and its syntax is based on lambda calculus.

- ALGOL
- MATLAB
- C
- LISP p# 27

132. Ada is a -------- typed language.

- Weakly
- Random
- Strongly. P#48
- List

0304-1659294 www.vulmshelp.com

133. The integrity of types is checked from all together in -------

- SNOBOL
- ALGOL
- Plankal Koll
- Ada

134. A language is reliable if during execution it does not create ------

- Result
- Error
- Bytecode
- Malfunction

135 is not a valid Prolog atom.

- This _ is_ it
- Mary, _c1
- 'Hello'
- F

136 generates readable code which is easy to maintain.

- Clauses
- Backtracking. P#97
- Inference mechanism
- Facts

137. In C#, value type objects use memory of---------- data structure.

- List
- Tree
- Stack
- Heap

0304-1659294
www.vulmshelp.com

138 ---------- is an 8-byte integer.

- Short
- Long
- Byte
- Char

139. Simple data structure and large floating point operations are linked to --------

- Artificial intelligence language domain
- Parallel programming domain
- Scientific application programming domain
- System programming domain

140. Each source file in-------has a public class.

- C++
- C#
- Java p#98
- None of the given

141. There is no autonomic type conversion in -------

- C
- Both java and C++
- Java
- C++

142. Every class in java is part of some ----------

- Subclass
- Method
- Package p#107
- Object

0304-1659294
www.vulmshelp.com

143. Automatic garbage collection in java prevents ---------

- Multithreading
- Exception handling
- Indirect referencing
- Dangling pointer p#117

144. Value types in C# are inherited from ---------

- Java primitive type
- Object
- Reference
- None of the given

146. PHP supported all major Databases including ----------

- None of the given
- ODBC
- ORACLE
- SQL Server

147. In---------the Break statement may have the optional parameter or argument.

- C/C++
- Java
- PHP
- Java Script

148. Classes and objects of PHP are similar to --------

- Classes and objects of C++
- Classes and objects of java
- Classes and objects of C

0304-1659294
www.vulmshelp.com

- Classes and objects of Basic

149----------operator in Prolog is used for List construction and also for List dismantling.

- |(Vertical Slash). P#90
- !(Sign of exclamation)
- : (Colon)
- None of the given

150. In JavaScript --------- operator is used for concatenation.

- Dot(.)
- Plus(+). P#152
- |
- ^

151. The resultant value of variable 'x' in JavaScript statement var x = "5"-"2"; will be -------

- 5-2
- 52
- "5"-"2"
- 3

152. The-------- model in JavaScript provides access to the contents of the browser window.

- DOM. P#155
- BOM
- ROM

AL-JUNAID TECH INSTITUTE 0304-1659294 www.aljunaidhelp.com

- COM

153. In ---------- we may specify the range and precision for floating point numbers. C#

- C/C++
- Ada
- Both Ada and C#

154 ----------parameters are declared inside a subprogram.

- Default
- Actual
- Formal
- Copy

155. eq or equal operator in LISP is used to compare two ---------

- Atom symbols
- List symbols
- Non numeric symbols
- Numeric symbols

157. Object in JavaScript can be accessed through ---------

- Associated array
- Reference pointer method
- Reference type
- Both reference pointer method and reference type

158. Shortcut evaluation is not allowed for ----------

- Boolean operators
- Relational operators
- Bitwise operators

0304-1659294
www.vulmshelp.com

- Both boolean and relational operators

159. Which one of the following languages is designed for distributed computing architecture?

- CORBA
- FORTRAN
- ADA
- LISP

160. In Ada elementary types are also termed as --------

- User defined types
- Static types
- Built in types
- Public types

161. Study of programming languages helps in increasing the----------to express programming concepts.

- Capacity. P#5
- Level
- Volume
- Range

162 ----------is the designer of C++ language.

- Bjarne Stroustrup p#15
- James Goslings
- Mike Sheridan
- Patrick Naughton

163. Set membership in Prolog is different from---------- membership.

0304-1659294
www.vulmshelp.com

- List
- Symbol
- Join
- None of the given

164 ----------support array with built in bounds checking.

- Java
- C++
- C#
- Both java and C# p#118

165. FORTRAN, PL 1 and BASIC language provide --------

- Explicit declaration
- Implicit declaration
- Either implicit and explicit declaration
- None of the given

166. There is no arithmetic expression precedence rule in -------

- PASCAL
- Small talk
- SIMULA
- C/C++

167. C/C++ has both pre-test and post-test version of --------

- Counter controlled loop
- Logically controlled loop
- For loop
- While loop. P#192

168. C++ support only--------mode parameter passing.

0304-1659294
www.ulmshelp.com

- OUT
- IN
- Union
- IN/OUT

169.java has eliminated the concept of ----------

- Classes
- Variables
- Struck. P#31
- Arrays

170. In java Explicit conversions are done through --------

- Referencing
- Aliasing
- Casting. P#104
- Operator overloaded

171. Prolog database is based upon --------

- Facts
- Facts and queries
- Rules and queries
- Facts and rules. P#82

172. A predicate many have ------ or more arguments.

- Three
- Zero. P#88
- One
- Two

173 ---------- is used as a place holder for a value that is not required.

0304-1659294 www.vulmshelp.com

- Variable
- Atom
- Constant
- Anonymous variable. P#89

174. In C#, if you don't use new keyword, you must---------- all the values in the struct by hand before you use it.

- Define
- Declare
- Create
- Initialize. P#135

175. Which statement best suited for C programming language?

- String manipulation language
- First language to provide exception handling
- With powerful set of operators but poor type checking p#30
- Introduce the notion of class

176. Which statement is true about SNOBOL?

- Its developers are computer expert
- ITE developers have limited introduction with computer science. P#46
- Is an example of aspect programming languages
- Have many data type

177. In SNOBOL, for entire assignment we use --------- operator in pattern matching statement. $(dollar)

- (.)Dot
- Unary $(Dollar)
- Binary space. P#36

0304-1639294 www.vulmshelp.com

178. Disjunction in Prolog is through -------- and conjunction is through ---------

- Coma (,), OR
- OR, coma(,)
- OR, Dot(.)
- Dot(.), OR

179. In ------- we can make a pointer variable of value type only.

- C++
- C#
- Java
- Both Java and C#

180 ---------- exception handling has a finally ( ) block.

- Java
- C++
- C
- Plankal kul

181. Which of the following statement is True if $a is not identical to $b in php?

- $a!==$b. P#143
- $a!=$
- $a=!$
- $a=!$

182 ---------- is the magical thing in Prolog.

- Program partition
- Inference engine

0304-1659294
www.vulmshelp.com

- List processing
- None of the given

183. In JavaScript navigator is---------- object.

- Built-in
- Browser. P#155
- Document
- User defined

184. The concept of package in java is similar to ---------

- Global class in C++
- Assembly in C#
- Global class in C#
- Global Class in both C++ and C# p#130

185. Array in PHP are not like C/C++ array but they are ---------

- Templates
- Records
- Maps
- Both Templates and Records

186. “with” statement in JavaScript is an alternative of ---------

- While statement
- Union statement
- Single document.write statements
- Multiple document.write statements. P#161

187. Sub ranges of integer types are not compatible with --------

- Integers types

188. Arrays in JavaScript are --------- based.

AL-JUNAID TECH INSTITUTE 0304 1659294 www.vulmshelp.com

- 0

189. Unlike C/C++, arrays in PHP are_____.

- Maps
- Templates
- Records
- Both Templates and Records

190. Enumeration type in C# may take any type of_____in contrast to C++ where it take only _____.

- Numeric value, integer value
- Value type value, numeric value
- Primitive type value, reference type value
- Value type value, reference type value

191. PHP syntax looks like_____.

- ASP syntax
- C/C++ syntax
- Ada syntax
- Both ASP and Ada

192. How many <script> tags can be used in the <head> element?

- Zero
- One
- Two
- Many

193. C# code when compiled is converted into_____code.

- MSIL

0304-1639294
www.vulmshelp.com

- Bytecode
- machine native code

194. In C#, strings are _____.

- Non-Immutable
- Immutable
- Neither Immutable nor Non-Immutable
- Aliasable

196. In_____the relationship between a get and set method is inherited, while in___ it has to be maintained.

- Java, C++
- C++, C#
- Ada, Java
- C#, Java or C++

197. In_____we can make a pointer variable of value Type only.

- C++
- C#
- Java
- Both java and C++

198.In JavaScript, which of the given provides access to the contents of browser window?

- DOM
- BOM
- ROM
- COM

199. A variable in_____cannot be used unless and until it is not initialized.

0304-1659294
www.vulmshelp.com

- C++
- C#
- ALGOL
- C

200. In how many places a javascript code can be placed?

- 1
- 2
- 3
- 4

201. Which operator is used for concatenation in JavaScript?

- +
- |
- $
- dot(.)

202. Classes and objects of PHP are similar to _____.

- Classes and objects of Java
- Classes and objects of C++
- Classes and objects of Basic
- Classes and objects of C

203. Which of the following is not true about delegates?

- Delegates are value type
- Delegates are event based
- Delegates are like C/C++ function pointer
- Delegates are reference type

204. Which of the given statement is True if "$a" is not identical to "$b" in php?

0304-1659294 www.vulmshelp.com

- $a =! $
- $a !=$
- $a !== $b
- $a ==! $

205. Which of the given operator is used to return a reference from a function in PHP?

- &
- &&
- $
- Dot

206. Managed or safe code in_____is executed under the control of common language runtime (CLR) with automatic garbage collection, no explicit memory allocation and de allocation and no explicit destructor.

- C++
- Java
- Ada and C++
- C#

207. In C# the value type and reference type variable are inter convertible through _____ concept.

- Tagged type
- Interfaces
- Boxing
- None of the given

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

210. In____Boolean expression is convertible into integer type.

- C#
- C++
- JAVA
- Ada

211. _____, an object that describes the basic characteristics of the browser, notably its type and version.

- Window
- Document
- Navigator
- Location

212. To make necessary arguments at run time error is called-----

- Type checking
- Exception handling
- Error handling
- None of the given

0304-1659294
www.vulmshelp.com

213. In----------we have to address the client side compatibility issue.

- JavaScript
- VB Script
- PHP
- Perl

214. How to compare and examine language?

- Readability
- Writability
- Reliability
- All of the given options

215. In SNOBOL 2 spaces can be used, the purpose of 1st space is for ---------- and 2nd for -------

- Pattern matching, String Concatenation
- String concatenation, Pattern matching
- String concatenation, String concatenation
- Pattern matching, Pattern matching

216. Which of the following is an incorrect option from the following statements regarding 'objectives of learning new languages'?

- Help to compare different languages.
- Help in transition from one language to other language
- Help in understanding the language piracy policy
- Help to choose a language for development of a certain application

217. The more is the simplicity of a language, the more it will always be readable.

- True
- False

218. Value upon successful completion of pattern matching, the substring matched

0304-1659294 www.vulmshelp.com

by the pattern is assigned to the variable as -------

- Value
- String
- Integer
- Real numbers

219. The main design goals of Ada were EXCEPT

- Program reliability and maintenance
- Design language for DOD
- Programming is a human activity therefore avoid unintentional mistakes
- Designing a portable language

220. One of the major design goals of Ada was

- To help developers to code the software in lesser time
- To make it difficult for developers to make mistakes
- To help develop an IDE for Ada
- To make testers to test Ada application easily

221. We can have nested procedures in -------- language.

- C++
- Ada
- C
- PROLOG

222. Learning the implementation details of a language help in the efficient use of that language.

- True
- False

223. Too much simplicity in language design can also cause problems.

0304-1659294
www.vulmshelp.com

- True
- False

224. In ----------, Enumeration type can also be used as indexes in arrays.

- Ada
- C
- C++
- LISP

225. In following is the correct syntax of 'for' statement in Ada.

- for variable in low_value..high_value loop-Loop body goes here end loop;
- for variable in low_value..high_value loop-Loop body goes here end;
- begin; for variable in low_value..high_value loop-Loop body goes here end loop;
- begin loop; for variable in low_value..high_value loop-Loop body goes here end loop;

226. Block statements in Ada is very different to a block in C.

- True
- False

229----------represents the class of languages from functional paradigm.

- LISP
- PROLOG
- Ada
- C++

230. Which statement is wrong about static variables?

- They are bound to memory cells before the execution of program
- They use to direct access the memory

0304-1659294
www.vulmshelp.com

- There is run time overhead of allocation and de-allocation of memory
- Storage can't be shared among variables

231. If you want an argument to a function to always be passed by reference, you can prepend

- Percentage sign (%) to the argument name in the function definition
- Dollar sign ($) to the argument name in the function definition
- An ampersand (&) to the argument name in the function definition
- Tilled sign (~) to the argument name in the function definition

232. 146. PHP supported all major Databases including ----------

- ODBC
- ORACLE
- SQL Server
- All of the given options

233. Managed or safe code in----------is executed under the control of common language runtime (CLR) with automatic garbage collection, no explicit memory allocation and de allocation and no explicit destructor.

- C++
- Java
- Ada and C++
- C#

234. ---------- is more strongly typed language then ----------

- C++, C#
- C#, C++
- C++, Java
- None of the given

235. Enumeration type in C# may take any type of---------- in contrast to C++

0304-1659294
www.vulmshelp.com

where it take only----------

- Numeric value, integer value
- Value type value, numeric value
- Primitive type value, reference type value

236. -------- exception inherit from exception class and --------- exception is anywhere in the program.

- Java, C#
- C++, C#
- C#, Java
- Java, C++

237. In ------ the relationship between a get and set method is inherited, while in ------ it has to be maintained.

- Java, C++
- C++, C#
- Ada, Java
- C#, Java or C++

238. Which of the following is not true about delegates?

- Delegates are value type
- Delegates are event based
- Delegates are like C/C++ function pointer
- Delegates are reference type

239. There are------ "categories" of types in java.

- Two NOTE: primitive type and reference type
- Three
- Four

0304-1659294 www.vulmshelp.com

- Five

240. A variable in---------cannot be used unless and until it is not initialized.

- C++
- C#
- ALGOL
- C

241. Prolog is considered to be as ---------

- Case and type insensitive
- Case and type sensitive
- Case sensitive and type insensitive
- Case insensitive and type sensitive

242. In java, out-of-bounds array index is always causes a ------- error.

- Syntax
- Compile time
- Runtime
- Logical

244. In prolog, a “member(X, T)” predicate is used to check the membership of X in ___

- Class
- Symbol
- List
- Both class and symbol

245.cannot be converted to other types in java.

- Booleans
- Char

0304-1659294
www.vulmshelp.com

- Double
- Int

246. The---------- operator in C# is used to test if the operator is of a certain type.

- "IN"
- "AS"
- "IS"
- "OUT"

247. In C# the "If" statement condition is an/a ------

- Arithmetic Expression
- Variable Expression
- Numeric Expression
- Boolean Expression

248. In JavaScript, which of the given provides access to the contents of browser windows?

- ROM
- DOM
- COM
- BOM

249. Which of the given is used before the declaration of variable in PHP?

- # Sign
- ? Sign
- $ Sign
- @ Sign

250. The "IS" operator in C# is used for runtime ----------

- Type conversion

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Type casting
- Type tagging
- Type checking

256. PHP stands for ----------

- PHP, Home Page
- PHP, Hypertext page
- PHP, Hypertext Preprocessor
- PHP, Home Preprocessor

257. In PHP, if a number is beyond the bounds of the integer type then it will be interpreted as a----------instead.

- String
- Short
- Long
- Float

259. Which of the following is very effective is solving complex puzzles?

- FORTRAN
- PROLOG
- ALGOL
- C/C++

260. The program is written in C# compiles to:

- Machine code
- An intermediate language (IL)
- Object code
- Source code

260. Concurrency in java is supported through:

0304-1659294
www.vulmshelp.com

- Resource allocation
- Batch execution
- Threads
- Operator Overloading

262. Which of the following are lightweight processes in java?

- Threads
- Packages
- Applets
- JVM

263. The methods that allow two threads to cooperate (or synchronize) with each other in a java program are:

- Wait() and run()
- run() and notify()
- Wait() and notify()
- sleep() and yield()

264. In how many ways threads can be created in java?

- Two
- Many
- Three
- Four

265. C# language is very similar to:

- Prolog
- C-language
- Delphi
- Java

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

266. Which of the following method is used to implement runable interface in java?

- Stop Thread()
- Run Thread()
- Stop()
- Run()

267. Which of the following method in a java class cannot be changed (overridden) in a subclass?

- Public void display (){-}
- Public static void area (){-}
- Private void radius (){-}
- Public final void result (){-}

268. In C#, the name of class and the name of the file in which it is saved.

- Must start with lowercase letter
- Must start with uppercase letter
- Must match up
- Do not need to match up

269. PHP supports various data types excepts ------

- Integer
- Array
- Object
- Char

270. Which of the given operator is used to return a reference from a function in PHP?

- &
- &&

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- $
- Dot

271. An----------in PHP is an ordered map.

- Array
- Queue
- Stack
- String

272. In----------the “break” statement may have an optional parameter or argument.

- C/C++
- Java
- PHP
- C#

273. In PHP “switch” structure, the ---------- starts or implements an implicit loop.

- Break statement
- For loop
- Continue statement
- Return statement

274. C# provides the feature of built-in bounds checking of:

- Functions and classes
- Objects and methods
- Arrays and strings
- Interfaces and packages

275. Which of the following keywords is used to make a class non-extendable in java?

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Static
- Private
- Final
- Public

276. In a PROLOG program, the definitions of predicate sentences or phrase are known as:

- Facts
- Clauses
- Declaration
- Inferences

NOTE: **Clauses**

Clauses are definition(s) of Predicate sentence or phrase.

277. What happens when you don't initialize the fields in the constructor of a java class?

- A compile-time error occurs
- Logical error occurs
- Default values are assigned WICKIPEDIA
- Runtime error occurs

278. Expert system ---------- provide a structure to design expert system.

- Techniques
- Shells
- Lists
- Mechanism

279. The inference mechanism of PROLOG is based upon ----------

- Forward chaining
- Back tracking

03041659294 www.vulmshelp.com

- Propositional logic
- Recursion

280. What happens when you try to use an out-of bounds array index in JAVA?

- Array size is automatically incremented
- A runtime error occurs
- A garbage value is printed
- Nothing happens

281. Which of the following is treated as an atom and not as a List data type in PROLOG?

- [a, t,o,m]
- [a,b,c]
- [a]
- [ ]

282. How many types of arrays are available in C#?

- Two
- Four
- Three
- One

283. All java classes (built-in or user-defined) are sub-classes of---------- class.

- Thread
- System
- Object
- Throwable

NOTE:

In Java, all classes (built-in or user-defined) are (implicitly) subclasses of the class **Object**.

0304-1659294 www.vulmshelp.com

AL-JUNAID TECH INSTITUTE

284. The scripts written in PHP are executed by:

- Client machine
- Web server
- Web browser
- Java Applet

285. The head and tail of a list in PROLOG is separated by:

- Semicolon (;)
- Comma (,)
- Vertical bar(|)
- Colon (:)

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

CS508-Modern Programming Language

FINAL TERM MCQS

Prepared by: JUNAID MALIK

AL-JUNAID TECH INSTITUTE

www.vulmshelp.com



Language Courses Training Available

I'm providing paid courses in different languages within 3 Months,Certificate will be awarded after completion.

- HTML
- CSS
- JAVASCRIPT
- BOOTSTRAPS
- JQUERY
- PHP MYSQL
- NODES.JS
- REACT JS

LMS Handling Services

LMS Activities Paid Task

Assignments 95% Results

Quizes 95% Results

GDB 95% Results

For CS619 Project Feel Free To Contact With Me

Ph# 0304-1659294

Email: junaidfazal08@gmail.com

AL-JUNAID TECH INSTITUT

1) One difference LISP and PROLOG is
   - ➢ AI
   - ➢ Puzzle
   - ➢ Game
   - ➢ All of the given

2) Variable of _____ is not an object of java
   - ➢ Primitive
   - ➢ Reference
   - ➢ Integer type
   - ➢ Both reference and Primitive

3) In _____ every class in Java is part is overloaded
   - ➢ C++
   - ➢ Java
   - ➢ C#
   - ➢ C# and java

4) C# and C++ have _____ size.
   - ➢ Same
   - ➢ Different
   - ➢ Distinct
   - ➢ None of the given

5) _____ compile into machine independent language, independent code which run in a managed execution environment.
   - ➢ C#
   - ➢ C++
   - ➢ Java
   - ➢ Ada

6) _____ compile initially to an intermediate. Which can be run by interpretation or just in time compilation or an appropriate virtual machine?
   - ➢ C++ and C#
   - ➢ C# and Java
   - ➢ Java and C++
   - ➢ Ada and C++

7) How many modes for the source code are in C#?

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

- ➢ One
- ➢ Two
- ➢ Three
- ➢ Four

8) Which chaining type is used by Prolog?

- ➢ Backward
- ➢ Forward
- ➢ Horizontal
- ➢ Up

9) In C# Managed code is executed under the control of

- ➢ CRL
- ➢ CLR
- ➢ Both
- ➢ None

10) PHP syntax looks like _____

- ➢ ASP syntax
- ➢ C/C++
- ➢ Both
- ➢ None

11) In Java we can make pointer of_____.

- ➢ Any type
- ➢ Reference type only
- ➢ Both of the above options
- ➢ None of the given

12) Java has a String class which is not exactly an array of

- ➢ Char
- ➢ Elements
- ➢ Indices
- ➢ Long

13) How many string operators are in PHP?

- ➢ 2
- ➢ 3
- ➢ 4

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

➢ 10

14) C# code when compiled is converted into _____ code.

➢ MISL

➢ MSIL

➢ MSLL

➢ None

15) in C# _____can be inherited from other class but no inheritance from it. On the other hand _____ cannot be inherited not inheritance is possible from it is possible

➢ Private class , public class

➢ Sealed class ,struct in C#

➢ struct in C# , Sealed class

➢ public class , inherited class

16) The IS operator in C# is used for_____

➢ Run time type conversion

➢ Run time type checking

➢ Run time type casting

➢ None of the given

17) PHP is a _____typed language.

➢ Strongly

➢ Dynamic

➢ Static

➢ None of Given

18) Anything starting with Capital or underscore is a variable in _____ ➢ Prolog,

➢ Lisp,

➢ COBOL

➢ None of the given

19) In C# the if statement condition is an/a _____

➢ Arithmetic expression

➢ Boolean expression

➢ Numeric expression

➢ Both Numeric expression and Boolean expression

AL-JUNAID TECH INSTITUTE 03041659294 www.vulmshelp.com

20) In C# the value type and reference type variable are interconvert able through _____ concept.

- ➢ Tagged type
- ➢ Boxing
- ➢ interfaces
- ➢ None of the given

21) C# support only_____ inheritance and it achieve_____ inheritance through the concept of interfaces.

- ➢ Multiple, multiple
- ➢ Single, multiple
- ➢ Single, single
- ➢ None of the given

22) Dynamic binding occurs at:

- ➢ Compile Time
- ➢ Design Time
- ➢ Link Time
- ➢ Run Time

23) Prolog language falls under the domain of:

- ➢ Scientific Applications
- ➢ Business Applications
- ➢ Special Purpose Languages
- ➢ None of these

24) First language that provided the concept of Pointer data type was _____. ➢ COBOL

- ➢ LISP
- ➢ PL/1
- ➢ JAVA

25) Variable use in VB without declaring decrease reliability and increase _____ ➢ Readably

- ➢ Writeable
- ➢ Cost
- ➢ Compile time

26) Dot operator in a _____ SNOBOL?

0304 1659294 www.vulmshelp.com

➢ Reference pointer
➢ Unary pointer
➢ Class pointer
➢ Binary pointer

27) The GOTO statement in SNOBOL is _____
➢ Explicit
➢ Implementation
➢ Punter method
➢ An Indirect Reference

28) Ada has _____ do while loop just like C++.
➢ Also
➢ NO
➢ Defective
➢ None of the above

29) The last value execution in the _____ LISP is the return value
➢ Atom
➢ Object
➢ Class
➢ Function

30) Dotimes loop of LIPS similar working to ada:
➢ For
➢ Switch loop
➢ Do while
➢ While

31) Indexes of arrays in Ada do not start from
➢ 0
➢ 1
➢ 2
➢ 3

32) The keyword unsafe is used while dealing with_____
➢ Loop
➢ Arrays
➢ Pointers

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

➢ Classes

33) Java code when compiled is converted into _____ code.

➢ Bit code

➢ Byte code

➢ Kbytes code

➢ Giga byte Code

34) Ada pointers are called Access types.

➢ True

➢ False

35) The dangling pointer problem is partially alleviated by Ada design

➢ True

➢ False

36) Following statement returns the union of the two list in LISP.

➢ >(L1 UNION L2)

➢ >(union L1 L2)

➢ >Union L1

➢ >(L1 union L2)

37) In LISP, _____ is the main tool used for iteration

➢ Recursion

➢ For Loop

➢ While Loop

➢ Do-While Loop

38) In LISP, following statement returns the difference of the two lists.

➢ (Difference L1 L2)

➢ (set-difference L1 L2)

➢ (L1 Difference L2)

➢ (L1 difference L2)

39) Lists can be constructed with the help of three basic functions which are _____. ➢ scheme, common lisp and cons

➢ cons, append and scheme

➢ cons, list and append

➢ list, atoms and append

40) SNOBOL was designed for _____ purpose.

0304-1659294 www.vulmshelp.com

➢ String manipulation
➢ AI
➢ Business
➢ Scientific

41) Computer architecture has a major influence on the design of programming language. ➢ True
➢ False

42) COBOL is mainly designed for _____.
➢ Scientific experiments
➢ Business application
➢ AI applications
➢ Publishing and writing algorithm

43) In SONOBAL binary operators have at least____ spaces
➢ 1
➢ 2
➢ 3
➢ 4

44) In SONOBOL can the size of the array be determined at run time.
➢ Yes
➢ No

45) _____ is an important feature of Ada language used in embedded systems and operating systems. It is used in managing parallel threads of controls.
➢ Controls
➢ Tasking
➢ Classes
➢ Arrays

46) First electronic computer was _____.
➢ ENIAC
➢ Babbage analytical engine
➢ Itel 386
➢ Ibm x86

47) It is always better to find out the mistakes in the code at _____.

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- ➢ Runtime
- ➢ Compile time
- ➢ Link time
- ➢ None of given option

48) Too much Orthogonality reduces Readability.

- ➢ Yes
- ➢ No

49) COBOL was the first language that brings the concept of _____

- ➢ Records
- ➢ Structure
- ➢ Object
- ➢ Variable

50) SONOBOL is case _____

- ➢ Sensitive
- ➢ In-sensitive
- ➢ Super sensitive
- ➢ Not sensitive

51) The space operator has _____ precedence than arithmetic operators.

- ➢ Higher
- ➢ Lower
- ➢ Higher and Lower
- ➢ None of the give

52) A language evaluation criteria includes following factors EXCEPT:

- ➢ Readability
- ➢ Writabilty
- ➢ Portability
- ➢ Modularity

53) The variable name has profound effect on _____.

- ➢ Readability
- ➢ Writability
- ➢ Orthogonality
- ➢ Portability

54) SIZE function in SONOBOL language is used to return the

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

size of _____ ➢ String

➢ Operator

➢ Variable

➢ Keyword

55) Indirect referencing in SONOBOL is same as of _____in C.

➢ Arrays

➢ Pointers

➢ Aliasing

➢ Stack

56) Following factors influences a portable language design EXCEPT:

➢ Computer architecture

➢ Readability

➢ Programmer's time

➢ Windows XP

57) + Sign is used for _____ in SONOBOL.

➢ Line Continuation

➢ Line Break

➢ Line Configuration

➢ Line Alignment

58) _____ was the first object oriented language.

➢ COBOL

➢ LISP

➢ JAVA

➢ SIMULA

59) In C# struct are used as_____

➢ pointer

➢ array

➢ parameters

➢ class

60) JavaScript_____ from java language

➢ related

➢ un-related

➢ derived

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

➢ none of the given

61) In Prolog we specify_____ and not_____ .

➢ Solution, problem
➢ Solution, code
➢ Problem, solution
➢ None of the above

62) A_____ is a default mechanism for specify types of variable?

➢ implicit
➢ explicit
➢ Both of the above options
➢ None of the given

63) A_____ is a special word that cannot be used as a user-defined name

➢ Keyword
➢ Reserved word
➢ Both of the above options
➢ None of the given

64) We use _____ in Ada.

➢ tagged type
➢ int type
➢ float type
➢ none of the given

65) Control structure is a _____ /jump..:)….. statement

➢ CONTINUE
➢ GOTO
➢ SWITCH
➢ None of the given

66) _____ is place holder value that is not required.

➢ anonymous
➢ prolog
➢ both of the above options
➢ none of the given

67) LISP used in _____ and _____.

➢ functional paradigm, AI

0304-1659294
www.vumshelp.com

- ➢ AI, functional paradigm
- ➢ Multi-paradigm, AI
- ➢ PROLOG Paradigm, AI

68) We use_____ indirect referencing operator in SNOBOL

- ➢ Binary
- ➢ Binary $
- ➢ Unary
- ➢ Unary $

69) Elementary types are also called _____ in ADA

- ➢ Static
- ➢ user defines
- ➢ built-in
- ➢ Discrete

70) ADA is a _____ typed language

- ➢ partially strongly
- ➢ complex
- ➢ easy
- ➢ none of the given

71) _____ has elaborated exception handling

- ➢ Ada
- ➢ C++
- ➢ JAVA
- ➢ COBOL

72) _____ has a powerful set of operators but poor type checking

- ➢ C
- ➢ C++
- ➢ ADA
- ➢ LISP

73) _____and _____ have declaration paradigm

- ➢ Prolog, SQL
- ➢ SQL, Prolog
- ➢ Lisp, SQL
- ➢ SQL, Lisp

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

74) 1st machine independent language is _____

- ➢ ALGOL
- ➢ COBOL
- ➢ ADA
- ➢ PASCAL

75) In C# Managed code is executed under the control of

- ➢ CLR
- ➢ CRL
- ➢ Both of the above options
- ➢ None of the given

76) The depth at which we can think is influenced by _____

- ➢ implementation details
- ➢ significance of implementation
- ➢ implemented recursion
- ➢ none of the above

77) Readability has no influence on the cost of _____

- ➢ testing
- ➢ deployment
- ➢ debugging
- ➢ coding

78) _____ has distributed computing architecture

- ➢ PASCAL
- ➢ LISP
- ➢ C
- ➢ CORBA

79) Language with wide domain of application has higher_____

- ➢ Portability
- ➢ Generality
- ➢ Reliability
- ➢ Cost

80) In Java we can make pointer of_____.

- ➢ Any type
- ➢ Reference type only

AL-JUNAID TECH INSTITUTE 0304-1659294 www.aljunaidtechinshelp.com

81) The concept of C# jagged array is similar in function to

- ➢ C++ rectangular Array
- ➢ Java Array of Array

82) In_____ Boolean expression is convertible into integer type

- ➢ C#
- ➢ C++
- ➢ JAVA
- ➢ Ada

83) _____compile initially to an intermediate. Which can be run by interpretation or just in time compilation or an appropriate virtual machine?

- ➢ C++ and C#
- ➢ C# and Java

84) For narrowing conversion which type conversion is appropriate?

- ➢ Implicit Conversion
- ➢ Explicit Conversion

85) For narrowing conversion which type conversion is appropriate?

- ➢ Implicit Conversion
- ➢ Explicit Conversion
- ➢ Both of the above options
- ➢ None of the given

86) C# and C++ have _____ size.

- ➢ Same
- ➢ Different
- ➢ Distinct
- ➢ None of the given

87) C# code when compiled is converted into _____ code.

- ➢ MSIL
- ➢ MISL

88) The concept of sealed class in C# is similar to _____

- ➢ Struct in C#,
- ➢ Struct in C++
- ➢ Abstract class in C#

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

➢ None of the given

89) Dynamic binding occurs at:

➢ Compile Time
➢ Design Time
➢ Link Time
➢ Run Time

90) Prolog language falls under the domain Of

➢ Scientific Applications
➢ Business Applications
➢ Special Purpose Languages
➢ None of these

91) For Recursion it is necessary that a language

➢ Dynamic
➢ Static
➢ Both dynamic and static
➢ Stack

92) Two important versions of LISP are _____

➢ Scheme and Atoms
➢ Scheme and Common Lisp
➢ Common Lisp and defacto
➢ List and Common Lisp

93) COBOL was the first language that brings the concept of _____

➢ Records
➢ Structure
➢ Object
➢ Variable

94) Ada pointers are called Access types.

➢ True
➢ False

95) SIZE function in SONOBOL language is used to return the size of _____

➢ String
➢ Operator

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

➢ Variable

96) A language is reliable if it does not create -------- during execution.

➢ Error

➢ Result

97) C++ support only -------- mode operator passing

➢ In/out

➢ union

98) Concept of package in java is similar to ---------

➢ C++

➢ C++ and c#

99) -------- has also non-rectangular type of array

➢ C

➢ Java

C

C and C++

121. The syntax of PHP foreach loop is similar to ------ loop.

- C++ foreach
- C# foreach
- Java foreach
- C++ for

122. With programming in -------- we state what and not how.

- Prolog. P#92
- Algol
- C#
- Fortran

123. When the type is fixed before run time then this is called as-----

- Load time binding
- Static binding

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

- Dynamic binding
- None of the given

124. A programming language is ------ typed if type error are ---- detected.

- Weakly, Always
- Always, weakly
- Strongly, often
- Strongly, always. P#171

125. All objects in java are ------

- Explicit heap dynamic
- Dynamic storage binding
- Stack dynamic storage binding
- Static storage binding

126. --------- usually a logical grouping of heterogeneous elements.

- Array is
- Record is. P#176
- Structure is
- Both Structure and Record are

127. In java the arithmetic expression evaluation order is always from ------

- Center to right
- Right to Left
- Center to left
- Left to right

128. A control structure is a --------- and the statement whose execution it controls.

Control algorithm

0304 1659294 www.vulmshelp.com

- Control statement. P#185
- Control keyword
- None of the given

129. In -------- control statements were based directly on IBM 704 hardware.

- Ada
- FORTRAN l p#185
- FORTRAN 77
- IBM Assembly language

130. We cannot pass array in ---------- by value as it has no fix size. But it has fixed size in structure. C#

- Java
- C++
- C

131. -------- is a language for symbolic computation and its syntax is based on lambda calculus.

- ALGOL
- MATLAB
- C
- LISP p# 27

132. Ada is a -------- typed language.

- Weakly
- Random
- Strongly. P#48
- List

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

133. The integrity of types is checked from all together in -------

- SNOBOL
- ALGOL
- Plankal Koll
- Ada

134. A language is reliable if during execution it does not create ------

- Result
- Error
- Bytecode
- Malfunction

135. -------- is not a valid Prolog atom.

- This _ is_ it
- Mary, _c1
- 'Hello'
- F

136. ------- generates readable code which is easy to maintain.

- Clauses
- Backtracking. P#97
- Inference mechanism
- Facts

137. In C#, value type objects use memory of --------- data structure.

- List
- Tree
- Stack
- Heap

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

138.---------- is an 8-byte integer.

- Short
- Long
- Byte
- Char

139. Simple data structure and large floating point operations are linked to --------

- Artificial intelligence language domain
- Parallel programming domain
- Scientific application programming domain
- System programming domain

140. Each source file in ------ has a public class.

- C++
- C#
- Java p#98
- None of the given

141. There is no autonomic type conversion in -------

- C
- Both java and C++
- Java
- C++

142. Every class in java is part of some ----------

- Subclass
- Method
- Package p#107
- Object

0304-1659294
www.vulmshelp.com

143. Automatic garbage collection in java prevents ---------

- Multithreading
- Exception handling
- Indirect referencing
- Dangling pointer p#117

144. Value types in C# are inherited from ---------

- Java primitive type
- Object
- Reference
- None of the given

146. PHP supported all major Databases including ----------

- None of the given
- ODBC
- ORACLE
- SQL Server

147. In -------- the Break statement may have the optional parameter or argument.

- C/C++
- Java
- PHP
- Java Script

148. Classes and objects of PHP are similar to --------

- Classes and objects of C++
- Classes and objects of java
- Classes and objects of C

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Classes and objects of Basic

149. ---------- operator in Prolog is used for List construction and also for List dismantling.

- |(Vertical Slash). P#90
- !(Sign of exclamation)
- : (Colon)
- None of the given

150. In JavaScript --------- operator is used for concatenation.

- Dot(.)
- Plus(+). P#152
- |
- ^

151. The resultant value of variable 'x' in JavaScript statement var x = "5"-"2"; will be -------

- 5-2
- 52
- "5"-"2"
- 3

152. The ------- model in JavaScript provides access to the contents of the browser window.

- DOM. P#155
- BOM
- ROM

AL-JUNAID TECH INSTITUTE 0304-1659294 www.aljunaidhelp.com

- COM

153. In ---------- we may specify the range and precision for floating point numbers. C#

- C/C++
- Ada
- Both Ada and C#

154. ---------- parameters are declared inside a subprogram.

- Default
- Actual
- Formal
- Copy

155. eq or equal operator in LISP is used to compare two ---------

- Atom symbols
- List symbols
- Non numeric symbols
- Numeric symbols

157. Object in JavaScript can be accessed through ---------

- Associated array
- Reference pointer method
- Reference type
- Both reference pointer method and reference type

158. Shortcut evaluation is not allowed for ----------

- Boolean operators
- Relational operators
- Bitwise operators

AL-JUNAID TECH INSTITUTE
0304-1659294
www.vulmshelp.com

- Both boolean and relational operators

159. Which one of the following languages is designed for distributed computing architecture?

- CORBA
- FORTRAN
- ADA
- LISP

160. In Ada elementary types are also termed as --------

- User defined types
- Static types
- Built in types
- Public types

161. Study of programming languages helps in increasing the --------- to express programming concepts.

- Capacity. P#5
- Level
- Volume
- Range

162. --------- is the designer of C++ language.

- Bjarne Stroustrup p#15
- James Goslings
- Mike Sheridan
- Patrick Naughton

163. Set membership in Prolog is different from ---------- membership.

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- List
- Symbol
- Join
- None of the given

164. ---------- support array with built in bounds checking.

- Java
- C++
- C#
- Both java and C# p#118

165. FORTRAN, PL 1 and BASIC language provide --------

- Explicit declaration
- Implicit declaration
- Either implicit and explicit declaration
- None of the given

166. There is no arithmetic expression precedence rule in -------

- PASCAL
- Small talk
- SIMULA
- C/C++

167. C/C++ has both pre-test and post-test version of ---------

- Counter controlled loop
- Logically controlled loop
- For loop
- While loop. P#192

168. C++ support only ------- mode parameter passing.

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- OUT
- IN
- Union
- IN/OUT

169.java has eliminated the concept of ----------

- Classes
- Variables
- Struck. P#31
- Arrays

170. In java Explicit conversions are done through --------

- Referencing
- Aliasing
- Casting. P#104
- Operator overloaded

171. Prolog database is based upon --------

- Facts
- Facts and queries
- Rules and queries
- Facts and rules. P#82

172. A predicate many have ------ or more arguments.

- Three
- Zero. P#88
- One
- Two

173. --------- is used as a place holder for a value that is not required.

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- Variable
- Atom
- Constant
- Anonymous variable. P#89

174. In C#, if you don't use new keyword, you must ---------- all the values in the struct by hand before you use it.

- Define
- Declare
- Create
- Initialize. P#135

175. Which statement best suited for C programming language?

- String manipulation language
- First language to provide exception handling
- With powerful set of operators but poor type checking p#30
- Introduce the notion of class

176. Which statement is true about SNOBOL?

- Its developers are computer expert
- ITE developers have limited introduction with computer science. P#46
- Is an example of aspect programming languages
- Have many data type

177. In SNOBOL, for entire assignment we use --------- operator in pattern matching statement. $(dollar)

- (.)Dot
- Unary $(Dollar)
- Binary space. P#36

AL-JUNAID TECH INSTITUTE 0304-1639294 www.vulmshelp.com

178. Disjunction in Prolog is through -------- and conjunction is through ---------

- Coma (,), OR
- OR, coma(,)
- OR, Dot(.)
- Dot(.), OR

179. In ------- we can make a pointer variable of value type only.

- C++
- C#
- Java
- Both Java and C#

180. ---------- exception handling has a finally ( ) block.

- Java
- C++
- C
- Plankal kul

181. Which of the following statement is True if $a is not identical to $b in php?

- $a!==$b. P#143
- $a!=$
- $a=!$
- $a=!$

182. --------- is the magical thing in Prolog.

- Program partition
- Inference engine

AL-JUNAID TECH INSTITUTE 0304-1659294 www.vulmshelp.com

- List processing
- None of the given

183. In JavaScript navigator is ---------- object.

- Built-in
- Browser. P#155
- Document
- User defined

184. The concept of package in java is similar to ---------

- Global class in C++
- Assembly in C#
- Global class in C#
- Global Class in both C++ and C# p#130

185. Array in PHP are not like C/C++ array but they are ---------

- Templates
- Records
- Maps
- Both Templates and Records

186. “with” statement in JavaScript is an alternative of ---------

- While statement
- Union statement
- Single document.write statements
- Multiple document.write statements. P#161

187. Sub ranges of integer types are not compatible with --------

- Integers types

188. Arrays in JavaScript are --------- based.

AL-JUNAID TECH INSTITUTE 0304 1659294 www.vulmshelp.com

AL-JUNAID TECH INSTITUT

- 0



cs508 modern programming languages
Final Papers & Quizzes

One difference LISP and PROLOG is

1. AI
2. **Puzzle**
3. Game
4. All f the given

Variable of ……. Is not an object of java

1. Primitive
2. Reference
3. **Integer type**
4. Both reference and Primitive

In …… Every class in Java is part is overloaded

1. **C++..?**
2. Java
3. C#
4. C# and java

C# and C++ have ……. size

1. Same
2. Different
3. **Distinct**
4. None of the given

____ compile into machine independent language, independent code which run in a managed execution environment.

1. **C#**
2. Java
3. C++
4. Ada

pc13020***

_____compile initially to an intermediate. Which can be run by interpretation or just in time compilation or an appropriate virtual machine?

1. C++ and C#
2. **C# and Java**
3. Java and C++
4. Ada , C++

In _____ the relationship between a get and set method is inherited, while in _____ it has to be maintained.

1. Java , C++
2. C++ , C#
3. Ada , Java
4. **C# , Java or C++**

How many modes for the source code are in C#?

1. One
2. **Two**
3. Three
4. Four

Which chaining type is used by Prolog?

1. **Backward**
2. Forward
3. Up
4. Horizontal
5. Maps in SNOBOL are also available in ____(C, C++, MATLAB, Prolog)

In C# struct are used as ……parameters…..

Javascript …related.. from java language

In … JavaScript ….. we have to address the client side compatibility issue.

_____exception inherits from exception class and _____ exception is anywhere in the program.

1. Java , C#
2. C++ , C# c
3. C# , Java
4. **Java ,C++ ..?**

pc13020***

In C# Managed code is executed under the control of

1. CLR
2. **CRL**

In_____ Boolean expression is convertible into integer type.

1. C#
2. C++
3. **JAVA..?**
4. Ada

PHP syntax looks like _____

1. ASP syntax
2. **C/C++ syntax**

For narrowing conversion which type conversion is appropriate?

1. Implicit Conversion
2. **Explicit Conversion**

In Java we can make pointer of_____.

1. Any type
2. **Reference type only**

The concept of package in Java is similar to _____

1. **Assembly in C#**
2. Global class in C#

The concept of C# jagged array is similar in function to _____

1. C++ rectangular Array
2. **Java Array of Array**
3. Java pointer Array
4. C# Array

Java has a String class which is not exactly an array of

1. **Char**
2. Elements
3. Indices
4. Long

pc13020***

How many string operators are in PHP?

1. **2**
2. 3
3. 4
4. 10

C# code when compiled is converted into _____ code.

1. **MSIL**
2. MISL

In C# _____can be inherited from other class but no inheritance from it. On the other hand _____ cannot be inherited not inheritance is possible from it is possible.

1. Private class , public class
2. Sealed class ,struct in C#
3. **struct in C# , Sealed class**
4. public class , inherited class

The concept of sealed class in C# is similar to _____

1. **Struct in C#,**
2. Struct in C++
3. Abstract class in C#
4. None of the given

Enumeration type in C# may take any type of _____ in contrast to C++ where it take only _____

a. **Numeric value, integer value**
b. Value type value, numeric value
c. Primitive type value, reference type value
d. Value type value, reference type value

The IS operator in C# is used for_____

1. Run time type conversion
2. Run time type checking
3. Run time type casting
4. **None of the given..(The 'is' operator supports run time type information)**

PHP is a _____typed language.

1. Strongly
2. Dynamic

PC130200***

3. Static
4. **None of Given**

_____is more strongly typed language then _____

1. C++, C#
2. C#, C++
3. C++, Java
4. **None of the given**

Anything starting with Capital or underscore is a variable in _____

1. **Prolog,**
2. Lisp,
3. Cobol

In C# the if statement condition is an/a _____

1. Arithmetic expression
2. **Boolean expression**
3. Numeric expression
4. Both Numeric expression and Boolean expression

In C# the value type and reference type variable are interconvert able through _____ concept.

1. Tagged type
2. **Boxing**
3. Interfaces
4. None of the given

C# support only_____ inheritance and it achieve_____ inheritance through the concept of interfaces.

1. Multiple, multiple
2. **Single, multiple**

Managed or safe code in_____ is executed under the control of common language runtime (CLR) with automatic garbage collection, no explicit memory allocation and de allocation and no explicit destructor.

1. C++
2. Java

pc13020***

3. Ada and C++
4. **C#**

PHP supported all major Databases including_____.

1. ODBC
2. Oracle
3. SQL Server
4. **None Of given…?**

Dynamic binding occurs at:

1. Compile Time
2. Design Time
3. Link Time
4. **Run Time**

Prolog language falls under the domain of:

1. **Scientific Applications**
2. Business Applications
3. Special Purpose Languages
4. None of these

4. In Prolog we specify **solution** and not **problem**

Object in java script can be accessed through ……

1. **Reference pointer method…….not in handouts….using dot notation is in handouts**
2. None of the above
3. **Capital letter or underscore in PROLOG** **variable**
4. **Variable in PROLOG …. Are any value is associated that can not be changed.**

For Recursion it is necessary that a language

1. **Dynamic**
2. Static
3. Both dynamic and static
4. Stack

pc13020***

First language that provided the concept of Pointer data type was _____.

1. COBOL
2. LISP
3. **PL/1**
4. JAVA

A … implicit.. is a default mechanism for specify types of variable?

A reserved word is a special word that cannot be used as a user-defined name

Variable use in VB without declaring decrease reliability and increase …..

1. Readably
2. **Writeable**
3. Cost
4. compile time

Dot operator in a …. SNOBOL?

1. **Reference pointer**
2. Unary pointer
3. Class pointer
4. Binary pointer

The GOTO statement in SNOBOL is …..

1. **Explicit**
2. Punter method
3. Implementation
4. An Indirect Reference

Ada has … do while loop just like C++

1. Also
2. **No**
3. Defective
4. None of the above

We use tagged type in Ada…..

The last value execution in the …..LISP is the return value

pc13020***

1. Atom
2. **Object**

Dotimes loop of LIPS similar working to ada

1. **For**
2. Switch loop
3. Do while
4. While

Control structure is a ……GOTO/jump..:)….. statement

…… anonymous ……. is place holder value that is not required

Indexes of arrays in Ada DO NOT starts from

- **0**
- 1
- 2
- 3

The keyword unsafe is used while dealing with_____

1. Loop
2. Arrays
3. **Pointers**
4. Classes

Tasks in ____are processes and cannot share data but thread in _____ do it.

1. C# , C++
2. C++ , Ada
3. Java , C#
4. **Ada , Java..?**

Java code when compiled is converted into _____ code.

1. Bit code
2. **Byte code**
3. Kbytes code
4. Giga byte Code

If you want an argument to a function to always be passed by reference, you can prepend

pc13020***

1. Percentage sign (%) to the argument name in the function definition
2. Dollar sign ($)to the argument name in the function definition
3. **An ampersand (&) to the argument name in the function definition**
4. Tilled sign (~)to the argument name in the function definition

Ada pointers are called Access types.

a) **TRUE**
b) FALSE

The dangling pointer problem is partially alleviated by Ada design.

1. TRUE
2. **FALSE**

Which statement is wrong about Static variables?

1. They are bound to memory cells before the execution of program
2. They use to direct access the memory.
3. **There is run time overhead of allocation and de-allocation of memory.**
4. Storage can't be shared among variables

Following statement returns the union of the two list in LISP.

1. >(L1 UNION L2)
2. **>(union L1 L2)**
3. >Union L1
4. >(L1 union L2)

Following is the correct structure of a "block" in Ada.

1. declare -- declare section optional
   statements
   begin
   declarations

   exception -- exception section optional

pc130200***

handlers
end;

2. **declare -- declare section optional**
   declarations
   begin
   statements

   exception -- exception section optional
   handlers
   end;
3. declare -- declare section optional
   statements
   begin
   declarations
   handlers
   exception -- exception section optional
   end;
4. declare -- declare section optional
   statements
   declarations
   begin
   statements
   exception -- exception section optional
   handlers
   end;

In LISP, _____ is the main tool used for iteration.

1. **Recursion**
2. For Loop
3. While Loop
4. Do-While Loop

pc13020***

_____ represents the class of languages from functional paradigm.

1. **LISP**
2. PROLOG
3. Ada
4. C++

In LISP, following statement returns the difference of the two lists.

1. (Difference L1 L2)
2. **(set-difference L1 L2)**
3. (L1 Difference L2)
4. (L1 difference L2)

Lists can be constructed with the help of three basic functions which are _____.

1. scheme, common lisp and cons
2. cons, append and scheme
3. **cons, list and append**
4. list, atoms and append

Block statement in Ada is very different to a block in C.

1. True
2. **False**

Two important versions of LISP are _____.

1. Scheme and Atoms
2. **Scheme and Common Lisp**
3. Common Lisp and defacto
4. List and Common Lisp

pc13020***

Following is the correct syntax of 'for' statement in Ada.

1. **for variable in low_value .. high_value loop**
   -- Loop body goes here
   end loop;
2. for variable in low_value .. high_value loop
   -- Loop body goes here
   end;
3. begin;
   for variable in low_value .. high_value loop
   -- Loop body goes here
   end loop;
4. begin loop;
   for variable in low_value .. high_value loop
   -- Loop body goes here
   end loop;

In _____, Enumeration type can also be used as indexes in arrays.

1. **Ada**
2. C
3. C++
4. LISP

SNOBOL was designed for _____ purpose.

1. **String manipulation**
2. AI
3. Business
4. Scientific

Computer architecture has a major influence on the design of programming language.

1. **True**

pc13020***

2. False

Too much simplicity in language design can also cause problems.

1. **True**
2. False

COBOL is mainly designed for _____.

1. Scientific experiments
2. **Business application**
3. AI applications
4. Publishing and writing algorithm

In SONOBAL binary operators have atleast____ spaces

- 1
- **2**
- 3
- 4

In SONOBOL can the size of the array be determined at run time.

1. **Yes**
2. No

_____ is an important feature of Ada language used in embedded systems and operating systems. It is used in managing parallel threads of controls.

1. Controls
2. **Tasking**
3. classes

First electronic computer was _____

1. **ENIAC**
2. Babbage analytical engine
3. Itel 386
4. Ibm x86

pc13020***

It is always better to find out the mistakes in the code at _____.

1. Runtime
2. **Compile time**
3. Link time
4. None of given option

Too much Orthogonality reduces Readability.

1. **True**
2. False

COBOL was the first language that brings the concept of _____.

1. **Records**
2. Structure
3. Object
4. Variable

Learning the implementation details of a language helps in the efficient use of that language.

1. **True**
2. False

We can have nested procedures in _____ language.

1. C++
2. **Ada**
3. C
4. PROLOG

One of the major design goals of Ada was

1. **to help developers to code the software in lesser time**
2. to make it difficult for developers to make mistakes
3. to help develop an IDE for Ada
4. to make testers to test Ada application easily

SONOBOL is case _____

1. Sensitive
2. **In-sensitive**
3. Super sensitive
4. Not sensitive

pc13020***

The main design goals of Ada were EXCEPT

1. Program reliability and maintenance
4. Design language for DoD
5. Programming is a human activity therefore avoid unintentional mistakes
6. **Designing a portable language**

The space operator has _____ precedence than arithmetic operators.

1. Higher
2. **Lower**

Pattern . Variable Upon successful completion of pattern matching, the substring matched by the pattern is assigned to the variable as _____

1. **Value**
2. String
3. Integer
4. Real numbers

A language evaluation criteria includes following factors EXCEPT

1. Readability
2. Writabilty
3. Portability
4. **Modularity**

The variable name has profound effect on _____.

1. Readability
2. Writability
3. Orthogonality
4. **Portability**

SIZE function in SONOBOL language is used to return the size of _____

1. **String**
2. Operator
3. Variable

pc130200***

4. Keyword

Indirect referencing in SONOBOL is same as of _____in C.

1. Arrays
2. **Pointers**
3. Aliasing
4. Stack

Following factors influences a portable language design EXCEPT

1. Computer architecture
2. Readability
3. Programmer's time
4. **Windows XP**

The more is the Simplicity of a language, the more it will always be readable.

1. **True**
2. False

+ Sign is used for _____ in SONOBOL.

1. **Line Continuation**
2. Line Break

Which of the following is an incorrect option from the following statements regarding 'objectives of learning new languages '?

1. Help to compare different languages.
2. Help in transition from one language to other language.
3. **Help in understanding the language piracy policy**
4. Help to choose a language for development of a certain application.

_____ was the first object oriented language.

1. COBOL
2. LISP
3. JAVA

pc13020***

4. **SIMULA**

In SONOBOL 2 spaces can be used, the purpose of 1st space is for _____ and 2nd for

1. **Pattern matching, String Concatenation**
2. String concatenation, Pattern matching

LISP used in _____ and _____(functional paradigm, AI)

First arguments in LISP is ____**symbol..?**_____ (Atom, argument, integer, LIST)

Maps in SNOBOL are also available in ____(C, C++, MATLAB, Prolog)

We use ____ indirect referencing operator in SNOBOL (Binary ".", Binary $, Unary ".", **Unary $)**

Elementary types are also called _____ in ADA (Static, **user defines**, builtin)

ADA is a _____typed language **(partially strongly)**

_____ has elaborated exception handling (**ADA**, C++, JAVA, COBOL)

___ has a powerful set of operators but poor type checking (**C**, C++, ADA, LISP)

_____and _____ have declaration paradigm **(Prolog, SQL)**

1st machine independent language is _____ **ALGOL**

To make necessary arguments at run time error is called _____**(exception handling)**

Language with wide domain of application has higher_____**(generality)**

_____ has distributed computing architecture **(CORBA)**

Readability has no influence on the cost of _____**(deployment)**

The depth at which we can think is influenced by _____(**implementation details)**

There are no struct, union, enum, unsigned, typedef, or pointers types in **Java**

==========

write three concepts which are introduced in LISP first time?

pc130200***

- Conditionals: such as if-then-else construct.
- Function types: where functions are just like integers and strings
- Recursion: first language to support it.
- Dynamic typing: all variable are pointers.
- Garbage-Collection.
- Programs composed of expressions.
- A symbol type.
- The whole program is a mathematical function

Ada is strongly typed language describe how?

ADA is strongly typed. A programming language is strongly typed if type errors are always detected and in ADA Errors can be signaled as exceptions and handled explicitly. Many serious errors such as computational overflow and invalid array indexes are automatically caught and handled through this exception mechanism, improving program reliability....?

Write a function in LISP to concatenate two lists List a=(3 4 5) List b=(c d 6)

>(append '(3 4 5) '(c d 6))

(3 4 5 c d 6)..concatenated List.

In C++ ^ and ~ are used for bitwise exclusive OR and bitwise NOT write there equivalent in ada

Ans:

^ bitwise exclusive OR of c++ = Xor in ADA..

~ = Not in ADA

What code in LISP language used to compute power of x to y. Marks3:

```
(defun power (x y)
 (if (= y 0) 1 (* x (power x (1- y)))))
```

This function computes the power of x to y. That is, it computes xy

by recursively multiplying x with itself y number of times.

Example;

>(power 3 4)

81

A code was given about ADA case concept. Please refer topic "Case statement"

```
case expression is
        when choice list =>
                sequence-of-statements
        when choice list =>
                sequence-of-statements
        when others =>
                sequence-of-statements
end case;
```

How can we determine the size of Array in SNOBOL…2

In SNOBOL, The size of the array can be determined at run time by using input from the system of using a variable.

Example:

A = ARRAY(INPUT)

May 11, 2012

Write IO header file for Ada..

```
with Ada.Text_Io;  -- intent to use
use Ada.Text_Io;  -- direct visibility
```

name functions that are used in List construction

Lists can be created and extended with the help of three basic functions.

1. cons,
2. list
3. append.

What are operators for Logical AND && and Logical OR || used in ADA.

pc13020***

Logical AND &&= And in ADA

Logical OR || = Or in ADA

Features added in COBOL not included in SNOBOL.

COBOL has introduced hierarchical data structures (records) and nested selection statements.

The COBOL language supported long variable names (up to 30 characters) with hyphens, data division, and fixed-point arithmetic.

These all feature in COBOL language are those which were added or enhanced and were not included in SNOBOL..

2013 spring mid paper:

what is the functionality of KEYWORD INT|CAHR IN snobol4 2

In SNOBOL 4 Vertical bar is used to specify pattern alternation.

KEYWORD INT|CAHR

This statement assigns the pattern 'INT' | 'CHAR' to the variable KEYWORD.

KEYWORD will now get a new value which is 'INT' | 'CHAR' So we can create new pattern by using the assignment statement.

What is error in it >(sqrt x) in LISP 3

Ans:

This code generates an error as the symbol x is not associated with any value and thus cannot be evaluated.it will give error like this.

Error: The variable X is unbound.

How many element in it (a (d e)) related to lisp… 2

There are two elements.

Atom = a

List = (d e)

What is predicate in lisp language conform ?...3

A predicate is a special function which **returns NIL** if the predicate is false, T or anything other than NIL, otherwise. Predicates are used to build Boolean expressions in the logical statements.

Comparative operators in LISP used as functions for numerical values and return a T or NIL. =, >, <, >=, <=;

For example 1:

(= (+ 2 4) (* 2 3))

T

example 2:

(> (- 5 2) (+ 3 1))

NIL

write two comparative operator used as function for numerical values in lisp programming language ? 2 marks

Comparative operators which are used as functions for numerical values are

=, >, <, >=, <=;

which data structure map pairs of associated data object in snobol? 3

A table data structure maps pairs of associated data objects. Tables have varying lengths and are dynamically extended if necessary.

T = TABLE()……If want to creates a table of unspecified length.

T = TABLE(N)……..if want to creates a table that initially has room for N elements

Once created, table can be used in a manner similar to arrays. The only difference is that they are indexed by the key value and not the index number. For example:

T<'A'> = 1

Associates key 'A' with value 1.

pc13020***

which language first provided exception handling among c++ , ada? .... 3 marks

Ans;

Although PL/1 has introduce the concept of exception handling. But ADA has elaborated this concept.

- Ada was the first language to provide a structured exception handling mechanism.
- Ada includes an exception handling mechanism so that these problems can be dealt with at run-time.
- Errors can be signaled as exceptions and handled explicitly.
- Many serious errors such as computational overflow and invalid array indexes are automatically caught and handled through this exception mechanism, improving program reliability.

write a complete program in ada to print this out put by only using put_line command. use the loop isn't allowed.

print this code

```
*

***

*****

*******
```

Ans.

```
procedure Starprint is


begin

Put ("*");
New_Line ;

Put ("***");
New_Line ;

Put ("*****");
New_Line ;
```

pc130200***

```
Put ("******");
New_Line ;

end Starprint;
```

write program in ada using loop to print this code

code :

*

**

***

****

***** **(these star have to print using loop)**

Ans:

```
procedure Loopprint is

  Number_Of_Time: Integer:=5;

begin

  for I in 1..Number_Of_Time loop

  for J in 1..I loop
Put ('*');

  end loop;

  New_Line;
End loop;


end Nested_Loops;

end Loopprint;
```

does ada believe in human programming if yes then y?

yes, ada believe in human programming .Programming as a human activity is the main goal of ADA. In ADA the whole philosophy is that a programmer is a human and all humans make

pc13020***

mistakes. So to make it safer, Ada uses discriminants in a record that tell what type of data is currently stored there.

c or ada, which support subprograms?

ADA supports subprograms. There are two types of subprograms:

1. procedures and
2. Functions.

we can also have nesting of subprograms. A subprogram defined inside another subprogram can be used by its parent, children, or sibling subprograms only.

concepts of car,cdr, first and rest in Lisp?

In order to select elements from a list, selectors functions are used. There are two basic selector functions known as

1. first (or car) and
2. rest (or cdr).

The rest can be build with the help of these functions.

1. **First (or car)** takes a list as an argument and returns the first element of that list.
   example:

>(first '(a s d f))

a

2. **rest (or cdr)** takes a list as its argument and returns a new list after removing the first element from the list.

examples:

>(rest '(a s d f))

(s d f).

Note language generality? 2marks

Generality

Generality is also an important factor and deals with the applicability of the language to a

pc13020***

range of different domains. For example, C is more general purpose than LISP or

FORTRAN and hence can be used in more domains than these two languages.

CS 508 mid term spring 2010 paper

Compare ADA dotimes loop with dolist and dotime in LISP (5)

Apart from recursion, in LISP we can write code involving loops using iterative non recursive mechanism. There are two basic statements for that purpose: **dotimes** and **dolist.**

DOTIMES

dotimes is like a counter-control for loop. Its syntax is given as below:

(**dotimes** (count n result) body)

It executes the **body** of the loop n times where count starts with 0, ends with n-1.

The **result** is optional and is to be used to hold the computing result. If ***result*** is given, the function will return the value of ***result***. Otherwise it returns NIL. The value of the **count** can be used in the loop body.

DOLIST

The second looping structure is **dolist.** It is used to iterate over the list elements, one at a time. Its syntax is given below:

(**dolist** (x L result) body)

It executes the **body** for each top level element x in L. x is not equal to an element of L in each iteration, but rather x takes an element of L as its value. The value of x can be used in the loop body. As we have seen in the case of **dotimes,** the **result** is optional and is to be used to hold the computing result. If ***result*** is given, the function will return the value of ***result***. Otherwise it returns NIL.

Differentiate between ADA access types and C/C++ pointer type (5)

An *access* type in ADA roughly corresponds to a C++ pointer.

type Address_Ref **is access** Address;

A_Ref := new Address;

A_Ref.Postal_Code := "94960-1234";

Unlike C, there is no notational difference for accessing a record field directly or through an access value.

To refer to the entire record accessed by an access value use the following notation:

Print(A_Ref.**all**);

Why predicate is a special function in LISP (3)

A predicate is a special function which returns NIL if the predicate is false, T or anything other than NIL, otherwise. Predicates are used to build Boolean expressions in the logical statements.

The following comparative operators are used as functions for numerical values and return a T or NIL. **=, >, <, >=, <=;**

What additional features are added in COBOL (2)

COBOL uses level numbers to show nested records; others use recursive definitions Business applications

reports, decimal arithmetic, character operations - COBOL

It was designed to look like simple English to broaden the base of computer users.

Is there anything like templates as in C++ (2)

Generics are like templates in C++ and allow parameterization of subprograms and packages with parameters which can be types and subprograms as well as values and objects.

Difference of C and C++ 2 marks

C++ Differs from C in two ways:

1. The control expression can also be Boolean

2. The initial expression can include variable definitions (scope is from the definition to the end of the function in which it is defined).

Write types of loop in Ada.

There are three types of loops in ADA.

1. For loop
2. While loop
3. Simple ..unconditional infinite loop

Brief note on Orthogonality.

Orthogonality is a very important concept. It addresses how relatively small number of components that can be combined in a relatively small number of ways to get the desired results. It is closely associated with simplicity: the more orthogonal the designs the fewer exceptions and it make it easier to learn, read, and write programs in a programming language. The meaning of an orthogonal feature is independent of the context. The key parameters are symmetry and consistency. For example pointers are an orthogonal concept.

1)S=0
S=o
-- N=LT(N,13)N+1:F(DONE)
SUM=SUM+_N:(ADD)
DONE OUTPUT=SUM

SYNTACALLY SHOW HOW CAN WE DEFINE THE LISP?
LISP is a representative language of this style of programming.
Lisp stands for "LISt Process". It was invented by John McCarthy in 1958 at MIT.

1. It has simple data structure (atoms and lists) and makes heavy use of recursion.
2. It is an interpretive language and has many variations.
3. The two most popular versions are
   - Scheme and
   - Common Lisp
4. It is the most widely used AI programming language.
5. Atom and LIST are two main elements of LISP.

??????????

3)DEFERENTIATE BETWEEN TEH ada record type and c/c++??
4)define struct with the proper example

6)is polymorphism allowed in ada????

There are two means of using polymorphism in Ada. *Static polymorphism* is provided through the generic parameter mechanism whereby a generic unit may at compile time be instantiated with any type from a class of types. *Dynamic polymorphism* is provided through the use of so-called class-wide types and the distinction is then made at runtime on the basis of the value of a tag.

8)algol main feature?

Salient features of the language are:

1. Concept of type was formalized
2. Names could have any length
3. Arrays could have any number of subscripts.Lower bound of an array could be defined
4. Parameters were separated by mode (in & out)
5. Subscripts were placed in brackets
6. Compound statements were introduced (begin ... end)
7. Semicolon as a statement separator was used
8. Assignment operator was :=
9. if had an else-if clause

why parallel programing is use in ADA? (3) marks

Babbage's Analytical Engine (2)

Charles Babbage is considered to be the inventor of the first computer. This machine,

known as the Analytical Engine or Difference Engine, was invented in 1820's. In the

beginning, it could only be made to execute tasks by changing the gears which executed the calculations. Thus, the earliest form of a computer language was physical motion.

The key features of this machine included

1) Memory (called store),
2) jump,
3) loop, and the
4) concept of subroutines.

It was motivated by the success of power looms. It had limited capability and because of the technological limitations this design could not be fully implemented.

December 1, 2010 at 8:23pm

What is the difference between >(intersection L1,L2) and (set-difference L1,L2) Lisp functions. 5

These are set operations in LISP.

```
>(union L1 L2)            ; returns the union of the two lists
>(intersection L1 L2)     ; returns the intersection of the two lists
>(set-difference L1 L2)   ; returns the difference of the two lists
```

Give silent features of packages in Ada 5

Packages

These are primary structure used for encapsulation in.

1) Packages are used to group data and subprograms.
2) Packages can be hierarchical, allowing a structured and extensible relationship for data and code.
3) All the standard Ada libraries are defined within packages.
4) Package definitions usually consist of two parts:
    1. package specification and
    2. package body.
5) Package bodies can also declare and define data types, variables, constants, functions, and procedures not declared in the package specification.

Creating list functions in Lisp may be written as (append '(ab)'(cd)) so why we use the single quote (') in front of atom or list. 3

it a shorthand notation for the function, quote. Quote is a function that takes in its argument and sends back as its answer, the same value that went into it.

What is batting-average in Ada explain with suitable example. 3

The type Batting_Averages is a fixed point type whose values are evenly spaced real numbers in the range from 0 through 1. The distance between the values is no more than 1/1000. The actual distance between values may be 1/1024, which is 2-10.

For example:

type Batting_Averages is delta 0.001 range 0.0..1.0;

The distance between values is implemented as a power of 2.

Write pattern matching statement in SNOBOL. 2

pc13020***

In SNOBOL Space is used as the pattern matching operator and the statement has the following form:
subject pattern
There is no assignment operator in this case. Both the subject and the pattern are strings and this statement tries to match the pattern in the subject. It will be successful if the match is found and will result in failure otherwise.
Example:
TRADE = 'PROGRAMMER'
PART = 'GRAM'
TRADE PART

a) **What are interpreted and compiled languages? Give examples (5)**

Interpreted computing languages are languages whose source code is processed by a software program called an interpreter that reads in the text and immediately acts upon the instructions defined by the text. Compiled computing languages are languages whose source code is processed by a software program called a compiler that converts the source code into a file which can then be run directly or indirectly by a computer operating system.

1. Prolog It is an interactive (hybrid compiled/interpreted) language.
2. PHP is interpreted
3. FORTAN is compiled
4. SNOBAL is compiled

Comparison between functional and imperative languages?
A most important class of programming languages, known as the imperative languages, i based upon the von Neumann Architecture. This includes languages like FORTAN COBOL, Pascal, Ada, C, and many more.
While functional language is where there is no need for assignment and in it control flow is achieved via recursion and conditional expressions.

Convert the following Ada code into equivalent C code.

```
case ch is
when 'A' | 'E' | 'I' | 'O' | 'U' =>
putline("this is an uppercase vowel");
when 'J' .. 'N' =>
putline("between uppercase J and N");
when others =>
putline("something else");
```

end case;

What is valid or invalid statement in ADA language 5

a=(1....5) integer**...(invalid)**

b=(1....5) integer...(invalid)

c,d=(1....5) float...(invalid)

All Declarations are invalid.

There should be proper assignment operator (:=) . In these colon before equal is missing ...

Improper array declaration here too .. only 2 dots should be there(..)

condition

a=b

a=c

b=a

Write Output of the following code. ……5

```
Procedure Color is
  Color= BasicColor(Red, green, blue, yellow)
begin BasicColor
  Color:=BasicColor'PRED(RED)
end color
```

Asn:

RED.

pc13020***

How to compare and examine language?

1. Readability
2. Writ ability
3. Reliability

Pattern matching Output of code?

Sentence='this is ur pen'

Sentence ‘ur’= ’my’

Sentence ’my’=

Z= ’10’

Prolog learning curve is very high meanings of this statement 3marks

Prolog is a declarative programming language where we only specify what we need rather than how to do it. It has a simple concise syntax with built-in tree formation and backtracking which generates readable code which is easy to maintain. It is relatively case and type insensitive and is suitable for problem solving / searching, expert systems / knowledge representation, language processing / parsing and NLP, and game playing.

Discuss the issue related with declaring a method/class as final java? 3 marks

Final Fields and Methods

A final field is like a constant: once it has been given a value, it cannot be assigned to again. Fields and methods can also be declared final. A final method cannot be overridden in a subclass.

With suitable examples the concept of boxing in C#. How C# is different there concept from other languages? 3 marks

Boxing

Boxing is converting any value type to corresponding object type and convert the resultant 'boxed' type back again.

int i = 123;

```
object box = i;  // value of i is copied to the object box
if (box is int)  // runtime type of box is returned as boxed value type
{
Console.Write("Box contains an int");  // this line is printed
}
```

Notation of actual /formal Parameters? 3 marks

Actual/Formal Parameter Correspondence:

1. Positional
2. Keyword

e.g. SORT(LIST => A, LENGTH => N);

Default Parameter Values

```
procedure SORT(LIST : LIST_TYPE;
               LENGTH : INTEGER := 100);
...
SORT(LIST => A);
```

Dangling pointer how to state in java? 5marks

Dangling pointers are those pointers that points to a heap-dynamic variable that has been Deallocated. Automatic garbage collection prevents memory leaks and dangling pointers.

Example missing…☹

Aliasing Problem in java Script? with suitable examples. 5 marks

Aliasing Problems in Java

The fact that arrays and classes are really pointers in Java can lead to some problems. Here is a simple assignment that causes aliasing:

```
int [] A = new int [4];
```

Int [] B = new int [2];

This obviously creates problems. programmers have to be very careful when writing programs in Java.

In Java, all parameters are passed by value, but for arrays and classes the actual parameter is really a pointer, so changing an array element, or a class field inside the function does change the actual parameter's element or field.

Example:

```
void f( int [ ] A ) {
        A[0] = 10;      // change an element of parameter A
        A = null;       // change A itself
    }
    void g() {
        int [ ] B = new int [3];
        B[0] = 5;
        f(B);
    }
```

B is not null here, because B itself was passed by value however, B[0] is now 10, because function f changed the first element of the array.

What is monitor in java thread?

To prevent problems that could occur by having two methods modifying the same object, Java uses monitors and the synchronized keyword to control access to an object by a thread. Any object that implements the "synchronized" keyword is considered to be a monitor. A monitor is an object that can move a thread process between a blocked and running state. Monitors are required when a process needs to wait for an external event to occur before thread processing can continue. A typical example is when a thread can't continue until an object reaches a certain state.

What queried in prolog?

Queries are used to retrieve information from the database. A query is a pattern that PROLOG is asked to *match* against the database and has the syntax of a compound query. It

may contain variables. A query will cause PROLOG to look at the database, try to find a match for the query pattern, execute the body of the matching head, and return an answer.

What is quoted atom in prolog?

Quoted atoms - sequence of characters surrounded by single quotes. Examples: 'Apple' 'hello world'

What is managed and unmanaged code?

Ans;

Managed code

Managed code is executed under the control of Common Language Runtime (CRL).

It has automatic garbage collection. That is, the dynamically allocated memory area which is no longer is in use is not destroyed by the programmer explicitly. It is rather automatically returned back to heap by the built-in garbage collector. There is no explicit memory's allocation and deallocation and there is no explicit call to the garbage collector.

Unmanaged code

The unmanaged code provides access to memory through pointers just like C++. It is useful in many scenarios. For example:

- Pointers may be used to enhance performance in real time applications.
- In non-.net DLLs some external functions requires a pointer as a parameter, such as Windows APIs that were written in C.
- Sometimes we need to inspect the memory contents for debugging purposes, or you might need to write an application that analyzes another application process and memory.

How many ways the static binding can be define?

Static Binding

A binding is static if it occurs before run time and remains unchanged throughout program execution

If static, type may be specified by either an explicit or an implicit declaration .

An explicit declaration is a program statement used for declaring the types of variables .

An implicit declaration is a default mechanism for specifying types of variables i.e the first appearance of the variable in the program.

Write three different methods how to write strings in PHP? 3

Strings

PHP strings are created using single quote or double quote.

They can also be created by <<< which is called heredoc. One should provide an identifier after <<<, then the string, and then the same identifier to close the quotation. The closing identifier must begin in the first column of the line.

How to convert PHP string in numeric value? 2

String conversion to numbers:

When a string is evaluated as a numeric value, the resulting value and type are determined as follows.

- The string will evaluate as a **float** if it contains any of the characters '.', 'e', or 'E'. Otherwise, it will evaluate as an integer.
- The value is given by the initial portion of the string. If the string starts with valid numeric data, this will be the value used. Otherwise, the value will be 0 (zero).

Example:

```
<?php
        $foo = 2 + "10.5";              // $foo is float (12.5)
        $foo = 1 + "-1.1e3";            // $foo is float (-1099)
        $foo = 1 + “Ali-1.3e3";         // $foo is integer (1)
        $foo = 1 + "10 Small Cats";     // $foo is integer (11)
        $foo = "10.0 cats " + 1;    // $foo is float (11)
?>
```

Using strings in numeric expressions provides flexibility but it should be obvious that it also is a source to numerous programming errors and mistakes. This kind of error is also very hard to debug and detect.

Discuss readability problem using control statements? 2

Control statements play an important role in readability.

pc13020***

1. We are all aware of the hazards of goto statement. If a language relies on goto statements for control flow, the logic becomes difficult to follows and hence understands and maintain.
2. Restricted use of goto in extreme was needed and useful as well but with the emergence of new language constructs to handle those situations, it probably not an issue any more.

What are the enumeration and subrange types? Differentiate these two in points.

a) An enumeration is a special kind of value type limited to a restricted and unchangeable set of numerical values. By default, these numerical values are integers, but they can also be longs, bytes, etc. (any numerical value except char).while subrange type is an ordered contiguous subsequence of an ordinal type.
b) Subrange types behave as their parent types; can be used as
for variables and array indices
   - E.g. type pos = 0 .. MAXINT;
c) Enumeration types are implemented as integers while Subrange types are the parent types with code inserted (by the compiler) to restrict assignments to subrange variables.

Short circuiting in java and c and c++ 3marks

Short Circuit Evaluation;

- A and B

- A or B

- *Example*

```
index := 1;
while (index <= length) and
      (LIST[index] <> value) do
  index := index + 1
```

C, C++, and Java*:* use short-circuit evaluation for the usual Boolean operators (&& and ||), but also provide bitwise Boolean operators that are not short circuit (& and |) Structs c++ and c# structs are public by default. Structs are basically "objects" that contain variables inside of them.The **struct** type: In C#, a **struct** is a value type.

pc13020***

what seal struct and abstract means in C# ?

An *abstract class* is any class that includes an abstract method. It is similar to Pure virtual in C++.If a class includes an abstract method, the class *must* be declared abstract, too.

Write two differences between C++ and Java

Java is more robust than C++. Some of the reasons are:

- Object handles are initialized to null (a keyword)
- Handles are always checked and exceptions are thrown for failures
- All array accesses are checked for bounds violations
- Automatic garbage collection prevents memory leaks and dangling pointers
- Type conversion is safer
- Clean, relatively fool-proof exception handling
- Simple language support for multithreading
- Bytecode verification of network applets

pc13020***

Final Term fall 2010

Difference between proper example Union type in c/c++ and ada discriminated type? 2marks

Discriminated records are like union types in C. There are however major differences between C union types and Ada discriminated records. The union type in C is fundamentally unsafe, and therefore unacceptable.

Division by zero is an expression? what type of error is this and either handled by compiler or it through exception? 3marks

Division by zero is due to Inherent limitations of arithmetic.it is run-time errors sometimes called exceptions.

How Short circuit evolution is performed in Ada and fortran? 3 marks

In Ada, programmer can specify either short-circuit is specified with

1. ‘and then’
2. ‘or else’

While in FORTRAN 77, short circuiting is there, but any side affected place must be set to undefined. The Problem with Short Circuiting is

(a > b) || (b++ / 3)

Short-circuit evaluation exposes the potential problem of side effects in expressions

What term Class attribute in C#? marks

In C#, Attributes are used to give information to .Net compiler

Example:

it is possible to tell the compiler that a class is compliant with .Net Common Language Specification.

```
[CLSCompliant (true)]
publc class MyClass
{
//class code
}
```

Define and explain “throws Clause” and the “finally Clause” with respect to exception handling in Java. (5)

Throws Clause

Throws clause is overloaded in C++ and conveys two different meanings: one as specification and the other as command. Java is similar in syntax but different in semantics. The appearance of an exception class name in the **throws** clause of Java method specifies that the exception class or any of its descendents can be thrown by the method.

A C++ program unit that does not include a throw clause can throw any exceptions. A Java method that does not include a throws cannot throw any checked exception it does not handle. A method cannot declare more exceptions in its throws clause than the methods it overrides, though it may declare fewer. A method that does not throw a particular exception, but calls another method that could throw the exception, must list the exception in its throws clause.

The finally clause

A Java exception handler may have a finally clause. A finally clause *always* executes when its try block executes (whether or not there is an exception). The finally clause is written as shown below:

```
try {
…
}
catch (…) {
…
}
…
finally {
…
}
```

A finally clause is usually included to make sure that some clean-up (e.g., closing opened files) is done. If the finally clause includes a transfer of control statement (return, break, continue, throw) then that statement overrides any transfer of control initiated in the try or in a catch clause.

Explain the Prolog features regarding its applications in real world. (5)

We can find PROLOG in areas like

1. Expert systems
2. Artificial intelligence,
3. Natural language understanding,
4. logical puzzles and games.
5. theorem proves construction
6. The variant of PROLOG called DATALOG is used in database management.
7. It is relatively case and type insensitive and is suitable for problem solving / searching, expert systems / knowledge representation, language processing / parsing and NLP, and game playing.

PC13020***

Prolog is a declarative programming language where we only specify what we need rather than how to do it. It has a simple concise syntax with built-in tree formation and backtracking which generates readable code which is easy to maintain.

Describe the programming steps in Prolog? (5)

PROLOG programming follows the following steps:

- Declaring some facts about objects and their relationships
- Defining some rules about objects and their relationships
- Asking questions about objects and their relationships

How to define PHP classes?

Classes and objects in PHP are similar to Java. A variable of the desired type is created with the *new* operator. It supports Single inheritance only and uses the keyword extends to inherit from a super class. The inherited methods and members can be overridden, unless the parent class has defined a method as final.

Union in c++ and java difference?

C and C++ have free unions (no tags)

- Not part of their records

- No type checking of references

Java has neither records nor unions

Two difference b/w c++ and java

1. Control expression must be Boolean
2. Scope of variables defined in the initial expression is only the loop body

Two difference b/w c and c++

The control expression can also be Boolean
The initial expression can include variable definitions, scope is from the definition to the end of the function in which it is defined.

What is notify and wait in java

pc13020***

Threads are based upon the concept of a Monitor. The wait and notify methods are used just like wait and signal in a Monitor. They allow two threads to cooperate and based on a single shared lock object.

what is notify() and notifyall() in java?

There is a slight difference between notify and notifyAll. As the name suggest, notify() wakes up a single thread which is waiting on the object's lock. If there is more than one thread waiting, the choice is arbitrary i.e. there is no way to specify which waiting thread should be re-awakened. On the other hand, notifyAll() wakes up ALL waiting threads; the scheduler decides which one will run.

Explain Stack Dynamic variable with example? 5

- Fixed stack dynamic - range of subscripts is statically bound, but storage is bound at elaboration time e.g. C local arrays are not static
    - Advantage: space efficiency
- Stack-dynamic - range and storage are dynamic, but fixed from then on for the variable's lifetime e.g. Ada declare blocks declare

```
STUFF : array (1..N) of FLOAT;
    begin
    ...
    end;
```

Advantage: flexibility - size need not be known until the array is about to be used

Differentiate between the implicit and explicit type conversion with respect to Java. (5)

Java is much stronger than C++ in the type conversions that are allowed.

Booleans cannot be converted to other types. For the other primitive types (char, byte, short, int, long, float, and double).

Implicit conversions:

An implicit conversion means that a value of one type is changed to a value of another type without any special directive from the programmer. A char can be implicitly converted to an int, a long, a float, or a double.

pc13020***

For example:

```
char c = 'a';

int k = c;

long x = c;

float y = c;

double d = c;
```

Explicit conversions:

Explicit conversions are done via *casting*: the name of the type to which you want a value converted is given, in parentheses, in front of the value.

For example,

The following code uses casts to convert a value of type double to a value of type int, and to convert a value of type double to a value of type short:

```
double d = 5.6;

 int k = (int)d;

short s = (short)(d * 2.0);
```

Casting can be used to convert among any of the primitive types except boolean.

Two example of atoms in PROLOG syntax?

Atoms:

AlphaNumaric start with lower letter

Quoted Atom sequence of character quoted by single quotes

Symbolic symbol & +-* special atom !;[]{}

Two example of predefined reference type in C#? 2 marks

pc13020***

1. object
2. string

Differentiate between client side scripting and server side scripting languages? (5)

JavaScript – client side scripting

Primary objective of JavaScript is to create dynamic HTML documents and check validity of input forms. It is usually embedded in an HTML document. It is not really related to Java

PHP (Personal Home Page) – server-side scripting

It is interpreted on the Web Server when the HTML document in which embedded is requested by the browser. It often produces HTML code as an output and is very similar to JavaScript. It allows simple access to HTML form data and makes form processing easy. It also provides support for many different database management systems and hence provides Web access to databases.

Differentiate between client side scripting and server side scripting languages? (5)

JavaScript – client side scripting

Primary objective of JavaScript is to create dynamic HTML documents and check validity of input forms. It is usually embedded in an HTML document. It is not really related to Java

PHP (Personal Home Page) – server-side scripting

It is interpreted on the Web Server when the HTML document in which embedded is requested by the browser. It often produces HTML code as an output and is very similar to JavaScript. It allows simple access to HTML form data and makes form processing easy. It also provides support for many different database management systems and hence provides Web access to databases.

Differentiate between the Dynamic Type binding and Static type binding?

Static and Dynamic Binding

A binding is static if it occurs before run time and remains unchanged throughout program execution.

A binding is dynamic if it occurs during execution or can change during execution of the program.

What is the run time environment in case of C# similar to JVM in case of Java programming language?

It is Similar to Java and C++ in many respects. The .NET platform is centered on a Common Language Runtime (CLR - which is similar to a JVM) and a set of libraries which can be exploited by a wide variety of languages which are able to work together by all compiling to an intermediate language (IL).

Explain the Concept of Explicit and Implicit heap, dynamic variables and stack dynamic storage binding? Clarify the concept with suitable examples

Explicit Heap Dynamic Variables

- Allocated and de-allocated by explicit directives, specified by the programmer, which take effect during execution
- Referenced only through pointers or references

Examples: Dynamic objects in C++ (via new and delete) All objects in Java

Advantage: Provide dynamic storage management

Disadvantage: Inefficient and unreliable

Implicit Heap Dynamic Variables

- Allocation and de-allocation is caused by assignment statements

Example:All variables in SNOBOL

Advantage: Flexibility

Disadvantages: Inefficient, because all attributes are dynamic Loss of error detection

Write Ada language procedure (Code) to display your name on screen

```
withAda.Text_Io;
useAda.Text_Io;
procedureHello is
begin
Put_Line("Shazia Bano!");
```

pc13020***

endHello;

In C# how many Allocation is handled through manage Code

There is no explicit memory's allocation and deallocation and there is no explicit calls to the garbage collector i.e. call to destructor.

Do we have pointers for reference types in case of C#?

No! in c#, Pointer can be declared to hold the memory addresses of value types. That is, we cannot have pointers for reference type.

How many character types are supported in Ada Language?

There are two built in character types in Ada

- Simple 8-bit ASCII Characters
- Wide_Character that support 16-bit Unicode/ISO standard 10646.

These are good enough for most purposes, but you can define your own types just like the integer types:

What are subprogram issues in different languages?

Subprograms are complex structures in programming languages, and it follows from this a lengthy list of issues in their design. Following are some issues with sub programming,

1. What parameter-passing method or methods are used?
2. Are the types of the actual parameters checked against the types of the formal parameters?
3. Are local variables statistically or dynamically allocated?
4. If subprograms can be passed as parameters, what is the referencing environment of such a subprogram?
5. If subprograms can be passed as parameters, are types of parameters checked in calls to the passed subprograms?
6. Can subprograms be overloaded?
7. Can subprograms be generic?
8. Is neitherseparate or independent compilation possible?

What is seal struct and abstract in C#

Abstract: A class declared as 'abstract' cannot itself be instanced - it is designed only to be a base class for inheritance.

Sealed: A class declared as 'sealed' cannot be inherited from. It may be noted that structs can also not be inherited from. But it can inherit from other class.

Structs: Structs in C# are designed to encapsulate lightweight objects. They are value types (not reference types), so they're passed by value. They are sealed, which means they cannot be derived from or have any base class other than System.ValueType, which is derived from Object. Structs cannot declare a default (parameterless) constructor. Structs are more efficient than classes, that's' why they are perfect for the creation of lightweight objects.

SNOBOL stands for what?
SNOBOL stands for StriNg Oriented SymBOlic Language.

Write a program in Ada that prints the text Area of your course for example "BS-Computer Sciences."

```
withAda.Text_Io;

useAda.Text_Io;

procedureBSCS is

begin

Put_Line("BS-Computer Sciences!");

End BSCS;
```

Implementation models?

Implementation Models:

Pass-by-value (in mode): Either by physical move or access path

What is the function of cut(!) predicate in PROLOG? 2 marks

cut <or> ! is a special predicate. And it is used in the body of a given clause so as to avoid using clauses appearing after the given clause in the program.it is like a goal which is always succeeded but never backtracked past.

For example, to prevent extra solutions being found by Prolog and avoid additional computations that are not desired or required in a program.

How do Ada and COBOL differ by syntax and semantics in referencing a record element? Give examples of each (5)

In ADA, Record types are like structures in C.

```
type Address is record
Street : Unbounded_String;
City :    Unbounded_String;
Postal_Code : String(1..10);
end record;
```

- COBOL uses level numbers to show nested records; others use recursive definitions
- Examples:

COBOL

```
field_name OF record_name_1 OF ... OF
    record_name_name
```

According to readability point of view COBOL record definition syntax is easier to read and understand but according to writability point of view other languages record definition syntax is easier to write and less time consuming.

We studied several reasons to study programming languages. With that context in mind discuss:

(a) Increased capacity to express programming concepts

(b) Improved background for choosing appropriate languages and show the output.

Discuss the difference between enumeration types of C and Ada. Which is better and why?

Although Just like C, an enumeration type in Ada is a sequence of ordered enumeration literal, It is however different from C in many respects:

There is no arithmetic defined for these types.

Example

```
S1, S2 : State;
S1 := S1 + S2; -- Illegal
```

Unlike C, the same symbolic literal can be used in two enumeration types.

Example:

```
type RainbowColors is (Red, Orange, Yellow, Green, Blue, Indigo, Violet);

type BasicColors is (Red, Green, Blue);
```

The Ada compiler will use the type of the variable in question and there will be no ambiguity.Enumeration types are used as attributes or properties of different objects.

Why it is necessary to use (:) in control flow statement?

PHP offers an alternative syntax for some of its control structures; namely, if, while, for, foreach, and switch. In each case, the basic form of the alternate syntax is to change the opening brace to a colon (:) and the closing brace to endif;, endwhile;, endfor;, endforeach;, or endswitch;, respectively.

Give two examples of errors when pointer are wrongly used ?

Dangling pointers: A pointer points to a heap-dynamic variable that has been deallocated

Lost Heap-Dynamic Variables : A heap-dynamic variable that is no longer referenced by any program pointer. The process of losing heap-dynamic variables is called memory leakage

Difference between Actual Parameter and Predicate parameter? 3 marks

A parameter association defines the association between an actual parameter and a formal parameter.

A predicate is a special function which returns NIL if the predicate is false, T or anything other than NIL, otherwise. Predicates are used to build Boolean expressions in the logical statements.

Can we define members and length function of our own in LISP?if yes then explain your answer with suit able example.

yes we can, The LISP built-in function list-length counts the number of elements in a list. For example,

USER(33): (list-length '(2 3 5 7 11 13 17 19))
8

a function can be implemented recursively. A given list *L* is created by either one of the two constructors, namely nil or a cons:

- *Case 1*: *L* is nil.
  The length of an empty list is zero.
- *Case 2*: *L* is constructed by cons.
  Then *L* is composed of two parts, namely, (first *L*) and (rest *L*). In such case, the length of *L* can be obtained inductively by adding 1 to the length of (rest *L*).

????

Write a code in SNOBOL by using indirect referencing which decreases the value by 1.

Whose better among C/C++ and Ada according to overloading concept..

As Use of an operator for more than one purpose is known as operator overloading. Ada allows a limited overloading of operators. C++ and Ada allow user-defined overloaded operators…???

What is inference mechanism in Prolog? Give example.

How to type comment in PROLOG language.

What will happen if user does not provide the string array as the argument to the method in Java,will there be any kind of error or not ?

2. case A is

when 1 =>fly;

when 11|14 => null;

when 22|20.....30 =>swim;

when others => complain ;

end case;

what will be executed if A condition is 12. ..... 2 marks

type big is mod 8.

big :Big :=3; this code will generate an error in ada ?

And ek qs tha keeping in mind that expressions in LISP are in the List show the top variables of the following list.

pc130200**

Ese kr k lists thin…

(add 4, mult 3)

(oranges, grapes, apples)

pc130200***

CS508 VU Final Term Past Papers Solved By Malik!!

In the name of Allah, the most beneficent, and the most merciful.

vumalik.blogspot.com

All CS Free Services

LMS Handling

Quiz

GDB's

Assignment

Project



Contact Us VU Malik 0317 6291353

To seek knowledge is the duty of every Muslim man and woman

1. Whichofthefollowingconversionhastobedoneexplicitlybytheprogrammer inC#?
   - Floattoint
   - IntotoFloat
   - Intto long
   - Floatofdouble
2. Thedynamically generateawebpagewhichofthefollowingprogramminglanguageismostsuitable?
   - Ada
   - PHP
   - C++
   - Prolog
3. InC#,whichofthefollowingisusedtogiveinformationto.Netcompilerthataclassiscompliant withcommonlanguageSpecification(CLS)?
   - Classvariables
   - Classattributes
   - Classdefinition
   - Classfunction
4. C#doesnotsupporttheconversionof_____valuestointegers.
   - Boolean
   - Character
   - Floatingpoint
   - Decimal
5. ClassesandobjectsofPHParesimilarto_____
   - ClassesandobjectsofBasic
   - ClassesandObjectsofC
   - ClassesandObjectsofJAVA
   - ClassesandObjectsofC++
6. Whichofthefollowinglanguageisusedforserver-sidescripting?
   - C#
   - ADDA
   - PHP
   - C++
7. WhichofthegivenoperatorisusedtoreturntoreferencefromafunctioninPHP?
   - &&
   - $
   - Dot
   - &
8. Avariablein_____cannotbeusedunlessanduntilitisnotinitialized.
   - ALGOL
   - C
   - C++
   - C#
9. Inordertopassavaluebyreferencetoamethodin C#,whichofthefollowingkeywordisusedwithm ethodparameter.
   - Refer
   - New

VU MALIK

- Ref
- Explicit

10. ThecodewritteninPHPisreturnedtothewebbrowseras:
    - CSSflexbox
    - ShellScripts
    - Applets
    - PlainHTML
11. “With”statementinJavaScriptisanalternativeof_____
    - Multipledocument.writestatements
    - Singledocument.writestatements
    - Multipledocument.readstatements
    - Singledocument.readstatements
12. C#supportonly_____inheritanceandit achieve_____inheritance throughtheconceptofinterfaces.
    - Multiple,multiple
    - Single,Multiple
    - Noneofthegiven
    - Single,Single
13. InthecontextofC#,whichofthefollowingisnottrueaboutdelegates?
    - Delegatesarevaluetype
    - Delegates areeventbased
    - Delegates arelikeC/C++ functionpointer
    - Delegates arereferencetype
14. FORTRAN,PL1andBASIClanguageprovide---------- ofvariables.
    - Explicitdeclaration
    - Implicitdeclaration
    - Eitherimplicitandexplicitdeclaration
    - Noneofthegiven
15. Whichofthegivenstatementistrueif“$a”isnotequalto“$b”inPHP?
    - $a=!$
    - $a!==$b
    - $a!=$
    - $a==! $
16. TheloopcontrolexpressioninanyloopofC#mustbeof_____type.
    - Integer
    - Boolean
    - Decimal
    - Float
17. The_____operatorinC#isusedtotestittheoperator/expressionisofacertaintype.
    - ‘IN’
    - ‘IS’
    - ‘AS’
    - ‘OUT’

18. AscriptwritteninPHPareexecutedby:
    - Webbrowser
    - Clientmachine
    - JavaApplets
    - WebServer
19. InPHP‘Switch’structurethe_____startsorimplementsonimplicitloop.
    - Returnstatement
    - ContinueStatement
    - BreakStatement
    - ForLoop
20. PHPstandfor
    - PHP,HomePage
    - PHP,Hypertextpage
    - PHP,HypertextPreprocessor
    - PHP,HomePreprocessor
21. WhichoftheFollowingtypeofnumberarenotsupportedbyPHP
    - RealNumber
    - ComplexNumber
    - SingleIntegers
    - UnsignedInteger
22. Thedivisionoftwointegers(i.e7/2)inPHPgeneratesa/an.
    - FloatingPointnumber
    - Integer
    - Exception
    - Runtimeerror
23. ArraysinJavaScriptare_____based
    - Zeroindex
    - Length
    - Location
    - Oneindex
24. The____modelinJavaScriptprovidesaccesstothecontentsofthebrowser windows.
    - COM
    - DOM
    - BOM
    - ROM
25. An_____inPHPisanorderedmap.
    - Queue
    - Array
    - Stack
    - String
26. InthecontextofC#,aclassthatisdefinedonthebodyofanotherclassiscalled.
    - Protectedclass
    - PreviousClass
    - PublicClass
    - NestedClass

27. IfyouwanttooverrideamethodinC#thentheoverridemethodmustnotbedeclaredas.
    - Override
    - Static
    - Abstract
    - Virtual
28. InJavaScript,whichofthegivenprovidesaccesstocontextofbrowserwindow.
    - DOM
    - ROM
    - COM
    - BOM
29. WhichofthegivenisusedbeforethedeclarationofvariableinPHP?
    - #Sign
    - ?Sign
    - $Sign
    - @Sign
30. InhowmanyPlaces aJavaScriptcodecanbeplaced.
    - 3
    - 2
    - 4
    - 5
31. The“OUT”keyboardinC#usedtopass_____variablebyreferencetoamethod.
    - Numeric
    - Static
    - String
    - Un-initialized
32. In_____stringand Numericvalues areinter convertible.
    - C#
    - JAVA
    - c/C++
    - PHP
33. A/An_____inadefaultmechanism forSpecifyingTypesofvariables.
    - StaticDeclaration
    - RunTimeDeclaration
    - ExplicitDeclaration
    - ImplicitDeclaration
34. InPHP,ifanumberisbeyondtheBoundsoftheintegertypes,thenItwillbeinterpretedasa_instead.
    - Long
    - Float
    - Short
    - String
35. IfX andYareintegervariablesandZisaBooleanvariablethenwhichoftheFollowingStatementcausecompilationerrorinC#?

- If(x=y)
{

//SomeCode

}
- If(x>y)
{

//SomeCode

}
- If(y>x)
{

//SomeCode

}
- If(z)
{

//SomeCode

}

36. A/an_____isaspecialwordthatcannotbeusedasauserdefinedname.
    - ReservedWord
    - FlagWord
    - DummyWord
    - Abstractword
37. _____anobjectthatdescribesthebasiccharacteristicsofthebrowser,notablyitstypeandversion.
    - Navigator
    - Location
    - Document
    - Window
38. Arrayin PHParenotlikeC/C++arraysbuttheyare_____
    - Templates
    - Structure
    - Maps
    - Record
39. Whichofthe FollowingClassinC#cannotbeinheritedfrom.
    - Inheritclass
    - AbstractClass
    - Publicclass
    - SealedClass
40. InthecontentofC#,aclassthatisdefinedthebodyofanotherclassiscalled.
    - ProtectedClass
    - NestedClass
    - PrivateClass

- PublicClass

41. InJavaScript navigatorisa_____objects.
    - Userdefined
    - Built-in
    - Browser
    - Document
42. Object-OrientedprogramminginC#is supportedthrough.
    - Classes
    - Functions
    - ControlflowStatements
    - Packages
43. WhichoperatorisusedforConcatenationinJavaScript?
    - +
    - Dot(.)
    - |
    - $
44. WhentheTypeisFixed beforeruntimethenthisiscalledas_____
    - DynamicBinding
    - StaticBinding
    - LoadTimeBinding
    - StorageBinding
45. ForeventdrivenmechanisminC#,weuse_____justlike____inC++.
    - Delegate,Functionpointer
    - Templates,Delegate
    - Eventhandlers,packages
    - EventsButtons,Packages
    - EventnButtons,GraphicsCode
46. InC#,theorderofoperatorevaluationis:
    - FromLefttoright
    - FromRighttoLeft
    - Arbitrary
    - Notspecified

1) OnedifferenceLISPand PROLOGis

- ➢ AI
- ➢ Puzzle
- ➢ Game
- ➢ All ofthegiven

2) Variableof_____isnotanobjectofjava

- ➢ Primitive
- ➢ Reference
- ➢ Integertype
- ➢ Bothreferenceand Primitive

3) In_____everyclass inJavaispartis overloaded

- ➢ C++
- ➢ Java
- ➢ C#
- ➢ C#andjava

4) C#and C++have_____size.

- ➢ Same
- ➢ Different
- ➢ Distinct
- ➢ Noneofthegiven

5) compileintomachineindependentlanguage,independentcodewhich run inamanagedexecutionenvironment.

- ➢ C#
- ➢ C++
- ➢ Java
- ➢ Ada

6) compile initially to an intermediate. Which can be run byinterpretationorjustintimecompilationoranappropriatevirtualmachine?

- ➢ C++andC#
- ➢ C#and Java
- ➢ Javaand C++
- ➢ AdaandC++

7) Howmany modesforthesourcecodearein C#?

VU MALIK

- ➢ One
- ➢ Two
- ➢ Three
- ➢ Four

8) Whichchainingtypeis usedbyProlog?

- ➢ Backward
- ➢ Forward
- ➢ Horizontal
- ➢ Up

9) InC#Managedcodeis executedunderthecontrolof

- ➢ CRL
- ➢ CLR
- ➢ Both
- ➢ None

10) PHPsyntaxlookslike_____

- ➢ ASPsyntax
- ➢ C/C++
- ➢ Both
- ➢ None

11) In Javawecanmakepointerof_____.

- ➢ Anytype
- ➢ Referencetypeonly
- ➢ Bothoftheaboveoptions
- ➢ Noneofthegiven

12) JavahasaStringclasswhichisnotexactlyanarrayof

- ➢ Char
- ➢ Elements
- ➢ Indices
- ➢ Long

13) HowmanystringoperatorsareinPHP?

- ➢ 2
- ➢ 3
- ➢ 4

VU MALIK

➢ 10

14) C#codewhencompiledisconvertedinto_____code.

➢ MISL
➢ MSIL
➢ MSLL
➢ None

15) in C#
_canbeinheritedfromotherclassbutnoinheritancefromit.Ontheotherhand
_cannot be inherited not inheritance ispossiblefromitis possible

➢ Privateclass,publicclass
➢ Sealedclass,structinC#
➢ structinC# ,Sealedclass
➢ publicclass,inheritedclass

16) TheISoperatorinC#isused for_____

➢ Runtimetypeconversion
➢ Runtimetypechecking
➢ Runtimetypecasting
➢ Noneofthegiven

17) PHPisa_____typedlanguage.

➢ Strongly
➢ Dynamic
➢ Static
➢ NoneofGiven

18) Anythingstartingwith Capitalorunderscoreisavariablein

_____➢Prolog,
➢ Lisp,
➢ COBOL
➢ Noneofthegiven

19) InC#theifstatementconditionisan/a_____

➢ Arithmeticexpression
➢ Booleanexpression
➢ Numericexpression
➢ BothNumericexpressionandBooleanexpression

20) InC# thevaluetypeandreferencetype variableareinterconvertablethrough__concept.

- ➢ Taggedtype
- ➢ Boxing
- ➢ interfaces
- ➢ Noneofthegiven

21) C#supportonly_____inheritanceandit achieve_____ inheritancethrough theconcept ofinterfaces.

- ➢ Multiple,multiple
- ➢ Single,multiple
- ➢ Single,single
- ➢ Noneofthegiven

22) Dynamicbindingoccursat:

- ➢ CompileTime
- ➢ DesignTime
- ➢ LinkTime
- ➢ RunTime

23) Prologlanguagefallsunderthedomainof:

- ➢ ScientificApplications
- ➢ BusinessApplications
- ➢ SpecialPurposeLanguages
- ➢ Noneofthese

24) Firstlanguagethatprovidedtheconceptof Pointerdatatype was_____.➢COBOL

- ➢ LISP
- ➢ PL/1
- ➢ JAVA

25) VariableuseinVBwithoutdeclaringdecreasereliabilityandincr ease_____➢Readably

- ➢ Writeable
- ➢ Cost
- ➢ Compiletime

26) Dotoperatorina_____SNOBOL?

- ➢ Referencepointer
- ➢ Unarypointer
- ➢ Classpointer
- ➢ Binarypointer

27) TheGOTOstatementinSNOBOLis_____

- ➢ Explicit
- ➢ Implementation
- ➢ Puntermethod
- ➢ AnIndirect Reference

28) Ada has_____dowhileloopjustlike C++.

- ➢ Also
- ➢ NO
- ➢ Defective
- ➢ Noneoftheabove

29) Thelastvalueexecutioninthe_____LISPisthereturnvalue

- ➢ Atom
- ➢ Object
- ➢ Class
- ➢ Function

30) DotimesloopofLIPSsimilarworkingtoada:

- ➢ For
- ➢ Switchloop
- ➢ Dowhile
- ➢ While

31) IndexesofarraysinAdadonotstartfrom

- ➢ 0
- ➢ 1
- ➢ 2
- ➢ 3

32) Thekeywordunsafeisusedwhiledealingwith_____

- ➢ Loop
- ➢ Arrays
- ➢ Pointers

VU MALIK

➢ Classes

33) Javacodewhencompiledisconvertedinto_____code.

➢ Bitcode

➢ Bytecode

➢ Kbytescode

➢ GigabyteCode

34) AdapointersarecalledAccesstypes.

➢True

➢ False

35) The danglingpointerproblemispartiallyalleviatedbyAdadesign

➢ True

➢ False

36) Followingstatementreturnstheunionofthetwolistin LISP.

➢ >(L1UNIONL2)

➢ >(unionL1L2)

➢ >UnionL1

➢ >(L1unionL2)

37) InLISP,_____isthemain toolusedforiteration

➢ Recursion

➢ ForLoop

➢ WhileLoop

➢ Do-WhileLoop

38) InLISP,followingstatementreturnsthedifferenceofthetwolists.

➢ (DifferenceL1L2)

➢ (set-differenceL1L2)

➢ (L1DifferenceL2)

➢ (L1differenceL2)

39) Listscanbeconstructedwith thehelpofthreebasicfunctionswhich are_.

➢scheme,commonlispandcons

➢ cons,append andscheme

➢ cons,listandappend

➢ list,atoms and append

40) SNOBOLwasdesigned for_____purpose.

- ➢ Stringmanipulation
- ➢ AI
- ➢ Business
- ➢ Scientific

41) Computerarchitecturehasamajorinfluenceonthedesignofprogramminglanguage.➢True
- ➢ False

42) COBOLismainlydesignedfor_____.
- ➢ Scientificexperiments
- ➢ Businessapplication
- ➢ AIapplications
- ➢ Publishingandwritingalgorithm

43) In SONOBALbinaryoperatorshaveatleast_____spaces
- ➢ 1
- ➢ 2
- ➢ 3
- ➢ 4

44) InSONOBOLcan thesizeofthearraybedeterminedatrun time.
- ➢ Yes
- ➢ No

45) _____is an important feature of Ada language used in embeddedsystemsandoperatingsystems.Itisusedinmanagingparallelthreadsofcontrols.
- ➢ Controls
- ➢ Tasking
- ➢ Classes
- ➢ Arrays

46) Firstelectroniccomputerwas_____.
- ➢ ENIAC
- ➢ Babbageanalyticalengine
- ➢ Itel386
- ➢ Ibmx86

47) Itisalwaysbettertofindoutthemistakesinthecodeat_____.

VU MALIK

- ➢ Runtime
- ➢ Compiletime
- ➢ Linktime
- ➢ Noneofgivenoption

48) ToomuchOrthogonalityreducesReadability.

- ➢ Yes
- ➢ No

49) COBOLwasthe firstlanguagethatbrings the conceptof_____

- ➢ Records
- ➢ Structure
- ➢ Object
- ➢ Variable

50) SONOBOLis case_____

- ➢ Sensitive
- ➢ In-sensitive
- ➢ Supersensitive
- ➢ Notsensitive

51) The spaceoperatorhas_____precedencethanarithmeticoperators.

- ➢ Higher
- ➢ Lower
- ➢ HigherandLower
- ➢ Noneofthegive

52) Alanguageevaluationcriteriaincludesfollowing factorsEXCEPT:

- ➢ Readability
- ➢ Writabilty
- ➢ Portability
- ➢ Modularity

53) Thevariablenamehasprofoundeffecton_____.

- ➢ Readability
- ➢ Writability
- ➢ Orthogonality
- ➢ Portability

54) SIZEfunctioninSONOBOLlanguageisusedtoreturnthe

size of_____➢String

➢ Operator

➢ Variable

➢ Keyword

55) Indirectreferencing inSONOBOLissameasof_____inC.

➢ Arrays

➢ Pointers

➢ Aliasing

➢ Stack

56) Followingfactorsinfluencesaportablelanguagedesign EXCEPT:

➢ Computerarchitecture

➢ Readability

➢ Programmer'stime

➢ WindowsXP

57)+Sign isusedfor_____inSONOBOL.

➢ LineContinuation

➢ LineBreak

➢ LineConfiguration

➢ LineAlignment

58) wasthefirstobjectorientedlanguage.

➢ COBOL

➢ LISP

➢ JAVA

➢ SIMULA

59) In C#structareusedas_____

➢ pointer

➢ array

➢ parameters

➢ class

60) JavaScript_____ fromjavalanguage

➢ related

➢ un-related

➢ derived

- noneofthegiven

61) InPrologwespecify_____andnot_____.

- Solution,problem
- Solution,code
- Problem,solution
- Noneoftheabove

62) A_____isadefaultmechanismforspecifytypesofvariable?

- implicit
- explicit
- Bothoftheaboveoptions
- Noneofthegiven

63) A_____isaspecialwordthatcannotbeused asauser-definedname

- Keyword
- Reservedword
- Bothoftheaboveoptions
- Noneofthegiven

64) Weuse_____inAda.

- taggedtype
- inttype
- floattype
- noneofthegiven

65) Controlstructureisa_____/jump..:).....statement

- CONTINUE
- GOTO
- SWITCH
- Noneofthegiven

66) _____isplaceholdervaluethatisnot required.

- anonymous
- prolog
- bothofthe aboveoptions
- noneofthegiven

67) LISPusedin_____ and_____.

- functionalparadigm,AI

- AI,functionalparadigm
- Multi-paradigm,AI
- PROLOGParadigm,AI

68) Weuse_____indirectreferencingoperatorinSNOBOL

- Binary
- Binary$
- Unary
- Unary$

69) Elementarytypesarealso called_____inADA

- Static
- userdefines
- built-in
- Discrete

70) ADAisa_____typedlanguage

- partiallystrongly
- complex
- easy
- noneofthegiven

71) haselaboratedexceptionhandling

- Ada
- C++
- JAVA
- COBOL

72) hasapowerfulsetofoperatorsbutpoortypechecking

- C
- C++
- ADA
- LISP

73) and____havedeclarationparadigm

- Prolog,SQL
- SQL,Prolog
- Lisp,SQL
- SQL,Lisp

74) 1stmachineindependentlanguageis_____

- ALGOL
- COBOL
- ADA
- PASCAL

75) InC#Managedcodeisexecutedunderthecontrol of

- CLR
- CRL
- Bothoftheaboveoptions
- Noneofthegiven

76) Thedepthatwhichwecanthinkisinfluencedby_____

- implementationdetails
- significanceofimplementation
- implementedrecursion
- noneofthe above

77) Readabilityhasnoinfluenceonthecostof_____

- testing
- deployment
- debugging
- coding

78) hasdistributedcomputingarchitecture

- PASCAL
- LISP
- C
- CORBA

79) Languagewithwidedomainofapplicationhashigher_____

- Portability
- Generality
- Reliability
- Cost

80) In Javawecanmakepointerof_____.

- Anytype
- Referencetypeonly

81) TheconceptofC#jaggedarrayissimilarinfunctionto

- C++rectangularArray
- JavaArrayofArray

82) In_____Booleanexpressionisconvertibleintointegertype

- C#
- C++
- JAVA
- Ada

83) _compile initially to an intermediate. Which can be run byinterpretation or just in time compilation or an appropriate virtualmachine?

- C++andC#
- C#and Java

84) Fornarrowingconversionwhichtypeconversionisappropriate?

- ImplicitConversion
- ExplicitConversion

85) Fornarrowingconversionwhichtypeconversionisappropriate?

- ImplicitConversion
- ExplicitConversion
- Bothoftheaboveoptions
- Noneofthegiven

86) C#and C++have_____size.

- Same
- Different
- Distinct
- Noneofthegiven

87) C#codewhencompiledisconvertedinto_____code.

- MSIL
- MISL

88) TheconceptofsealedclassinC#issimilarto_____

- Structin C#,
- Structin C++
- AbstractclassinC#

➢ Noneofthegiven

89) Dynamicbindingoccursat:

➢ CompileTime
➢ DesignTime
➢ LinkTime
➢ RunTime

90) ProloglanguagefallsunderthedomainOf

➢ ScientificApplications
➢ BusinessApplications
➢ SpecialPurposeLanguages
➢ Noneofthese

91) ForRecursionitisnecessarythatalanguage

➢ Dynamic
➢ Static
➢ Bothdynamic andstatic
➢ Stack

92) TwoimportantversionsofLISPare_____

➢ SchemeandAtoms
➢ SchemeandCommonLisp
➢ CommonLispanddefacto
➢ Listand CommonLisp

93) COBOLwasthe firstlanguagethatbrings the conceptof_____

➢ Records
➢ Structure
➢ Object
➢ Variable

94) AdapointersarecalledAccesstypes.

➢ True
➢ False

95) SIZEfunctioninSONOBOLlanguageisusedtoreturnthesizeof _____

➢ String
➢ Operator

➢ Variable

96) Alanguageisreliableifitdoesnotcreate---------- duringexecution.

➢ Error

➢ Result

97) C++supportonly----------modeoperatorpassing

➢ In/out

➢ union

98) Conceptofpackagein javaissimilarto ---------

➢ C++

➢ C++ and c#99)hasalsonon-rectangulartypeofarray

➢ C

➢ Java

C

Cand C++

121. ThesyntaxofPHPforeachloopissimilarto ---------- loop.

- C++foreach
- C#foreach
- Javaforeach
- C++for

122. Withprogrammingin ---------- westatewhatandnothow.

- Prolog.P#92
- Algol
- C#
- Fortran

123. Whenthetypeisfixedbeforeruntimethenthisiscalledas-----

- Loadtime binding
- Staticbinding

- Dynamicbinding
- Noneof thegiven

124. Aprogramminglanguageis ------typediftypeerrorare---------- detected.

- Weakly,Always
- Always,weakly
- Strongly,often
- Strongly,always.P#171

125.Allobjectsinjavaare------

- Explicitheapdynamic
- Dynamicstoragebinding
- Stackdynamicstoragebinding
- Staticstoragebinding

126----------usuallyalogicalgroupingofheterogeneouselements.

- Arrayis
- Recordis.P#176
- Structureis
- BothStructureandRecord are

127.Injavathearithmeticexpressionevaluationorderisalwaysfrom------

- Centertoright
- RighttoLeft
- Centerto left
- Lefttoright

128. Acontrolstructureisa---------- andthestatementwhose executionitcontrols.

Controlalgorithm

- Controlstatement.P#185
- Controlkeyword
- Noneof thegiven

129. In--------- controlstatementswerebaseddirectlyonIBM 704hardware.

- Ada
- FORTRANlp#185
- FORTRAN77
- IBMAssemblylanguage

130.Wecannot passarrayin---------- byvalueasithasno fixsize.But it has fixedsizein structure.C#

- Java
- C++
- C

131---------- isalanguageforsymboliccomputationanditssyntaxisbased onlambdacalculus.

ALGOL
MATLAB

C

LISPp#27

132.Adaisa ----------typedlanguage.

- Weakly
- Random
- Strongly.P#48
- List

133.Theintegrityoftypesischecked fromalltogetherin -------

- SNOBOL
- ALGOL
- PlankalKoll
- Ada

134.Alanguageisreliableifduringexecutionitdoesnotcreate------

- Result
- Error
- Bytecode
- Malfunction

135 isnotavalidPrologatom.

- This_is_it
- Mary,_c1
- ‘Hello'
- F

136 generatesreadablecodewhichiseasytomaintain.

- Clauses
- Backtracking.P#97
- Inferencemechanism
- Facts

137.InC#,valuetypeobjectsuse memoryof ---------- datastructure.

- Lis
  - Tree
  - Stack
  - Heap

138 ---------- is an8-byteinteger.

- Short
- Long
- Byte
- Char

139. Simpledatastructureandlarge floatingpointoperationsarelinkedto--------

- Artificialintelligencelanguagedomain
- Parallelprogrammingdomain
- Scientificapplicationprogrammingdomain
- Systemprogrammingdomain

140. Eachsourcefilein--------- hasapublicclass.

- C++
- C#
- Javap#98
- Noneof thegiven

141. Thereisno autonomictypeconversionin-------

- C
- Bothjava andC++
- Java
- C++

142. Everyclassinjavaispartofsome ----------

- Subclass
- Method
- Packagep#107
- Object

VU MALIK

143.Automaticgarbagecollectioninjavaprevents---------

- Multithreading
- Exceptionhandling
- Indirectreferencing

- Danglingpointerp#117

144.Valuetypesin C#areinheritedfrom---------

- Javaprimitivetype
- Object
- Reference
- Noneof thegiven

146. PHPsupportedallmajorDatabasesincluding----------

- Noneof thegiven
- ODBC
- ORACLE
- SQLServer

147. In -------- theBreakstatementmayhavetheoptional

parameterorargument.
C/C++
JavaPHP

JavaScript

- ClassesandobjectsofC++
- Classesandobjectsofjava
- ClassesandobjectsofC

- ClassesandobjectsofBasic

149 ---------- operatorinPrologisusedforListconstructionandalso forListdismantling.

- |(VerticalSlash).P#90
- !(Signofexclamation)
- :(Colon)
- Noneof thegiven

150. InJavaScript--------- operatorisusedforconcatenation.

- Dot(.)
- Plus(+).P#152
- |
- ^

151. Theresultantvalueofvariable ‘x’in JavaScriptstatementvarx=“5”-“2”;will be-------

5-2

- 52
- “5”-“2”
- 3

152.The ---------modelinJavaScriptprovidesaccesstothecontentsof thebrowserwindow.

- DOM.P#155
- BOM
- ROM

- COM

153.In---------- wemayspecifythe range and precisionfor floatingpointnumbers.C#

- C/C++
- Ada
- BothAda and C#

154 ---------- parametersaredeclaredinsideasubprogram.

- Default
- Actual
- Formal
- Copy

155.eqorequaloperatorinLISPis usedtocomparetwo ---------

- Atomsymbols
- Listsymbols
- Nonnumericsymbols
- Numericsymbols

157. ObjectinJavaScriptcanbeaccessedthrough---------

- Associatedarray
- Referencepointermethod
- Referencetype
- Bothreferencepointermethodandreferencetype

158. Shortcutevaluationisnotallowedfor----------

- Booleanoperators
- Relationaloperators
- Bitwiseoperators

- Bothboolean and relationaloperators

159.Whichoneofthefollowinglanguagesisdesignedfordistributedcomputingarchitecture?

- CORBA
- FORTRAN
- ADA
- LISP

160. InAdaelementarytypesarealsotermedas--------

- Userdefined types
- Statictypes
- Builtintypes
- Publictypes

161. Studyofprogramminglanguageshelpsinincreasingthe ---------- toexpress programmingconcepts.

Capacity.P#5

LevelVolume

Range

162---------- isthedesignerofC++language.

- BjarneStroustrupp#15
- JamesGoslings
- MikeSheridan
- PatrickNaughton

163.Setmembershipin Prologisdifferentfrom ---------- membership.

- List
- Symbol
- Join
- Noneof thegiven

164 ----------supportarraywith builtinboundschecking.

- Java
- C++
- C#
- Bothjava andC# p#118

165. FORTRAN,PL1 and BASIClanguageprovide--------

- Explicitdeclaration
- Implicitdeclaration
- Eitherimplicitandexplicitdeclaration
- Noneof thegiven

166. Thereisnoarithmeticexpressionprecedencerulein-------

- PASCAL
- Smalltalk
- SIMULA
- C/C++

167. C/C++hasbothpre-testandpost-testversionof--------

- Countercontrolledloop
- Logicallycontrolledloop
- Forloop
- Whileloop.P#192

168.C++supportonly ---------- modeparameterpassing.

- OUT
- IN
- Union
- IN/OUT
- javahas eliminatedtheconceptof----------
    - Classes
    - Variables
    - Struck.P#31
    - Arrays
- InjavaExplicitconversionsaredonethrough --------
    - Referencing
    - Aliasing
    - Casting.P#104
    - Operatoroverloaded
- Prologdatabase isbasedupon--------
    - Facts
    - Factsandqueries
    - Rulesandqueries
    - Factsandrules.P#82
- Apredicatemanyhave-or morearguments.
    - Three
    - Zero.P#88

- One
- Two

173----------isusedasaplaceholder foravaluethatis notrequired.

- Variable
- Atom
- Constant
- Anonymousvariable.P#89

174. In C#,if you don’tusenewkeyword,youmust ---------- allthevaluesin thestructbyhandbeforeyouuseit.

- Define
- Declare
- Create
- Initialize.P#135

175. WhichstatementbestsuitedforCprogramminglanguage?

- Stringmanipulationlanguage
- Firstlanguagetoprovideexceptionhandling
- Withpowerfulsetofoperatorsbutpoortypecheckingp#30
- Introducethenotionofclass

176. Whichstatementistrue aboutSNOBOL?

- Itsdevelopersarecomputerexpert
- ITEdevelopershavelimitedintroductionwithcomputerscience.P#46
- Isanexampleofaspectprogramminglanguages
- Havemanydatatype

177. InSNOBOL,forentireassignment weuse ---------- operatorin pattern matchingstatement.$(dollar)

- (.)Dot
- Unary$(Dollar)
- Binaryspace.P#36

178. DisjunctioninPrologisthrough--------andconjunctionisthrough---------

- Coma(,),OR
- OR,coma(,)
- OR,Dot(.)
- Dot(.),OR

179.In -------- wecanmakeapointervariable ofvaluetypeonly.

- C++
- C#
- Java
- BothJavaand C#

180 ---------- exceptionhandlinghasa finally()block.

- Java
- C++
- C
- Plankalkul

181.Whichofthefollowingstatement isTrueif$ais notidenticalto$b inphp?

- $a!==$b.P#143
- $a!=$
- $a=!$
- $a=!$

182 ----------isthemagicalthingin Prolog.

- Programpartition
- Inferenceengine

- Listprocessing
- Noneof thegiven

183.InJavaScriptnavigatoris ----------object.

- Built-in
- Browser.P#155
- Document
- Userdefined

184. Theconceptofpackagein javais similarto ---------

- GlobalclassinC++
- Assemblyin C#
- GlobalclassinC#
- GlobalClassinbothC++andC#p#130

185. ArrayinPHP arenotlike C/C++ arraybuttheyare---------

- Templates
- Records
- Maps
- BothTemplatesandRecords

186. “with”statementinJavaScriptisanalternativeof---------

- Whilestatement
- Unionstatement
- Singledocument.writestatements
- Multipledocument.writestatements.P#161

187. Subrangesofintegertypes arenotcompatiblewith --------

- Integerstypes

188. ArraysinJavaScriptare ----------based.

- 0

189. UnlikeC/C++, arraysin PHPare_____.

- Maps
- Templates
- Records
- BothTemplatesandRecords

190. EnumerationtypeinC#maytakeanytypeof_____in contrast to C++whereit takeonly _____.

- Numericvalue,integervalue
- Valuetypevalue,numericvalue
- Primitivetypevalue,referencetypevalue
- Valuetypevalue,referencetypevalue

191. PHPsyntax looks like_____.

- ASPsyntax
- C/C++syntax
- Adasyntax
- BothASPand Ada

192. Howmany<script>tagscanbeused inthe<head>element?

- Zero
- One
- Two
- Many

193. C# codewhencompiledis convertedinto_____code.

- MSIL
- MISL

- Bytecode
- machinenativecode

194. InC#,strings are_____.

- Non-Immutable
- Immutable
- NeitherImmutablenorNon-Immutable
- Aliasable

196. In_____therelationshipbetweenagetandsetmethodisinherited,whilein___it has tobe maintained.

- Java,C++
- C++,C#
- Ada,Java
- C#,Javaor C++

197. In_____wecan mkeapointervariableofvaluetypronly.

- C++
- C#
- Java
- Bothjava andC++

198.InJavaScript,whichofthegivenprovidesaccessto thecontentsofbrowserwindow?

- DOM
- BOM
- ROM
- COM

199.Avariablein_____cannotbeusedunless anduntilitisnot initialized.

- C++
- C#
- ALGOL
- C
- Inhowmanyplaces ajavascriptcodecanbeplaced?
    - 1
    - 2
    - 3
    - 4
- WhichoperatorisusedforconcatenationinJavaScript?
- +
    - |
    - $
    - dot(.)
- Classesandobjectsof PHP aresimilarto_____.
    - ClassesandobjectsofJava
    - ClassesandobjectsofC++
    - ClassesandobjectsofBasic
    - ClassesandobjectsofC
- Whichofthefollowingisnot trueaboutdelegates?
    - Delegatesarevaluetype
    - Delegatesareeventbased
- Delegatesarelike C/C++functionpointer
- Delegatesarereferencetype

204.Whichofthegivenstatementis Trueif"$a"isnotidenticalto"$b"inphp?

VU MALIK

- $a!=$
- $a=! $
- $a!==$b
- $a==! $
- Whichofthegivenoperatorisusedtoreturnareferencefromafunctioninphp?
    - &
    - &&
    - $
    - Dot
- Managedorsafecodein_____isexecutedunderthecontrolofcommonlanguage runtime (CLR) with automatic garbage collection, no explicit memoryallocationanddeallocationandno explicit destructor.
    - C++
    - Java
    - Adaand C++
    - C#
- InC#thevaluetypeandreferencetypevariableareinterconvertiblethrough _____ concept.
    - Taggedtype
    - Interfaces
    - Boxing
    - Noneof thegiven

209.Javacodewhencompiledisconvertedinto_____code.

- Bitcode
- Byte code

- Kbytescode
- GigabyteCode

211.In_____Booleanexpressionisconvertibleintointegertype.

- C#
- C++
- JAVA
- Ada

212._____,anobjectthatdescribesthebasiccharacteristicsofthebrowser,notablyitstypeand version.

- Window
- Document
- Navigator
- Location

213. InC#_____canbeinheritedfromotherclassbutnoinheritancefromit.Ontheotherhand_____cannot be inherited and not inheritance from itpossible.

- Privateclass,publicclass
- Sealedclass,structinC#
- structinC#,Sealedclass
- publicclass,inheritanceclass

214. Tomakenecessaryargumentsatruntimeerroriscalled-----

- Typechecking
- Exceptionhandling
- Errorhandling
- Noneof thegiven

VU MALIK

215. In ----------wehaveto addresstheclientsidecompatibilityissue.

- JavaScript
- VBScript
- PHP
- Perl

216. Howtocompareandexaminelanguage?

- Readability
- Writability
- Reliability
- Allofthegivenoptions

217. In SNOBOL2spacescanbeused,thepurposeof1st spaceisfor---------- and 2nd for-------

- Patternmatching,StringConcatenation
- Stringconcatenation,Patternmatching
- Stringconcatenation,Stringconcatenation
- Patternmatching,Patternmatching

218. Whichofthefollowingisanincorrectoptionfromthefollowingstatementsregarding‘objectivesof learningnewlanguages’?

- Helptocomparedifferent languages.
- Helpintransitionfromonelanguagetootherlanguage
- Helpinunderstandingthelanguagepiracypolicy
- Helptochoosealanguagefordevelopmentofacertainapplication

219. The moreis thesimplicityof alanguage,themoreit will alwaysbereadable.

- True
- False

220. Valueuponsuccessfulcompletionofpatternmatching,thesubstringmatched

bythepatternisassignedto thevariableas -------

- Value
- String
- Integer
- Realnumbers

221. The maindesigngoalsofAdawereEXCEPT

- Programreliabilityand maintenance
- DesignlanguageforDOD
- Programmingisahumanactivitythereforeavoidunintentionalmistakes
- Designingaportablelanguage

222. Oneofthemajordesigngoalsof Adawas

- Tohelpdeveloperstocodethesoftwareinlessertime
- Tomakeitdifficultfordeveloperstomakemistakes
- TohelpdevelopanIDEforAda
- TomaketesterstotestAda applicationeasily

223. Wecanhavenestedproceduresin----------language.

- C++
- Ada
- C
- PROLOG

224. Learningtheimplementationdetailsofalanguagehelpintheefficientuseofthatlan guage.

- True
- False

225. Too muchsimplicityinlanguagedesigncanalsocauseproblems.

- True
- False

226. In ----------,Enumerationtypecanalsobeusedasindexesinarrays.

- Ada
- C
- C++
- LISP

227. Infollowingisthecorrectsyntaxof‘for’statementin Ada.

- forvariableinlow_value..high_valueloop-Loop bodygoeshereendloop;
- forvariableinlow_value..high_valueloop-Loop bodygoeshereend;
- begin;forvariableinlow_value..high_valueloop-Loopbodygoeshereendloop;
- beginloop;forvariable inlow_value..high_valueloop-Loopbodygoeshereendloop;

228. Blockstatements inAdaisverydifferenttoablockinC.

- True
- False

229 ---------- represents theclassoflanguagesfromfunctionalparadigm.

- LISP
- PROLOG
- Ada
- C++

230. Whichstatementiswrongaboutstaticvariables?

- Theyareboundtomemorycellsbeforetheexecutionofprogram
- Theyusetodirectaccess the memory

- Thereisruntimeoverheadofallocationandde-allocationofmemory
- Storagecan’tbesharedamongvariables

231. Ifyouwantanargumenttoafunctiontoalwaysbepassedbyreference,youcanprep end

- Percentagesign (%)totheargumentnameinthefunctiondefinition
- Dollarsign($)totheargumentnameinthefunction definition
- Anampersand(&)totheargumentnameinthefunctiondefinition
- Tilledsign(~)totheargumentnameinthefunction definition

232. 146.PHPsupportedallmajorDatabasesincluding ----------

- ODBC
- ORACLE
- SQLServer
- Allofthegivenoptions

233. Managed orsafecodein---------- isexecutedunderthecontrolofcommon languageruntime(CLR)withautomaticgarbagecollection,noexplicitmemoryalloc ationanddeallocationandno explicit destructor.

- C++
- Java
- Adaand C++
- C#

234. ----------is morestronglytypedlanguagethen----------

- C++,C#
- C#,C++
- C++,Java
- Noneof thegiven

235. Enumerationtypein C#maytakeanytypeof ----------in contrastto C++

whereittakeonly----------

- Numericvalue,integervalue
- Valuetypevalue,numericvalue
- Primitivetypevalue,referencetypevalue

236. --------exceptioninheritfromexceptionclassand -------exceptionis anywhereintheprogram.

- Java,C#
- C++,C#
- C#, Java
- Java,C++

237. In------therelationshipbetweenagetandsetmethod isinherited,whilein--------ithastobe maintained.

- Java,C++
- C++,C#
- Ada,Java
- C#,Javaor C++

238. Whichofthefollowingisnottrue aboutdelegates?

- Delegatesarevaluetype
- Delegatesareeventbased
- Delegatesarelike C/C++functionpointer
- Delegatesarereferencetype

239. There are "categories"oftypesin java.

-

- Three
- Four

VU MALIK

- Five

240. A variable in ---------- cannot be used unless and until it is not initialized.

- C++
- C#
- ALGOL
- C

241. Prolog is considered to be as ---------

- Case and type insensitive
- Case and type sensitive
- Case sensitive and type insensitive
- Case insensitive and type sensitive

242. In java, out-of-bounds array index is always causes a ---------- error.

- Syntax
- Compile time
- Runtime
- Logical

244. In prolog, a "member(X,T)" predicate is used to check the membership of X in _____

- Class
- Symbol
- List
- Both class and symbol

245. cannot be converted to other types in java.

- Booleans
- Char

- Double
- Int

246. The ---------- operatorin C#isusedto test iftheoperatorisofa certaintype.

- "IN"
- "AS"
- "IS"
- "OUT"

247. InC#the"If"statementconditionisan/a------

- ArithmeticExpression
- VariableExpression
- NumericExpression
- BooleanExpression

248. InJavaScript,whichofthegivenprovidesaccesstothe contentsofbrowserwindows?

- ROM
- DOM
- COM
- BOM

249. Whichofthegivenisused beforethedeclarationofvariablein PHP?

- # Sign
- ?Sign
- $ Sign
- @Sign

250.The "IS"operatorinC#isusedforruntime----------

- Typeconversion

- Typecasting
- Typetagging
- Typechecking

256.PHPstandsfor----------

- PHP,HomePage
- PHP, Hypertextpage
- PHP,HypertextPreprocessor
- PHP,HomePreprocessor

257.InPHP,ifanumberisbeyondtheboundsof theintegertypethenitwillbeinterpretedasa ----------instead.

- String
- Short
- Long
- Float

259. Whichofthefollowingis veryeffectiveissolvingcomplexpuzzles?

- FORTRAN
- PROLOG
- ALGOL
- C/C++

260. TheprogramiswritteninC#compilesto:

- Machinecode
- Anintermediatelanguage(IL)
- Objectcode
- Sourcecode

260.Concurrencyinjavaissupportedthrough:

- Resourceallocation
- Batchexecution
- Threads
- OperatorOverloading
- Whichofthefollowingarelightweightprocessesinjava?
    - Threads
    - Packages
    - Applets
    - JVM
- Themethodsthatallowtwothreadstocooperate(orsynchronize)witheachotherina javaprogramare:
    - Wait()andrun()
    - run()andnotify()
    - Wait()andnotify()
    - sleep()andyield()
- Inhowmanywaysthreadscanbe createdinjava?
    - Two
    - Many
    - Three
    - Four
- C#languageisverysimilarto:
    - Prolog

- C-language
- Delphi
- Java

266. Whichofthefollowingmethodisusedtoimplement runableinterfaceinjava?

- StopThread()
- Run Thread()
- Stop()
- Run()

267. Whichofthefollowingmethodinajavaclasscannotbechanged(overr idden)inasubclass?

- Publicvoid display(){-}
- Publicstaticvoid area(){-}
- Privatevoidradius(){-}
- Publicfinalvoidresult(){-}

268. InC#,thename ofclass andthenameofthe filein whichitissaved.

- Muststartwithlowercaseletter
- Muststart withuppercaseletter
- Mustmatchup
- Donotneedtomatchup

269. PHPsupportsvariousdatatypesexcepts------

- Integer
- Array
- Object
- Char

270. WhichofthegivenoperatorisusedtoreturnareferencefromafunctioninPHP?

- &
- &&

- $
- Dot

271. An ----------inPHPisanordered map.

- Array
- Queue
- Stack
- String

272. In --------- the“break”statementmayhaveanoptional parameteror argument.

- C/C++
- Java
- PHP
- C#

273. InPHP“switch”structure,the---------- startsorimplementsanimplicitloop.

- Breakstatement
- Forloop
- Continuestatement
- Returnstatement

274. C#providesthefeatureofbuilt-inboundschecking of:

- Functionsandclasses
- Objectsandmethods
- Arraysandstrings
- Interfacesandpackages

275.Whichofthefollowingkeywordsisusedto makeaclassnon-extendableinjava?

VU MALIK

- Static
- Private
- Final
- Public
- InaPROLOGprogram,thedefinitionsofpredicatesentencesorphraseareknownas:
    - Facts
    - Clauses
    - Declaration
    - Infere ncesN OTE: **Claus es**

Clausesaredefinition(s)ofPredicatesentenceorphrase.

- Whathappenswhenyoudon’tinitializethefieldsin theconstructorofajavaclass?
    - Acompile-timeerroroccurs
    - Logicalerroroccurs
    - Defaultvaluesareassigned WICKIPEDIA
    - Runtimeerroroccurs
- Expertsystem --- provide astructuretodesignexpertsystem.
    - Techniques
    - Shells
    - Lists
    - Mechanism

279. The inferencemechanismofPROLOGisbasedupon----------

- Forwardchaining
- Backtracking
- Propositionallogic

- Recursion

280. Whathappenswhenyoutrytouseanout-ofboundsarrayindexin JAVA?

- Arraysizeisautomaticallyincremented
- Aruntimeerroroccurs
- Agarbagevalueisprinted
- Nothinghappens

281. Whichofthefollowingistreated asan atomandnot asaListdatatypeinPROLOG?

- [a,t,o,m]
- [a,b,c]
- [a]
- [ ]

282. Howmanytypesofarrays areavailablein C#?

- Four
- Two
- Three
- One

283. Alljavaclasses(built-inoruser-defined)aresub-classesof ----------class.

- Thread
- System
- Object
- Throwable

NOTE:

InJava,allclasses(built-in oruser-defined)are(implicitly)subclassesof theclass **Object**.


284.ThescriptswritteninPHPareexecutedby:

- Clientmachine
- Webserver
- Webbrowser

- JavaApplet

285.Theheadandtailofalistin PROLOGisseparatedby:

- Semicolon(;)
- Comma(,)
- Verticalbar(|)
- Colon (:)

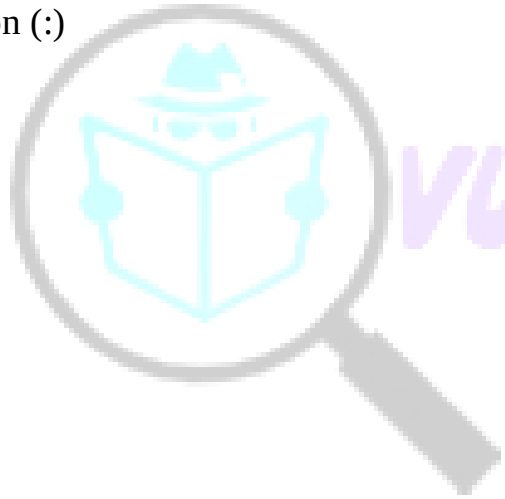

More Files Visit VUAnswer.com

CS508 FINAL TERM SOLVED MCQS

(VISIT VUANSWER FOR MORE)

One difference LISP and PROLOG is

1. AI
2. **Puzzle**
3. Game
4. All f the given

Variable of .....Is not an object of java

1. Primitive
2. Reference
3. **Integer type**
4. Both reference and Primitive

In ..... Every class in Java is part is overloaded

1. **C++..?**
2. Java
3. C#
4. C# and java

C# and C++ have.....size

1. Same

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

2. Different
3. **Distinct**
4. None of the given

_____compile into machine independent language, independent code which run in a managed execution environment.

1. **C#**
2. Java
3. C++
4. Ada

_____compile initially to an intermediate. Which can be run by interpretation or just in time compilation or an appropriate virtual machine?

1. C++ and C#
2. **C# and Java**
3. Java and C++
4. Ada , C++

In_____the relationship between a get and set method is inherited, while in_____it has to be maintained.

1. Java , C++
2. C++ , C#
3. Ada , Java
4. **C# , Java or C++**

How many modes for the source code are in C#?

1. One
2. **Two**
3. Three
4. Four

Which chaining type is used by Prolog?

1. **Backward**

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

2. Forward
3. Up
4. Horizontal
5. Maps in SNOBOL are also available in_____(C, C++, MATLAB, Prolog)

In C# struct are used as ……parameters…..

Javascript …related.. from java language

In … JavaScript ….. we have to address the client side compatibility issue.

_____exception inherits from exception class and_____exception is anywhere in the program.

1. Java , C#
2. C++ , C# c
3. C# , Java **4. Java ,C++ ..?**

In C# Managed code is executed under the control of

1. CLR
2. **CRL**

In_____Boolean expression is convertible into integer type.

1. C
   #
2. C
   +
   +
   3
   .
   J
   A
   V
   A

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

:

:

?

4. Ada

PHP syntax looks like _____

1. ASP syntax
2. **C/C++ syntax**

For narrowing conversion which type conversion is appropriate?

1. Implicit Conversion
2. **Explicit Conversion**

In Java we can make pointer of_____.

1. Any type
2. **Reference type only**

The concept of package in Java is similar to _____

1. **Assembly in C#**
2. Global class in C#

The concept of C# jagged array is similar in function to _____

1. C++ rectangular Array
2. **Java Array of Array**
3. Java pointer Array
4. C# Array

Java has a String class which is not exactly an array of

1. **Char**
2. Elements
3. Indices
4. Long

More Files Visit VUAnswer.com

More Visit VUAnswer.com

More Files Visit VUAnswer.com

How many string operators are in PHP?

1

.

2

2

.

3

3. 4

4. 10

C# code when compiled is converted into_____code.

1. **MSIL**
2. MISL

In C#_____can be inherited from other class but no inheritance from it. On the other hand _____ cannot be inherited not inheritance is possible from it is possible.

1. Private class , public class
2. Sealed class ,struct in C#
3. **struct in C# , Sealed class**
4. public class , inherited class

The concept of sealed class in C# is similar to _____

1. **Struct in C#,**
2. Struct in C++
3. Abstract class in C#
4. None of the given

Enumeration type in C# may take any type of_____in contrast to C++ where it take only _____

a. **Numeric value, integer value**

b. Value type value, numeric value

c. Primitive type value, reference type value

More Files Visit VUAnswer.com

More Visit VUAnswer.com

More Files Visit VUAnswer.com

d. Value type value, reference type value

The IS operator in C# is used for_____

1. Run time type conversion
2. Run time type checking
3. Run time type casting
4. **None of the given..(The 'is' operator supports run time type information)**

PHP is a_____typed language.

1. Strongly
2. Dynamic
3. Static
4. **None of Given**

_____is more strongly typed language then _____

1. C++, C#
2. C#, C++
3. C++, Java
4. **None of the given**

Anything starting with Capital or underscore is a variable in _____

1. **Prolog,**
2. Lisp,
3. Cobol

In C# the if statement condition is an/a _____

1. Arithmetic expression
2. **Boolean expression**
3. Numeric expression
4. Both Numeric expression and Boolean expression

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

In C# the value type and reference type variable are interconvert able through_____concept.

1. Tagged type
2. **Boxing**
3. Interfaces
4. None of the given

C# support only_____inheritance and it achieve_____inheritance through the concept of interfaces.

1. Multiple, multiple
2. **Single, multiple**

Managed or safe code in_____is executed under the control of common language runtime (CLR) with automatic garbage collection, no explicit memory allocation and de allocation and no explicit destructor.

1. C++
2. Java
3. Ada and C++
4. **C#**

PHP supported all major Databases including_____.

1. ODBC
2. Oracle
3. SQL Server
4. **None Of given…?**

Dynamic binding occurs at:

1. Compile Time
2. Design Time

More Visit VUAnswer.com

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

3. Link Time
4. **Run Time**

Prolog language falls under the domain of:

1. **Scientific Applications**
2. Business Applications
3. Special Purpose Languages
4. None of these

4. In Prolog we specify **solution** and not **problem**

Object in java script can be accessed through ……

1. **Reference pointer method ..... not in handouts….using dot notation is in handouts** 2. None of the above
3. **Capital letter or underscore in PROLOG variable**
4. **Variable in PROLOG …. Are any value is associated that can not be changed.**

For Recursion it is necessary that a language

1. **Dynamic**
2. Static
3. Both dynamic and static
4. Stack

First language that provided the concept of Pointer data type was_____.

1. COBOL
2. LISP
3. **PL/1**
4. JAVA

A … implicit.. is a default mechanism for specify types of variable?

More Files Visit VUAnswer.com

A reserved word is a special word that cannot be used as a user-defined name

Variable use in VB without declaring decrease reliability and increase …..

1. Readably
2. **Writeable**
3. Cost
4. compile time

Dot operator in a …. SNOBOL?

1. **Reference pointer**
2. Unary pointer
3. Class pointer
4. Binary pointer

The GOTO statement in SNOBOL is …..

1. **Explicit**
2. Punter method
3. Implementation
4. An Indirect Reference

Ada has … do while loop just like C++

1. Also
2. **No**
3. Defective
4. None of the above

We use tagged type in Ada…..

The last value execution in the …..LISP is the return value

More Visit VUAnswer.com

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

1. Atom
2. **Object**

Dotimes loop of LIPS similar working to ada

1. **For**
2. Switch loop
3. Do while
4. While

Control structure is a ……GOTO/jump..:)….. statement

…… anonymous ……. is place holder value that is not required

Indexes of arrays in Ada DO NOT starts from

- **0**
- 1
- 2
- 3

The keyword unsafe is used while dealing with_____

1. Loop
2. Arrays
3. **Pointers**
4. Classes

Tasks in_____are processes and cannot share data but thread in_____do it.

1. C# , C++
2. C++ , Ada
3. Java , C# **4. Ada , Java..?**

Java code when compiled is converted into_____code.

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

1. Bit code
2. **Byte code**
3. Kbytes code
4. Giga byte Code

If you want an argument to a function to always be passed by reference, you can prepend

1. Percentage sign (%) to the argument name in the function definition
2. Dollar sign ($)to the argument name in the function definition
3. **An ampersand (&) to the argument name in the function definition** 4. Tilled sign (~)to the argument name in the function definition

Ada pointers are called Access types.

a) **TRUE**
b) FALSE

The dangling pointer problem is partially alleviated by Ada design.

1. TRUE
2. **FALSE**

Which statement is wrong about Static variables?

1. They are bound to memory cells before the execution of program
2. They use to direct access the memory.
3. **There is run time overhead of allocation and de-allocation of memory.** 4. Storage can't be shared among variables

Following statement returns the union of the two list in LISP.

1. >(L1 UNION L2)
2. **>(union L1 L2)**
3. >Union L1

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

4. >(L1 union L2)

Following is the correct structure of a "block" in Ada.

1. declare -- declare section optional
   statements begin declarations

   exception -- exception section optional

More Visit VUAnswer.com

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

handl
ers
end;

2. **declare -- declare section optional declarations begin statements**

   exception -- exception section optional handlers end;

3. declare -- declare section optional statements begin declarations handlers exception -- exception section optional end;

4. declare -- declare section optional statements declarations begin statements exception -- exception section optional handlers end;

In LISP,_____is the main tool used for iteration.

1. **Recursion**
2. For Loop
3. While Loop
4. Do-While Loop

_____represents the class of languages from functional paradigm.

1. **LISP**
2. PROLOG
3. Ada
4. C++

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

In LISP, following statement returns the difference of the two lists.

1. (Difference L1 L2)
2. **(set-difference L1 L2)**
3. (L1 Difference L2)
4. (L1 difference L2)

Lists can be constructed with the help of three basic functions which are _____.

1. scheme, common lisp and cons
2. cons, append and scheme
3. **cons, list and append**
4. list, atoms and append

Block statement in Ada is very different to a block in C.

1. True
2. **False**

Two important versions of LISP are_____.

1. Scheme and Atoms
2. **Scheme and Common Lisp**
3. Common Lisp and defacto
4. List and Common Lisp

Following is the correct syntax of 'for' statement in Ada.

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

1. **for variable in low_value .. high_value**
   loop -- Loop body goes here end loop;
2. for variable in low_value .. high_value loop
   -- Loop body goes here end;
3. begin; for variable in low_value ..
   high_value loop
   -- Loop body goes here
   end loop;
4. begin loop; for variable in low_value ..
   high_value loop
   -- Loop body goes here
   end loop;

In_____, Enumeration type can also be used as indexes in arrays.

1. **Ada**
2. C
3. C++
4. LISP

SNOBOL was designed for_____purpose.

1. **String manipulation**
2. AI
3. Business
4. Scientific

Computer architecture has a major influence on the design of programming language.

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

1. **True**
2. False

Too much simplicity in language design can also cause problems.

1. **True**
2. False

COBOL is mainly designed for_____.

1. Scientific experiments
2. **Business application**
3. AI applications
4. Publishing and writing algorithm

In SONOBAL binary operators have atleast____spaces

- 1
- **2**
- 3
- 4

In SONOBOL can the size of the array be determined at run time.

1. **Yes**
2. No

_____is an important feature of Ada language used in embedded systems and operating systems. It is used in managing parallel threads of controls.

1. Controls
2. **Tasking**
3. classes

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

First electronic computer was _____

1. **ENIAC**
2. Babbage analytical engine
3. Itel 386
4. Ibm x86

It is always better to find out the mistakes in the code at_____.

1. Runtime
2. **Compile time**
3. Link time
4. None of given option

Too much Orthogonality reduces Readability.

1. **True**
2. False

COBOL was the first language that brings the concept of_____.

1. **Records**
2. Structure
3. Object
4. Variable

Learning the implementation details of a language helps in the efficient use of that language.

1. **True**
2. False

We can have nested procedures in_____language.

More Files Visit VUAnswer.com

More Visit VUAnswer.com

More Files Visit VUAnswer.com

1. C++
2. **Ada**
3. C
4. PROLOG

One of the major design goals of Ada was

1. **to help developers to code the software in lesser time**
2. to make it difficult for developers to make mistakes
3. to help develop an IDE for Ada
4. to make testers to test Ada application easily

SONOBOL is case _____

1. Sensitive
2. **In-sensitive**
3. Super sensitive
4. Not sensitive

The main design goals of Ada were EXCEPT

1. Program reliability and maintenance
4. Design language for DoD
5. Programming is a human activity therefore avoid unintentional mistakes **6. Designing a portable language**

The space operator has_____precedence than arithmetic operators.

1. Higher
2. **Lower**

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

Pattern . Variable Upon successful completion of pattern matching, the substring matched by the pattern is assigned to the variable as _____

1. **Value**
2. String
3. Integer
4. Real numbers

A language evaluation criteria includes following factors EXCEPT

1. Readability
2. Writabilty
3. Portability
4. **Modularity**

The variable name has profound effect on_____.

1. Readability
2. Writability
3. Orthogonality
4. **Portability**

SIZE function in SONOBOL language is used to return the size of _____

1. **String**
2. Operator
3. Variable
4. Keyword

Indirect referencing in SONOBOL is same as of_____in C.

1. Arrays
2. **Pointers**
3. Aliasing

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

4. Stack

Following factors influences a portable language design EXCEPT

1. Computer architecture
2. Readability
3. Programmer's time
4. **Windows XP**

The more is the Simplicity of a language, the more it will always be readable.

1. **True**
2. False

+ Sign is used for_____in SONOBOL.

1. **Line Continuation**
2. Line Break

Which of the following is an incorrect option from the following statements regarding 'objectives of learning new languages '?

1. Help to compare different languages.
2. Help in transition from one language to other language.
3. **Help in understanding the language piracy policy**
4. Help to choose a language for development of a certain application.

_____was the first object oriented language.

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

1. COBOL
2. LISP
3. JAVA
4. **SIMULA**

In SONOBOL 2 spaces can be used, the purpose of 1st space is for_____and 2nd for

1. **Pattern matching, String Concatenation**
2. String concatenation, Pattern matching

LISP used in_____and_____(functional paradigm, AI)

First arguments in LISP is ____**symbol..?**_____(Atom, argument, integer, LIST)

Maps in SNOBOL are also available in____(C, C++, MATLAB, Prolog)

We use_____indirect referencing operator in SNOBOL (Binary ".", Binary $, Unary ".", **Unary $)**

Elementary types are also called_____in ADA (Static, **user defines**, builtin)

ADA is a_____typed language **(partially strongly)**

_____has elaborated exception handling (**ADA**, C++, JAVA, COBOL)

___has a powerful set of operators but poor type checking (**C**, C++, ADA, LISP)

_____and_____have declaration paradigm **(Prolog, SQL)**

1st machine independent language is _____ **ALGOL**

To make necessary arguments at run time error is called _____**(exception handling)**

Language with wide domain of application has higher_____**(generality)**

_____has distributed computing architecture **(CORBA)**

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

Readability has no influence on the cost of _____**(deployment)**

The depth at which we can think is influenced by_____**(implementation details)**

There are no struct, union, enum, unsigned, typedef, or pointers types in **Java**

========== **write three concepts which are**

introduced in LISP first time?

- Conditionals: such as if-then-else construct.
- Function types: where functions are just like integers and strings
- Recursion: first language to support it.
- Dynamic typing: all variable are pointers.
- Garbage-Collection.
- Programs composed of expressions.
- A symbol type.
- The whole program is a mathematical function

Ada is strongly typed language describe how?

ADA is strongly typed. A programming language is strongly typed if type errors are always detected and in ADA Errors can be signaled as exceptions and handled explicitly. Many serious errors such as computational overflow and invalid array indexes are automatically caught and handled through this exception mechanism, improving program reliability... ?

Write a function in LISP to concatenate two lists List a=(3 4 5) List b=(c d 6)

>(append '(3 4 5) '(c d 6))

(3 4 5 c d 6)..concatenated List.

In C++ ^ and ~ are used for bitwise exclusive OR and bitwise NOT write there equivalent in ada

Ans:

^ bitwise exclusive OR of c++ = Xor in ADA..

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

~ = Not in ADA

What code in LISP language used to compute power of x to y. Marks3:

(defun power (x y)

(if (= y 0) 1 (* x (power x (1- y)))))

This function computes the power of x to y. That is, it computes xy by

recursively multiplying x with itself y number of times.

Example;

>(power 3 4)
81

A code was given about ADA case concept. Please refer topic "Case statement" case

expression is when choice list => sequence-of-statements when choice list =>

sequence-of-statements when others => sequence-of-statements

end case;

How can we determine the size of Array in SNOBOL…2

In SNOBOL, The size of the array can be determined at run time by using input from the system of using a variable.

Example:

A = ARRAY(INPUT)

May 11, 2012

Write IO header file for Ada..

with Ada.Text_Io; -- intent to use use

Ada.Text_Io; -- direct visibility **name functions that**

are used in List construction

More Files Visit VUAnswer.com

Lists can be created and extended with the help of three basic functions.

1. cons,
2. list
3. append.

What are operators for Logical AND && and Logical OR || used in ADA.

Logical AND &&= And in ADA

Logical OR || = Or in ADA

Features added in COBOL not included in SNOBOL.

COBOL has introduced hierarchical data structures (records) and nested selection statements.

The COBOL language supported long variable names (up to 30 characters) with hyphens, data division, and fixed-point arithmetic.

These all feature in COBOL language are those which were added or enhanced and were not included in SNOBOL..

2013 spring mid paper:

what is the functionality of KEYWORD INT|CAHR IN snobol4 2

In SNOBOL 4 Vertical bar is used to specify pattern alternation.

KEYWORD INT|CAHR

This statement assigns the pattern 'INT' | 'CHAR' to the variable KEYWORD.

KEYWORD will now get a new value which is 'INT' | 'CHAR' So we can create new pattern by using the assignment statement.

What is error in it >(sqrt x) in LISP 3

Ans:

This code generates an error as the symbol x is not associated with any value and thus cannot be evaluated.it will give error like this.

Error: The variable X is unbound.

More Visit VUAnswer.com

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

How many element in it (a (d e)) related to lisp… 2

There are two elements.

Atom = a

List = (d e)

What is predicate in lisp language conform ?...3

A predicate is a special function which **returns NIL** if the predicate is false, T or anything other than NIL, otherwise. Predicates are used to build Boolean expressions in the logical statements.

Comparative operators in LISP used as functions for numerical values and return a T or NIL. =, >, <, >=, <=;

For example 1:

(= (+ 2 4)

(* 2 3)) T

example

2:

(> (- 5 2) (+ 3 1))

NIL

write two comparative operator used as function for numerical values in lisp programming language ? 2 marks

Comparative operators which are used as functions for numerical values are

=, >, <, >=, <=; **which data structure map pairs of associated data object in snobol? 3**

A table data structure maps pairs of associated data objects. Tables have varying lengths and are

dynamically extended if necessary.

T = TABLE()……If want to creates a table of unspecified length.

T = TABLE(N)… ....if want to creates a table that initially has room for N elements

More Files Visit VUAnswer.com

More Visit VUAnswer.com

More Files Visit VUAnswer.com

Once created, table can be used in a manner similar to arrays. The only difference is that they are

indexed by the key value and not the index number. For example:

T<'A'> = 1

Associates key 'A' with value 1.

which language first provided exception handling among c++ , ada?.....3 marks Ans;

Although PL/1 has introduce the concept of exception handling. But ADA has elaborated this concept.

- Ada was the first language to provide a structured exception handling mechanism.
- Ada includes an exception handling mechanism so that these problems can be dealt with at run-time.
- Errors can be signaled as exceptions and handled explicitly.
- Many serious errors such as computational overflow and invalid array indexes are automatically caught and handled through this exception mechanism, improving program reliability.

write a complete program in ada to print this out put by only using put_line command. use the loop isn't allowed.

print this code

```
*

***

*****
*****
**
```

```
A
n
s
.
procedure Starprint is



b
e
```


More Files Visit VUAnswer.com

```
g
i
n

Put ("*");
New_Line ;

Put ("***");
New_Line ;

Put ("*****");
New_Line ;


Put ("******");
New_Line ;

end Starprint;
```

write program in ada using loop to print this code code :

*****

******

****

****

******* (these star have to print using loop)**

```
Ans: procedure
Loopprint is

  Number_Of_Time: Integer:=5;

b
e
```


More Files Visit VUAnswer.com

More Visit VUAnswer.com

More Files Visit VUAnswer.com

```
g
i
n
  for I in 1..Number_Of_Time loop

  for J in 1..I loop
Put ('*');

  end loop;

  New_Line;
End loop;
 end
Nested_Loops;
end Loopprint;
```

does ada believe in human programming if yes then y?

---

yes, ada believe in human programming .Programming as a human activity is the main goal of ADA. In ADA the whole philosophy is that a programmer is a human and all humans make mistakes. So to make it safer, Ada uses discriminants in a record that tell what type of data is currently stored there. **c or ada, which support subprograms?**

ADA supports subprograms. There are two types of subprograms:

1. procedures and
2. Functions.

we can also have nesting of subprograms. A subprogram defined inside another subprogram can be used by its parent, children, or sibling subprograms only. **concepts of car,cdr, first and rest in Lisp?**

In order to select elements from a list, selectors functions are used. There are two basic selector functions known as

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

1. first (or car)
and 2. rest (or
cdr).

The rest can be build with the help of these functions.

1. **First (or car)** takes a list as an argument and returns the first element of that list. **example:**

>(first '(a

s d f)) a

2. **rest (or cdr)** takes a list as its argument and returns a new list after removing the first element from the list. examples:

>(rest '(a s d f))

(s d f).

Note language generality? 2marks

Generality

Generality is also an important factor and deals with the applicability of the language to a range of different domains. For example, C is more general purpose than LISP or

FORTRAN and hence can be used in more domains than these two languages.

CS 508 mid term spring 2010 paper

Compare ADA dotimes loop with dolist and dotime in LISP (5)

Apart from recursion, in LISP we can write code involving loops using iterative non recursive mechanism.

There are two basic statements for that purpose: **dotimes** and **dolist.** **DOTIMES**

dotimes is like a counter-control for loop. Its syntax is given as below:

(**dotimes** (count n result) body)

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

It executes the **body** of the loop n times where count starts with 0, ends with n-1.

The **result** is optional and is to be used to hold the computing result. If ***result*** is given, the function will return the value of ***result***. Otherwise it returns NIL. The value of the **count** can be used in the loop body.

DOLIST

The second looping structure is **dolist.** It is used to iterate over the list elements, one at a time. Its syntax is given below:

(**dolist** (x L result) body)

It executes the **body** for each top level element x in L. x is not equal to an element of L in each iteration, but rather x takes an element of L as its value. The value of x can be used in the loop body. As we have seen in the case of **dotimes,** the **result** is optional and is to be used to hold the computing result. If ***result*** is given, the function will return the value of ***result***. Otherwise it returns NIL.

Differentiate between ADA access types and C/C++ pointer type (5)

An *access* type in ADA roughly corresponds to a C++ pointer. **type**

Address_Ref **is access** Address;

A_Ref := new Address;
A_Ref.Postal_Code := "94960-1234";

Unlike C, there is no notational difference for accessing a record field directly or through an access value.

To refer to the entire record accessed by an access value use the following notation:

Print(A_Ref.**all**);

Why predicate is a special function in LISP (3)

A predicate is a special function which returns NIL if the predicate is false, T or anything other than NIL, otherwise. Predicates are used to build Boolean expressions in the logical statements.

The following comparative operators are used as functions for numerical values and return a T or NIL. **=, >, <, >=, <=;**

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

What additional features are added in COBOL (2)

COBOL uses level numbers to show nested records; others use recursive definitions Business applications reports, decimal arithmetic, character operations - COBOL

It was designed to look like simple English to broaden the base of computer users.

Is there anything like templates as in C++ (2)

Generics are like templates in C++ and allow parameterization of subprograms and packages with parameters which can be types and subprograms as well as values and objects.

Difference of C and C++ 2 marks

C++ Differs from C in two ways:

1. The control expression can also be Boolean
2. The initial expression can include variable definitions (scope is from the definition to the end of the function in which it is defined).

Write types of loop in Ada.

There are three types of loops in ADA.

1. For loop
2. While loop
3. Simple ..unconditional infinite loop

Brief note on Orthogonality.

Orthogonality is a very important concept. It addresses how relatively small number of components that can be combined in a relatively small number of ways to get the desired results. It is closely associated with simplicity: the more orthogonal the designs the fewer exceptions and it make it easier to learn, read, and write programs in a programming language. The meaning of an orthogonal feature is

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

independent of the context. The key parameters are symmetry and consistency. For example pointers are an orthogonal concept.

1)S=0
S=o
-- N=LT(N,13)N+1:F(DONE)
SUM=SUM+_N:(ADD)
DONE OUTPUT=SUM

SYNTACALLY SHOW HOW CAN WE DEFINE THE LISP?
LISP is a representative language of this style of programming.
Lisp stands for "LISt Process". It was invented by John McCarthy in 1958 at MIT.

1. It has simple data structure (atoms and lists) and makes heavy use of recursion.
2. It is an interpretive language and has many variations.
3. The two most popular versions are
   - Scheme and
   - Common Lisp
4. It is the most widely used AI programming language.
5. Atom and LIST are two main elements of LISP.

??????????

3)DEFERENTIATE BETWEEN TEH ada record type and c/c++?? 4)define struct
with the proper example

6)is polymorphism allowed in ada????
There are two means of using polymorphism in Ada. *Static polymorphism* is provided through the generic parameter mechanism whereby a generic unit may at compile time be instantiated with any type from a class of types. *Dynamic polymorphism* is provided through the use of so-called class-wide types and the distinction is then made at runtime on the basis of the value of a tag.

8) algol main feature?
Salient features of the language are:

1. Concept of type was formalized

More Files Visit VUAnswer.com

2. Names could have any length
3. Arrays could have any number of subscripts.Lower bound of an array could be defined
4. Parameters were separated by mode (in & out)
5. Subscripts were placed in brackets
6. Compound statements were introduced (begin ... end)
7. Semicolon as a statement separator was used
8. Assignment operator was :=
9. if had an else-if clause

why parallel programing is use in ADA? (3) marks Babbage's Analytical Engine (2)

Charles Babbage is considered to be the inventor of the first computer. This machine, known as

the Analytical Engine or Difference Engine, was invented in 1820's. In the

beginning, it could only be made to execute tasks by changing the gears which executed the calculations. Thus, the earliest form of a computer language was physical motion.

The key features of this machine included

1) Memory (called store),
2) jump,
3) loop, and the
4) concept of subroutines.

It was motivated by the success of power looms. It had limited capability and because of the technological limitations this design could not be fully implemented.

December 1, 2010 at 8:23pm

What is the difference between >(intersection L1,L2) and (set-difference L1,L2) Lisp functions. 5

These are set operations in LISP.

>(union L1 L2) ; returns the union of the two lists

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

>(intersection L1 L2) ; returns the intersection of the two lists >(set-difference L1 L2) ; returns the difference of the two lists

Give silent features of packages in Ada 5

Packages

These are primary structure used for encapsulation in.

1) Packages are used to group data and subprograms.
2) Packages can be hierarchical, allowing a structured and extensible relationship for data and code.
3) All the standard Ada libraries are defined within packages.
4) Package definitions usually consist of two parts: 1. package specification and
   2. package body.
5) Package bodies can also declare and define data types, variables, constants, functions, and procedures not declared in the package specification.

Creating list functions in Lisp may be written as (append '(ab)'(cd)) so why we use the single quote (') in front of atom or list. 3 it a shorthand notation for the function, quote. Quote is a function that takes in its argument and sends back as its answer, the same value that went into it.

What is batting-average in Ada explain with suitable example. 3

The type Batting_Averages is a fixed point type whose values are evenly spaced real numbers in the range from 0 through 1. The distance between the values is no more than 1/1000. The actual distance between values may be 1/1024, which is 2-10.

For example: type Batting_Averages is delta 0.001
range 0.0..1.0;

The distance between values is implemented as a power of 2.

Write pattern matching statement in SNOBOL. 2

In SNOBOL Space is used as the pattern matching operator and the statement has the following form:

subject pattern

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

There is no assignment operator in this case. Both the subject and the pattern are strings and this statement tries to match the pattern in the subject. It will be successful if the match is found and will result in failure otherwise.

Example:

TRADE = 'PROGRAMMER'

PART = 'GRAM'

TRADE PART

a) What are interpreted and compiled languages? Give examples (5)

Interpreted computing languages are languages whose source code is processed by a software program called an interpreter that reads in the text and immediately acts upon the instructions defined by the text. Compiled computing languages are languages whose source code is processed by a software program called a compiler that converts the source code into a file which can then be run directly or indirectly by a computer operating system.

1. Prolog It is an interactive (hybrid compiled/interpreted) language.
2. PHP is interpreted
3. FORTAN is compiled
4. SNOBAL is compiled

Comparison between functional and imperative languages?

A most important class of programming languages, known as the imperative languages, i based upon the von Neumann Architecture. This includes languages like FORTAN COBOL, Pascal, Ada, C, and many more.

While functional language is where there is no need for assignment and in it control flow is achieved via recursion and conditional expressions.

Convert the following Ada code into equivalent C code.

```
case ch is when 'A' | 'E' | 'I' | 'O' |
'U' => putline("this is an uppercase
vowel"); when 'J' .. 'N' =>
putline("between uppercase J and
N"); when others =>
putline("something else");
end case;
```


More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

What is valid or invalid statement in ADA language 5

a=(1 ... 5) integer**...(invalid) b=(1 ... 5) integer...(invalid)**

c,d=(1 ... 5) float...(invalid)

All Declarations are invalid.

There should be proper assignment operator (:=) . In these colon before equal is missing ...

Improper array declaration here too .. only 2 dots should be there(..)

condition a=b a=c b=a

Write Output of the following code. 5

Procedure Color is

Color= BasicColor(Red, green, blue, yellow) begin

BasicColor

Color:=BasicColor'PRED(RED)

end color

Asn:

RED.

How to compare and examine language?

1. Readability
2. Writ ability
3. Reliability

More Files Visit VUAnswer.com

More Visit VUAnswer.com

More Files Visit VUAnswer.com

Pattern matching Output of code?

Sentence='this is ur pen'

Sentence ‘ur’= ’my’

Sentence ’my’=

Z= ’10’

Prolog learning curve is very high meanings of this statement 3marks

Prolog is a declarative programming language where we only specify what we need rather than how to do it. It has a simple concise syntax with built-in tree formation and backtracking which generates readable code which is easy to maintain. It is relatively case and type insensitive and is suitable for problem solving / searching, expert systems / knowledge representation, language processing / parsing and NLP, and game playing.

Discuss the issue related with declaring a method/class as final java? 3 marks

Final Fields and Methods

A final field is like a constant: once it has been given a value, it cannot be assigned to again. Fields and methods can also be declared final. A final method cannot be overridden in a subclass.

With suitable examples the concept of boxing in C#. How C# is different there concept from other languages? 3 marks

Boxing

Boxing is converting any value type to corresponding object type and convert the resultant 'boxed' type back again.

int i = 123;
object box = i; // value of i is copied to the object box if (box is int) //

runtime type of box is returned as boxed value type

{

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

Console.Write("Box contains an int"); // this line is printed

}

Notation of actual /formal Parameters? 3 marks

Actual/Formal Parameter Correspondence:

1. Positional

2. Keyword

e.g. SORT(LIST => A, LENGTH =>

N); Default Parameter Values

procedure SORT(LIST : LIST_TYPE;

LENGTH : INTEGER := 100);

...

SORT(LIST => A);

Dangling pointer how to state in java? 5marks

Dangling pointers are those pointers that points to a heap-dynamic variable that has been

Deallocated. Automatic garbage collection prevents memory leaks and dangling pointers.

Example missing…☹

Aliasing Problem in java Script? with suitable examples. 5 marks

Aliasing Problems in Java

The fact that arrays and classes are really pointers in Java can lead to some problems. Here is a simple assignment that causes aliasing:

int [] A = new int [4];
Int [] B = new int [2];

This obviously creates problems. programmers have to be very careful when writing programs in Java.

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

In Java, all parameters are passed by value, but for arrays and classes the actual parameter is really a pointer, so changing an array element, or a class field inside the function does change the actual parameter's element or field.

Example:

```
void f( int [ ] A ) {
        A[0] = 10;      // change an element of parameter A
A = null;       // change A itself
    }       void g() {
int [ ] B = new int [3];
B[0] = 5;               f(B);
    }
```

B is not null here, because B itself was passed by value however, B[0] is now 10, because function f changed the first element of the array.

What is monitor in java thread?

To prevent problems that could occur by having two methods modifying the same object, Java uses monitors and the synchronized keyword to control access to an object by a thread. Any object that implements the "synchronized" keyword is considered to be a monitor. A monitor is an object that can move a thread process between a blocked and running state. Monitors are required when a process needs to wait for an external event to occur before thread processing can continue. A typical example is when a thread can't continue until an object reaches a certain state.

What queried in prolog?

Queries are used to retrieve information from the database. A query is a pattern that

PROLOG is asked to *match* against the database and has the syntax of a compound query. It may contain variables. A query will cause PROLOG to look at the database, try to find a match for the query pattern, execute the body of the matching head, and return an answer.

What is quoted atom in prolog?

Quoted atoms - sequence of characters surrounded by single quotes. Examples: 'Apple' 'hello world'

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

What is managed and unmanaged code? Ans;

Managed code

Managed code is executed under the control of Common Language Runtime (CRL).

It has automatic garbage collection. That is, the dynamically allocated memory area which is no longer is in use is not destroyed by the programmer explicitly. It is rather automatically returned back to heap by the built-in garbage collector. There is no explicit memory's allocation and deallocation and there is no explicit call to the garbage collector.

Unmanaged code

The unmanaged code provides access to memory through pointers just like C++. It is useful in many scenarios. For example:

- Pointers may be used to enhance performance in real time applications.
- In non-.net DLLs some external functions requires a pointer as a parameter, such as Windows APIs that were written in C.
- Sometimes we need to inspect the memory contents for debugging purposes, or you might need to write an application that analyzes another application process and memory.

How many ways the static binding can be define?

Static Binding

A binding is static if it occurs before run time and remains unchanged throughout program execution

If static, type may be specified by either an explicit or an implicit declaration .

An explicit declaration is a program statement used for declaring the types of variables .

An implicit declaration is a default mechanism for specifying types of variables i.e the first appearance of the variable in the program.

Write three different methods how to write strings in PHP? 3

Strings

PHP strings are created using single quote or double quote.

They can also be created by <<< which is called heredoc. One should provide an identifier after <<<, then the string, and then the same identifier to close the quotation. The closing identifier must begin in the first column of the line.

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

How to convert PHP string in numeric value? 2

String conversion to numbers:

When a string is evaluated as a numeric value, the resulting value and type are determined as follows.

- The string will evaluate as a **float** if it contains any of the characters '.', 'e', or 'E'. Otherwise, it will evaluate as an integer.
- The value is given by the initial portion of the string. If the string starts with valid numeric data, this will be the value used. Otherwise, the value will be 0 (zero). **Example:**

```
<?php
        $foo = 2 + "10.5";              // $foo is float (12.5)
        $foo = 1 + "-1.1e3";            // $foo is float (-1099)
        $foo = 1 + “Ali-1.3e3";         // $foo is integer (1)
        $foo = 1 + "10 Small Cats";     // $foo is integer (11)
        $foo = "10.0 cats " + 1;  // $foo is float (11)
?>
```

Using strings in numeric expressions provides flexibility but it should be obvious that it also is a source to numerous programming errors and mistakes. This kind of error is also very hard to debug and detect.

Discuss readability problem using control statements? 2 Control statements play an important role in readability.

1. We are all aware of the hazards of goto statement. If a language relies on goto statements for control flow, the logic becomes difficult to follows and hence understands and maintain.
2. Restricted use of goto in extreme was needed and useful as well but with the emergence of new language constructs to handle those situations, it probably not an issue any more.

What are the enumeration and subrange types? Differentiate these two in points.

a) An enumeration is a special kind of value type limited to a restricted and unchangeable set of numerical values. By default, these numerical values are integers, but they can also be longs, bytes, etc. (any numerical value except char).while subrange type is an ordered contiguous subsequence of an ordinal type.

b) Subrange types behave as their parent types; can be used as for variables and array indices

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

- E.g. type pos = 0 .. MAXINT;

c) Enumeration types are implemented as integers while Subrange types are the parent types with code inserted (by the compiler) to restrict assignments to subrange variables.

Short circuiting in java and c and c++ 3marks

Short Circuit Evaluation;

- A and B

- A or B

- *Example*

index := 1; while

(index <= length) and

(LIST[index] <> value) do

index := index + 1

C, C++, and Java*:* use short-circuit evaluation for the usual Boolean operators (&& and ||), but also provide bitwise Boolean operators that are not short circuit (& and |) Structs c++ and c# structs are public by default. Structs are basically "objects" that contain variables inside of them.The **struct** type: In C#, a **struct** is a value type.

what seal struct and abstract means in C# ?

An *abstract class* is any class that includes an abstract method. It is similar to Pure virtual in C++.If a class includes an abstract method, the class *must* be declared abstract, too.

Write two differences between C++ and Java

Java is more robust than C++. Some of the reasons are:

- Object handles are initialized to null (a keyword)
- Handles are always checked and exceptions are thrown for failures
- All array accesses are checked for bounds violations
- Automatic garbage collection prevents memory leaks and dangling pointers

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

- Type conversion is safer
- Clean, relatively fool-proof exception handling
- Simple language support for multithreading
- Bytecode verification of network applets

Final Term fall 2010

Difference between proper example Union type in c/c++ and ada discriminated type? 2marks

Discriminated records are like union types in C. There are however major differences between C union types and Ada discriminated records. The union type in C is fundamentally unsafe, and therefore unacceptable.

Division by zero is an expression? what type of error is this and either handled by compiler or it through exception? 3marks

Division by zero is due to Inherent limitations of arithmetic.it is run-time errors sometimes called exceptions.

How Short circuit evolution is performed in Ada and fortran? 3 marks

In Ada, programmer can specify either short-circuit is specified with

1. 'and then'
2. 'or else'

While in FORTRAN 77, short circuiting is there, but any side affected place must be set to undefined. The Problem with Short Circuiting is

(a > b) || (b++ / 3)

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

Short-circuit evaluation exposes the potential problem of side effects in expressions

What term Class attribute in C#? marks

In C#, Attributes are used to give information to .Net compiler

Example:

it is possible to tell the compiler that a class is compliant with .Net Common Language Specification. [CLSCompliant (true)] publc class MyClass

{

//class code

}

Define and explain "throws Clause" and the "finally Clause" with respect to exception handling in Java. (5)

Throws Clause

Throws clause is overloaded in C++ and conveys two different meanings: one as specification and the other as command. Java is similar in syntax but different in semantics. The appearance of an exception class name in the **throws** clause of Java method specifies that the exception class or any of its descendents can be thrown by the method.

A C++ program unit that does not include a throw clause can throw any exceptions. A Java method that does not include a throws cannot throw any checked exception it does not handle. A method cannot declare more exceptions in its throws clause than the methods it overrides, though it may declare fewer. A method that does not throw a particular exception, but calls another method that could throw the exception, must list the exception in its throws clause.

The finally clause

A Java exception handler may have a finally clause. A finally clause *always* executes when its try block executes (whether or not there is an exception). The finally clause is written as shown below:

try {

…

}

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

```
        catch (…) {
        …
}
…
        finally {
        …
        }
```

A finally clause is usually included to make sure that some clean-up (e.g., closing opened files) is done. If the finally clause includes a transfer of control statement (return, break, continue, throw) then that statement overrides any transfer of control initiated in the try or in a catch clause.

Explain the Prolog features regarding its applications in real world. (5)

We can find PROLOG in areas like

1. Expert systems
2. Artificial intelligence,
3. Natural language understanding,
4. logical puzzles and games.
5. theorem proves construction
6. The variant of PROLOG called DATALOG is used in database management.
7. It is relatively case and type insensitive and is suitable for problem solving / searching, expert systems / knowledge representation, language processing / parsing and NLP, and game playing.

Prolog is a declarative programming language where we only specify what we need rather than how to do it. It has a simple concise syntax with built-in tree formation and backtracking which generates readable code which is easy to maintain.

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

Describe the programming steps in Prolog? (5)

PROLOG programming follows the following steps:

- Declaring some facts about objects and their relationships
- Defining some rules about objects and their relationships
- Asking questions about objects and their relationships

How to define PHP classes?

Classes and objects in PHP are similar to Java. A variable of the desired type is created with the *new* operator. It supports Single inheritance only and uses the keyword extends to inherit from a super class. The inherited methods and members can be overridden, unless the parent class has defined a method as final.

Union in c++ and java difference?

C and C++ have free unions (no tags)

- Not part of their records

- No type checking of references

Java has neither records nor unions

Two difference b/w c++ and java

1. Control expression must be Boolean
2. Scope of variables defined in the initial expression is only the loop body

Two difference b/w c and c++

The control expression can also be Boolean

The initial expression can include variable definitions, scope is from the definition to the end of the function in which it is defined.

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

What is notify and wait in java

Threads are based upon the concept of a Monitor. The wait and notify methods are used just like wait and signal in a Monitor. They allow two threads to cooperate and based on a single shared lock object.

what is notify() and notifyall() in java?

There is a slight difference between notify and notifyAll. As the name suggest, notify() wakes up a single thread which is waiting on the object's lock. If there is more than one thread waiting, the choice is arbitrary i.e. there is no way to specify which waiting thread should be re-awakened. On the other hand, notifyAll() wakes up ALL waiting threads; the scheduler decides which one will run.

Explain Stack Dynamic variable with example? 5

- Fixed stack dynamic - range of subscripts is statically bound, but storage is bound at elaboration time e.g. C local arrays are not static
- Advantage: space efficiency
- Stack-dynamic - range and storage are dynamic, but fixed from then on for the variable's lifetime e.g. Ada declare blocks declare

```
STUFF : array (1..N) of FLOAT;
    begin
    ...
    end;
```

Advantage: flexibility - size need not be known until the array is about to be used

Differentiate between the implicit and explicit type conversion with respect to Java. (5) Java is much stronger than C++ in the type conversions that are allowed.

Booleans cannot be converted to other types. For the other primitive types (char, byte, short, int, long, float, and double).

Implicit conversions:

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

An implicit conversion means that a value of one type is changed to a value of another type without any special directive from the programmer. A char can be implicitly converted to an int, a long, a float, or a double.
For example:

```
char c = 'a';

int k = c;


long x = c;

float y = c;

double d = c;
```

Explicit conversions:

Explicit conversions are done via *casting*: the name of the type to which you want a value converted is given, in parentheses, in front of the value.

For example,

The following code uses casts to convert a value of type double to a value of type int, and to convert a value of type double to a value of type short:

```
double d = 5.6;

 int k = (int)d; short

s = (short)(d * 2.0);
```

Casting can be used to convert among any of the primitive types except boolean.

Two example of atoms in PROLOG syntax?

Atoms:

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

AlphaNumaric start with lower letter

Quoted Atom sequence of character quoted by single quotes

Symbolic symbol & +-* special atom !;[]{}

Two example of predefined reference type in C#? 2 marks

1. object
2. string

Differentiate between client side scripting and server side scripting languages? (5)

JavaScript – client side scripting

Primary objective of JavaScript is to create dynamic HTML documents and check validity of input forms. It is usually embedded in an HTML document. It is not really related to Java

PHP (Personal Home Page) – server-side scripting

It is interpreted on the Web Server when the HTML document in which embedded is requested by the browser. It often produces HTML code as an output and is very similar to JavaScript. It allows simple access to HTML form data and makes form processing easy. It also provides support for many different database management systems and hence provides Web access to databases.

Differentiate between client side scripting and server side scripting languages? (5)

JavaScript – client side scripting

Primary objective of JavaScript is to create dynamic HTML documents and check validity of input forms. It is usually embedded in an HTML document. It is not really related to Java

PHP (Personal Home Page) – server-side scripting

It is interpreted on the Web Server when the HTML document in which embedded is requested by the browser. It often produces HTML code as an output and is very similar to JavaScript. It allows simple access to HTML form data and makes form processing easy. It also provides support for many different database management systems and hence provides Web access to databases.

Differentiate between the Dynamic Type binding and Static type binding?

Static and Dynamic Binding

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

A binding is static if it occurs before run time and remains unchanged throughout program execution.

A binding is dynamic if it occurs during execution or can change during execution of the program.

What is the run time environment in case of C# similar to JVM in case of Java programming language?
It is Similar to Java and C++ in many respects. The .NET platform is centered on a Common Language Runtime (CLR - which is similar to a JVM) and a set of libraries which can be exploited by a wide variety of languages which are able to work together by all compiling to an intermediate language (IL).

Explain the Concept of Explicit and Implicit heap, dynamic variables and stack dynamic storage binding? Clarify the concept with suitable examples

Explicit Heap Dynamic Variables

- Allocated and de-allocated by explicit directives, specified by the programmer, which take effect during execution
- Referenced only through pointers or references

Examples: Dynamic objects in C++ (via new and delete) All objects in Java

Advantage: Provide dynamic storage management

Disadvantage: Inefficient and unreliable

Implicit Heap Dynamic Variables

- Allocation and de-allocation is caused by assignment statements

Example:All variables in SNOBOL

Advantage: Flexibility

Disadvantages: Inefficient, because all attributes are dynamic Loss of error detection

Write Ada language procedure (Code) to display your name on screen

```
withAda.Text_Io;  useAda.Text_Io;  procedureHello is  begin
```


More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

```
Put_Line("Shazia Bano!");
endHello;
```

In C# how many Allocation is handled through manage Code

There is no explicit memory's allocation and deallocation and there is no explicit calls to the garbage collector i.e. call to destructor.

Do we have pointers for reference types in case of C#?

No! in c#, Pointer can be declared to hold the memory addresses of value types. That is, we cannot have pointers for reference type.

How many character types are supported in Ada Language?

There are two built in character types in Ada

- Simple 8-bit ASCII Characters
- Wide_Character that support 16-bit Unicode/ISO standard 10646.

These are good enough for most purposes, but you can define your own types just like the integer types:

What are subprogram issues in different languages?

Subprograms are complex structures in programming languages, and it follows from this a lengthy list of issues in their design. Following are some issues with sub programming,

1. What parameter-passing method or methods are used?
2. Are the types of the actual parameters checked against the types of the formal parameters?
3. Are local variables statistically or dynamically allocated?
4. If subprograms can be passed as parameters, what is the referencing environment of such a subprogram?
5. If subprograms can be passed as parameters, are types of parameters checked in calls to the passed subprograms?
6. Can subprograms be overloaded?
7. Can subprograms be generic?
8. Is neitherseparate or independent compilation possible?

More Visit VUAnswer.com

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

What is seal struct and abstract in C#

Abstract: A class declared as 'abstract' cannot itself be instanced - it is designed only to be a base class for inheritance.
Sealed: A class declared as 'sealed' cannot be inherited from. It may be noted that structs can also not be inherited from. But it can inherit from other class.

Structs: Structs in C# are designed to encapsulate lightweight objects. They are value types (not reference types), so they're passed by value. They are sealed, which means they cannot be derived from or have any base class other than System.ValueType, which is derived from Object. Structs cannot declare a default (parameterless) constructor. Structs are more efficient than classes, that's' why they are perfect for the creation of lightweight objects.

SNOBOL stands for what?

SNOBOL stands for StriNg Oriented SymBOlic Language.

Write a program in Ada that prints the text Area of your course for example "BSComputer Sciences." withAda.Text_Io; useAda.Text_Io; procedureBSCS is begin

```
Put_Line("BS-Computer Sciences!");

End BSCS;
```

Implementation models?

Implementation Models:

Pass-by-value (in mode): Either by physical move or access path **What is the**

function of cut(!) predicate in PROLOG? 2 marks

cut <or> ! is a special predicate. And it is used in the body of a given clause so as to avoid using clauses appearing after the given clause in the program.it is like a goal which is always succeeded but never backtracked past.

For example, to prevent extra solutions being found by Prolog and avoid additional computations that are not desired or required in a program.

How do Ada and COBOL differ by syntax and semantics in referencing a record element?

Give examples of each (5)

In ADA, Record types are like structures in C.
type Address is record Street : Unbounded_String;

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

City : Unbounded_String;
Postal_Code : String(1..10);
end record;

- COBOL uses level numbers to show nested records; others use recursive definitions - Examples: COBOL field_name OF record_name_1 OF ... OF record_name_name

According to readability point of view COBOL record definition syntax is easier to read and understand but according to writability point of view other languages record definition syntax is easier to write and less time consuming.

We studied several reasons to study programming languages. With that context in mind discuss:

(a) Increased capacity to express programming concepts

(b) Improved background for choosing appropriate languages and show the output.

Discuss the difference between enumeration types of C and Ada. Which is better and why? Although Just like C, an enumeration type in Ada is a sequence of ordered enumeration literal, It is however different from C in many respects:

There is no arithmetic defined for these types.

Example

S1, S2 : State;

S1 := S1 + S2; -- Illegal

Unlike C, the same symbolic literal can be used in two enumeration types.

Example:

type RainbowColors is (Red, Orange, Yellow, Green, Blue, Indigo, Violet); type

BasicColors is (Red, Green, Blue);

The Ada compiler will use the type of the variable in question and there will be no ambiguity.Enumeration types are used as attributes or properties of different objects.

Why it is necessary to use (:) in control flow statement?

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

PHP offers an alternative syntax for some of its control structures; namely, if, while, for, foreach, and switch. In each case, the basic form of the alternate syntax is to change the opening brace to a colon (:) and the closing brace to endif;, endwhile;, endfor;, endforeach;, or endswitch;, respectively.

Give two examples of errors when pointer are wrongly used ?

Dangling pointers: A pointer points to a heap-dynamic variable that has been deallocated

Lost Heap-Dynamic Variables : A heap-dynamic variable that is no longer referenced by any program pointer. The process of losing heap-dynamic variables is called memory leakage

Difference between Actual Parameter and Predicate parameter? 3 marks

A parameter association defines the association between an actual parameter and a formal parameter.

A predicate is a special function which returns NIL if the predicate is false, T or anything other than NIL, otherwise. Predicates are used to build Boolean expressions in the logical statements.

Can we define members and length function of our own in LISP?if yes then explain your answer with suit able example.

yes we can, The LISP built-in function list-length counts the number of elements in a list. For example,

USER(33): (list-length '(2 3 5 7 11 13 17 19))

8 a function can be implemented recursively. A given list *L* is created by either one of the two constructors, namely nil or a cons:

- *Case 1*: *L* is nil.
  The length of an empty list is zero.
- *Case 2*: *L* is constructed by cons.
  Then *L* is composed of two parts, namely, (first *L*) and (rest *L*). In such case, the length of *L* can be obtained inductively by adding 1 to the length of (rest *L*).

????

More Files Visit VUAnswer.com

More Files Visit VUAnswer.com

Write a code in SNOBOL by using indirect referencing which decreases the value by 1.

Whose better among C/C++ and Ada according to overloading concept..

As Use of an operator for more than one purpose is known as operator overloading. Ada allows a limited overloading of operators. C++ and Ada allow user-defined overloaded operators…???

What is inference mechanism in Prolog? Give example.

How to type comment in PROLOG language.

What will happen if user does not provide the string array as the argument to the method in Java,will there be any kind of error or not ?

2. case A is when 1 =>fly; when 11|14 => null; when

22|20.... 30 =>swim; when others => complain ; end case;

what will be executed if A condition is 12.....2 marks

type big is mod 8. big :Big :=3; this code will generate an

error in ada ?

And ek qs tha keeping in mind that expressions in LISP are in the List show the top variables of the following list.
Ese kr k lists thin…

(add 4, mult 3)

(oranges, grapes,
apples)

More Visit VUAnswer.com

More Files Visit VUAnswer.com



Rana Abubakar Khan

If you want to learn computer programming then contact with me

truefriendlion@gmail.com

JOIN FB GROUP FOR VU HELP

www.facebook.com/groups/vu1234/

CS508 FINAL TERM PAPER SHARED BY STUDENT

ON FEBRUARY 20, 2018 AT 2:06PM

Mostly MCQs from this file.

1. enlist 3 Design issues arithmetic operators. (3)

2. what the elephant is?? a mammal . Write this in prolog(3).

3. SNOBOL concatenation and replacement example (3).

4. JAVA code with errors for inheritance given we have to find error and rewrite code. (5)

5. Enlist php opening and closing tags. (3)

6. Prolog example given to eliminate redundant elements from list(5).

7. Duality in operators of php in controlled statement. with example (5).



CS508 FINAL TERM PAPER SHARED BY STUDENT

ON FEBRUARY 23, 2018 AT 10:18PM

-overloading sideeffects.

-php odbc connection

-foreach c#

-LIST elements [head|tail] concept

-remprop syntax

Difficulty level was high atleast for me.

Best of luck everyone.

CS508 FINAL TERM PAPER SHARED BY STUDENT

ON FEBRUARY 26, 2018 AT 3:50PM

90% mcqs were from hadi and arsalan file.

Subjective:

1)Java is a object oriented programming language. suppose two pcs one is pentium 1 and the other 1 is intel core 2 duo. Discuss the Longvariable storage? And it is possible that storage of variables are same in any pc???

2)Aik program the java ka us ka output btana tha

3)concatenation ka question tha

4)SNOBOL and SNOBOL4 ka question tha

5)What is static binding and Storage binding? Also discuss advantages and disadvantages

Bus itnay hi yaad hain.



Good luck guyz!!!

CS508 FINAL TERM PAPER SHARED BY STUDENT

CS508 FINAL SUBJECTIVE (12-08-2017)

Q)The list is one of the original LISP data types, based on the concept of List in LISP, answer the following parts.

a) Write a function in LISP that creates a list by taking following three arguments as its elements.

Foo, Bar, Jack

b) Create a list that inserts symbol ‘z’ at the front of list L. (5marks)

Q)Suppose there is a function append() in prolog. This function can take 3 arguments. The first two arguments are list and the third argument is a variable which is assigned a value after appending second argument at the end of first argument. Consider the following queries and write down the outputs of them. (5marks)

1. ?- combine([a, b,c],[1,2,3],X).
2. ?- combine([foo,bar,yip,yup], [glub,glab,glib,glob], Result).
3. ?- combine([], [1, 2, 3], Z).
4. ?- combine(combine([ali, is],[a, good], X), [boy, *], Y).

Q)There is usually no need to convert between numbers and strings in PHP. Numbers and strings are interchangeable.

a)Write the resultant output after the execution of following php statements.

$foo = 1 + "11 Rabbits";

$foo = "11.0 rabbits " + 1;



b) Mention the advantages and disadvantages of using strings in numeric expressions.

(3 marks)

Q)How many ways can be used to write foreach statement using php.Write syntax in each case. (3 marks)

Q)What will be the output of the following C# code?

```
using System;
public class HelloWorld
{
   public static void Main()
   {
         string s1 = "hello";
         string s2 = s1;
         s1 = “world”;
          Console . WriteLine(s1);
    }
}
```

Q)We have a java program in which a variable named “LongVar” of type long is declared and used. Suppose this program runs on two machines; one is having Intel **Pentium I** processor and the other is having Intel **Core 2 Duo**. How many bytes of memory “LongVar” will consume on each machine? Give reasons to support your answer.



Q)From the given code snippet in C#, find out whether aliasing problem will arise or not? Justify your answer with valid reasons. (5marks)

```
object studentcs = new object();
studentcs.id = 123;
object  studentbba =  studentcs;
studentbba.id = 204;
```

CS508 FINAL TERM PAPER SHARED BY STUDENT

CS508 Current Final Term Papers In ONE thread 25-feb-2017 to 8 march 2017

Share by Student.

Q41:
Should the name of the class and the name of the file in which it is saved need to match up in case of c#. Justify your answer.
Q42:
What was the primary role behind the development of programming language like php?
Q43:
Write a prolog fact for the following statement
"The empty set is the subset of every set"
Q44:
Identify the approach used in the following record definition system.
"Employee.EmployeeName.First"
Q45:
How is dynamic binding in java different from C++?
Q46:
Explain stack dynamic type of array with two examples.
Q47:
Describe a character array of size 5 in Java also write down the default initial value that will be assigned to each element of an array when no initial value is assigned.
Q48:
How can we define many variables at once in Java Script variables with two examples?
Q49:
Point out the design issues of counted controlled loop with three examples.
Q50:



Suppose you are writing a program for some gaming application in java you need to use arrays data structure to store some values. What basic steps will be taken for array manipulation in Java with two examples?

Q51:

Write a code snipped in C# to print character of vowel array using foreach loop.

CS508 FINAL TERM PAPER SHARED BY STUDENT

ON FEBRUARY 26, 2017 AT 5:26PM

Today was my paper.

Only 15% MCQ'S from past papers 85% conceptual

3 long question From coding

How many typing method in Java ?

One was from Prolog languge , Relation and facts

How many types of constants ?

Write special atoms ?

Read your handout from 22 to 39. Mostly questions are from there.

Best of luck for your paper.



CS508 FINAL TERM PAPER SHARED BY STUDENT

CS508 CURRENT PAPER (20-08-2016)

2 marks questions:

1. Which type of inheritance is achieved through the use of interface in JAVA?
2. Does C supports Boolean expression, justify?
3. Find the length of list L' (D E F G I) by using list manipulation function?
4. What is difference b/w implicit and explicit conversion?

3 marks questions:

1. Separate predicate and clauses:

Man (symbol)

Brother (ahmad, chand)

Snowy(X), rainy(X), cold(X)

1. What is role of monitor in JAVA
2. Name any three control statement in PHP?

5 marks questions:

1. JAVA and C# commonalities?
2. Explain function side effect with occurs in arithmetic expression?
3. Write the resultant output of following function statement in LISP:

1) Intersection'(a b c) ' (b a b c)

2) Union'(c) ' (a b c)

1. Being a programmer , you are required to identify different kind of issues and tradeoffs

Face by a programmer while doing string and number inter-conversion in PHP?



CS508 FINAL TERM PAPER SHARED BY STUDENT

ON AUGUST 21, 2016 AT 10:16AM

9 mcqs from past paper
subjective
1-in c c++/java what type of operator are used for short-circuut evalution?
2-which operator are used for inequality in prolog?
3- why one have to be aware of left recursion while writing program in prolog?
4-in c# when does you absolutely have to declare a class as abstract?
5- coercion belong to which type of conversion write disadvantage of using it?
6-name file extension used in php?
7-difference b/w forward and backward chaining which is prefer?
8-what is run-time environment in case of .net similar to java in case of java explain the run time environment ? marks 5
9- annalist the merits and demerits pointers? marks 5
10 why does compiler genrate error in java code segment ?

```
public interface MYInterface
{
void sumint(inta,intb)
{ intc:
c=a+b;
}
void sumint(inta,intb);
```

es terha ka kch code tha

CS508 FINAL TERM PAPER SHARED BY STUDENT

ON AUGUST 22, 2016 AT 9:51AM

Cs508 todays Paper 8:00Am
All BC >.< MCQs were from All over the book mostly from the topic Ada ,LISP , Java , C# , Fortran ,PHP , PROLOG etc. :p
1 Question of 5 marks was from past papers
1) What code in LISP language used to compute power of x to y? 5 marks
2) what was main reason of creating php language (3) marks
3) Java code was given we have to tell the error . 5 marks
4) 1 Question was From LISP cdr and other points .3 marks
5) 1 was from php abot $ift1/2 is it valid or not. 2 marks



6) 1 question was from java script. 3 marks
7) Problems caused by Controlled loops in programing languages 5marks
3 question or thay bhol gye
Overall paper was average tha . Plzz pray for my next paper. Allah pak sab ko kamyab karay . Ameen

CS508 FINAL TERM PAPER SHARED BY STUDENT

CS508 Final Exam (20-08-2016) SUBJECTIVE ONLY

Question: 41 (Marks: 2)

Interpret the following axioms.

c:- a.
c:- b.

Question: 42 (Marks: 2)

Define value type variable with context to C#.

Modern Programming Languages (CS508)

Question: 43 (Marks: 2)

In C#, which type of variables can be used to create pointers?



Modern Programming Languages (CS508)

Question: 44 (Marks: 2)

Write a single HTML statement that creates a Text Field named "Country".

Modern Programming Languages (CS508)

Question: 45 (Marks: 3)

Write a function in LISP that return the difference of the two lists L3 and L4.

Modern Programming Languages (CS508)

Question: 46 (Marks: 3)

JavaScript is an Object Based Programming language. Identify three types of objects in java script.

Modern Programming Languages (CS508)

Question: 47 (Marks: 3)

How C# rectangular arrays syntax is different from C++ rectangular arrays syntax?

Modern Programming Languages (CS508)

Question: 48 (Marks: 3)

What is meant by compound terms (structures) in PROLOG? Give any example.



Modern Programming Languages (CS508)

Question: 49 (Marks: 5)

What does meant by limited access to variables? Also point out the design considerations for parameter passing.

Modern Programming Languages (CS508)

Question: 50 (Marks: 5)

Given the database below and study the Prolog queries below it. Indicate whether you think the goal will succeed or not by answering yes or no as prompted.

Data:

```
blue_box.
red_box.
green_circle.
blue_circle.
orange_triangle.
```

Queries:

```
?- green_circle.
?- circle_green.
?- red_triangle.
?- red_box.
?- orange_Triangle.
```

Note:- You will give your answer in "yes" or "no" only.



Modern Programming Languages (CS508)

Question: 51 (Marks: 5)

Suppose you are developing a small application using java. The application uses "arraycopy" method for copying array contents. Identify the error(s) in the code given below and also write the correct code.

```
int [ ] A, B;

A = new int[10];
// copies first 5 values from A to B
arraycopy(A, 0, B, 0, 5);
// copies last value from A into last element of B
arraycopy(A, 9, B, 4, 1);
```

Modern Programming Languages (CS508)

Question: 52 (Marks: 5)

```
var students=["Ali", "Aakash", "Taha", "Faiq"];
```

Based on the above Javascript array, what will be the output of following JavaScript statements:

1. document.write(students[2]);
2. document.write("My name is " + students[0]);
3. document.write(students[1]+students[3]);
4. students[2]="Furqan";
   document.write(students[0]+" "+students[1]+" "+students[2]+" "+students[3]);



CS508 FINAL TERM PAPER SHARED BY STUDENT

CS508 MY TODAYS PAPER: 22/08/2015

1) Which type of variable is used in Dynamic storage management and also inefficient and unreliable?

Ans:- (page # 168)

Explicit Heap Dynamic Variables

2) In how many types we can include JavaScript code in page?

Ans:- page # 141

JavaScript may be placed at three places

In the <head> element

In the <body> element

External to the HTML file

3) How many types of object in Java Script?

Ans:- Pg # 147

There are many types of objects in JavaScript

- Built-in objects (primarily type related)
- Browser objects (navigator, window etc.)
- Document objects (forms, images etc.)
- User defined objects



4) **Describe how to define an array in JavaScript? Also make an array naming** "myarray" and give 3 values red , green , blue.

Var myarray=["red", "green", "blue"];

Ans:- Pg # 144

• Arrays in JavaScript are 0 based

• We access arrays by index values

var firstArray = ["Mars", "Jupiter", "Saturn"];

5) Different types of starting tags recommended in PHP ?? give syntax

Answer:-

1. <?php

echo "this is the recommended style";

?>

2. <script language="php">

echo "this style is also available";

</script>

3. <?

echo "this is short tags style; it needs to be configured";

?>

4. <%

echo 'this is ASP-style tags; it may not be available';



%>

6) Different control statements of PHP and give examples

Answer:-

Control Statements

PHP supports the following control statements:

• if

• while

• do while

• for

• switch

• foreach

• break

• continue

7) What is the inheritance mechanism in PHP.

1) Single?
2) Multiple?

Answer:-It supports Single inheritance only and uses the keyword extends to inherit from a super class.

8) Find error and if error then correct syntax

```
Int a , b ;

Someobject.f00(ref a, b) ;
```

Answer:-

```
Int a , b ;
```



b= 0 ;

Someobject.f00(ref a, b) ;

9) What is correct to make pointer in C#

1) **Int *a , b , c;**
2) Int *a, *b, *c

10) What are methods used in java for synchronizing threads?

Ans:- wait() , notify()

Listed more threads

Start()

Notifyall()

Sleep()

11) System.arraycoppy(A, 1 , B , 0 , 7)

1) What is source array?
2) What is destination array?
3) What is sorce position?
4) What is destination position?
5) Number of elements to be copied.

Answer:- PG # 125

1) What is source array = A
2) What is destination array = B
3) What is sorce position = 1
4) What is destination position = 0
5) Number of elements to be copied = 7



12) Make an array of 5 values, with type character in java.

String [] afridi={“shalober, malikden” so on” }

;

Char [] Pakistan={ Islamabad, Karachi, peshwar, queta, Lahore }

string[] Pakistan={p,I,q};

string[] Pakistan=new string[3];

pakistan

What is Aliasing ?

Aliasing is used to assign by reference. To assign by reference, simply prepend an ampersand (&) to the beginning of the variable which is being assigned (the source variable) as shown below:

<?php

$foo = ‘Fakhar';

$bar = &$foo; // Reference $foo via $bar.




```
$bar = "My name is $bar"; // Alter $bar...

echo $bar;

echo $foo; // $foo is altered too.

?>
```

Variable variable

A variable variable is like pointers that is, it maintains the address of a variable in it. This

is shown in the example below:

```
<?php

$a = ‘hello’;

$$a = 'world';

echo "$a ${$a}“; // ‘hello world”
```

PHP logical operator

AND, OR, XOR, &&, ||, !



There are two types of special words

1. Keyword
2. Reserved

Keywod is a special only in certain context.

Reserved word is a special word which can't be used as user defined words

What is binding ?

Binding is a association between an entity,

What is predictes ?

Predicates are decleartion of relation or rule. Predicte may have one or more arugument.

What is clause ?

Clauses are definition of predicate statement.



Prolog has two constants

1. Atoms
2. Number

Numbers only including integer and floationg point.

Defferent types of atoms

1. Alphanumeric atoms
2. Symbolic atoms (<, >, +, -. *)
3. Special atoms (; [], {},!)
4. Quoted atoms ('amin' mateen')

Two types of clauses

1. Rule
2. Facts

What is Propositional Logic ?

Propositional Logic is a set of Boolean statements. It involves logic connectives such as

¬ ∧ ∨ ⇔ ⇒.

What is Anonymous variable ?

The _ is a special variable. It is called the anonymous variable. It is used as a place holder for a value that is not required. For example _ is used as a variable in the following clause:



What is vertical bar in prologo ?

Vertical bar is dual purpose in prolog , It is used for list dismantling and list construction.

How many types in java ?

There is two types in java

1. Primitive types
2. Reference types

There is five function of System.arraycopy

1. Src
2. Srcpos
3. Dst
4. Dstpos
5. Count

Int [] [] A;



A= new int[5][];

A[0]=new int [2];

A[1]= new int [3];

Type converstion in java

1. Implicit convertion/205-+2
2. Explicit convertion

Access level in java

Public

Privite

Protected

Puckage

Abstract clases of java is same of Pure virtual.



Throable classes ?

There is two predefined subclasses

Erro

Exception.

C#

Two modes in c#

1. Managed code.
2. Unmanged code.

What is deference between java and c++ ?

The main deference between java and c++ is memory safe. Java is a memeory safe languge and c++ not.

C++ have single and multlple inhertencie

Java have only signle ingertain.c



Two example of predefined reference type in C#?

Answer:

1) object

2) string

CS508 FINAL TERM PAPER SHARED BY STUDENT

CS508 2016 final subjectives.

Q1:Which type of inheritance is achieved through the use of interface in JAVA?

Ans: Java directly supports single inheritance. To support concept of a interface class is used. Inheritance is achieved as shown below:

class SuperClass

{

…

}

class SubClass extends SuperClass

{ …



}

1. Q2: Does C supports Boolean expression, justify?

Ans: Traditionally, C did not provide a standard Boolean type, partly and partly to allow the programmer to make the appropriate space/time tradeoff. (Using an `int` may be faster, while using `char` may save data space. Smaller types may make the generated code bigger or slower, though, if they require lots of conversions to and from `int`.

Q3: Find the length of list L' (D E F G I) by using list manipulation function?

Ans: >(reverse L) ; reverses a list

(D E F G I)

and

>(length L) ; returns the length of list L

5

Q4: What is difference b/w implicit and explicit conversion?

Ans: An implicit conversion means that a value of one type is changed to a value of another type without any special directive from the programmer. A char can be implicitly converted to an int, a long, a float, or a double. For example, the following will compile without error:

```
char c = 'a';
```



int k = c;

long x = c;

float y = c;

double d = c;

Explicit conversions are done via casting: the name of the type to which you want a value converted is given, in parentheses, in front of the value. For example, the following code uses casts to convert a value of type double to a value of type int, and to convert a value of type double to a value of type short:

double d = 5.6; int k = (int)d; short s = (short)(d * 2.0);

1. Q5: Separate predicate and clauses:
   Man (symbol)
   Brother (ahmad, chand)
   Snowy(X), rainy(X), cold(X)

Answer: Clauses are definition(s) of Predicate sentence or phrase. It has two types: rules and facts. A rule is a function definition. It may have 0 or more conditions. A fact has all parameters as constants and it cannot contain any condition. Example

– Fact:

brother(ahmed, chand).

Saying that ahmed and chand are brothers.

Example – Rule:

brother(X,Y):-

man(X), man(Y),



father(Z,Y),

father(Z,X).

It says that two symbols, X and Y, are brothers if X is a man and Y is a man and their father is same.

Q6: What is role of monitor in JAVA?

Answer: A monitor is mechanism to control concurrent access to an object.

Thread 1:

```
public void a()
{
    Synchronized (someObject) {
        // do something (1)
    }
}
```

Thread 2:

```
public void b()
{
    synchronized(someObject) {
        // do something else (2)
    }
}
```

Q7: Name any three control statement in PHP?

Ans: PHP supports the following control statements:

- if



- while
- do while
- for
- switch
- foreach
- break
- continue

Q8: JAVA and C# commonalities?

Ans: Java and C# are very similar and have a number of commonalities.

a. Both of these languages compile into machine-independent language-independent code which runs in a managed execution environment.

b. Both C# and Java compile initially to an intermediate language: C# to Microsoft Intermediate Language (MSIL), and Java to Java bytecode. In each case the intermediate language can be run - by interpretation or just-in-time compilation - on an appropriate 'virtual machine'. In C#, however, more support is given for the further compilation of the intermediate language code into native code.

c. Both of these have garbage Collection coupled with the elimination of pointers (in C# restricted use is permitted within code marked unsafe).

d. Both have powerful reflection capabilities.



e. In case of both these languages, there is no header files, all code scoped to packages or assemblies, no problems declaring one class before another with circular dependencies.

Q9: Explain function side effect with occurs in arithmetic expression?

Ans:
Functional side effects: when a function changes a two-way parameter or a non-local variable

- Problem with functional side effects:

à When a function referenced in an expression alters another operand of the expression; e.g., for a parameter change:

```
a = 10;
/* assume that fun changes its parameter */
b = a + fun(a);
```

Q10: in c c++/java what type of operator are used for short-circuut evalution?

Ans: C, C++, and Java: use short-circuit evaluation for
the usual Boolean operators (&& and ||), but
also provide bitwise Boolean operators that are
not short circuit (& and |)



Q11: which operator are used for inequality in prolog?

Ans: `inequality \==`

`Q12`: which operator are used for inequality in prolog?

`Ans`: While writing programs one has to be aware of the left recursion, failing to do that may result in infinite loops. It has a steep learning curve and suffers from lack of standardization.

Q13: in c# when does you absolutely have to declare a class as abstract?

Ans: When at least one of the methods in the class is abstract.

When the class itself is inherited from an abstract class, but not all base abstract methods have been over-ridden.

Q14: coercion belong to which type of conversion write disadvantage of using it?

Ans: Coercion is an implicit type conversion

- Disadvantage of coercions:

They decrease in the type error detection ability of the compiler

- In most languages, all numeric types are coerced in expressions, using

Widening conversions

- In Ada, there are virtually no coercions in expressions

Q14: name file extension used in php?



Ans: .php

Q15: difference b/w forward and backward chaining which is prefer?

Ans: Backward chaining (from goal to fact) finds that D can be proven if sub-goal C is true because D :- C. The system then deduces that the sub-goal is C is true because C :- A, B. Since the system could prove C it has proven D.

To deduce a goal (theorem), the logic programming system searches axioms and combines sub-goals. For this purpose we may apply forward (from fact to goal) or backward (from goal to fact) chaining. For example, given the axioms:

C :- A, B.

D :- C.

Given that A and B are true, forward chaining (from fact to goal) deduces that C is true

because C :- A, B and then D is true because D :- C.

Q16: what is run-time environment in case of .net similar to java in case of java explain the run time environment ? (5marks)

Ans: C# is a strongly-typed object-oriented language. It is Similar to Java

and C++ in many respects. The .NET platform is centered on a Common Language

Runtime (CLR - which is similar to a JVM) and a set of libraries which can be exploited



by a wide variety of languages which are able to work together by all compiling to an intermediate language (IL).

Q17: annalist the merits and demerits pointers?

Ans: Dangling pointers

A pointer points to a heap-dynamic variable that has been deallocated

- Lost Heap-Dynamic Variables

à A heap-dynamic variable that is no longer referenced by any program pointer

The process of losing heap-dynamic variables is called memory leakage

- Pointers are like goto's - they widen the range of cells that can be accessed by a variable

- Pointers are necessary - so we can't design a language without them.



With programming in _____ we state what and not how.

_____ support array with built in bounds checking.

When the type is fixed before run time then this is called as_____.

FORTRAN , PL 1 and BASIC language provide_____

If type binding is dynamic then _____must be dynamic.

If type binding is dynamic then _____must be dynamic.

When the type is fixed before run time then this is called as_____.

Dangling pointer errors in Java reduce the language _____ .

There is no arithmetic expression precedence rule in _____

In Java the arithmetic expression evaluation order is always from _____



We cannot pass array in _____ by value as it has no fix size. But it has fixed size in structure.

In C programming language array is passed by_____.

Java supports _____ programming paradigm.

In Java Explicit conversions are done through _____.

The earliest form of a computer language was _____ motion.

Prolog database is based upon _____.

52

From the given code snippet in C#, find out whether aliasing problem will arise or not? Justify your answer with valid reasons.

```
object studentcs = new object();
studentcs.id = 123;
object  studentbba =  studentcs;
studentbba.id = 204;
```

51

Find out whether there is an error or not in the given C# program. If there is an error give reason.

```
Using System;
```




```
class Addition
{
   int a, b;
   public  Addition (int a, int b)
   {
      this.a = a;
      this.b = b;
   }
   public void Add()
   {
      a = 6;
      b = 7;
      result=a+b;
      Console.WriteLine(result);
   }
  private readonly int a, b;
  public static void Main()
  {
     Addition addi=new Addition(4,6);
     addi.Add();
  }
}
```

50

Explain problem with Functional Side Effects which occurs in arithmetic expressions.

Note: Use of same example given in handouts is not allowed.



49

Suppose there is a function append() in prolog. This function can take 3 arguments. The first two arguments are list and the third argument is a variable which is assigned a value after appending second argument at the end of first argument. Consider the following queries and write down the outputs of them.

1. ?- combine([a, b,c],[1,2,3],X).
2. ?- combine([foo,bar,yip,yup], [glub,glab,glib,glob], Result).
3. ?- combine([], [1, 2, 3], Z).
4. ?- combine(combine([ali, is],[a, good], X), [boy, *], Y).

48

What will be the output of the following C# code?

```
using System;
public class HelloWorld
{
  public static void Main()
  {
        string s1 = "hello";
        string s2 = s1;
        s1 = “world”;
        Console.WriteLine(s1);
    }
}
```

47

In how many ways the static type binding is performed? Briefly define each.



46

Write the resultant output of the following Php code.

```
<?php
$a = ‘hello’;
$$a = 'world';
echo "$a ${$a}“;
?>
```

45

Suppose you have to select heads from the following lists of members. Use prolog’s list head and tail concept to do this.

1. [Ali, | [Saad, Sana, Haadi]]
2. [Suleman, Arshad, | [Akbar, Aliya, Sara]]
3. [Aneela, Ainie, Fahad, Jibran | []]

44

Identify error in the following JavaScript statement and also write corrected statement.

```
x=x+1    alert(x)
```

43

Consider the following

```
short int num= 50000;
System.Console.Println(num);
```

Which type of run-time error will occur in this case? Justify your answer.



42

How C# char is different from C++ char? Give two reasons.

41

Write vowel predicate in prolog which has vowel letters list as an argument.

Arrays in PHP are not like C/C++ arrays but they are _____.

Symbolic expression in LISP is a form of _____

In JavaScript navigator is a _____object.

The document object model in Java Script include the features and issues of _____.

In JavaScript _____operator is used for concatenation.



Expert system_____ provide a structure to design expert system.

_____ operator in Prolog is used for List construction and also for List dismantling.

_____operator is used to return a reference from a function in PHP.

In php *foreach* statement works only on _____.

PHP syntax look like _____.

_____is more strongly typed language then _____.

Each Thread has its own set of _____and _____.

Every class in Java is part of some _____.

In LISP there is no concept of _____ .

List in LISP is itself a _____.



_____ may also change global variable as a side effect.

Random number generation with strict requirements is available in _____.

Which statement is true about SNOBOL?

In Ada all pointers are initialized to _____.

_____ is the correct size of a Decimal datatype.

In C#, if you don't use new keyword, you must _____ all the values in the struct by hand before you use it.

In C#, reference type objects use memory of _____ data structure.

The inference mechanism is based upon _____.
Prolog database is based upon _____.

The earliest form of a computer language was _____ motion.



CS508 FINAL TERM PAPER SHARED BY STUDENT

My today's Paper of CS508 (11am)

Total Questions: 52

MCQ'S: 40

2 Marks Q: 4

3 Marks Q: 4

5 Marks Q: 4

Some of the MCQ'S are:

1. Threads in Java are based upon the concept of Monitor
2. A class declared as 'sealed' cannot be inherited from
3. In C# the value type and reference type variable are interconvert able through _____ concept.

Tagged type

Boxing

Interfaces

None of the given

4. In _____, Boolean values can convert to integers.

C#

C++

Java

Ada

5. In _____ control statements were based directly on IBM704 hardware.

Ada

FORTRAN I

FORTRAN 77

IBM Assembly language

6. _____ is a unit level control iterative statement.

Recursion

Iteration

Loop

Switch statement



7. In ENIAC physical motion was eventually replaces by _____ signals.

Analog

Digital

Electrical

Logical

8. Function must have at least _____ return statement.

Three

Two

One

Four

9. _____ operations must have one of its parameters of tagged type.

Concurrent

Synchronized

Generic

Primitive

10. In C# value type objects use memory of _____ data structure

List

Tree

Stack

Heap

11. _____ has efficient use of processor and memory.

C++

Plankul kool

LISP

CORBA

12. _____ programming language is known as “Write Only” language.

FORTRAN

BASIC

APL

PL/1

13. Everything in LISP is considered as _____

Class

Object



Function

Symbol

14. The Era of 1970's is known as :_____

Analysis and elaboration

Effective software technology

Discovery and description of programming language concepts

Aspect-Oriented Programming

15. All primitive types in _____ have fixed size.

FORTRAN

C++

JAVA

C#

16. An array in PHP is an ordered _____

Data structure

MAP

Tree

Execution type

17. There may be _____ *elseif* within the same php *if* statements.

Several

Few

Single

Two

2 Marks Q: 4

Which operator is used to access element of a struct type?
Just like C++, the dereference operator '->' is used to access elements of a struct type.

Write the functionality of "=" operator in prolog.

Which type of binding time it is when you want to bind a non static local variable to a memory cell.
Runtime - e.g. bind a non-static local variable to a memory cell



Write the difference between public class and non public class in java.

A public class can be used in any package and a non-public class can only be used in its own package.

3 Marks Q: 4

What are the three conditions in which a string is evaluated as a float in php.

The string will evaluate as a float if it contains any of the characters '.', 'e', or 'E'. Otherwise, it will evaluate as an integer.

Coercion belongs to which type of conversion? Also write the Disadvantage of using it?

Coercion is an implicit type conversion, and it's disadvantage is that they decrease in the type error detection ability of the compiler. In most languages, all numeric types are coerced in expressions, using widening conversions. In Ada, there are virtually no coercions in expressions

Write a property named HOURS in C# which enables a client to specify a time in hours. The getter/setter for the Hours property performs the conversion between hours and seconds.

Convert the following into prolog rules:

1. Socrates is a mortal if he is a human.
2. X is an animal if X eats grass.
3. X is a sportsperson if X plays football.

5 Marks Q: 4

Write the difference between Managed and unmanaged code and also mention at least 3 scenarios where unmanaged code is useful.

MANAGED CODE

1. Managed code is executed under the control of Common Language Runtime(CRL).

2. It has automatic garbage collection. That is, the dynamically allocated memory area which is no longer is in use is not destroyed by the programmer explicitly. It is rather automatically returned back to heap by the built-in garbage collector.



3. There is no explicit memory's allocation and deallocation and there is no explicit calls to the garbage collector i.e. call to destructor.

UNMANAGED CODE (Java does not have this concept**)**

The unmanaged code provides access to memory through pointers just like C++. It is useful in many scenarios. For example:

• Pointers may be used to enhance performance in real time applications.

• **External Functions:** In non-.net DLLs some external functions requires a pointer as a parameter, such as Windows APIs that were written in C.

• **Debugging:** Sometimes we need to inspect the memory contents for debugging purposes, or you might need to write an application that analyzes another application process and memory.

In a program we need two dimensional int type array, the array has 2 rows where first row has 5 columns and second row has 3 columns. Write down the code of declaring this array in java.

int [ ][ ] A; // A is a two-dimensional array

A = new int[2][]; // A now has 2 rows, but no columns yet

A[0] = new int [5]; // A's first row has 5 column

A[1] = new int [3]; // A's second row has 3 columns

What does meant by limited access to variables? Also point out design considerations for parameter passing.

Limited access to variables, which means one-way whenever possible.

Design Considerations for Parameter Passing

1. Efficiency

2. One-way or two-way

- These two are in conflict with one another!

Good programming =>limited access to variables, which means one-way whenever possible

Efficiency =>pass by reference is fastest way to pass structures of significant size.

You are required to identify order of execution of HTML tags:




```
<body>
<h1>Hello World</h1>
<script type=“text/javascript”>
//script statements
</script>

<body>
<h3>Welcome to this website</h3>
<script type=“text/javascript”>
//script statements
</script>

<body>
<h2>Mobile Applicaions</h2>
<script type=“text/javascript”>
//script statements
</script>

</body>
```



- You can use as many **<script>** tags as you like in both the **<head>** and **<body>** and they are executed sequentially.

- ```
  <h1>Ready start</h1>
  <script language="Javascript" type="text/javascript">
      alert("First Script Ran");
  </script>
  <h2>Running…</h2>
  <script language="Javascript" type="text/javascript">
      alert("Second Script Ran");
  </script>
  <h2>Keep running</h2>
  <script language="Javascript" type="text/javascript">
      alert("Third Script Ran");
  </script>
  </h1>Stop!</h1>
  </body>
  ```

CS508 FINAL TERM PAPER SHARED BY STUDENT

on March 11, 2015 at 8:21pm

My Today Paper
Sir say MCQs saray lectures say mix diye thay.
Short question
1) Write one line html code to define text field containing "Paksitan".
2) Wrtie the use of "!" in PROLOG.
3) Static binding
4) Why variable in prolog are loosely held?
5) Which language you'll use to develop intelligent business system. Case ma medical system tha...
6) JavaScript k program ka output btana tha array ka question tha concatenation k sth.
bs ye he questions yaad hain...
  ```



CS508 FINAL TERM PAPER SHARED BY STUDENT

ON FEBRUARY 27, 2016 AT 12:09PM

1. from JS **2Marks**
2. from JS **2Marks**
3. package name inclusion (not remembered) **2Marks**
4. Algol if then statement **2Marks**
5. separate Prolog atom and variable from following **3marks**
6. why pointers are included in C#. give solid arguments **3Marks**
7. reason behind the php evolution **3Marks**
8. when string is evaluated as float **3Marks**
9. Enumeration and Immutability implementation **5marks**
10. **.**Design issue for arithmetic expressions **5Marks**
11. Two object were given, second one was initialized by first, have to prove either Aliasing exist or not **5Marks**
12. A company want to design an expert system for real time medical problem. which programming language is most appropriate? support with arguments. **5marks**

CS508 FINAL TERM PAPER SHARED BY STUDENT

ON FEBRUARY 27, 2016 AT 10:54PM

My today cs508 paper. Almost 40% mcqs were from past papers.
1. Backward chaining problem. (2)
2. Int x and x=23 identify the error and also correct the errors. (2)
3. Coercien is related which type of casting also write disadvantages of that casting. (3)
4. Give syntax of java and c+ multi dimensional arrays. (3)
5. Ek tha k we have varable named myvary of type long and if we run this in pentium 1 and core 2 duo computer to ye dono me kitni kitni memory le ga. Give reasons(3)
6. Ek boxing ka code diya to or kaha tha k output maloom kry.(5)
7. Backward chaining and foreward chaining ka question tha solve krna tha. X: Y , Z and W:X kuch is trh ka tha (5)
C# and java arrays ek dosry se related he how? And type if multi dimensional arrays in c#. (5)
8. Which languages support type arguments? Matlb k aisi konsi languages hai jin k arguments dety waqt unki tatype b dena zruri he. Name btaiye. (5)
9. Php opening and ending tags likhy (3)
Baqi yad ni aa rhy. Remember ne in ur prayers..



CS508 FINAL TERM PAPER SHARED BY STUDENT

ON FEBRUARY 29, 2016 AT 11:35AM

Mcq's were easy and simple … 20 to 25 Mcq's were from Past papers and 7 to 8 Mcq's from Midterm Specially form ADA .. and remaining were new ……
Read ADA , LISP , PROLOG, JAVA, C# , PHP , Java Script ….. No need to study last lectures 39 to 45 … hardly 2 mcqs were there from these lectures and 1 short qs ….

Subjective :

Name the Package in which built in Class for string creation is used in Java. **[2 marks]**

Name any two Special predicates used in PROLOG language. **[2 marks]**

Consider the following

double a;

float b;

If we convert "a" to "b" Does the variable "a" will lose some data and also mention the conversion type. **[2 marks]**

How JavaScript statements are terminated? **[2 marks]**

Name any three Control statements supported by PHP? **[3 marks]**

Enlist any 3 design issues related with arithmetic expression? **[3 marks]**

Which of the following sequences are PROLOG atoms and variables? **[3 marks]**

explain, X, b , < ----- > , MyVariable

A company use visual studio 2005 .. If they use numeric type with range -32,768 to 32,767 , which types of data types you will use ? **[3marks]**

Categories the following Java variables and function with primitives and Reference types ?



Long, byte, Struct, array , class **[5 marks]**

Code was given in C# and write the output .. Qs was very easy and simple **[5 marks]**

Write the name of languages that which have pretest logical loop statements **[5 marks]**

Declare a jagged array in C# with named "studentName" and there should b 3 elements in array. **[5 marks]**

CS508 FINAL TERM PAPER SHARED BY STUDENT

Today's My CS508 paper started at 29/02/2016 10:30 AM

MCQS from mostly from past papers 20 to 25.

1. Which type of variable is used in Dynamic storage management and also inefficient and unreliable?(**2Marks)**

1. why prolog used steep learning curve?**(2Marks).**
2. Write package name in java working with arrays. (**2Marks)**
3.
4. Identify the error in given statement. Also write the corrected code.

x=x+1 alert(x) **(3Marks).**

1. Write extensions of php file.(**3Marks**)
2. Write c# program using arrays which prints vowel using foreach loop.(**5Marks)**
3. Suppose you are required to write a program for gaming in java you need to used array data structure what are the basic steps working with java arrays.(**5Marks)**
4. **9.** Write a semantic model of parameter passing. **(5Marks)**
5. **10.** Write output for given code in php. And also write advantages and disadvantages.

$foo = 1 + "10 Rabbits";

$foo = "10.0 rabbits" + 1; **(5Marks)**



☺😐☹ MUHAMMAD FAISAL ☺😐☹

MIT 4th Semester

Al-Barq Campus (VGJW01) Gujranwala

faisalgrw123@gmail.com

Solved Short Questions for Final Term Papers

CS508- Modern Programming Languages

Q.No.1 Write three concepts which are introduced in LISP first time?

Answer:

• Conditionals: such as if-then-else construct.
• Function types: where functions are just like integers and strings
• Recursion: first language to support it.
• Dynamic typing: all variable are pointers.
• Garbage-Collection.
• Programs composed of expressions.
• A symbol type.
• The whole program is a mathematical function

Q.No.2 Write a function in LISP to concatenate two lists List a=(3 4 5) List b=(c d 6)

Answer:

>(append '(3 4 5) '(c d 6))
(3 4 5 c d 6)..concatenated List

Q.No.3 Ada is strongly typed language describe how?

Answer:

ADA is strongly typed. A programming language is strongly typed if type errors are always detected and in ADA Errors can be signaled as exceptions and handled explicitly. Many serious errors such as computational overflow and invalid array indexes are automatically caught and handled through this exception mechanism, improving program reliability.

Q.No.4 How can we determine the size of Array in SNOBOL?

Answer:

In SNOBOL, The size of the array can be determined at run time by using input from the system of using a variable.
Example:
A = ARRAY(INPUT)

Q.No.5 In C++ ^ and ~ are used for bitwise exclusive OR and bitwise NOT write there equivalent in ada

Answer:

^ bitwise exclusive OR of c++ = Xor in ADA..
~ = Not in ADA

Q.No.6 What code in LISP language used to compute power of x to y?

Answer:

```
(defun power (x y)
 (if (= y 0) 1 (* x (power x (1- y)))))
```

This function computes the power of x to y. That is, it computes xy by recursively multiplying x with itself y number of times.
Example;

```
>(power 3 4)
81
```

Q.No.7 A code was given about ADA case concept. Please refer topic "Case statement"

Answer:

```
case expression is
        when choice list =>
            sequence-of-statements
        when choice list =>
            sequence-of-statements
        when others =>
            sequence-of-statements
end case;
```

Q.No.8 Name functions that are used in List construction

Answer:

Lists can be created and extended with the help of three basic functions.

1) cons,
2) list
3) append

Q.No.9 Write IO header file for Ada.

Answer:

```
with Ada.Text_Io;  -- intent to use
use Ada.Text_Io;  -- direct visibility
```

Q.No.10 What are operators for Logical AND && and Logical OR || used in ADA.

Answer:

Logical AND &&= And in ADA
Logical OR || = Or in ADA

Q.No.11 Features added in COBOL not included in SNOBOL.

Answer:

COBOL has introduced hierarchical data structures (records) and nested selection statements.

The COBOL language supported long variable names (up to 30 characters) with hyphens, data division, and fixed-point arithmetic.

These all feature in COBOL language are those which were added or enhanced and were not included in SNOBOL.

Q.No.12 What is the functionality of KEYWORD INT|CAHR IN snobol4?

Answer:

In SNOBOL 4 Vertical bar is used to specify pattern alternation.
KEYWORD INT|CAHR
This statement assigns the pattern 'INT' | 'CHAR' to the variable KEYWORD. KEYWORD will now get a new value which is 'INT' | 'CHAR' So we can create new pattern by using the assignment statement.

Q.No.13 Write two comparative operators used as function for numerical values in lisp programming language?

Answer:

Comparative operators which are used as functions for numerical values are =, >, <, >=, <=;

Q.No.14 What is error in it >(sqrt x) in LISP?

Answer:

This code generates an error as the symbol x is not associated with any value and thus cannot be evaluated. It will give error like this.

Error: The variable X is unbound.

Q.No.15 How many element in it (a (d e)) related to lisp?

Answer:

There are two elements.

Atom = a

List = (d e)

Q.No.16 Which data structure map pairs of associated data object in snobol?

Answer:

A table data structure maps pairs of associated data objects. Tables have varying lengths and are dynamically extended if necessary.

T = TABLE()……If want to creates a table of unspecified length.

T = TABLE(N)……..if want to creates a table that initially has room for N elements

Once created, table can be used in a manner similar to arrays. The only difference is that they are indexed by the key value and not the index number.

For example:

T<‘A’> = 1

Associates key ‘A’ with value 1.

Q.No.17 What is predicate in lisp language conform?

Answer:

A predicate is a special function which returns NIL if the predicate is false, T or anything other than NIL, otherwise. Predicates are used to build Boolean expressions in the logical statements.

Comparative operators in LISP used as functions for numerical values and return a T or NIL. =, >, <, >=, <=;

For example 1:

(= (+ 2 4) (* 2 3))

T

example 2:

(> (- 5 2) (+ 3 1))

NIL

Q.No.18 Which language first provided exception handling among c++, ada?

Answer:

Although PL/1 has introduce the concept of exception handling. But ADA has elaborated this concept.

➔ Ada was the first language to provide a structured exception handling mechanism.

➔ Ada includes an exception handling mechanism so that these problems can be dealt with at run-time.

➔ Errors can be signaled as exceptions and handled explicitly.

➔ Many serious errors such as computational overflow and invalid array indexes are automatically caught and handled through this exception mechanism, improving program reliability.

Q.No.19 Write a complete program in ada to print this out put by only using put_line command. Use the loop isn't allowed.

print this code
*
***
*****
****

Answer:

```
procedure Starprint is


begin

Put ("*");
New_Line ;

Put ("***");
New_Line ;

Put ("*****");
New_Line ;

Put ("*******");
New_Line ;

end Starprint;
```

Q.No.20 Does ada believe in human programming if yes then y?

Answer:

Yes, ada believe in human programming .Programming as a human activity is the main goal of ADA. In ADA the whole philosophy is that a programmer is a human and all humans make mistakes. So to make it safer, Ada uses discriminates in a record that tells what type of data is currently stored there.

Q.No.21 c or ada, which support subprograms?

Answer:

ADA supports subprograms. There are two types of subprograms:

1) Procedures
2) Functions

We can also have nesting of subprograms. A subprogram defined inside another subprogram can be used by its parent, children, or sibling subprograms only.

Q.No.22 Write program in ada using loop to print this code

code:

*
**
***
****
***** (these stars have to print using loop)

Answer:

```
procedure Loopprint is

  Number_Of_Time: Integer:=5;

begin

  for I in 1..Number_Of_Time loop

  for J in 1..I loop
Put ('*');

end loop;

  New_Line;
End loop;

end Nested_Loops;
end Loopprint;
```

Q.No.23 concepts of car,cdr, first and rest in Lisp?

Answer:

In order to select elements from a list, selectors functions are used. There are two basic selector functions known as

1) first (or car) and
2) rest (or cdr).

The rest can be build with the help of these functions.

1. **First (or car)** takes a list as an argument and returns the first element of that list.

example:

>(first '(a s d f))

a

2. **rest (or cdr)** takes a list as its argument and returns a new list after removing the first element from the list.

examples:

>(rest '(a s d f))

(s d f).

Q.No.24 Write three concepts which are introduced in LISP first time?

Answer:

Generality:

Generality is also an important factor and deals with the applicability of the language to a range of different domains. For example, C is more general purpose than LISP or FORTRAN and hence can be used in more domains than these two languages.

Q.No.25 Compare ADA dotimes loop with dolist and dotime in LISP.

Answer:

Apart from recursion, in LISP we can write code involving loops using iterative non recursive mechanism. There are two basic statements for that purpose: **dotimes** and **dolist**.

DOTIMES
dotimes is like a counter-control for loop. Its syntax is given as below:
(**dotimes** (count n result) body)
It executes the body of the loop n times where count starts with 0, ends with n-1.

The **result** is optional and is to be used to hold the computing **result**. If result is given, the function will return the value of **result**. Otherwise it returns NIL. The value of the **count** can be used in the loop body.

DOLIST
The second looping structure is **dolist**. It is used to iterate over the list elements, one at a time. Its syntax is given below:

(**dolist** (x L result) body)

It executes the **body** for each top level element x in L. x is not equal to an element of L in each iteration, but rather x takes an element of L as its value. The value of x can be used in the loop body. As we have seen in the case of **dotimes**, the **result** is optional and is to be used to hold the computing **result**. If result is given, the function will return the value of **result**. Otherwise it returns NIL.

Q.No.26 Is there anything like templates as in C++?

Answer:

Generics are like templates in C++ and allow parameterization of subprograms and packages with parameters which can be types and subprograms as well as values and objects.

Q.No.27 Differentiate between ADA access types and C/C++ pointer type.

Answer:

An access type in ADA roughly corresponds to a C++ pointer.
type Address_Ref **is access** Address;
A_Ref := new Address;
A_Ref.Postal_Code := "94960-1234";

Unlike C, there is no notational difference for accessing a record field directly or through an access value.

To refer to the entire record accessed by an access value use the following notation:
Print(A_Ref.**all**);

Q.No.28 Why predicate is a special function in LISP?

Answer:

A predicate is a special function which returns NIL if the predicate is false, T or anything other than NIL, otherwise. Predicates are used to build Boolean expressions in the logical statements.

The following comparative operators are used as functions for numerical values and return

a T or NIL. =, >, <, >=, <=;

Q.No.29 What additional features are added in COBOL?

Answer:

COBOL uses level numbers to show nested records; others use recursive definitions Business applications reports, decimal arithmetic, character operations - COBOL

It was designed to look like simple English to broaden the base of computer users.

Q.No.30 Difference of C and C++.

Answer:

C++ Differs from C in two ways:

1) The control expression can also be Boolean

2) The initial expression can include variable definitions (scope is from the definition to the end of the function in which it is defined).

Q.No.31 Write types of loop in Ada.

Answer:

There are three types of loops in ADA.

1) For loop

2) While loop

3) Simple… unconditional infinite loop

Q.No.32 is polymorphism allowed in ada?

Answer:

There are two means of using polymorphism in Ada. Static polymorphism is provided through the generic parameter mechanism whereby a generic unit may at compile time be instantiated with any type from a class of types. Dynamic polymorphism is provided through the use of so-called class-wide types and the distinction is then made at runtime on the basis of the value of a tag.

Q.No.33 Brief note on Orthogonality.

Answer:

Orthogonality is a very important concept. It addresses how relatively small number of components that can be combined in a relatively small number of ways to get the desired results. It is closely associated with simplicity: the more orthogonal the designs the fewer exceptions and it make it easier to learn, read, and write programs in a programming language. The meaning of an orthogonal feature is independent of the context. The key parameters are symmetry and consistency. For example pointers are an orthogonal concept.

1)S=0
S=o
-- N=LT(N,13)N+1:F(DONE)
SUM=SUM+_N:(ADD)
DONE OUTPUT=SUM

Q.No.34 SYNTACALLY SHOW HOW CAN WE DEFINE THE LISP?

Answer:

LISP is a representative language of this style of programming.

Lisp stands for “LISt Process”. It was invented by John McCarthy in 1958 at MIT.

1. It has simple data structure (atoms and lists) and makes heavy use of recursion.

2. It is an interpretive language and has many variations.

3. The two most popular versions are

   - Scheme and
   - Common Lisp

4. It is the most widely used AI programming language.

5. Atom and LIST are two main elements of LISP.

Q.No.35 algol main feature?

Answer:

Salient features of the language are:

1. Concept of type was formalized
2. Names could have any length
3. Arrays could have any number of subscripts.Lower bound of an array could be defined
4. Parameters were separated by mode (in & out)
5. Subscripts were placed in brackets
6. Compound statements were introduced (begin ... end)
7. Semicolon as a statement separator was used
8. Assignment operator was :=
9. if had an else-if clause

Q.No.36 Babbage's Analytical Engine.

Answer:

Charles Babbage is considered to be the inventor of the first computer. This machine, known as the Analytical Engine or Difference Engine, was invented in 1820's. In the beginning, it could only be made to execute tasks by changing the gears which executed the calculations. Thus, the earliest form of a computer language was physical motion.

The key features of this machine included:

1. Memory (called store),
2. jump,
3. loop, and the
4. concept of subroutines.

It was motivated by the success of power looms. It had limited capability and because of the technological limitations this design could not be fully implemented.

Q.No.37 What is the difference between >(intersection L1,L2) and (set-difference L1,L2) Lisp Functions?

Answer:

These are set operations in LISP.

```
>(union L1 L2)              ; returns the union of the two lists
>(intersection L1 L2)       ; returns the intersection of the two lists
>(set-difference L1 L2)     ; returns the difference of the two lists
```

Q.No.38 Give silent features of packages in Ada.

Answer:

Packages
These are primary structure used for encapsulation in.

1) Packages are used to group data and subprograms.

2) Packages can be hierarchical, allowing a structured and extensible relationship for data and code.

3) All the standard Ada libraries are defined within packages.

4) Package definitions usually consist of two parts:

- package specification and
- package body

5) Package bodies can also declare and define data types, variables, constants, functions, and procedures not declared in the package specification.

Q.No.39 Dangling pointer how to state in java?

Answer:

Dangling pointers are those pointers that points to a heap-dynamic variable that has been Deallocated. Automatic garbage collection prevents memory leaks and dangling pointers.

Q.No.40 Creating list functions in Lisp may be written as (append '(ab)'(cd)) so why we use the single quote (') in front of atom or list.

Answer:

It a shorthand notation for the function, quote. Quote is a function that takes in its argument and sends back as its answer, the same value that went into it.

Q.No.41 What is batting-average in Ada explain with suitable example.

Answer:

The type Batting_Averages is a fixed point type whose values are evenly spaced real numbers in the range from 0 through 1. The distance between the values is no more than 1/1000. The actual distance between values may be 1/1024, which is 2-10.
For example:
type Batting_Averages is delta 0.001 range 0.0..1.0;
The distance between values is implemented as a power of 2.

Q.No.42 Write pattern matching statement in SNOBOL.

Answer:

In SNOBOL Space is used as the pattern matching operator and the statement has the following form:
subject pattern
There is no assignment operator in this case. Both the subject and the pattern are strings and this statement tries to match the pattern in the subject. It will be successful if the match is found and will result in failure otherwise.
Example:
TRADE = 'PROGRAMMER'
PART = 'GRAM'
TRADE PART

Q.No.43 What are interpreted and compiled languages? Give examples.

Answer:

Interpreted computing languages are languages whose source code is processed by a software program called an interpreter that reads in the text and immediately acts upon the instructions defined by the text. Compiled computing languages are languages whose source code is processed by a software program called a compiler that converts the source code into a file which can then be run directly or indirectly by a computer operating system.

- ⇨ Prolog It is an interactive (hybrid compiled/interpreted) language.
- ⇨ PHP is interpreted
- ⇨ FORTAN is compiled
- ⇨ SNOBAL is compiled

Q.No.44 Comparison between functional and imperative languages?

Answer:

A most important class of programming languages, known as the imperative languages, i based upon the von Neumann Architecture.

This includes languages like FORTAN COBOL, Pascal, Ada, C, and many more.

While functional language is where there is no need for assignment and in it control flow is achieved via recursion and conditional expressions.

Q.No.45 Write three concepts which are introduced in LISP first time?

Answer:

Convert the following Ada code into equivalent C code.

```
case ch is
when ‘A’ | ‘E’ | ‘I’ | ‘O’ | ‘U’ =>
putline(“this is an uppercase vowel”);
when ‘J’ .. ‘N’ =>
putline(“between uppercase J and N”);
when others =>
putline(“something else”);
end case;
```

Q.No.46 What is valid or invalid statement in ADA language?

Answer:

a=(1....5) integer**…(invalid)**
b=(1....5) integer**…(invalid)**
c,d=(1....5) float**…(invalid)**

Note: All Declarations are invalid.

There should be proper assignment operator (:=). In this colon before equal is missing.

Improper array declaration here too... only 2 dots should be there(..)

condition

a=b

a=c

b=a

Q.No.47 Write Output of the following code.

```
Procedure Color is

  Color= BasicColor(Red, green, blue, yellow)

begin BasicColor

  Color:=BasicColor'PRED(RED)

end color
```

Answer:

RED

Q.No.48 How to compare and examine language?

Answer:

1. Readability
2. Writability
3. Reliability

Q.No.49 Pattern matching Output of code?

Answer:

Sentence='this is ur pen'
Sentence ‘ur’= ’my’
Sentence ’my’=
Z= ’10’

Q.No.50 Prolog learning curve is very high meanings of this statement.

Answer:

Prolog is a declarative programming language where we only specify what we need rather than how to do it. It has a simple concise syntax with built-in tree formation and backtracking which generates readable code which is easy to maintain. It is relatively case and type insensitive and is suitable for problem solving / searching, expert systems / knowledge representation, language processing / parsing and NLP, and game playing.

Q.No.51 Discuss the issue related with declaring a method/class as final java?

Answer:

Final Fields and Methods
A final field is like a constant: once it has been given a value, it cannot be assigned to again. Fields and methods can also be declared final. A final method cannot be overridden in a subclass.

Q.No.52 With suitable examples the concept of boxing in C#. How C# is different there concept from other languages?

Answer:

Boxing
Boxing is converting any value type to corresponding object type and convert the resultant 'boxed' type back again.

```
int i = 123;
object box = i;  // value of i is copied to the object box
if (box is int)  // runtime type of box is returned as boxed value type
{
Console.Write("Box contains an int");  // this line is printed
}
```

Q.No.53 Notation of actual /formal Parameters?

Answer:

Actual/Formal Parameter Correspondence:

1. Positional
2. Keyword

```
    e.g.  SORT(LIST => A, LENGTH => N);
 Default Parameter Values
   procedure SORT(LIST : LIST_TYPE;
                  LENGTH : INTEGER := 100);
  ...
  SORT(LIST => A);
```

Q.No.54 What is quoted atom in prolog?

Answer:

Quoted atoms - sequence of characters surrounded by single quotes.
Examples: ‘Apple’ ‘hello world’

Q.No.55 Aliasing Problem in java Script? with suitable examples.

Answer:

Aliasing Problems in Java

The fact that arrays and classes are really pointers in Java can lead to some problems. Here is a simple assignment that causes aliasing:

```
int [] A = new int [4];
Int [] B = new int [2];
```

This obviously creates problems. Programmers have to be very careful when writing programs in Java.

In Java, all parameters are passed by value, but for arrays and classes the actual parameter is really a pointer, so changing an array element, or a class field inside the function does change the actual parameter's element or field.

Example:

```
void f( int [ ] A ) {

        A[0] = 10;      // change an element of parameter A

        A = null;       // change A itself
    }

void g() {
        int [ ] B = new int [3];

        B[0] = 5;

        f(B);

    }
```

B is not null here, because B itself was passed by value however, B[0] is now 10, because function f changed the first element of the array.

Q.No.56 What is monitor in java thread?

Answer:

To prevent problems that could occur by having two methods modifying the same object, Java uses monitors and the synchronized keyword to control access to an object by a thread. Any object that implements the "synchronized" keyword is considered to be a monitor. A monitor is an object that can move a thread process between a blocked and running state. Monitors are required when a process needs to wait for an external event to occur before thread processing can continue. A typical example is when a thread can't continue until an object reaches a certain state.

Q.No.57 What queried in prolog?

Answer:

Queries are used to retrieve information from the database. A query is a pattern that PROLOG is asked to match against the database and has the syntax of a compound query. It may contain variables. A query will cause PROLOG to look at the database, try to find a match for the query pattern, execute the body of the matching head, and return an answer.

Q.No.58 How many ways the static binding can be define?

Answer:

Static Binding

A binding is static if it occurs before run time and remains unchanged throughout program execution.

If static, type may be specified by either an explicit or an implicit declaration.

An explicit declaration is a program statement used for declaring the types of variables.

An implicit declaration is a default mechanism for specifying types of variables i.e the first appearance of the variable in the program.

Q.No.59 What is managed and unmanaged code?

Answer:

Managed code:

Managed code is executed under the control of Common Language Runtime (CRL).
It has automatic garbage collection. That is, the dynamically allocated memory area which is no longer is in use is not destroyed by the programmer explicitly. It is rather automatically returned back to heap by the built-in garbage collector. There is no explicit memory's allocation and deallocation and there is no explicit call to the garbage collector.

Unmanaged code:

The unmanaged code provides access to memory through pointers just like C++. It is useful in many scenarios. For example:

- Pointers may be used to enhance performance in real time applications.
- In non-.net DLLs some external functions requires a pointer as a parameter, such as Windows APIs that were written in C.
- Sometimes we need to inspect the memory contents for debugging purposes, or you might need to write an application that analyzes another application process and memory.

Q.No.60 Write three different methods how to write strings in PHP?

Answer:

Strings
PHP strings are created using single quote or double quote.

They can also be created by <<< which is called heredoc. One should provide an identifier after <<<, then the string, and then the same identifier to close the quotation. The closing identifier must begin in the first column of the line.

Q.No.61 How to convert PHP string in numeric value?

Answer:

String conversion to numbers:

When a string is evaluated as a numeric value, the resulting value and type are determined as follows.

The string will evaluate as a **float** if it contains any of the characters '.', 'e', or 'E'. Otherwise, it will evaluate as an integer.

The value is given by the initial portion of the string. If the string starts with valid numeric data, this will be the value used. Otherwise, the value will be 0 (zero).

Example:

```
<?php
  $foo = 2 + "10.5";       // $foo is float (12.5)
  $foo = 1 + "-1.1e3";     // $foo is float (-1099)
  $foo = 1 + “Ali-1.3e3";     // $foo is integer (1)
  $foo = 1 + "10 Small Cats";   // $foo is integer (11)
  $foo = "10.0 cats " + 1;   // $foo is float (11)
?>
```

Using strings in numeric expressions provides flexibility but it should be obvious that it also is a source to numerous programming errors and mistakes. This kind of error is also very hard to debug and detect.

Q.No.62 What seal struct and abstract means in C#?

Answer:

An abstract class is any class that includes an abstract method. It is similar to Pure virtual in C++. If a class includes an abstract method, the class must be declared abstract, too.

Q.No.63 Discuss readability problem using control statements?

Answer:

Control statements play an important role in readability.

1. We are all aware of the hazards of goto statement. If a language relies on goto statements for control flow, the logic becomes difficult to follows and hence understands and maintain.

2. Restricted use of goto in extreme was needed and useful as well but with the emergence of new language constructs to handle those situations, it probably not an issue any more.

Q.No.64 What are the enumeration and subrange types? Differentiate these two in points.

Answer:

a) An enumeration is a special kind of value type limited to a restricted and unchangeable set of numerical values. By default, these numerical values are integers, but they can also be longs, bytes, etc. (any numerical value except char).while subrange type is an ordered contiguous subsequence of an ordinal type.

b) Subrange types behave as their parent types; can be used as
for variables and array indices
▪ E.g. type pos = 0 .. MAXINT;

c) Enumeration types are implemented as integers while Subrange types are the parent types with code inserted (by the compiler) to restrict assignments to subrange variables.

Q.No.65 Division by zero is an expression? what type of error is this and either handled by compiler or it through exception?

Answer:

Division by zero is due to Inherent limitations of arithmetic. It is run-time errors sometimes called exceptions.

Q.No.66 Difference between proper example Union type in c/c++ and ada discriminated type?

Answer:

Discriminated records are like union types in C. There are however major differences between C union types and Ada discriminated records. The union type in C is fundamentally unsafe, and therefore unacceptable.

Q.No.67 Short circuiting in java and c and c++.

Answer:

Short Circuit Evaluation;

- A and B
- A or B

- Example

```
index := 1;
while (index <= length) and
      (LIST[index] <> value) do
  index := index + 1
```

C, C++, and Java: use short-circuit evaluation for the usual Boolean operators (&& and ||), but also provide bitwise Boolean operators that are not short circuit (& and |) Structs c++ and c# structs are public by default. Structs are basically "objects" that contain variables inside of them.The **struct** type: In C#, a **struct** is a value type.

Q.No.68 How to define PHP classes?

Answer:

Classes and objects in PHP are similar to Java. A variable of the desired type is created with the new operator. It supports Single inheritance only and uses the keyword extends to inherit from a super class. The inherited methods and members can be overridden, unless the parent class has defined a method as final.

Q.No.69 Define and explain "throws Clause" and the "finally Clause" with respect to exception handling in Java.

Answer:

Throws Clause:

Throws clause is overloaded in C++ and conveys two different meanings: one as specification and the other as command. Java is similar in syntax but different in semantics. The appearance of an exception class name in the throws clause of Java method specifies that the exception class or any of its descendents can be thrown by the method.
A C++ program unit that does not include a throw clause can throw any exceptions. A Java method that does not include a throws cannot throw any checked exception it does not handle. A method cannot declare more exceptions in its throws clause than the methods it overrides, though it may declare fewer. A method that does not throw a particular exception, but calls another method that could throw the exception, must list the exception in its throws clause.

The finally clause:

A Java exception handler may have a finally clause. A finally clause always executes when its try block executes (whether or not there is an exception). The finally clause is written as shown below:

```
try {
…
}
catch (…) {
…
}
…
finally {
…
}
```

A finally clause is usually included to make sure that some clean-up (e.g., closing opened files) is done. If the finally clause includes a transfer of control statement (return, break, continue, throw) then that statement overrides any transfer of control initiated in the try or in a catch clause.

Q.No.70 Explain the Prolog features regarding its applications in real world.

Answer:

We can find **PROLOG** in areas like:

1) Expert systems
2) Artificial intelligence,
3) Natural language understanding,
4) logical puzzles and games.
5) theorem proves construction
6) The variant of PROLOG called DATALOG is used in database management.
7) It is relatively case and type insensitive and is suitable for problem solving/searching, expert systems / knowledge representation, language processing / parsing and NLP, and game playing.

Prolog is a declarative programming language where we only specify what we need rather than how to do it. It has a simple concise syntax with built-in tree formation and backtracking which generates readable code which is easy to maintain.

Q.No.71 Write two differences between C++ and Java.

Answer:

Java is more robust than C++. Some of the reasons are:

→ Object handles are initialized to null (a keyword)
→ Handles are always checked and exceptions are thrown for failures
→ All array accesses are checked for bounds violations
→ Automatic garbage collection prevents memory leaks and dangling pointers
→ Type conversion is safer
→ Clean, relatively fool-proof exception handling
→ Simple language support for multithreading
→ Byte code verification of network applets

Q.No.72 How Short circuit evolution is performed in Ada and fortran?

Answer:

In Ada, programmer can specify either short-circuit is specified with:

1. 'and then'
2. 'or else'

While in FORTRAN 77, short circuiting is there, but any side affected place must be set to undefined. The Problem with Short Circuiting is

(a > b) || (b++ / 3)

Short-circuit evaluation exposes the potential problem of side effects in expressions

Q.No.73 What term Class attribute in C#?

Answer:

In C#, Attributes are used to give information to .Net compiler
Example:
it is possible to tell the compiler that a class is compliant with .Net Common Language Specification.

```
[CLSCompliant (true)]
publc class MyClass
{
//class code
}
```

Q.No.74 Describe the programming steps in Prolog?

Answer:

PROLOG programming follows the following steps:

- Declaring some facts about objects and their relationships
- Defining some rules about objects and their relationships
- Asking questions about objects and their relationships

Q.No.75 Union in c++ and java difference?

Answer:

C and C++ have free unions (no tags)
- Not part of their records
- No type checking of references

Java has neither records nor unions

Q.No.76 Two difference b/w c++ and java.

Answer:

1. Control expression must be Boolean
2. Scope of variables defined in the initial expression is only the loop body

Q.No.77 Two difference b/w c and c++.

Answer:

1) The control expression can also be Boolean

2) The initial expression can include variable definitions, scope is from the definition to the end of the function in which it is defined.

Q.No.78 What is notify and wait in java?

Answer:

Threads are based upon the concept of a Monitor. The wait and notify methods are used just like wait and signal in a Monitor. They allow two threads to cooperate and based on a single shared lock object.

Q.No.79 What is notify() and notifyall() in java?

Answer:

There is a slight difference between notify and notifyAll. As the name suggest, notify() wakes up a single thread which is waiting on the object's lock. If there is more than one thread waiting, the choice is arbitrary i.e. there is no way to specify which waiting thread should be re-awakened. On the other hand, notifyAll() wakes up ALL waiting threads; the scheduler decides which one will run.

Q.No.80 Explain Stack Dynamic variable with example?

Answer:

Fixed stack dynamic - range of subscripts is statically bound, but storage is bound at elaboration time e.g. C local arrays are not static

Advantage: space efficiency

Stack-dynamic - range and storage are dynamic, but fixed from then on for the variable's lifetime e.g. Ada declare blocks declare

```
STUFF : array (1..N) of FLOAT;
        begin
        ...
        end;
```

Advantage: flexibility - size need not be known until the array is about to be used

Q.No.81 Two example of atoms in PROLOG syntax?

Answer:

Atoms:

AlphaNumaric start with lower letter
Quoted Atom sequence of character quoted by single quotes
Symbolic symbol & +-* special atom !;[]{}

Q.No.82 Two example of predefined reference type in C#?

Answer:

1) object
2) string

Q.No.83 Differentiate between client side scripting and server side scripting languages?

Answer:

JavaScript – client side scripting
Primary objective of JavaScript is to create dynamic HTML documents and check validity of input forms. It is usually embedded in an HTML document. It is not really related to Java

PHP (Personal Home Page) – server-side scripting
It is interpreted on the Web Server when the HTML document in which embedded is requested by the browser. It often produces HTML code as an output and is very similar to JavaScript. It allows simple access to HTML form data and makes form processing easy. It also provides support for many different database management systems and hence provides Web access to databases.

Q.No.84 What is seal struct and abstract in C#

Answer:

Abstract: A class declared as 'abstract' cannot itself be instanced - it is designed only to be a base class for inheritance.

Sealed: A class declared as 'sealed' cannot be inherited from. It may be noted that structs can also not be inherited from. But it can inherit from other class.

Structs: Structs in C# are designed to encapsulate lightweight objects. They are value types (not reference types), so they're passed by value. They are sealed, which means they can not be derived from or have any base class other than System.ValueType, which is derived from Object. Structs cannot declare a default (parameterless) constructor. Structs are more efficient than classes, that's' why they are perfect for the creation of lightweight objects.

Q.No.85 Differentiate between the implicit and explicit type conversion with respect to Java.

Answer:

Java is much stronger than C++ in the type conversions that are allowed.

Booleans cannot be converted to other types. For the other primitive types (char, byte, short, int, long, float, and double).

Implicit conversions:

An implicit conversion means that a value of one type is changed to a value of another type without any special directive from the programmer. A char can be implicitly converted to an int, a long, a float, or a double.

For example:

```
        char c = 'a';
    int k = c;
    long x = c;
    float y = c;
    double d = c;
```

Explicit conversions:
Explicit conversions are done via casting: the name of the type to which you want a value converted is given, in parentheses, in front of the value.

For example,
The following code uses casts to convert a value of type double to a value of type int, and to convert a value of type double to a value of type short:

```
  double d = 5.6;
 int k = (int)d;
short s = (short)(d * 2.0);
```

Casting can be used to convert among any of the primitive types except boolean.

Q.No.86 In C# how many Allocation is handled through manage Code?

Answer:
There is no explicit memory's allocation and deallocation and there are no explicit calls to the garbage collector i.e. call to destructor.

Q.No.87 Explain the Concept of Explicit and Implicit heap, dynamic variables and stack dynamic storage binding? Clarify the concept with suitable examples

Answer:

Explicit Heap Dynamic Variables

• Allocated and de-allocated by explicit directives, specified by the programmer, which take effect during execution

• Referenced only through pointers or references

Examples: Dynamic objects in C++ (via new and delete) All objects in Java

Advantage: Provide dynamic storage management

Disadvantage: Inefficient and unreliable

Implicit Heap Dynamic Variables

• Allocation and de-allocation is caused by assignment statements

Example:All variables in SNOBOL

Advantage: Flexibility

Disadvantages: Inefficient, because all attributes are dynamic Loss of error detection

Q.No.88 Write Ada language procedure (Code) to display your name on screen.

Answer:

```
withAda.Text_Io;
useAda.Text_Io;
procedureHello is
begin
Put_Line("Shazia Bano!");
endHello;
```

Q.No.89 What are subprogram issues in different languages?

Answer:

Subprograms are complex structures in programming languages, and it follows from this a lengthy list of issues in their design. Following are **some issues** with sub programming,

1. What parameter-passing method or methods are used?
2. Are the types of the actual parameters checked against the types of the formal parameters?
3. Are local variables statistically or dynamically allocated?
4. If subprograms can be passed as parameters, what is the referencing environment of such a subprogram?
5. If subprograms can be passed as parameters, are types of parameters checked in calls to the passed subprograms?
6. Can subprograms be overloaded?
7. Can subprograms be generic?
8. Is neitherseparate or independent compilation possible?

Q.No.90 Differentiate between the Dynamic Type binding and Static type binding?

Answer:

Static and Dynamic Binding

A binding is static if it occurs before run time and remains unchanged throughout program execution.

A binding is dynamic if it occurs during execution or can change during execution of the program.

Q.No.91 What is the run time environment in case of C# similar to JVM in case of Java programming language?

Answer:

It is Similar to Java and C++ in many respects. The .NET platform is centered on a Common Language Runtime (CLR - which is similar to a JVM) and a set of libraries which can be exploited by a wide variety of languages which are able to work together by all compiling to an intermediate language (IL).

Q.No.92 How do Ada and COBOL differ by syntax and semantics in referencing a record element? Give examples of each.

Answer:

In ADA, Record types are like structures in C.
type Address is record
Street : Unbounded_String;
City : Unbounded_String;
Postal_Code : String(1..10);
end record;

- COBOL uses level numbers to show nested records; others use recursive definitions
- Examples:
COBOL
field_name OF record_name_1 OF ... OF record_name_name

According to readability point of view COBOL record definition syntax is easier to read and understand but according to writability point of view other languages record definition syntax is easier to write and less time consuming.

Q.No.93 SNOBOL stands for what?

Answer:

SNOBOL stands for StriNg Oriented SymBOlic Language.

Q.No.94 How many character types are supported in Ada Language?

Answer:

There are two built in character types in Ada,

1) Simple 8-bit ASCII Characters

2) Wide_Character that support 16-bit Unicode/ISO standard 10646.

These are good enough for most purposes, but you can define your own types just like the integer types.

Q.No.95 Write a program in Ada that prints the text Area of your course for example "BS-Computer Sciences."

Answer:

```
withAda.Text_Io;
useAda.Text_Io;
procedureBSCS is
begin
Put_Line("BS-Computer Sciences!");
End BSCS;
```

Q.No.96 Whose better among C/C++ and Ada according to overloading concept..

Answer:

As Use of an operator for more than one purpose is known as operator overloading. Ada allows a limited overloading of operators. C++ and Ada allow user-defined overloaded operators.

Q.No.97 Implementation models.

Answer:

Implementation Models:
Pass-by-value (in mode): Either by physical move or access path

Q.No.98 What is the function of cut(!) predicate in PROLOG?

Answer:

cut <or> ! is a special predicate. And it is used in the body of a given clause so as to avoid using clauses appearing after the given clause in the program.it is like a goal which is always succeeded but never backtracked past.

For example, to prevent extra solutions being found by Prolog and avoid additional computations that are not desired or required in a program.

Q.No.99 Give two examples of errors when pointers are wrongly used?

Answer:

Dangling pointers:

A pointer points to a heap-dynamic variable that has been deallocated.

Lost Heap-Dynamic Variables:

A heap-dynamic variable that is no longer referenced by any program pointer. The process of losing heap-dynamic variables is called memory leakage

Q.No.100 We studied several reasons to study programming languages. With that context in mind discuss:
(a) Increased capacity to express programming concepts
(b) Improved background for choosing appropriate languages and show the output.
Discuss the difference between enumeration types of C and Ada. Which is better and why?

Answer:

Although Just like C, an enumeration type in Ada is a sequence of ordered enumeration literal, It is however different from C in many respects:
There is no arithmetic defined for these types.

Example
S1, S2 : State;
S1 := S1 + S2; -- Illegal
Unlike C, the same symbolic literal can be used in two enumeration types.

Example:
type RainbowColors is (Red, Orange, Yellow, Green, Blue, Indigo, Violet);
type BasicColors is (Red, Green, Blue);
The Ada compiler will use the type of the variable in question and there will be no ambiguity.Enumeration types are used as attributes or properties of different objects.

Q.No.101 Why it is necessary to use (:) in control flow statement?

Answer:

PHP offers an alternative syntax for some of its control structures; namely, if, while, for, foreach, and switch. In each case, the basic form of the alternate syntax is to change the opening brace to a colon (:) and the closing brace to endif;, endwhile;, endfor;, endforeach;, or endswitch;, respectively.

Q.No.102 Difference between Actual Parameter and Predicate parameter?

Answer:

A parameter association defines the association between an actual parameter and a formal parameter.

A predicate is a special function which returns NIL if the predicate is false, T or anything other than NIL, otherwise. Predicates are used to build Boolean expressions in the logical statements.

Q.No.103 Can we define members and length function of our own in LISP?if yes then explain your answer with suit able example.

Answer:

yes we can, The LISP built-in function list-length counts the number of elements in a list. For example,
USER(33): (list-length '(2 3 5 7 11 13 17 19))
8
a function can be implemented recursively. A given list L is created by either one of the two constructors, namely nil or a cons:

Case 1: L is nil.
The length of an empty list is zero.

Case 2: L is constructed by cons.
Then L is composed of two parts, namely, (first L) and (rest L). In such case, the length of L can be obtained inductively by adding 1 to the length of (rest L).

----------Wish U Best of L|U|C|K for EXAMS ----------

MUHAMMAD FAISAL

Al-Barq Campus (VGJW01) Gujranwala

VIRTUAL UNIVERSITY OF PAKISTAN

CS508 Current Paper 2023

Mcqs some from Junaid file and handouts

Q.No:1 Type checking btana thy

Ans:

- implicit type chacking ,
- explicit type chackin

Q.No:2 Prelog ka question tha

Q.No:3 Lisp ka 2 question

Q.No:4 Three C# class modifier btana thy

Ans:

- public
- internal,
- internal public,
- abstract

Q.No:5 PHP ka program likha ho ga output btana

Q.No:6 Java ka code likha hoa tha us ma missing lines thi wo likhni thi

Q.No:7 Name the Function that are used in LISP.
Ans:

- Append,
- Cons,
- List

Q.No:8 Name the Operators that are used in LISP.
Ans:

- and,
- or,
- not

M.junaid Qazi
+923074960034

CS508 1st.March.2023 (8AM)

MCQ From (Junaid File, Vu topper +Handouts)

Q.No:1 Three semantic models of parameters of typing programming language?

Ans:

- in mode,
- out mode,
- in-out mode

Q.No:2 Three disadvantages of Stack-dynamic Variables?

Ans:

- Inefficient
- unreliable
- all attributes are dynamic Loss of error detection

Q.No:3 Reserve words (Keyword) in C++ and JavaScript

Ans:

Reserve words in c++:

- public,
- protected,
- private

Reserve words in javaScript:

- abstract,
- argument,
- await*

M.junaid Qazi
+923074960034

Q.No:4 with Three LISP statements write program

Ans:

- dynamic ,
- conditional,
- garbage collection

Q.No:5 Types of arrays

Ans:

- single dimensional
- multi dimensional**:**
  - ractutgular
  - jagged

Q.No:6 Convert into Rules of PROLOG Rules

Ans:

- Socrates is a mortal if he is a human.
- X is an animal if X eats grass.
- X is a sportsperson if X plays football.

Q.No:7 CONTROL STATEMENTS SUPPORTED BY PHP

Ans:

- if,
- if else
- if else if
- switch statement

Q.No:8 HELLO WORLD PROGRAM IN C#

Ans:

```
Using system;

Public class Helloworld{

Public static void Main(){

Console.WriteLine("Hello World");
        }

    }
```

M.junaid Qazi
+923074960034

Q.No:9 JAVASCRIPT EVENT HANDLERS

Ans:

- mouse event,
- keyword event,
- window event etc

Cs508 today's paper

Some mcqz were from Junaid file

Q.No:1 Operator of ada

Ans: there are **three** operators in adda is are mostly use

1) Assignment operator(:=)
2) equality operator(=)
3) inequality operator(/=)

Q.No:2 Output of snobol code

Q.No:3 Opening and closing of php

Ans: These are Following

1) <?php

   ?>

2) <?

   ?>

3) <%

   %>

4) <script language="PHP">

   </script>

M.junaid Qazi
+923074960034

Q.No:4 Name of 5 time bindings

Ans:

1) design time,
2) implement time,
3) compile time,
4) runtime time,
5) load time

Q.No:5 Fill the blanks of code (koi cat and animal wala code tha)

Ans:

English	PROLOG
“is a table an animal?” answer:"no"	?- animal(table). no
“what is a cat?” answer: “a mammal”	?- is a(cat, X). X = mammal

Cs508 Today paper 27/2/2023

Mostly conceptual

Paper covered from

Lisp

C#

PHP

Javascript

Java

M.junaid Qazi
+923074960034

Cs508 Today paper 05/3/2023

Some McQ junaid file se or kuch handout

Q.No:1 Five language names (checking problem)
Ans:

1. C
2. C++
3. C#
4. F#
5. Python
6. JAVA

Q.No:2 Four Categories of Arrays (based on subscript binding and binding to storage)
Ans:

- **Static -** range of subscripts and storage bindings are static e.g. FORTRAN 77, some arrays in Ada

Advantage: execution efficiency (no allocation or de-allocation)

- **Fixed stack dynamic -** range of subscripts is statically bound, but storage is bound at elaboration time e.g. C local arrays are not static

Advantage: space efficiency

- **Stack-dynamic -** range and storage are dynamic, but fixed from then on for the variable's lifetime e.g. Ada declare blocks declare

Advantage: flexibility - size need not be known until the array is about to be used

Q.No:3 Prolog k Question thy
Q.No:4 Output pochi thi 2 question me
Q.No:5 java ka code tha Parent object class un ki tarteeb change kr k relation bttane thy k kon sa child hai Kon sa parent hai

Q.No:6 Hellow World prolog me ttha
Ans:

```
:- initialization(main).

main :-
  write('Hello, World!'), nl,
  halt.
```

Q.No:7 Array wale topic se Question thy mcq bbhi
Q.No:8 Php wale topic se aik Question ttha

M.junaid Qazi
+923074960034

www.vu786.com

	FINALTERM EXAMINATION FALL 2006 CS508 - MODERN PROGRAMMING LANGUAGES (Session - 1)	Marks: 60 Time: 120min

StudentID/LoginID: _____

Student Name: _____

Center Name/Code: _____

Exam Date: Monday, February 19, 2007

Please read the following instructions carefully before attempting any of the questions:

Note: This paper is Close book and Close Handouts

1. Attempt all questions. Marks are written adjacent to each question.

2. Do not ask any questions about the contents of this examination from anyone.

a. If you think that there is something wrong with any of the questions, attempt it to the best of your understanding.

b. If you believe that some essential piece of information is missing, make an appropriate assumption and use it to solve the problem.

c. Write all steps, missing steps may lead to deduction of marks.

****WARNING: Please note that Virtual University takes serious note of unfair means. Anyone found involved in cheating will get an `F` grade in this course.**

For Teacher's use only											
Question	1	2	3	4	5	6	7	8	9	10	Total
Marks											

Question No: 1 (Marks: 2) - Please choose one

www.vu786.com

Java has a String class which is not exactly an array of

- Char
- Elements
- Indices
- Long

Question No: 2 (Marks: 2) - Please choose one

How many string operators are in PHP?

- 2
- 3
- 4
- 10

Question No: 3 (Marks: 2) - Please choose one

If you want an argument to a function to always be passed by reference, you can prepend

- Percentage sign (%) to the argument name in the function definition
- Dollar sign ($)to the argument name in the function definition

www.vu786.com

- An ampersand (&) to the argument name in the function definition
- Tilled sign (~)to the argument name in the function definition

Question No: 4 (Marks: 2) - Please choose one

How many modes for the source code are in C# ?

- One
- Two
- Three
- Four

Question No: 5 (Marks: 2) - Please choose one

Which chaining type is used by Prolog?

- Backward
- Forward
- Up
- Horizontal

Question No: 6 (Marks: 10)

What is meant by binding time? What are the five possible binding times? Explain each briefly.

www.vu786.com

Question No: 7 (Marks: 10)

What are the enumeration and subrange types? Differentiate these two in points.

Question No: 8 (Marks: 10)

a) What is the purpose of type conversion? (5)

b) Differentiate between the implicit and explicit type conversion with respect to Java. (5)

Question No: 9 (Marks: 10)

a) What are interpreted and compiled languages? Give examples (5)

b) Differentiate between client side scripting and server side scripting languages? (5)

Question No: 10 (Marks: 10)

a) Describe the programming steps in Prolog? (5)

b) Explain the Prolog features regarding its applications in real world. (5)

```
% Or, replace the last line by:
%   format("The ~w owns the zebra.", Who).

left_of(L1, L2, [L1, L2 |_]).
left_of(L1, L2, [_| Rest ]) :- left_of(L1, L2, Rest).

next_to(L1, L2, S) :- left_of(L1, L2, S).
next_to(L1, L2, S) :- left_of(L2, L1, S).
```

Expert system

One of the main application domains for Prolog has been the development of expert systems. Following is an example of a simple medical expert system:

% clauses for relieves(Drug, Symptom). That is facts about drugs and relevant symptoms

relieves(aspirin, headache).
relieves(aspirin, moderate_pain).
relieves(aspirin, moderate_arthritis).
relieves(aspirin_codine_combination, severe_pain).
relieves(cough_cure, cough).
relieves(pain_gone, severe_pain).
relieves(anti_diarrhea, diarrhea).
relieves(de_congest, cough).
relieves(de_congest, nasal_congestion).
relieves(penicilline, pneumonia).
relieves(bis_cure, diarrhea).
relieves(bis_cure, nausea).
relieves(new_med, headache).
relieves(new_med, moderate_pain).
relieves(cong_plus, nasal_congestion).

% now we have clauses for side effects in the form of aggravates(Drug, Condition).

aggravates(aspirin, asthma).
aggravates(aspirin, peptic_ulcer).
aggravates(anti-diarrhea, fever).
aggravates(de_congest, high_blood_pressure).
aggravates(de_congest, heart_disease).
aggravates(de_congest, diabetes).
aggravates(de_congest, glaucoma).
aggravates(penicilline, asthma).
aggravates(de_congest, high_blood_pressure).
aggravates(bis_cure, diabetes).
aggravates(bis_cure, fever).

% now some rules for prescribing medicine using symptoms and side effects
should_take(Person, Drug) :-
complains_of(Person, Symptom),
relieves(Drug, Symptom),

© Copyright Virtual University of Pakistan

```
        not(unsuitable_for(Person, Drug)).

unsuitable_for(Person, Drug) :-
        aggravates(Drug, Condition),
        suffers_from(Person, Condition).

% we now have some specific facts about a patient named Ali
complains_of(ali, headache).
suffers_from(ali, peptic_ulcer).


% now the query about the proper medicine and the answer by the expert system
?- should_take(ali, Drug).
Drug = new_med;
```

As mentioned earlier, Prolog has been used to write expert systems and expert system shells. Because of its inference mechanism and independence of rules and clauses it is relatively easy to achieve such task as compared to any imperative language.

Conclusions

Prolog is a declarative programming language where we only specify what we need rather than how to do it. It has a simple concise syntax with built-in tree formation and backtracking which generates readable code which is easy to maintain. It is relatively case and type insensitive and is suitable for problem solving / searching, expert systems / knowledge representation, language processing / parsing and NLP, and game playing.
Efficiency is definitely is negative point. While writing programs one has to be aware of the left recursion, failing to do that may result in infinite loops. It has a steep learning curve and suffers from lack of standardization.

© Copyright Virtual University of Pakistan

Java Programming Language (Lecture 27-30)

An Introduction

Java was developed at Sun in the early 1990s and is based on C++. It looks very similar to C++ but it is significantly simplified as compared to C++. That is why Professor Feldman says that Java is C++--. It supports only OOP and has eliminated multiple inheritance, pointers, structs, enum types, operator overloading, goto statement from C++. It includes support for applets and a form of concurrency.

The First Program

Here is the famous Hello World program in Java.

```
class HelloWorld {
        public static void main( String [ ] args )
  {
                System.out.println("Hello world!");
  }
}
```

It may be noted that as Java supports only OOP, in Java, every variable, constant, and function (including *main*) must be inside some class. Therefore, there are no global variables or functions in Java. In addition, the following may be noted:

- Function main is member of the class.
- Every class may have a main function; there may be more than one main function in a Java program.
- The main must be public static void.
- The main may have one argument: an array of String. This array contains the command-line arguments.
- There is no final semi-colon at the end of the class definition.

Java Files

In Java the source code is written in the .java file. The following restrictions apply:
(1) Each source file can contain at most one *public* class.
(2) If there is a public class, then the class name and file name must match.

Furthermore, every function must be part of a class and every class is part of a package. A *public* class can be used in *any* package and a non-public class can only be used in its own package.

The Java Bytecode is created by the Java compiler and is stored in .class file. This file contains ready to be exected Java bytecode which is executed by the Java Virtual Machine. For each class in a source file (both public and non-public classes), the compiler creates one ".class" file, where the file name is the same as the class name. When compiling a program, you type the full file name, including the ".java" extension; When running a program, you just type the name of the class whose *main* function you want to run.

© Copyright Virtual University of Pakistan

Java Types

Java has two "categories" of types: *primitive types* and *reference* types.

Primitive Types
All the primitive types have specified sizes that are machine independent for portability. This includes:

boolean	same as bool in C++
char	holds one 16 bit unicode character
byte	8-bit signed integer
short	16-bit signed integer
int	32-bit signed integer
long	64-bit signed integer
float	floating-point number
double	double precision floating-point number

Reference Types
arrays classes

There are no struct, union, enum, unsigned, typedef, or pointers types in Java.

C++ Arrays vs Java Arrays

In C++, when you declare an array, storage for the array is allocated. In Java, when you declare an array, you are really only declaring a pointer to an array; storage for the array itself is not allocated until you use "new". This difference is elaborated as shown below:

C++

```
int A[10];          // A is an array of length 10
A[0] = 5;           // set the 1st element of array A
```

JAVA

```
int [ ] A;          // A is a reference to an array
A = new int [10];   // now A points to an array of length 10
A[0] = 5;           // set the 1st element of the array pointed to by A
```

In both C++ and Java you can initialize an array using values in curly braces. Here's example Java code:

```
int [ ] myArray = {13, 12, 11};
                        //  myArray points to an array of length 3
                        // containing the values 13, 12, and 11
```

In Java, a default initial value is assigned to each element of a newly allocated array if no initial value is specified. The default value depends on the type of the array element as shown below:

Type	**Value**
boolean	false
char	'\u0000'

© Copyright Virtual University of Pakistan

byte, int, short, long, float, double	0
any reference	null

In Java, array bounds are checked and an out-of-bounds array index always causes a runtime error.

In Java, you can also determine the current length of an array (at runtime) using ".length" operator as shown below:

```
int [ ] A = new int[10];
...
A.length ...            // this expression evaluates to 10
A = new int[20];
...
A.length ...            // now it evaluates to 20
```

In Java, you can copy an array using the *arraycopy* function. Like the output function *println*, arraycopy is provided in java.lang.System, so you must use the name System.arraycopy. The function has five parameters:

src: the source array (the array from which to copy)
srcPos: the starting position in the source array
dst: the destination array (the array into which to copy)
dstPos: the starting position in the destination array
count: how many values to copy

Here is an example:

```
int [ ] A, B;
A = new int[10];

// code to put values into A
B = new int[5];
System.arraycopy(A, 0, B, 0, 5)      // copies first 5 values from A to B
System.arraycopy(A, 9, B, 4, 1)      // copies last value from A into last
                                     // element of B
```

Note that the destination array must already exist (i.e., *new* must already have been used to allocate space for that array), and it must be large enough to hold all copied values (otherwise you get a runtime error). Furthermore, the source array must have enough values to copy (i.e., the length of the source array must be at least srcPos+count). Also, for arrays of primitive types, the types of the source and destination arrays must be the same. For arrays of non-primitive types, System.arraycopy(A, j, B, k, n) is OK if the assignment B[0] = A[0] would be OK.

The arraycopy function also works when the source and destination arrays are the *same* array; so for example, you can use it to "shift" the values in an array:

```
int [ ] A = {0, 1, 2, 3, 4};
System.arraycopy(A, 0, A, 1, 4);
```


© Copyright Virtual University of Pakistan

After executing this code, A has the values: [0, 0, 1, 2, 3].

As in C++, Java arrays can be *multidimensional*. For example, a 2-dimensional array is an array of arrays. However, a two-dimensional arrays need not be rectangular. Each row can be a different length. Here's an example:

```
int [ ][ ] A;          // A is a two-dimensional array
A = new int[5][];      // A now has 5 rows, but no columns yet
A[0] = new int [1];    // A's first row has 1 column
A[1] = new int [2];    // A's second row has 2 columns
A[2] = new int [3];    // A's third row has 3 columns
A[3] = new int [5];    // A's fourth row has 5 columns
A[4] = new int [5];    // A's fifth row also has 5 columns
```

C++ Classes vs Java Classes

In C++, when you declare a variable whose type is a class, storage is allocated for an object of that class, and the class's constructor function is called to initialize that instance of the class. In Java, you are really declaring a pointer to a class object; no storage is allocated for the class object, and no constructor function is called until you use "new".

This is elaborated with the help of the following example:

Let us assume that we have the following class:

```
class MyClass {
        ...
}
```

Let us first look at C++

```
MyClass m;    // m is an object of type MyClass;
              //  the constructor function is called to initialize M.

MyClass  *pm;
              // pm is a pointer to an object of type MyClass
              // no object exists yet, no constructor function
              // has been called

pm = new MyClass;
              // now storage for an object of MyClass has been
              // allocated and the constructor function has been
              // called
```

Now the same thing in Java

```
MyClass m;    // pm is a pointer to an object of type MyClass
              // no object exists yet, no constructor function
              // has been called
m = new MyClass();
```


© Copyright Virtual University of Pakistan

```
// now storage for an object of MyClass has been allocated
// and the constructor function has been called. Note
// that you must use parentheses even when you are not
// passing any arguments to the constructor function

// Also note that there is a simple '.' (dot) operator used to
// access members or send message. Java does not use
// -> operator.
```

Whereas, as opposed to Java, in C++ use have the following:

```
MyClass m;          // m is an object of type MyClass;
                    // the constructor function is called to initialize M.

MyClass  *pm;       // pm is a pointer to an object of type MyClass
                    // no object exists yet, no constructor function has
                    // been called


pm = new MyClass; // now storage for an object of MyClass has been
                    // allocated and the constructor function has been
                    // called
```

Aliasing Problems in Java

The fact that arrays and classes are really pointers in Java can lead to some problems. Here is a simple assignment that causes *aliasing*:

```
int [] A = new int [4];
Int [] B = new int [2];
```


This is depicted as below:

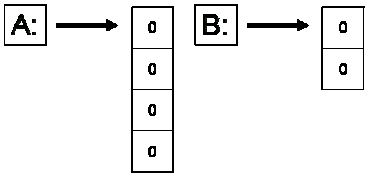

Now, when we say:

```
A[0] = 5;
```

We get the following:

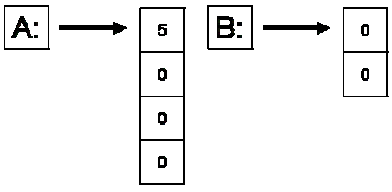


Now when we say:

```
B = A;
```



© Copyright Virtual University of Pakistan

B points to the same array as A and creates an alias. This is shown below:



Now if we make a simple assignment in B, we will also change A as shown below:

```
B[0] = 10;
```



This obviously creates problems. Therefore, as a programmer you have to be very careful when writing programs in Java.

In Java, all parameters are passed by value, but for arrays and classes the actual parameter is really a pointer, so changing an array element, or a class field inside the function *does* change the actual parameter's element or field.

This is elaborated with the help of the following example:

```
void f( int [ ] A ) {
        A[0] = 10;      // change an element of parameter A
        A = null;       // change A itself
}

void g() {
        int [ ] B = new int [3];
        B[0] = 5;
        f(B);
                // B is not null here, because B itself was passed by value
                // however, B[0] is now 10, because function f changed the
                // first element of the array
}
```

Note that, in C++, similar problems can arise when a class that has pointer data members is passed by value. This problem is addressed by the use of copy constructors, which can be defined to make copies of the values pointed to, rather than just making copies of the pointers. In Java, the solution is to use the *arraycopy* operation, or to use a class's *clone* operation. Cloning will be discussed later.

Type Conversion

Java is much stronger than C++ in the type conversions that are allowed.

© Copyright Virtual University of Pakistan

Here we discuss conversions among primitive types. Conversions among class objects will be discussed later.

Booleans cannot be converted to other types. For the other primitive types (char, byte, short, int, long, float, and double), there are two kinds of conversion: *implicit* and *explicit*.

Implicit conversions:

An implicit conversion means that a value of one type is changed to a value of another type without any special directive from the programmer. A char can be implicitly converted to an int, a long, a float, or a double. For example, the following will compile without error:

```
char c = 'a';
int k = c;
long x = c;
float y = c;
double d = c;
```

For the other (numeric) primitive types, the basic rule is that implicit conversions can be done from one type to another if the range of values of the first type is a subset of the range of values of the second type. For example, a byte can be converted to a short, int, long or float; a short can be converted to an int, long, float, or double, etc.

Explicit conversions:

Explicit conversions are done via *casting*: the name of the type to which you want a value converted is given, in parentheses, in front of the value. For example, the following code uses casts to convert a value of type double to a value of type int, and to convert a value of type double to a value of type short:

```
double d = 5.6; int k = (int)d; short s = (short)(d * 2.0);
```

Casting can be used to convert among any of the primitive types except boolean. Note, however, that casting can lose information; for example, floating-point values are truncated when they are cast to integers (e.g., the value of k in the code fragment given above is 5), and casting among integer types can produce wildly different values (because upper bits, possibly including the sign bit, are lost).

JAVA CLASSES

Java classes contain *fields* and *methods*. A field is like a C++ data member, and a method is like a C++ member function. Each field and method has an *access level*:

- private: accessible only in this class
- (package): accessible only in this package
- protected: accessible only in this package and in all subclasses of this class
- public: accessible everywhere this class is available

© Copyright Virtual University of Pakistan

Similarly, each class has one of two possible access levels:

- (package): class objects can only be declared and manipulated by code in this package
- public: class objects can be declared and manipulated by code in any package

Note: for both fields and classes, package access is the default, and is used when *no* access is specified.

A Simple Example Class

In the following example, a List is defined to be an ordered collection of items of any type:

```
class List {
        // fields
        private Object [ ] items;       // store the items in an array
        private int   numItems;         // the current # of items in the list
                                        // methods

        // constructor function
        public List()
        {
                items = new Object[10];
                numItems = 0;
        }

        // AddToEnd: add a given item to the end of the list
        public void AddToEnd(Object ob)
        {
        ...
        }
}
```

In Java, all classes (built-in or user-defined) are (implicitly) subclasses of the class **Object**. Using an array of Object in the List class allows any kind of Object (an instance of any class) to be stored in the list. However, primitive types (int, char, etc) cannot be stored in the list as they are not inherited from Object.

Constructor function:

As in C++, constructor functions in Java are used to initialize each instance of a class. They have no return type (not even void) and can be overloaded; you can have multiple constructor functions, each with different numbers and/or types of arguments. If you don't write any constructor functions, a default (no-argument) constructor (that doesn't do anything) will be supplied.

If you write a constructor that takes one or more arguments, no default constructor will be supplied (so an attempt to create a new object without passing any arguments will cause a compile-time error). It is often useful to have one constructor call another (for example, a constructor with no arguments might call a constructor with one argument, passing a

© Copyright Virtual University of Pakistan

default value). The call must be the *first* statement in the constructor. It is performed using *this* as if it were the name of the method. For example:

```
this( 10 );
```

is a call to a constructor that expects one integer argument.

Initialization of fields:

If you don't initialize a field (i.e., either you don't write any constructor function, or your constructor function just doesn't assign a value to that field), the field will be given a default value, depending on its type. The values are the same as those used to initialize newly created arrays (see the "Java vs C++" notes).

Access Control:

Note that the access control must be specified for every field and every method; there is no grouping as in C++. For example, given these declarations:

```
public
    int x;
    int y;
```

only x is public; y gets the default, package access.

Static Fields and Methods

Fields and methods can be declared *static*. If a field is static, there is only one copy for the entire class, rather than one copy for each instance of the class. (In fact, there is a copy of the field even if there are *no* instances of the class.) A method should be made static when it does not access any of the non-static fields of the class, and does not call any non-static methods. (In fact, a static method *cannot* access non-static fields or call non-static methods.) Methods that would be "free" functions in C++ (i.e., not members of any class) should be static methods in Java. A public static field or method can be accessed from outside the class.

Final Fields and Methods

Fields and methods can also be declared *final*. A final method cannot be overridden in a subclass. A final field is like a constant: once it has been given a value, it cannot be assigned to again.

Some Useful Built-in Classes

Following is a list of some useful classes in Java. These classes are not really part of the language; they are provided in the package *java.lang*

© Copyright Virtual University of Pakistan

1. String

String Creation:

```
String S1 = "hello",          // initialize from a string literal
S2 = new String("bye"),       // use new and the String constructor
S3 = new String(S1);          // use new and a different constructor
```

String concatenation

```
String S1 = “hello ” + “world”;
String S2 = S1 + “!”;
String S3 = S1 + 10;
```

2. Object

Object is the Base class for all Java Classes.

3. Classes for primitive types

In Java, we have classes also for primitive types. These are: Boolean, Integer, Double, etc. Note that variable of bool, int, etc types are not objects whereas variable of type Boolean, Integer, etc are objects.

Packages

Every class in Java is part of some *package*. All classes in a file are part of the same package. You can specify the package using a *package declaration*:

package *name* ;

as the first (non-comment) line in the file. Multiple files can specify the same package name. If no package is specified, the classes in the file go into a special unnamed package (the same unnamed package for all files). If package *name* is specified, the file must be in a subdirectory called *name* (i.e., the directory name must match the package name).

You can access public classes in another (named) package using:

package-name.class-name

You can access the public fields and methods of such classes using:

package-name.class-name.field-or-method-name

You can avoid having to include the *package-name* using import *package-name*.* or import *package-name.class-name* at the beginning of the file (after the package declaration). The former imports all of the classes in the package, and the second imports just the named class.
You must still use the *class-name* to access the classes in the packages, and *class-name.field-or-method-name* to access the fields and methods of the class; the only thing you can leave off is the package name.

© Copyright Virtual University of Pakistan

Inheritance

Java directly supports single inheritance. To support concept of a **interface** class is used. Inheritance is achieved as shown below:

```
class SuperClass {
        …
}

class SubClass extends SuperClass {
        …
}
```

When a class is inherited, all fields and methods are inherited. When the **final** reserved word is specified on a class specification, it means that class cannot be the parent of any class. *Private* fields are inherited, but cannot be accessed by the methods of the subclass. fields can be defined to be *protected*, which means that subclass methods can access them

Each superclass method (except its constructors) can be inherited, overloaded, or overridden. These are elaborated in the following paragraphs:

inherited: If no method with the same name is (re)defined in the subclass, then the subclass has that method with the same implementation as in the superclass.

overloaded: If the subclass defines a method with the same name, but with a different number of arguments or different argument types, then the subclass has *two* methods with that name: the old one defined by the superclass, and the new one it defined.

overridden: If the subclass defines a method with the same name, and the same number and types of arguments, then the subclass has only *one* method with that name: the new one it defined. A method cannot be overridden if it is defined as final in the superclass

Dynamic Binding

In C++, a method must be defined to be virtual to allow dynamic binding. In Java all method calls are dynamically bound unless the called method has been defined to be **final**, in which case it cannot be overridden and all bindings are static.

Constructors

A subclass's constructors *always* call a super class constructor, either explicitly or implicitly. If there is no explicit call (and no call to another of the subclass constructors), then the no-argument version of the superclass constructor is called before executing any statements.

Abstract Classes

An *abstract method* is a method that is declared in a class, but not defined. In order to be instantiated, a subclass must provide the definition. An *abstract class* is any class that includes an abstract method. It is similar to Pure virtual in C++.

© Copyright Virtual University of Pakistan

If a class includes an abstract method, the class *must* be declared abstract, too. For example:

```
abstract class AbstractClass {
        abstract public void Print();
                // no body, just the function header
}
class MyConcreteClass extends AbstractClass {
        public void Print() { // actual code goes here } }
```

An abstract class cannot be instantiated. A subclass of an abstract class that does not provide bodies for all abstract methods must also be declared abstract. A subclass of a *non*-abstract class can override a (non-abstract) method of its superclass, and declare it abstract. In that case, the subclass must be declared abstract.

Interface

As mentioned earlier, multiple inheritance is achieved through Interface in Java. Inheritance implements the "is-a" relationship whereas an interface is similar to a class, but can only contain public, static, final fields (i.e., constants) and public, abstract methods (i.e., just method headers, no bodies).

An interface is declared as shown below:

```
public interface Employee {
        void RaiseSalary( double d );
        double GetSalary();
}
```

Note that both methods are implicitly public and abstract (those keywords can be provided, but are not necessary).

A class can *implement* one or more interfaces (in addition to extending one class). It must provide bodies for all of the methods declared in the interface, or else it must be abstract. For example:

```
public class TA implements Employee {
        void RaiseSalary( double d ) {
                // actual code here
        }
        double GetSalary() {
                // actual code here
        }
}
```

Public interfaces (like public classes) must be in a file with the same name. Many classes can implement the same interface thus achieving multiple inheritance. An interface can be a "marker" with *no* fields or methods, is used only to "mark" a class as having a property, and is testable via the *instanceof* operator.

© Copyright Virtual University of Pakistan


Exception Handling in Java

Exception handling in Java is based on C++ but is designed to be more in line with OOP. It includes a collection of predefined exceptions that are implicitly raised by the JVM. All java exceptions are objects of classes that are descendents of Throwable class. There are two predefined subclasses of Throwable: Error and Exception.

Error and its descendents are related to errors thrown by JVM. Examples include out of heap memory. Such an exception is never thrown by the user programs and should not be handled by the user.

User programs can define their own exception classes. Convention in Java is that such classes are subclasses of Exception. There are two predefined descendents of Exception: IOException and RuntimeException. IOException deals with errors in I/O operation.
In the case of RuntimeException there are some predefined exceptions which are, in many cases, thrown by JVM for errors such as out of bounds, and Null pointer.

The following diagram shows the exception hierarchy in Java.

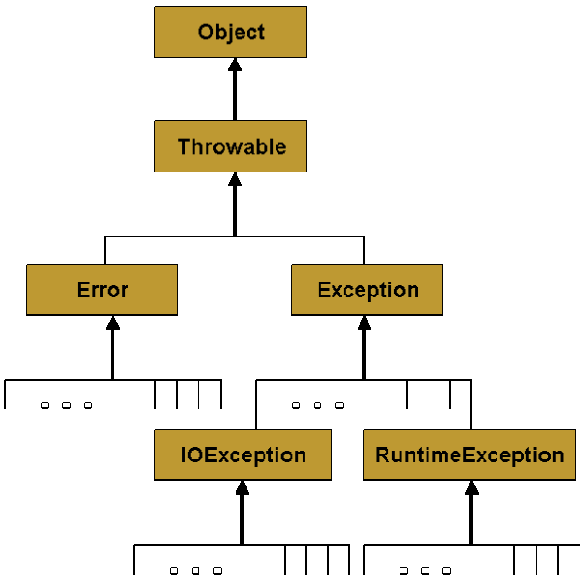

Checked and Unchecked Exceptions

Exceptions of class Error and RuntimeException are called unchecked exceptions. They are never a concern of the compiler. A program can catch unchecked exceptions but it is not required. All other are checked exceptions. Compiler ensures that all the checked exceptions a method can throw are either listed in its throws clause or are handled in the method.

Exception Handlers
Exception handler in Java is similar to C++ except that the parameter of every **catch** must be present and its class must be descendent of Thrwoable. The syntax of **try** is exactly same as C++ except that there is **finally** clause as well. For example:

© Copyright Virtual University of Pakistan

```
class MyException extends Exception {
        public MyException() { }
        public MyException(String message) {
                super (message);
        }
}
```

This exception can be thrown with

```
throw new MyException();
```

Or

```
MyException myExceptionObject = new MyException();
…
throw myExceptionObject;
```

Binding of exception is also similar to C++. If an exception is thrown in the compound statement of try construct, it is bound to the first handler (catch function) immediately following the try clause whose parameter is the same class as the thrown object or an ancestor of it. Exceptions can be handled and then re-thrown by including a throw statement without an operand at the end of the handler. To ensure that exceptions that can be thrown in a try clause are always handled in a method, a special handler can be written that matches all exceptions. For example:

```
catch (Exception anyException) {
        …
}
```

Other Design Choices

The exception handler parameter in C++ has a limited purpose. During program execution, the Java runtime system stores the class name of every object. getClass can be used to get an object that stores the class name. It has a getName method. The name of the class of the actual parameter of the throw statement can be retrieved in the handler as shown below.

```
anyException.getClass().getName();
```

In the case of a user defined exception, the thrown object could include any number of data fields that might be useful in the handler.

throws Clause

throws clause is overloaded in C++ and conveys two different meanings: one as specification and the other as command. Java is similar in syntax but different in semantics. The appearance of an exception class name in the **throws** clause of Java method specifies that the exception class or any of its descendents can be thrown by the method.

A C++ program unit that does not include a throw clause can throw any exceptions. A Java method that does not include a throws cannot throw any checked exception it does

© Copyright Virtual University of Pakistan

not handle. A method cannot declare more exceptions in its throws clause than the methods it overrides, though it may declare fewer. A method that does not throw a particular exception, but calls another method that could throw the exception, must list the exception in its throws clause.

The finally clause

A Java exception handler may have a finally clause. A finally clause *always* executes when its try block executes (whether or not there is an exception). The finally clause is written as shown below:

```
try {
        …
}
catch (…) {
        …
}
…
finally {
        …
}
```

A finally clause is usually included to make sure that some clean-up (e.g., closing opened files) is done. If the finally clause includes a transfer of control statement (return, break, continue, throw) then that statement overrides any transfer of control initiated in the try or in a catch clause.

First, let's assume that the finally clause does not include any transfer of control. Here are the situations that can arise:

- No exception occurs during execution of the try, and no transfer of control is executed in the try. In this case the finally clause executes, then the statement following the try block.
- No exception occurs during execution of the try, but it *does* execute a transfer of control. In this case the finally clause executes, then the transfer of control takes place.
- An exception *does* occur during execution of the try, and there is no catch clause for that exception. Now the finally clause executes, then the uncaught exception is "passed up" to the next enclosing try block, possibly in a calling function.
- An exception *does* occur during execution of the try, and there *is* a catch clause for that exception. The catch clause does not execute a transfer of control. In this case the catch clause executes, then the finally clause, then the statement following the try block.
- An exception *does* occur during execution of the try, there *is* a catch clause for that exception, and the catch clause *does* execute a transfer of control. Here, the catch clause executes, then the finally clause, then the transfer of control takes place.

If the finally block *does* include a transfer of control, then that takes precedence over any transfer of control executed in the try or in an executed catch clause. So for all of the

© Copyright Virtual University of Pakistan

cases listed above, the finally clause would execute, then *its* transfer of control would take place. Here's one example:

```
try {
        return 0;
} finally {
        return 2;
}
```

The result of executing this code is that 2 is returned. Note that this is rather confusing! The moral is that you probably do *not* want to include transfer-of-control statements in both the try statements and the finally clause, or in both a catch clause and the finally clause.

Java Threads

Java supports concurrency through threads which are lightweight processes. A thread is similar to a real process in that a thread and a running program are threads of execution. A thread takes advantage of the resources allocated for that program instead of having to allocate those resources again. A thread has its own stack and program counter. The code running within the thread works only within the context implied by the stack and PC so also called an execution context.

Creating Java Threads

There are two ways to create our own **Thread** object:

1. Subclassing the **Thread** class and instantiating a new object of that class
2. Implementing the **Runnable** interface

In both cases the **run()** method should be implemented. This is elaborated with the help of following examples:

Example of Extending Thread

```
public class ThreadExample extends Thread {
        public void run () {
        for (int i = 1; i <= 100; i++) {
                System.out.println("Thread: " + i);
    }
  }
}
```

Example of Implementing Runnable

```
public class RunnableExample implements Runnable {
        public void run () {
                for (int i = 1; i <= 100; i++) {
                System.out.println ("Runnable: " + i);
        }
```


© Copyright Virtual University of Pakistan

```
        }
    }
```

It may be noted that both of these are very similar to each other with minor syntactic and semantic differences.

Starting the Threads

A thread is started by simply sending the **start** message to the thread. This is shown in the following example:

```
public class ThreadsStartExample {
    public static void main (String argv[]) {
        new ThreadExample ().start ();
            new Thread(new RunnableExample ()).start ();
    }
}
```

Thread Methods

Some of the common thread methods are listed below:

- start()
- sleep()
- yield()
- run()
- wait()
- notify()
- notifyAll()
- setPriority()

Thread Synchronization - Wait and Notify

Threads are based upon the concept of a Monitor. The **wait** and **notify** methods are used just like **wait** and **signal** in a Monitor. They allow two threads to cooperate and based on a single shared lock object. The following example of a producer-consumer problem elaborates this concept.

```
class Buffer {
        private int [ ] buf;
        private int head, tail, max, size;

        public Buffer (int buf_size) {
                buf = new int [buf_size];
                head =0; tail = 0; size = 0;
                max = buf_size;
        }

        public synchronized void deposit (int item) {
                try {
```


© Copyright Virtual University of Pakistan

```
                        while (size ==max) wait();
                        buf [tail] = item;
                        tail = (tail + 1) % max;
                        size++;
                        notify();
                }
                catch
                (interruptedException e) {
                        // exception handler
                }
        }

        public synchronized int fetch() {
                int item = 0;
                try {
                        while (size == 0) wait();
                        item = buf [head] ;
                        head = (head + 1) % max;
                        size--;
                        notify();
                }
                catch
                   (interruptedException e) {
                        // exception handler
                }
                return item;
        }
class Producer extends Thread {
        private Buffer buffer;


        public Producer (Buffer buf) {
                buffer = buf;
        }

        public void run () {
                int item;
                while (true) {
                    // create a new item
                    buffer.deposit(item);
                }
        }
}

class Consumer implements Runnable  {
        private Buffer buffer;

        public Consumer (Buffer buf) {
                buffer = buf;
        }
```


© Copyright Virtual University of Pakistan

```
        public void run () {
                int item;
                while (true) {
                    item = buffer.fetch();
                    // consume item
                }
        }
}
```

We can now instantiate these threads as shown below:

```
Buffer buffer = new Buffer(100);
Producer producer1 = new Producer(buffer);
Consumer comsumer = new Consumer(buffer);
Thread consumer1 = new Thread(consumer);
producer1.start();
consumer1.start();
```

In this case the **buffer** is a shared variable used by both producer and consumer.

notify and notifyAll

There is a slight difference between **notify** and **notifyAll**. As the name suggest, **notify()** wakes up a single thread which is waiting on the object's lock. If there is more than one thread waiting, the choice is arbitrary i.e. there is no way to specify which waiting thread should be re-awakened. On the other hand, **notifyAll()** wakes up ALL waiting threads; the scheduler decides which one will run.

Applet

Java also has support for web applications through Applets. An applet is a stand alone Java *application.* Java *applet* runs in a Java-enabled Web browser.

Java versus C++

Generally, Java is more robust than C++. Some of the reasons are:

- Object handles are initialized to **null** (a keyword)
- Handles are always checked and exceptions are thrown for failures
- All array accesses are checked for bounds violations
- Automatic garbage collection prevents memory leaks and dangling pointers
- Type conversion is safer
- Clean, relatively fool-proof exception handling
- Simple language support for multithreading
- Bytecode verification of network applets

© Copyright Virtual University of Pakistan

C# Programming Language (Lecture 31-34)
An Introduction

C# was released by Microsoft in June 2000 as part of the .Net framework. It was co-authored by Anders Hejlsberg (who is famous for the design of the Delphi language), and Scott Wiltamuth. C# is a strongly-typed object-oriented language. It is Similar to Java and C++ in many respects. The .NET platform is centered on a Common Language Runtime (CLR - which is similar to a JVM) and a set of libraries which can be exploited by a wide variety of languages which are able to work together by all compiling to an intermediate language (IL).

Java and C# - Some Commonalities

Java and C# are very similar and have a number of commonalities.

a. Both of these languages compile into machine-independent language-independent code which runs in a managed execution environment.
b. Both C# and Java compile initially to an intermediate language: C# to Microsoft Intermediate Language (MSIL), and Java to Java bytecode. In each case the intermediate language can be run - by interpretation or just-in-time compilation - on an appropriate 'virtual machine'. In C#, however, more support is given for the further compilation of the intermediate language code into native code.
c. Both of these have garbage Collection coupled with the elimination of pointers (in C# restricted use is permitted within code marked unsafe).
d. Both have powerful reflection capabilities.
e. In case of both these languages, there is no header files, all code scoped to packages or assemblies, no problems declaring one class before another with circular dependencies.
f. Both of these support only OOP and classes all descend from object and must be allocated on the heap with new keyword.
g. Both support concurrency through thread support by putting a lock on objects when entering code marked as locked/synchronized.
h. Both have single inheritance and support for interfaces.
i. There are no global functions or constants, everything belongs to a class.
j. Arrays and strings with built-in bounds checking.
k. The "." operator is always used and there are no more ->, :: operators.
l. null and boolean/bool are keywords.
m. All values must be initialized before use.
n. Integers expressions cannot be used in ‘if’ statements and conditions in the loops.
o. In both languages try Blocks can have a finally clause.

Some C# features which are different from Java

a. C# has more primitive data types than Java and has more extension to the value types.
b. It supports safer enumeration types whereas Java does not have enumeration types.
c. It also has support for struct which are light weight objects.
d. There is support for operator overloading.
e. C# has the concept of 'delegates' which are type-safe method pointers and are used to implement event-handling.

© Copyright Virtual University of Pakistan

f. It supports three types of arrays: single dimensional, multi-dimensional rectangular and multi-dimensional jagged arrays.
g. It has restricted use of pointers. The 'switch' statements in C# have been changed so that 'fall-through' behavior is disallowed.
h. It also has support for class 'properties'.

C# Hello World

Let us have a look at the Hello World Program in C#.

```
using System;                    // System namespace
public class HelloWorld
{
   public static void Main()              // the Main function starts
                                                  // with capital M
   {
            Console.WriteLine("Hello World!”);
    }
}
```

In this example, it may be noted that just like Java and C++, C# is case sensitive. As we have in Java, everything in C# has to be inside a class and there is no semicolon at the end of the class. However, unlike Java, name of the class and the name of the file in which it is saved do not need to match up. You are free to choose any extension for the file, but it is usual to use the extension '.cs'. It supports single line and multiple line comments.

Variable Types: Reference Types and Value Types

As mentioned earlier, C# is a type-safe language. Variables can hold either value types or reference types, or they can be pointers. When a variable v contains a value type, it directly contains an object with some value and when it contains a reference type, what it directly contains is something which refers to an object.

Built-in Types

The following table lists the built-in C# types and their ranges.

C# Type	.Net Framework (System) type	Signed?	Bytes Occupied	Possible Values
sbyte	System.Sbyte	Yes	1	-128 to 127
short	System.Int16	Yes	2	-32768 to 32767
int	System.Int32	Yes	4	-2147483648 to 2147483647
long	System.Int64	Yes	8	-9223372036854775808 to 9223372036854775807
byte	System.Byte	No	1	0 to 255

© Copyright Virtual University of Pakistan

ushort	System.Uint16	No	2	0 to 65535
uint	System.UInt32	No	4	0 to 4294967295
ulong	System.Uint64	No	8	0 to 18446744073709551615
float	System.Single	Yes	4	Approximately ±1.5 x 10-45 to ±3.4 x 1038 with 7 significant figures
double	System.Double	Yes	8	Approximately ±5.0 x 10-324 to ±1.7 x 10308 with 15 or 16 significant figures
decimal	System.Decimal	Yes	12	Approximately ±1.0 x 10-28 to ±7.9 x 1028 with 28 or 29 significant figures
char	System.Char	N/A	2	Any Unicode character (16 bit)
bool	System.Boolean	N/A	1 / 2	true or false

Structs

1. Java did not have structs which have been brought back by C#. However, as compared to C++, they are significantly different in C#.
2. In C++ a struct is exactly like a class, except that the default inheritance and default access are public rather than private.
3. In C# structs are very different from classes.
4. Structs in C# are designed to encapsulate lightweight objects.
5. They are value types (not reference types), so they're passed by value.
6. They are sealed, which means they cannot be derived from or have any base class other than System.ValueType, which is derived from Object.
7. Structs cannot declare a default (parameterless) constructor.
8. Structs are more efficient than classes, that's' why they are perfect for the creation of lightweight objects.

Properties

C# has formalized the concept of getter/setter methods. The relationship between a get and set method is inherent in C#, while has to be maintained in Java or C++. For example, in Java/C++ we will have to write code similar to the one shown below:

```
public int getSize() {
        return size;
}

public void setSize (int value) {
        size = value;
}

foo.setSize (getSize () + 1);
```

In C# we can define a property and can use it as if we were using a public variable. This is shown below:

© Copyright Virtual University of Pakistan

```
public int Size {
        get {return size; }
        set {size = value; }
}

foo.size = foo.size + 1;
```

Reference types

In C#, the pre-defined reference types are object and string. As mentioned earlier, object is the ultimate base class of all other types. New reference types can be defined using 'class', 'interface', and 'delegate' declarations. Reference types actually hold the value of a memory address occupied by the object they reference.

Reference types however suffer from the problem of aliasing as shown below:

```
object x = new object();
x.myValue = 10;
object y = x;
y.myValue = 20;        // after this statement both x.myValue and y.myValue
                       // equal 20
```

There is however no aliasing in string. That is, strings are immutable. The properties of an immutable object can't be modified. So in order to change what a string variable references, a new string object must be created. Following is an example that elaborates this concept:

```
string s1 = "hello";
string s2 = s1; // s2 points to the same strings as s1
s1 = “world”;          // a new string is created and s1 points to it.
                       // s2 keeps pointing to the old strings
```

----------END OF LECTURE 31----------

Pointers

Pointers were present in C++ but Java designers took them out. C# has brought them back. However, C#, pointers can only be declared to hold the memory addresses of value types. That is, we cannot have pointers for reference types. The rest is very similar to C++. This is illustrated with the help of the following example:

```
int i = 5;
int *p;
p = &i;          // take address of i
*p = 10;         // changes the value of i to 10
```


© Copyright Virtual University of Pakistan

One major difference between C++ and C# is that the '*' applies to the type. That is, as opposed to C++, in C#, the following statement would declare two pointers p1 and p2:

```
int * p1, p2;
```

Just like C++, the dereference operator '->' is used to access elements of a struct type.

Pointers and unsafe code

In C#, we have two modes for the code, the managed and unmanaged. Theses are elaborated as below:

Managed code

1. Managed code is executed under the control of Common Language Runtime (CRL).
2. It has automatic garbage collection. That is, the dynamically allocated memory area which is no longer is in use is not destroyed by the programmer explicitly. It is rather automatically returned back to heap by the built-in garbage collector.
3. There is no explicit memory's allocation and deallocation and there is no explicit calls to the garbage collector i.e. call to destructor.

Unmanaged code (Java does not have this concept**)**

The unmanaged code provides access to memory through pointers just like C++. It is useful in many scenarios. For example:

- Pointers may be used to enhance performance in real time applications.
- **External Functions:** In non-.net DLLs some external functions requires a pointer as a parameter, such as Windows APIs that were written in C.
- **Debugging:** Sometimes we need to inspect the memory contents for debugging purposes, or you might need to write an application that analyzes another application process and memory.

© Copyright Virtual University of Pakistan

unsafe

The keyword unsafe is used while dealing with pointer. The name reflects the risks that you might face while using it. We can declare a whole class as unsafe as shown below:

```
unsafe class Class1 {
        //you can use pointers here!
}
```

Or only some class members can be declared as unsafe:

```
class Class1 {
        //pointer
        unsafe int * ptr;
        unsafe void MyMethod() {
                //you can use pointers here
        }
}
```

To declare unsafe local variables in a method, you have to put them in unsafe blocks as the following:

```
static void Main() {
        //can't use pointers here
        unsafe
        {
                //you can declare and use pointer here
        }
        //can't use pointers here
}
```

Disadvantages of using unsafe code in C#:

- Complex code
- Harder to use
- Pointers are harder to debug
- You may compromise type safety
- Misusing might lead to the followings:
    - Overwrite other variables
    - Illegal access to memory areas not under your control
    - Stack overflow

Garbage Collector Problem in C# and the fixed keyword

When pointers are used in C#, Garbage collector can change physical position of the objects. If garbage collector changes position of an object the pointer will point at wrong place in memory. To avoid such problems C# contains '*fixed*' keyword – informing the system not to relocate an object by the garbage collector.

© Copyright Virtual University of Pakistan

Arrays

Arrays in C# are more similar to Java than to C++. We can create an array as did in Java by using the new operator. Once created, the array can be used as usual as shown below:

```
int[] i = new int[2];
i[0] = 1;
i[1] = 2;
```

By default all arrays start with their lower bound as 0. Using the .NET framework's System.Array class it is possible to create and manipulate arrays with an alternative initial lower bound.

Types of Arrays:

- Single Dimensional Arrays
- Multidimensional arrays
  - Rectangular
  - Jagged

Rectangular Arrays:

A rectangular array is a single array with more than one dimension, with the dimensions' sizes fixed in the array's declaration. Here is an example:

```
int[,] squareArray = new int[2,3];
```

As with single-dimensional arrays, rectangular arrays can be filled at the time they are declared.

Jagged Arrays (Similar to Java jagged arrays**)**

Jagged arrays are multidimensional arrays with irregular dimensions. This flexibility derives from the fact that multidimensional arrays are implemented as arrays of arrays.

```
int[][] jag = new int[2][];
jag[0] = new int [4];
jag[1] = new int [6];
```

Each one of jag[0] and jag[1] holds a reference to a single-dimensional int array.

Pointers and Arrays

Just as in C++, a pointer can be declared in relation to an array:

```
int[] a = {4, 5};
int *b = a;
```


© Copyright Virtual University of Pakistan

In the above example memory location held by b is the location of the first type held by a. This first type must, as before, be a value type. If it is reference type then compiler will give error.

Enumerations

C# brought back enumerations which were discarded by Java designers. However, they are slightly different from C++.

- An enumeration is a special kind of value type limited to a restricted and unchangeable set of numerical values.
- By default, these numerical values are integers, but they can also be longs, bytes, etc. (any numerical value except char) as will be illustrated below.
- Type safe
- Consider the following example:

```
public enum DAYS {
        Monday=1,
        Tuesday,
        Wednesday,
        Thursday,
        Friday,
        Saturday,
        Sunday
}
```

In C# enumerations are type-safe, by which we mean that the compiler will do its best to stop you assigning illicit values to enumeration typed variables. For instance, the following code should not compile:

```
int i = DAYS.Monday;
DAYS d = i;
```

In order to get this code to compile, you would have to make explicit casts both ways (even converting from DAYS to int), ie:

```
int i = (int)DAYS.Monday;
DAYS d = (DAYS)i;
```

A useful feature of enumerations is that one can retrieve the literal as a string from the numeric constant with which it is associated. In fact, this is given by the default ToString() method, so the following expression comes out as true:

```
DAYS.Monday.ToString()=="Monday"
```

----------END OF LECTURE 32----------

© Copyright Virtual University of Pakistan

Boolean

- In C#, Boolean values do not convert to integers and Boolean values (true, false) do not equate to integer variables. Thus, you may not write:

```
if ( someFuncWhichReturnsAnIntegerValue() )
```

- No arithmetic expression is allowed where Boolean expressions are expected. Thus, if you write:

```
if (x = y)     // compilation error
```

It will not be compiled.

Operator evaluation order

As discussed earlier, in C/C++ the operator evaluation order is not specified. We have discussed at length how that creates problems. In C#, it is strictly from left to right and hence there is no ambiguity.

For example,

```
a=5;
x=a++ + --a;
```

If evaluated left-to-right

x=10

If evaluated right-to-left

x=8

Conversion

Like Java supports implicit widening conversion only. For narrowing conversion, fro example from float to int, the programmer has to explicitly state his intentions.

© Copyright Virtual University of Pakistan

Loops

C# provides a number of the common loop statements. These include while, do-while, for, and foreach.

The syntax of while, do-while, and for loops is similar to C++. The only difference is that the loop control expression must be of Boolean type.

foreach loop

The 'foreach' loop is used to iterate through the values contained by any object which implements the IEnumerable interface. It has the following syntax:

```
foreach (variable1 in variable2) statement[s]
```

When a 'foreach' loop runs, the given variable1 is set in turn to each value exposed by the object named by variable2. Here is an example:

```
int[] a = new int[]{1,2,3};
foreach (int b in a)
System.Console.WriteLine(b);
```

Other Control Flow Statements

C# supports a number of control statements including break, continue, goto, if, switch, return, and throw.

switch statement

They are more or less similar to their counterparts in C++. The switch statement is however significantly different is explained below. The syntax of the switch statement is given below:

```
switch (expression)
{
        case constant-expression:
        statements
        jump statement
        [default:
                statements
                jump statement
        ]
}
```

The expression can be an integral or string expression. Control does not fall through. Jump statement is required for each block – even in default block. Fall through is allowed to stack case labels as shown in the following example:

```
switch(a){
case 2:
```


© Copyright Virtual University of Pakistan

```
            Console.WriteLine("a>1 and ");
            goto case 1;
case 1:
            Console.WriteLine("a>0");
            break;
default:
            Console.WriteLine("a is not set");
            break;
}
```

As mentioned earlier, we can also use a string in the switch expression. This is demonstrated with the help of the following example:

```
void func(string option){
   switch (option)
   {
   case "label":
      goto case "jump":
   case "quit":
      return;
   case "spin":
      for(;;){ }
    case "jump":
    case "unwind":
      throw new Exception();
   default:
      break;
   }
}
```

In this example, note that jump and unwind are stacked together and there is no jump statement in the case of jump. When a case is empty, that is there is no statement in the body of the case then it may not have any jump statement either.

© Copyright Virtual University of Pakistan

Class

1. **Class Attributes:**
   - Attributes are used to give information to .Net compiler
     - E.g. it is possible to tell the compiler that a class is compliant with >Net Common Language Specification.

```
[CLSCompliant (true)]
publc class MyClass
{
        //class code
}
```

2. **Class Modifiers**

Support for OOP is provided through classes. In C#, we have the following modifiers:

- **public**: same as C++
- **internal**: internal is accessible only to types within the same assembly which is similar to package in Java.
- **protected**: same as C++
- **internal protected**: protected within the same assembly
- **private**: same as C++
- **new:**
  - The 'new' keyword can be used for 'nested' classes.
  - A nested class is one that is defined in the body of another class; it is in most ways identical to a class defined in the normal way, but its access level cannot be more liberal than that of the class in which it is defined.
  - Classes are usually specified independently of each other. But it is possible for one class to be specified within another's specification. In this case, the latter class is termed a nested class.
  - A nested class should be declared using the 'new' keyword just in case it has the same name as (and thus overrides) an inherited type.
- **abstract**: A class declared as 'abstract' cannot itself be instanced - it is designed only to be a base class for inheritance.
- **sealed**: A class declared as 'sealed' cannot be inherited from. It may be noted that structs can also not be inherited from.But it can inherit from other class.

----------**END OF LECTURE 33**----------

Method Modifiers

C# provides the following methods modifiers:

- **static:** The 'static' modifier declares a method to be a class method.
- **new, virtual, override**:
- **extern:** Similar to C extern. Mean that the method is defined externally, using a language other than C#

© Copyright Virtual University of Pakistan

Hiding and Overriding

The main difference between hiding and overriding relates to the choice of which method to call where the declared class of a variable is different to the run-time class of the object it references.

For example:

```
public virtual double getArea()
{
        return length * width;
}

public override double getArea()
{
        return length * length;
}
```

For one method to override another, the overridden method must not be static, and it must be declared as either 'virtual', 'abstract' or 'override'. Now look at the following:

```
public double getArea()
{
        return length * width;
}

public new double getArea()
{
        return length * length;
}
```

Where one method 'hides' another, the hidden method does not need to be declared with any special keyword. Instead, the hiding method just declares itself as 'new'.

http://www.akadia.com/services/dotnet_polymorphism.html

© Copyright Virtual University of Pakistan

Method Hiding

A 'new' method only hides a super-class method with a scope defined by its access modifier. In this case method calls do not always 'slide through' in the way that they do with virtual methods. So, if we declare two variables thus if we have:

```
Square sq = new Square(4);
Rectangle r = sq;
```

then

```
double area = r.getArea();
```

the getArea method run will be that defined in the Rectangle class, not the Square class.

Method parameters

In C#, as in C++, a method can only have one return value. You overcome this in C++ by passing pointers or references as parameters. In C#, with value types, however, this does not work. If you want to pass the value type by reference, you mark the value type parameter with the ref keyword as shown below.

```
public void foo(int x, ref int y)
```

Note that you need to use the ref keyword in both the method declaration and the actual call to the method.

```
someObject.f00(a, ref b);
```


© Copyright Virtual University of Pakistan

Out Parameters

C# requires definite assignment, which means that the local variables, a, and b must be initialized before foo is called.

```
int a, b;
b = 0;
someObject.f00(ref a, b);       // not allowed
                                                    // a has not been
                                                    // initialized
a = 0; b =0;
someObject.f00(ref a, b);       // now it is OK
```

This is unnecessarily cumbersome. To address this problem, C# also provides the out keyword, which indicates that you may pass in un-initialized variables and they will be passed by reference.

```
public void foo(int x, ref int y, out int z)

a = 0; b = 0;
someObject.f00(a, ref b, out c);     // no need to initialize c
```

params

One can pass an arbitrary number of types to a method by declaring a parameter array with the 'params' modifier. Types passed as 'params' are all passed by value. This is elaborated with the help of the following example:

```
public static void Main(){
        double a = 1;
        int b = 2;
        int c = 3;
        int d = totalIgnoreFirst(a, b, c);
}

public static int totalIgnoreFirst(double a, params int[] intArr){
        int sum = 0;
        for (int i=0; i < intArr.Length; i++)
                sum += intArr[i];
        return sum;
}
```


© Copyright Virtual University of Pakistan

Readonly fields

Readonly field are instance fields that cannot be assigned to. That is, their value is initialized only once and then cannot be modified. This is shown in the following example:

```
class Pair
{
   public Pair(int x, int y)
   {
      this.x = x;
      this.y = y;
   }
   public void Reset()
   {
      x = 0;                    // compile time errors
      y = 0;
   }
   private readonly int x, y; // this declares Pair as an immutable read only object
}
```

The is operator

- The **'is'** operator supports run time type information.
- It is used to test if the operator/expression is of certain type
  - **Syntax**: expression is type
- Evaluates to a Boolean result.
- It can be used as conditional expression.
- It will return true
  - if the expression is not NULL
  - the expression can be safely cast to type.
- The following example illustrates this concept:

```
class Dog {
…
}

class Cat {
…
}

…
// object o;
if (o is Dog)
        Console.Writeline("it's a dog");
else if (o is Cat)
        Console.Writeline("it's a cat");
else
        Console.Writeline("what is it?");
```


© Copyright Virtual University of Pakistan

The as operator

- The as operator attempts to cast a given operand to the requested type.
  - **Syntax**: expression as type
- The normal cast operation – (T) e – generates an InvalidCastException when there is no valid cast.
- The as operator does not throw an exception; instead the result returned is null as shown below:
  - expression is type ? (type) expression : (type) null

The new operator

- In C++, the new keyword instantiates an object on the heap.
- In C#, with reference types, the new keyword does instantiate objects on the heap but with value types such as structs, the object is created on the stack and a constructor is called.
- You can, create a struct on the stack without using new, but be careful! New initializes the object.
- If you don't use new, you must initialize all the values in the struct by hand before you use it (before you pass it to a method) or it won't compile.

Boxing

Boxing is converting any value type to corresponding object type and convert the resultant 'boxed' type back again.

```
int i = 123;
object box = i;     // value of i is copied to the object box
if (box is int)     // runtime type of box is returned as boxed value type
{
        Console.Write("Box contains an int");  // this line is printed
}
```

Interfaces

- Just like Java, C# also has interfaces contain method signatures.
- There are no access modifier and everything is implicitly ***public.***
- It doest not have any fields, not even ***static*** ones.
- A ***class*** can implement many ***interface***s but unlike Java there is no implements keyword .
- Syntax notation is positional where we have base ***class*** first, then base ***interface***s as shown below:
  - class X: CA, IA, IB
    {
        …
    }

© Copyright Virtual University of Pakistan

Delegates

Delegates are similar to function pointers. C/C++ function pointers lack instance-based knowledge whereas C# delegate are event based can be thought of a call-back mechanism where a request is made to invoke a specified method when the time is right.

Delegates are reference types which allow indirect calls to methods. A delegate instance holds references to some number of methods, and by invoking the delegate one causes all of these methods to be called. The usefulness of delegates lies in the fact that the functions which invoke them are blind to the underlying methods they thereby cause to run.

An example of delegates is shown below:

```
public delegate void Print (String s);
…

public void realMethod (String myString)
{
   // method code
}
…
```

Another method in the class could then instantiate the 'Print' delegate in the following way, so that it holds a reference to 'realMethod':

```
Print delegateVariable = new Print(realMethod);
```

Exception Handling and Multithreading

Exception handling is similar to java but is less restrictive. Multithreading is similar to java.

© Copyright Virtual University of Pakistan

PHP – Personal Home Page PHP: Hypertext Preprocessor (Lecture 35-37)

A Server-side Scripting Programming Language

An Introduction

What is PHP?

PHP stands for "**P**HP: **H**ypertext **P**reprocessor". It is a server-side scripting language. PHP scripts are executed on the server and it is especially suited for Web development and can be embedded into HTML. The main goal of the language is to allow web developers to write dynamically generated web pages quickly. Its syntax is very similar to C/C++ and it has support for almost all major OS, web-servers, and databases. PHP is an open source software (OSS) and is free to download and use.

What is a PHP File?

PHP files may contain text, HTML tags and scripts. PHP files are returned to the browser as plain HTML. PHP files have a file extension of ".php", ".php3", or ".phtml". As mentioned earlier, a PHP script is run on the web server, not on the user's browser. Therefore, client-side compatibility issues are not of concern of the programmer as simply return an HTML document for the browser to process. You need three things to make this work: the PHP parser (CGI or server module), a web server and a web browser.

PHP Hello World

Following is the PHP Hello World program.

```
<html>
 <head>
   <title>PHP Test</title>
 </head>
 <body>
        <?php // start of php code
        echo '<p>Hello World</p>';
        ?>
 </body>
</html>
```

The code written within "php" tags is parsed by the PHP processor and the rest is ignored. Hence, a PHP parser would convert the above code into the following HTML document and send it to the browser.

```
<html>
  <head>
   <title>PHP Test </title>
  </head>
```


© Copyright Virtual University of Pakistan

```
  <body>
        <p>Hello World</p>
  </body>
</html>
```

It may be noted that PHP supports C++ type of comments and requires a semicolon ";" at the end of each statement.

PHP Opening and Closing Tags

PHP scripts are always enclosed in between two PHP tags. This tells your server to parse the information between them as PHP. The three different forms are as follows:

1.
```
<?php
        echo "this is the recommended style";
?>
```

2.
```
<script language="php">
        echo "this style is also available";
</script>
```

3.
```
<?
        echo "this is short tags style; it needs to be configured";
?>
```

There is also another form which may or may not be supported on some browsers. It is shown as below:

4.
```
<%
        echo 'this is ASP-style tags; it may not be available';
%>
```


© Copyright Virtual University of Pakistan

Data types

The type of a variable is decided at runtime by PHP depending on the context in which that variable is used. PHP supports the following data types:

- Boolean
- integer
- float or double
- string
- array
- object
- resource
- NULL

Integers

The size of an integer is platform-dependent, although a maximum value of about two billion is the usual value (that's 32 bits signed). 2147483647 = $2^{31} – 1$. PHP does not support unsigned integers. It is important to note that, unlike C++ or Java, if you specify a number beyond the bounds of the integer type, it will be interpreted as a float instead. If an operation results in a number beyond the bounds of the **integer** type, a **float** will be returned instead. Also, there is no integer division operator in PHP. *1/2* yields the **float** *0.5*.

Strings

PHP strings are created using single quote or double quote. They can also be created by <<< which is called heredoc. One should provide an identifier after <<<, then the string, and then the same identifier to close the quotation. The closing identifier *must* begin in the first column of the line.

Variable

Variables in PHP are represented by a dollar sign followed by the name of the variable. The variable name is case-sensitive. A valid variable name starts with a letter or underscore, followed by any number of letters, numbers, or underscores. As a regular expression, it would be expressed thus: '[a-zA-Z_\x7f-\xff][a-zA-Z0-9_\x7f-\xff]*'.

Note: For our purposes here, a letter is a-z, A-Z, and any ASCII characters from 127 through 255 (0x7f-0xff). Therefore, $Inzi½ is a legal variable name. It is not necessary to initialize variables in PHP. Un-initialized variables have a default value of their type - FALSE, zero, empty string or an empty array.

String conversion to numbers

When a string is evaluated as a numeric value, the resulting value and type are determined as follows.

© Copyright Virtual University of Pakistan

- The string will evaluate as a **float** if it contains any of the characters '.', 'e', or 'E'. Otherwise, it will evaluate as an integer.
- The value is given by the initial portion of the string. If the string starts with valid numeric data, this will be the value used. Otherwise, the value will be 0 (zero).

Here is an example:

```
<?php
        $foo = 2 + "10.5";                  // $foo is float (12.5)
        $foo = 1 + "-1.1e3";            // $foo is float (-1099)
        $foo = 1 + “Ali-1.3e3";             // $foo is integer (1)
        $foo = 1 + "10 Small Cats";   // $foo is integer (11)
        $foo = "10.0 cats " + 1;        // $foo is float (11)
?>
```

Using strings in numeric expressions provides flexibility but it should be obvious that it also is a source to numerous programming errors and mistakes. This kind of error is also very hard to debug and detect.

Arrays

An array in PHP is an ordered map. An **array** can be created by the **array()** construct. It takes a certain number of comma-separated *key => value* pairs. *key* may be an **integer** or **string.** The following example illustrates this concept:

```
<?php
        $arr = array("foo" => "bar", 12 => true);
        echo $arr["foo"];               // bar
        echo $arr[12];          // 1
?>
```

If no key is specified in the assignment, then the maximum of the existing integer indices is taken, and the new key will be that maximum value + 1. If the current maximum is negative then the next key created will be zero. If no integer indices exist yet, the key will be *0* (zero). Note that the maximum integer key used for this *need not currently exist in the array*. It simply must have existed in the array at some time since the last time the array was re-indexed. If the specified key already has a value assigned to it, that value will be overwritten. These things are demonstrated in the following example:

```
<?php
        $arr = array(5 => 1, 12 => 2);
        $arr[] = 56;     // This is the same as $arr[13] = 56;
                                // at this point of the script
        $arr["x"] = 42;          // This adds a new element to
                        // the array with key "x“
        unset($arr[13]);         // This removes the element from the array
        $arr[] = 56;     // This is the same as $arr[14] = 56;
                                // at this point of the script
        unset($arr);     // This deletes the whole array
```


© Copyright Virtual University of Pakistan

```
?>
```

class

A class is defined as shown below:

```
<?php
        class Cart {
                var $items; // Items in our shopping cart
                                // Add $num articles of $artnr to the cart

                 function add_item($artnr, $num) {
                        $this->items[$artnr] += $num;
                }
                function remove_item($artnr, $num) {
                        if ($this->items[$artnr] > $num) {
                                $this->items[$artnr] -= $num;
                                return true;
                        }
                         elseif ($this->items[$artnr] == $num) {
                                unset($this->items[$artnr]);
                                return true;
                        }
                        else { return false; }
                }
        }
?>
```

Aliasing

Aliasing is used to assign by reference. To assign by reference, simply prepend an ampersand (&) to the beginning of the variable which is being assigned (the source variable) as shown below:

```
<?php
        $foo = ‘Fakhar';
        $bar = &$foo;                   // Reference $foo via $bar.
        $bar = "My name is $bar";       // Alter $bar...
        echo $bar;
        echo $foo;                                  // $foo is altered too.
?>
```

Variable variable

A variable variable is like pointers that is, it maintains the address of a variable in it. This is shown in the example below:

```
                <?php
                        $a = ‘hello’;
                        $$a = 'world';
                        echo "$a ${$a}“;                  // ‘hello world”
```


© Copyright Virtual University of Pakistan

```
?>
```

Constants

A constant is an identifier (name) for a simple value that cannot change during the execution of the script. A constant is case-sensitive by default. By convention, constant identifiers are always uppercase. The name of a constant follows the same rules as any label in PHP. A valid constant name starts with a letter or underscore, followed by any number of letters, numbers, or underscores. As a regular expression, it would be expressed thusly: *[a-zA-Z_\x7f-\xff][a-zA-Z0-9_\x7f-\xff]** .

Logical operators

PHP supports the following logical operators.

and, or, xor, !, &&, ||

The reason for the two different variations of "and" and "or" operators is that they operate at different precedence. This is demonstrated with the help of the following example:

```
$a and $b or $c     //      ($a and $b) or $c
$a && $b || $c
$a and $b || $c     //      $a and ($b || $c)
```

String operators

There are two **string** operators. The first is the concatenation operator ('.'), which returns the concatenation of its right and left arguments. The second is the concatenating assignment operator ('.='), which appends the argument on the right side to the argument on the left side.

```
<?php
        $a = "Hello ";
        $b = $a . "World!"; // now $b contains "Hello World!"
        $a = "Hello ";
        $a .= "World!";         // now $a contains "Hello World!"
?>
```


© Copyright Virtual University of Pakistan

Array Operators

PHP provides a number of operators to manipulate arrays. These are:

- $a + $b Union – Union of $a and $b.
- $a == $b Equality – **TRUE** if $a and $b have the same key/value pairs.
- $a === $b Identity - **TRUE** if $a and $b have the same key/value pairs in the same order and of the same types.
- $a != $b Inequality - **TRUE** if $a is not equal to $b.
- $a <> $b Inequality - **TRUE** if $a is not equal to $b.
- $a !== $b Non-identity - **TRUE** if $a is not identical to $b.

Note the difference between == and ===. The former checks if the same key-value pairs are present in the two arrays and the order does not matter whereas the latter requires that in order to be identical the pairs have to be in the same order.

The + operator appends the right handed array to the left handed, whereas duplicated keys are NOT overwritten. This concept is elaborated as below:

```
$a = array("a" => "apple", "b" => "banana");
$b = array("a" => "pear", "b" => “date", "c" => “mango");
$c = $a + $b; // Union of $a and $b
```

This will result in an array c with the following values:

```
["a"]=> "apple" ["b"]=> "banana" ["c"]=> “mango"
```

Control Statements

PHP supports the following control statements:

- if
- while
- do while
- for
- switch
- foreach
- break
- continue

Most control structures work in a manner similar to C. The differences are highlighted in the following paragraphs.

If statements

The if statement in PHP has the following shape and form:

© Copyright Virtual University of Pakistan

```
<?php
        if ($a > $b) { echo "a is bigger than b"; }
        elseif ($a == $b) { echo "a is equal to b"; }
        else { echo "a is smaller than b"; }
?>
```

There may be several *elseif*s within the same *if* statement. The first *elseif* expression (if any) that evaluates to **TRUE** would be executed. In PHP, you can also write 'else if' (in two words) and the behavior would be identical to the one of 'elseif' (in a single word).

foreach

foreach statement works only on arrays, and will issue an error when you try to use it on a variable with a different data type or an uninitialized variable. It gives an easy way to iterate over arrays. There are two syntaxes; the second is a minor but useful extension of the first:

- foreach (array_expression as $value) statement
- foreach (array_expression as $key => $value) statement

The first form loops over the array given by *array_expression*. On each loop, the value of the current element is assigned to *$value* and the internal array pointer is advanced by one. The second form does the same thing, except that the current element's key will also be assigned to the variable *$key* on each loop. As of PHP 5, it is possible to iterate objects too.

Note: Unless the array is referenced, *foreach* operates on a copy of the specified array and not the array itself. Therefore changes to the array element returned are not reflected in the original array. As of PHP 5, array's elements can be modified by preceding *$value* with &. This will assign reference instead of copying the value.

```
<?php
        $arr = array(1, 2, 3, 4);
        foreach ($arr as &$value)
                { $value = $value * 2; }
                        // $arr is now array(2, 4, 6, 8)
?>
```

This is possible only if iterated array can be referenced (i.e. is variable).

each

each return the current key and value pair from an array and advance the array cursor. It is used in the following manner:

array **each** (array &array)

© Copyright Virtual University of Pakistan

Returns the current key and value pair from the array *array* and advances the array cursor. This pair is returned in a four-element array, with the keys *0*, *1*, *key*, and *value*. Elements *0* and *key* contain the key name of the array element, and *1* and *value* contain the data. If the internal pointer for the array points past the end of the array contents, **each()** returns **FALSE**.

break

break ends execution of the current *for*, *foreach*, *while*, *do-while* or *switch* structure. In PHP, *break* accepts an optional numeric argument which tells it how many nested enclosing structures are to be broken out of. The following example illustrates this concept:

```
<?php
        $i = 0;
        while (++$i) {
                switch ($i) {
                        case 5:
                                echo "At 5<br />\n";
                                break 1; // Exit only the switch.
                        case 10:
                                echo "At 10; quitting<br />\n";
                                break 2; // Exit the switch and the while.
                        default:
                                break;    // Exit only the switch.
                }
        }
?>
```

continue

continue is used within looping structures to skip the rest of the current loop iteration and continue execution at the condition evaluation and then the beginning of the next iteration. **Note:** Note that in PHP the switch statement is considered a looping structure for the purposes of *continue*. Like break, *continue* accepts an optional numeric argument which tells it how many levels of enclosing loops it should skip to the end of.

Omitting the semicolon after *continue* can lead to confusion as shown below:

```
        <?php
                for ($i = 0; $i < 5; ++$i) {
                        if ($i == 2) continue print "$i\n";
                }
        ?>
```

One can expect the result to be : 0 1 3 4 but this script will output : 2 because the return value of the **print()** call is *int(1)*, and it will look like the optional numeric argument mentioned above.

© Copyright Virtual University of Pakistan

Alternative syntax for control statements

PHP offers an alternative syntax for some of its control structures; namely, *if*, *while*, *for*, *foreach*, and *switch*. In each case, the basic form of the alternate syntax is to change the opening brace to a colon (:) and the closing brace to *endif;*, *endwhile;*, *endfor;*, *endforeach;*, or *endswitch;*, respectively. An example is shown below:

```
<?php
        if ($a == 5):
                echo "a equals 5";
                echo "...";
        elseif ($a == 6):
                echo "a equals 6";
                echo "!!!";
        else: echo "a is neither 5 nor 6";
        endif;
?>
```

User defined functions

Just like all programming languages, one can define functions in PHP as shown in the following example:

```
<?php
        function foo($arg_1, $arg_2, /* ..., */ $arg_n)
        {
                echo "Example function.\n";
                return $retval;
        }
?>
```

PHP also allows functions to be defined inside functions. It may be noted that C and its descendents do not support this feature but descendants of Algol generally support it. The following example shows this concept:

```
<?php
        function foo() {
                function bar() {
                echo "I don't exist until foo() is called.\n";
                }
        }

        /* We can't call bar() yet since it doesn't exist. */

        foo();

        /* Now we can call bar(), foo()'s processesing has made it
          accessible. */

        bar();
```


© Copyright Virtual University of Pakistan

```
?>
```

PHP also supports recursive functions as shown below:

```
<?php
        function recursion($a) {
                if ($a < 20) {
                        echo "$a\n"; recursion($a + 1);
                }
        }
?>
```

Function arguments

PHP supports passing arguments by value (the default), passing by reference, and default argument values. If you want an argument to a function to always be passed by reference, you can prepend an ampersand (&) to the argument name in the function definition:

```
<?php
        function add_some_extra(&$string) {
                $string .= 'and something extra.';
        }
        $str = 'This is a string, ';
        add_some_extra($str);
        echo $str; // outputs 'This is a string, and
                        // something extra.‘
?>
```

You can't return multiple values from a function, but similar results can be obtained by returning a list as shown below:

```
<?php
                function small_numbers() {
                        return array (0, 1, 2);
                }
                list ($zero, $one, $two) = small_numbers();
?>
```

To return a reference from a function, you have to use the reference operator & in both the function declaration and when assigning the returned value to a variable:

```
<?php
                function &returns_reference() {
                        return $someref;
                }
                $newref =& returns_reference();
?>
```


© Copyright Virtual University of Pakistan

Classes and Objects

Classes and objects are similar to Java. A variable of the desired type is created with the *new* operator. It supports Single inheritance only and uses the keyword extends to inherit from a super class. The inherited methods and members can be overridden, unless the parent class has defined a method as final.

Databases

One of the strongest features of PHP is its support for providing web pages access to database. The following example shows database manipulation through ODBC in PHP:

```
<html>
<body>
<?php
        $conn=odbc_connect('northwind',",");
        if (!$conn)  {
                exit("Connection Failed: " . $conn);
        }
        $sql="SELECT * FROM customers";
        $rs=odbc_exec($conn,$sql);
        if (!$rs)  {exit("Error in SQL");}
        echo "<table><tr>";
        echo "<th>Companyname</th>";
        echo "<th>Contactname</th></tr>“;
        while (odbc_fetch_row($rs)){
                $compname=odbc_result($rs,"CompanyName");
                $conname=odbc_result($rs,"ContactName");
                echo "<tr><td>$compname</td>";
                echo "<td>$conname</td></tr>";
        }
        odbc_close($conn);
        echo "</table>";
?>
</body>
</html>
```


© Copyright Virtual University of Pakistan

Modern Programming Languages-JavaScript
Lecture 38

The <script> Tag

The <script> tag (<script>….</script>) in all major browsers interprets contents as JavaScript unless one of the following occurs

Inclusion of language attribute

<script language="VBS">….</script>
Inclusion of type attribute
<script type="text/javascript">….</script>

The type attribute is W3C recommended, it makes the language more common and in many ways more useful

<script> tag is used to delimit the script code from the HTML

- **The script tag causes the browser's JavaScript interpreter to be invoked, the script run and any output produced**
- **The browser is considered the "host" environment**
- **There are other hosts for JavaScript and its variants**

Location of Code

JavaScript may be placed at three places
In the <head> element

Place scripts to be called or when event is triggered here
Ensures script is loaded before called

```
<html>
 <head>
  <script type="text/javascript">
                //script statements
  </script>
 </head>
```

Location of Code

In the <body> element
Place scripts to be executed when the page loads here
Script generates some or all of the contents of the page

```
 <body>
  <script type="text/javascript">
                //script statements
  </script>
 </body>
```


© Copyright Virtual University of Pakistan

Location of Code

External to the HTML file

```
<head>
  <script src="myfile.js">
  </script>
</head>
```

Could be in <head> or <body>
External script should not contain <script> tag

- You can use as many **<script>** tags as you like in both the **<head>** and **<body>** and they are executed sequentially.

```
<h1>Ready start</h1>
<script language="Javascript" type="text/javascript">
    alert("First Script Ran");
</script>
<h2>Running...</h2>
<script language="Javascript" type="text/javascript">
    alert("Second Script Ran");
</script>
<h2>Keep running</h2>
<script language="Javascript" type="text/javascript">
    alert("Third Script Ran");
</script>
</h1>Stop!</h1>
</body>
```

Statements

- A script is made up of individual statements
- Javascript statements are terminated by returns or semi-colons same as

- So, prefer to use semi-colons

```
x=x+1    alert(x) //throws an error while
x=x+1;   alert(x); //does not
```

- Every variable has a data type that indicates what kind of data the variable holds
- Basic data types in JavaScript
- Strings

Strings may include special escaped characters

© Copyright Virtual University of Pakistan

- Numbers (integers, floats)
- Booleans (true, false)
- 'null' and 'undefined' are also considered as types

- Define a variable using the var statement
  - `var x;`
- If undefined a variable will be defined on its first use
- Variables can be assigned at declaration time
  - `var x = 5;`
- Commas can be used to define many variables at once
  - `var x, y = 5, z;`

- JavaScript is a weekly typed language meaning that the contents of a variable can change from one type to another
- Example

x = "hello"; x = 5; x=false;

While week typing seems beneficial to a programmer it can lead to problems

Arrays

- An ordered set of values grouped together with a single identifier
- Defining Arrays

- var myArray = [1,5,1968,3];
- var myArray2 = ["fakhar",true,3,-47.2];
- var myArray3 = new Array ();
- var myArray4 = new Array (10);

Arrays

- Arrays in JavaScript are 0 based
- We access arrays by index values

© Copyright Virtual University of Pakistan

- var myArray = [1,5,1968,3];
- myArray[3] is '3'

Difference

Array types (composite type as well) are reference types, so problem of aliasing is there

```
var firstArray = ["Mars", "Jupiter", "Saturn" ];
var secondArray = firstArray;
secondArray[0] = "Neptune";
alert(firstArray); // it has been changed
```

Operators

- Basic Arithmetic
  + , - , / , * , %
- Increment decrement
  ++, - -
- Comparison
  < , > , >= , <= , != , == , === (type equality)
- Logical
  &&, ||, !
- Bitwise Operators
  & , | , ^
- String Operator

- + (used for concatenation)
- document.write("JavaScript" + "is" + "great!");

Type Conversion

- **Converting one type of data to another is both useful and a source of numerous errors in JavaScript**
- var x = "10" – 2 ; //result is 8
- var x = "2" – "2" ; //result is 0
- var x = "2" + "2" ; //result is "22"

Control Statements

- **If**
- **Switch**
- **While**

© Copyright Virtual University of Pakistan

- **Do-while**
- **For**
- **Continue**
- **Break**
- **For (in)**

Labels and Flow Control

```
outerloop:
  for (var i=0; i < 3; i++)
  {
        document.write("Outerloop: "+i+"<br />");
        for (var j = 0; j < 5; j++)
          {
            if ( j == 3)
              break outerloop;
            document.write("Innerloop: "+j+"<br />");
          }
  }
  document.write("All loops done"+"<br>");
```

```
function name(parameter list)
 {
 function statement(s)
 return;
 }
```


© Copyright Virtual University of Pakistan

Local Functions

```
function testFunction()
    {

    function inner1() {  document.write("testFunction-inner1<br />"); }

    function inner2() {  document.write("testFunction-inner2<br />");  }

     document.write("Entering testFunction<br />");
     inner1();
     inner2();
     document.write("Leaving testFunction<br />");
    }

    document.write("About to call testFunction<br />");
    testFunction();
    document.write("Returned from testFunction<br />");

  /* Call inner 1 or inner2 here and error */
    inner1();
```


© Copyright Virtual University of Pakistan

Modern Programming Languages-JavaScript
Lecture 39

Objects

- **An object is a collection of data types as well as functions in one package**
- **The various data types called properties and functions called methods are accessed using the dot notation**

- **objectname.propertyname**

Objects

- **There are many types of objects in JavaScript**

- **Built-in objects (primarily type related)**
- **Browser objects (navigator, window etc.)**
- **Document objects (forms, images etc.)**
- **User defined objects**

Two Object Models

- **In JavaScript, two primary object models are employed**
- **Browser Object Model (BOM)**

- **The BOM provides access to the various characteristics of a browser such as the browser window itself, the screen characteristics, the browser history and so on.**
- **Document Object Model (DOM)**
- **The DOM on the other hand provides access to the contents of the browser window, namely the documents including the various HTML elements ranging from anchors to images as well as any text that may be enclosed by such element.**

The Big Picture

- Looking at the "big picture" of all various aspects of JavaScript including its object models. We see four primary pieces:
  1. The core JavaScript language (e.g. data types, operators, statements, etc.)
  2. The core objects primarily related to data types (e.g. Date, String, Math, etc.)
  3. The browser objects (e.g. Window, Navigator, Location, etc.)
  4. The document objects (e.g. Document, Form, Image, etc.)

© Copyright Virtual University of Pakistan

Four Models

- By studying the history of JavaScript we can bring some order to the chaos of competing object models. There have been four distinct object models used in JavaScript including:
  1. Traditional JavaScript Object Model (NS 2 & IE 3)
  2. Extended Traditional JavaScript Object Model (NS 3)
  3. Dynamic HTML Flavored Object Models
     1. a. IE 4
     2. b. NS 4
  4. Traditional Browser Object Model + Standard DOM (NS6 & Explorer 5)

© Copyright Virtual University of Pakistan

Overview of Core Objects

Object	Description
Window	The object that relates to the current browser window.
Document	An object that contains the various HTML elements and text fragments that make up a document. In the traditional JavaScript object model, the **Document** object relates roughly the HTML <body> tag.
Frames[ ]	An array of the frames in the Window contains any. Each frame in turn references another **Window** object that may also contain more frames.
History	An object that contains the current window's history list, namely the collection of the various URLs visited by the user recently.
Location	Contains the current location of the document being viewed in the form of a URL and its constituent pieces.
Navigator	An object that describes the basic characteristics of the browser, notably its type and version.

© Copyright Virtual University of Pakistan

Document Object

- The **Document** object provides access to page elements such as anchors, form fields, and links as well as page properties such as background and text color.
- Consider
  - document.alinkColor, document.bgColor, document.fgColor, document.URL
  - document.forms[ ], document.links[ ], document.anchors[ ]
- We have also used the methods of the **Document** object quite a bit
  - document.write( ) , document.writeln( ), document.open( ), document.close( )

© Copyright Virtual University of Pakistan

Object Access by Document Position

- HTML elements exposed via JavaScript are often placed in arrays or collections. The order of insertion into the array is based upon the position in the document.
- For example, the first **<form>** tag would be in document.forms[0], the second in document.forms[1] and so on.
- Within the form we find a collection of elements[ ] with the first **<input>, <select>** or other form field in document.forms[0].elements[0] and so on.
- As arrays we can use the length property to see how many items are in the page.
- The downside of access by position is that if the tag moves the script may break

© Copyright Virtual University of Pakistan

Object Access by Name

- When a tag is named via the **name** attribute (HTML 4.0 - **<a>**, **<img>**, embedded objects, form elements, and frames) or by **id** attribute (pretty much every tag) it should be scriptable.
- Given

```
<form id="myform" name="myform">
  <input type="text" name="username" id="username">
</form>
```

we can access the form at window.document.myform and the first field as

window.document.myform.username

© Copyright Virtual University of Pakistan

Object Access by Associative Array

- The collection of HTML objects are stored associatively in the arrays.
- Given the form named "myform" we might access it using

  window.document.forms["myform"]

- In Internet Explorer we can use the **item( )** method like so

  window.document.forms.item("myform")

Object Statement: With

```
document.write("Hello World");
document.write("<br />");
document.write("this is another write statement");

with (document) {
        write("Hello World");
         write("<br />");
         write("this is another write statement");
}
```


© Copyright Virtual University of Pakistan

Object Statements: for..in

- The **for...in** statement is used to loop through the properties of an object (if they can be enumerated)
- Syntax

  for (*variablename* in *object*)

  statement or block to execute

- Example

```
var aProperty;
 document.write("<h1>Navigator Object Properties</h1>");
 for (aProperty in navigator)
 {
   document.write(aProperty);
   document.write("<br />");
 }
```


© Copyright Virtual University of Pakistan

Events

- One of the primary uses of JavaScript is to make Web pages interactive.
  - Responsive to user actions
- JavaScript provides event handlers.
  - Execute segment of code based on events occurring within the application
  - E.g., `onLoad` or `onClick`
- Handlers associated with elements.
- Not all elements support all event handlers.

16

© Copyright Virtual University of Pakistan

Events (cont.)

```
<input type="button"
   name="clickme"
   value="Click Here"
   onClick=
      "window.status='Thanks';
     return true;">
```

17

Events (cont.)

- Event handlers can be categorized into interactive and non-interactive.
- Interactive: Depends on a user action.
  - E.g., `onClick`
- Non-interactive: Non-user event.
  - E.g., `onLoad`

18

© Copyright Virtual University of Pakistan

Events (cont.)

- `onAbort`: Image loading is interrupted.
- `onBlur`: Element loses input focus.
- `onChange`: User selects or deselects item.
- `onClick`: User clicks once.
- `onDragDrop`:
- `onError`: Image doesn't load properly.

19

© Copyright Virtual University of Pakistan

Events (cont.)

- onFocus: Element is given input focus.
- onKeyPress:
- onKeyUp:
- onLoad:
- onMouseDown:
- onMouseOver:
- onMouseOut:
- onMouseUp:

© Copyright Virtual University of Pakistan

Events
Supporting Events

1. Give the target HTML element a name attribute.

```
<input type="text"
       name="price"  />
```

2. Give activating HTML element event attribute that calls function.

```
<input type="submit"
    value="Calculate total."
    onClick="calcTotal()"/>
```

22

© Copyright Virtual University of Pakistan

Modern Programming Languages
Lecture # 40

Names

- Design issues:
  - Maximum length?
  - Are connector characters allowed?
  - Are names case sensitive?
  - Are special words reserved words or keywords?

Special Words

- There are two types of special words
  - Keyword
  - Reserved word
- A keyword is a word that is special only in a certain context
  - REAL X
  - REAL = 44.7
- Disadvantage: poor readability

- A reserved word is a special word that cannot be used as a user-defined name
  - Type

- **Type:** Determines the range of values of variables and the set of operations that are defined for values of that type; in the case of floating point, type also determines the precision
  - Value
- **Value:** The contents of the location with which the variable is associated
  - Binding

- **Binding :** A binding is an association, such as between an attribute and an entity, or between an operation and a symbol

  - Binding Time
    It is the time at which a binding takes place

Possible binding times

1. Language design time - e.g. bind operator symbols to operations
2. Language implementation time - e.g. bind fl. pt. type to a representation
3. Compile time - e.g. bind a variable to a type in C or Java
4. Load time- e.g.
5. Runtime - e.g. bind a non-static local variable to a memory cell

© Copyright Virtual University of Pakistan

Static and Dynamic Binding

- A binding is static if it occurs before run time and remains unchanged throughout program execution

- A binding is dynamic if it occurs during execution or can change during execution of the program

Type Bindings

- How is a type specified?
- When does the binding take place?
- If static, type may be specified by either an explicit or an implicit declaration
  - An explicit declaration is a program statement used for declaring the types of variables
  - An implicit declaration is a default mechanism for specifying types of variables (the first appearance of the variable in the program)
- FORTRAN, PL/I, BASIC, provide implicit declarations
  - Advantage: writability
  - Disadvantage: reliability

Dynamic Type Binding

- Specified through an assignment statement e.g. in SNOBOL
  - LIST = 'my name'
  - LIST = 4 + 5
- Advantage
  - Flexibility (generic program units)
- Disadvantages:
  - Type error detection by the compiler is difficult
  - High cost (dynamic type checking and interpretation)

Storage Bindings

- At what time we associate the memory location with a name

Categories of variables by lifetimes

1. Static Storage Binding

- Bound to memory cells before execution begins and remains bound to the same memory cell throughout execution
- Example

  - In FORTRAN 77 all variables are statically bound
  - C static variables

- Advantage

  - Efficiency (direct addressing), history-sensitive, subprogram support

© Copyright Virtual University of Pakistan

- Disadvantage
    - Lack of flexibility (no recursion)

Stack Dynamic Variables:

- Bound to storages when execution reaches the code to which the declaration is attached. (But, data types are statically bound.) That is, stack-dynamic variables are allocated from the **run-time stack**.
- Example
    - E.g. a Pascal procedure consists of a declaration section and a code section.
    - E.g. FORTRAN 77 and FORTRAN 90 use SAVE list for stack-dynamic list.
    - E.g. C and C++ assume local variables are static-dynamic.
- Advantage
    - allows recursion; conserves storage
- Disadvantages
    - Overhead of allocation and deallocation
    - Subprograms cannot be history sensitive
    - Inefficient references (indirect addressing)

Explicit Heap Dynamic Variables

- Allocated and de-allocated by explicit directives, specified by the programmer, which take effect during execution
- Referenced only through pointers or references
- Examples
    - Dynamic objects in C++ (via new and delete)
    - All objects in Java
- Advantage
    - Provide dynamic storage management
- Disadvantage
    - Inefficient and unreliable

Implicit Heap Dynamic Variables

- Allocation and de-allocation is caused by assignment statements
- Example
    - All variables in SNOBOL
- Advantage
    - Flexibility
- Disadvantages
    - Inefficient, because all attributes are dynamic
    - Loss of error detection

© Copyright Virtual University of Pakistan

Modern Programming Languages Lecture 41

Type Checking

- Generalizes the concept of operands and operators to include subprograms and assignments
- Type checking is the activity of ensuring that the operands of an operator are of compatible types
- A compatible type is one that is either legal for the operator, or is allowed under language rules to be implicitly converted, by compiler generated code, to a legal type. This automatic conversion is called **coercion**
- A type error is the application of an operator to an operand of an inappropriate type
- If all type bindings are static, nearly all type checking can be static
- If type bindings are dynamic, type checking must be dynamic
- A programming language is strongly typed if type errors are always detected
- A programming language which does all the type checking statically then it is a strongly typed languages otherwise weakly typed language.

Strongly Typed Languages?

- FORTRAN 77 is not strongly typed
  - Parameters, EQUIVALENCE
- C and C++ are not
  - Parameter type checking can be avoided
  - Unions are not type checked
- Pascal is not
  - Variant records
- Modula-2 is not
  - Variant records
- Ada is, almost
  - UNCHECKED CONVERSION is a loophole
  - Coercion rules strongly affect strong typing; they can weaken it considerably (C++ versus Ada)
- Advantage of strong typing
  - Allows the detection of the misuse of variables that result in type errors

Type Compatibility

- Type compatibility by name means that the two variables have compatible types if they are in either the same declaration or in declarations that use the same type name
- Easy to implement but highly restrictive
  - Sub ranges of integer types are not compatible with integer types

© Copyright Virtual University of Pakistan

Data Types

- Design Issues
  - What is the syntax of references to variables?
  - What operations are defined and how are they specified?

Primitive Data Types

- Not defined in terms of other data types

1. **Integer**
   - Almost always an exact reflection of the hardware, so the mapping is trivial
   - There may be as many as eight different integer types in a language

2. **Floating Point**
   - Models real numbers, but only as approximations
   - Languages for scientific use support at least two floating-point types; sometimes more
   - Usually exactly like the hardware, but not always; some languages allow accuracy specs in code e.g. (Ada)
     - type SPEED is digits 7 range 0.0..1000.0;
     - type VOLTAGE is delta 0.1 range -12.0..24.0;

3. **Decimal**
   - For business applications (money)
   - Store a fixed number of decimal digits
   - Advantage
     - Accuracy
   - Disadvantages
     - Limited range, wastes memory
   - COBOL and ADA supports decimal
   - C++ and java does not support decimal

4. **Boolean**
   - Could be implemented as bits, but often as bytes
   - Advantage
     - Readability

Character String Types

- Values are sequences of characters
- Design issues:
  - Is it a primitive type or just a special kind of array?
  - Is the length of objects static or dynamic?
- Operations:
  - Assignment
  - Comparison (=, >, etc.)
  - Concatenation
  - Substring reference
  - Pattern matching

© Copyright Virtual University of Pakistan

- Examples
  - Pascal---Not primitive; assignment and comparisons supported only
  - Ada, FORTRAN 77, FORTRAN 90 and BASIC
    - Somewhat primitive
    - Assignment, comparison, catenation
    - Substring reference
  - C and C++
    - Not primitive
    - Use char arrays and a library of functions that provide these operations
  - SNOBOL4 (a string manipulation language)
    - Primitive
    - Many operations, including elaborate pattern matching
  - Java; string class (not arrays of char)

Ordinal Types (user defined)

- An ordinal type is one in which the range of possible values can be easily associated with the set of positive integers
- Enumeration Types - one in which the user enumerates all of the possible values, which are symbolic constants
- Design Issue
  - Should a symbolic constant be allowed to be in more than one type definition?
- Examples
  - Pascal
    - Cannot reuse constants
    - They can be used for array subscripts e.g. for variables, case selectors
    - NO input or output
    - Can be compared
  - Ada
    - Constants can be reused (overloaded literals)
    - Disambiguates with context or type_name
    - CAN be input and output
  - C and C++
    - Like Pascal, except they can be input and output as integers
  - Java does not include an enumeration types
  - C# includes them

- Evaluation (of enumeration types)
  - Useful for readability
    - e.g. no need to code a color as a number
  - Useful for reliability
    - e.g. compiler can check operations and ranges of values

© Copyright Virtual University of Pakistan

- Subrange Type
  - An ordered contiguous subsequence of an ordinal type
  - Pascal
    - Subrange types behave as their parent types; can be used as for variables and array indices
    - E.g. type pos = 0 .. MAXINT;
  - Ada
    - Subtypes are not new types, they are just constrained existing types (so they are compatible)
    - Can be used as in Pascal, plus case constants
    - **E.g.** subtype POS_TYPE is
    - **E.g.** INTEGER range 0 ..INTEGER'LAST;
  - Evaluation (of enumeration types)
    - Aid to readability
    - Reliability - restricted ranges add error detection

- Implementation of user-defined ordinal types
  - Enumeration types are implemented as integers
  - Subrange types are the parent types with code inserted (by the compiler) to restrict assignments to subrange variables

5. Arrays

- An array is an aggregate of homogeneous data elements in which an individual element is identified by its position in the aggregate, relative to the first element
- Design Issues
  - What types are legal for subscripts?
  - Are subscripting expressions in element references range checked?
  - When are subscript ranges bound?
  - When does allocation take place?
  - What is the maximum number of subscripts?
  - Can array objects be initialized?

6. Subscript Types

- FORTRAN, C, C++
  - int only
- Pascal
  - Any ordinal type (int, boolean, char, enum)
- Ada
  - int or enum (includes boolean and char)
- Java
  - integer types only

© Copyright Virtual University of Pakistan

Four Categories of Arrays (based on subscript binding and binding to storage)

- **Static -** range of subscripts and storage bindings are static e.g. FORTRAN 77, some arrays in Ada
  - Advantage: execution efficiency (no allocation or de-allocation)
- **Fixed stack dynamic -** range of subscripts is statically bound, but storage is bound at elaboration time e.g. C local arrays are not static
  - Advantage: space efficiency
- **Stack-dynamic -** range and storage are dynamic, but fixed from then on for the variable's lifetime e.g. Ada declare blocks declare

  - STUFF : array (1..N) of FLOAT;
    begin
    ...
    end;
  - **Advantage:** flexibility - size need not be known until the array is about to be used

© Copyright Virtual University of Pakistan

Modern Programming Languages Lecture 42

Records-(like structs in C/C++)

- **Description:**
  - Are composite data types like arrays
  - The difference between array and record is that array elements are of same data type where as record is a logical grouping of heterogeneous data elements.
  - Another difference is that access to array elements is much slower than access to record fields, because subscripts are dynamic (field names are static)
  - Dynamic subscripts could be used with record field access, but it would disallow type checking and it would be much slower

- **Design Issues:**
  - What is the form of references?
  - What unit operations are defined?

- **Record Definition Syntax**
  - COBOL uses level numbers to show nested records; others use recursive definitions

  - Examples:
    - COBOL

      field_name OF record_name_1 OF ... OF
      record_name_n

    - Others (dot notation)

      record_name_1.record_name_2. ...
      .record_name_n.field_name

  - Better Approach:
    - According to readability point of view COBOL record definition syntax is easier to read and understand but according to writability point of view other languages record definition syntax is easier to write and less time consuming.

- **Record Field References**

  - Two types of record field references:
    - Fully qualified references must include all record names

    - Elliptical references allow leaving out record names as long as the reference is unambiguous

  - Pascal and Modula-2 provide a with clause to abbreviate references

© Copyright Virtual University of Pakistan

- **Record Operations**

  - Assignment
    - Pascal, Ada, and C allow it if the types are identical
    - In Ada, the RHS can be an aggregate constant

  - Initialization
    - - Allowed in Ada, using an aggregate constant

  - Comparison
    - - In Ada, = and /=; one operand can be an aggregate constant

Pointers

- **Description:**
  - A pointer type is a type in which the range of values consists of memory addresses and a special value, nil (or null)

- **Uses:**
  - Addressing flexibility
  - Dynamic storage management

- **Fundamental Pointer Operations:**
  - Assignment of an address to a pointer
  - References (explicit versus implicit dereferencing)

- **Design Issues**
  - What is the scope and lifetime of pointer variables?
  - What is the lifetime of heap-dynamic variables?
  - Are pointers restricted to pointing at a particular type?
  - Are pointers used for dynamic storage management, indirect addressing, or both?
  - Should a language support pointer types, reference types, or both?
  - Pointer arithmetic?

- **Problems with Pointers**

  - Dangling pointers
    - A pointer points to a heap-dynamic variable that has been deallocated

  - Lost Heap-Dynamic Variables
    - A heap-dynamic variable that is no longer referenced by any program pointer
    - The process of losing heap-dynamic variables is called memory leakage

  - Pointers are like goto's - they widen the range of cells that can be accessed by a variable
  - Pointers are necessary - so we can't design a language without them

© Copyright Virtual University of Pakistan

- **Examples:**
  - **Pascal:** used for dynamic storage management only
    - Explicit dereferencing
    - Dangling pointers are possible (dispose)
    - Dangling objects are also possible

  - **Ada:** a little better than Pascal and Modula-2
    - Some dangling pointers are disallowed because dynamic objects can be automatically deallocated at the end of pointer's scope
    - All pointers are initialized to null
    - Similar dangling object problem (but rarely happens)

  - **C/C++:** Used for dynamic storage management and addressing
    - Explicit dereferencing and address-of operator
    - Can do address arithmetic in restricted forms
    - Domain type need not be fixed (void *)
    - ```
      float stuff[100];
      float *p;
      p = stuff;
      ```
    - *(p+5) is equivalent to stuff [5] and p [5]
    - *(p+i) is equivalent to stuff[i] and p[i]
    - void * - can point to any type and can be type checked (cannot be dereferenced)

  - **Fortran90:** Can point to heap and non-heap variables
    - Implicit dereferencing
    - Special assignment operator for non dereferenced references

  - **C++ Reference Types**
    - Constant pointers that are implicitly dereferenced
    - Used for parameters
    - Advantages of both pass-by-reference and pass-by-value

  - **Java - Only references**
    - No pointer arithmetic
    - Can only point at objects (which are all on the heap)
    - No explicit deallocator (garbage collection is used)
    - Means there can be no dangling references
    - Dereferencing is always implicit

Unions

- **Description:**

  - A union is a type whose variables are allowed to store different type values at different times during execution

- **Design Issues for unions:**

  - What kind of type checking, if any, must be done?
  - Should unions be integrated with records?

© Copyright Virtual University of Pakistan
      ```

- **Examples:**

  - FORTRAN
    - EQUIVALENCE
  - Algol has "discriminated unions"
    - Use a hidden tag to maintain the current type
    - Tag is implicitly set by assignment
    - References are legal only in conformity clauses
    - This runtime type selection is a safe method of accessing union objects
  - Pascal
    - Both discriminated and non-discriminated unions are used e.g.

```
type intreal = record tag : Boolean of
                    true  : (blint : integer);
                    false : (blreal : real);
               end;
```

    - Problem with Pascal's design is that type checking is ineffective

    - Reasons:
      - User can create inconsistent unions (because the tag can be individually assigned)

```
var blurb : intreal;
      x : real;
blurb.tagg := true;   { it is an integer }
blurb.blint := 47;    { ok }
blurb.tagg := false;  { it is a real }
x := blurb.blreal;    { assigns an integer
                        to a real }
```

      - The tag is optional!

  - Ada
    - Discriminated unions are safer than Pascal & Modula-2
    - Reasons
      - Tag must be present
      - It is impossible for the user to create an inconsistent union (because tag cannot be assigned by itself)
      - All assignments to the union must include the tag value)

  - C and C++ have free unions (no tags)
    - Not part of their records
    - No type checking of references

  - Java has neither records nor unions but aggregate types can be created with classes, as in C++

  - Unions are potentially unsafe in most languages (except Ada)

© Copyright Virtual University of Pakistan

Arithmetic Expressions

- **Description:**

  - Arithmetic evaluation was one of the motivations for the development of the first programming languages
  - Arithmetic expressions consist of operators, operands, parentheses, and function calls
  - 15 * (a + b) / log(x)

- **Design issues for arithmetic expressions:**


  - What are the operator precedence rules?
  - What are the operator associativity rules?
  - What is the order of operand evaluation?
  - Are there restrictions on operand evaluation side effects?
  - Does the language allow user-defined operator overloading?
  - What mode mixing is allowed in expressions?
  - Conditional expressions?

© Copyright Virtual University of Pakistan


Modern Programming Languages Lecture 43

- **Arithmetic Expressions: Operators**
  - A unary operator has one operand
  - A binary operator has two operands
  - A ternary operator has three operands
- **Arithmetic Expressions: Operator Precedence Rules**
  - The operator precedence rules for expression evaluation define the order in which "adjacent" operators of different precedence levels are evaluated
  - Typical precedence levels
    - parentheses
    - unary operators
    - ** (if the language supports it)
    - *, /
    - +, -
- **Arithmetic Expressions: Potentials for Side Effects**
  - Functional side effects: when a function changes a two-way parameter or a non-local variable
  - Problem with functional side effects:
    - When a function referenced in an expression alters another operand of the expression; e.g., for a parameter change:

```
a = 10;
/* assume that fun changes its parameter */
b = a + fun(a);
```

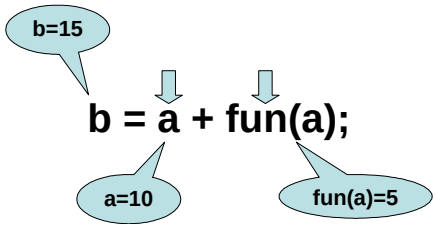


```
int fun(int &x)
{
   x = x + 1;
   return x*2;
```

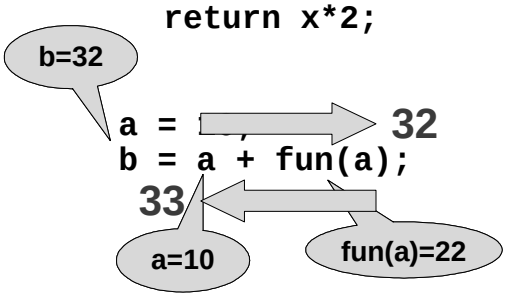

© Copyright Virtual University of Pakistan

- **Functional Side Effects**
  - Two possible solutions to the problem
    - Write the language definition to disallow functional side effects
      - No two-way parameters in functions
      - No non-local references in functions
      - **Advantage:** it works!
      - **Disadvantage:** inflexibility of two-way parameters and non-local references
  - Write the language definition to demand that operand evaluation order be fixed
    - **Disadvantage:** limits some compiler optimizations

- **Operator Overloading**
  - Use of an operator for more than one purpose is called operator overloading
  - Some overloaded operators are common (e.g. '+' for int and float)
  - Some are potential trouble (e.g. '*' in C and C++)
    - * is also used for pointers
  - Loss of compiler error detection (omission of an operand should be a detectable error)
  - Some loss of readability
  - Can be avoided by introduction of new symbols (e.g., Pascal's div for integer division)
  - C++ and Ada allow user-defined overloaded operators
  - Potential problems
    - Users can define nonsense operations
    - Readability may suffer

- **Type Conversion**

  - Implicit Type Conversion
  - Explicit Type Conversion

- **Implicit Type Conversions**

  - A **narrowing conversion** is one that converts an object to a type that cannot include all of the values of the original type e.g., float to int
  - A **widening conversion** is one in which an object is converted to a type that can include at least approximations to all of the values of the original type e.g., int to float
  - A **mixed-mode expression** is one that has operands of different types
  - **Coercion** is an implicit type conversion
  - **Disadvantage of coercions:**
    - They decrease in the type error detection ability of the compiler
  - In most languages, all numeric types are coerced in expressions, using widening conversions
  - In Ada, there are virtually no coercions in expressions

© Copyright Virtual University of Pakistan

- **Explicit Type Conversions**
  - Called casting in C-based language
  - Examples
    - C: (int) angle
    - Ada: Float (sum)
  - Note that Ada's syntax is similar to function calls

- **Errors in Expressions**
  - Causes
    - Coercions of operands in expressions
    - Inherent limitations of arithmetic e.g., division by zero
    - Limitations of computer arithmetic e.g. overflow or underflow
  - Division by zero, overflow, and underflow are run-time errors (sometimes called exceptions)

Relational Expressions

- Use relational operators and operands of various types

- Evaluate to some boolean representation

- Operator symbols used vary somewhat among different languages (!=, /=, .NE., <>, #)

Boolean Expressions

- Operands are Boolean and the result is also a Boolean

- Operators

FORTRAN 77	FORTRAN 90	C	Ada
AND	and	&&	and
OR	or	||	or
NOT	not	!	not
	xor		

Boolean Expressions

One odd characteristic of C's expressions
a < b < c

Short Circuit Evaluation

- A and B

- A or B

© Copyright Virtual University of Pakistan

- *Example*

```
index := 1;
while (index <= length) and
      (LIST[index] <> value) do
  index := index + 1
```

C, C++, and Java*:* use short-circuit evaluation for the usual Boolean operators (&& and ||), but also provide bitwise Boolean operators that are not short circuit (& and |)

Ada: programmer can specify either (short-circuit is specified with 'and then' and 'or else')

FORTRAN 77: short circuiting is there, but any side affected place must be set to undefined

Problem with Short Circuiting

(a > b) || (b++ / 3)

Short-circuit evaluation exposes the potential problem of side effects in expressions

© Copyright Virtual University of Pakistan

Modern Programming Languages Lecture 44

Control Structure

- Def: A *control structure* is a control statement and the statements whose execution it controls

- *Levels of Control Flow*
  1. Within expressions
  2. Among program units
  3. Among program statements

- *Overall Design Question*

What control statements should a language has, beyond selection and pretest logical loops?

Evolution

- FORTRAN I control statements were based directly on IBM 704 hardware
- Much research and argument in the1960s about the issue
- One important result: It was proven that all flowcharts can be coded with only two-way selection and pretest logical loops

Selection Statements
Design Issues

1. What is the form and type of the control expression?

2. What is the selectable segment form (single statement, statement sequence, compound statement)?

3. How should the meaning of nested selectors be specified?

Single-Way Selection Statement

FORTRAN IF
- IF (boolean_expr) statement

Problem

- Can select only a single statement;
- To select more, a goto must be used

FORTRAN example:

```
   IF (.NOT. condition) GOTO 20
     ...
     ...
20 CONTINUE
```


© Copyright Virtual University of Pakistan

ALGOL 60 if:

```
if (boolean_expr) then
  begin
  ...
  end
```

Two-way Selector

***ALGOL 60* if:**

```
if (boolean_expr)
  then statement  (the then clause)
  else statement  (the else clause)
```

- The statements could be single or compound

Nested Selectors

Example (Pascal)

```
if ... then
if ... then
    ...
else ...
```

- Which then gets the else?

- Pascal's rule: else goes with the nearest then

Nested Selectors

ALGOL 60's solution - disallow direct nesting

```
if ... then          if ... then
  begin                begin
  if ...               if ... then ...
    then ...             end
    else ...           else ...
  end
```

FORTRAN 77, Ada, Modula-2 solution – closing special words

Example (Ada)

```
if ... then          if ... then
  if ... then          if ... then
    ...                ...
  else                 end if
    ...              else
  end if               ...
```


© Copyright Virtual University of Pakistan

end if end if

- *Advantage:* flexibility and readability

- Modula-2 uses the same closing special word for all control structures (END)

- This results in poor readability

Multiple Selection Constructs

Design Issues

1. What is the form and type of the control expression?

2. What segments are selectable (single, compound, sequential)?

3. Is the entire construct encapsulated?

4. Is execution flow through the structure restricted to include just a single selectable segment?

5. What is done about un-represented expression values?

Early Multiple Selectors

1. FORTRAN arithmetic IF (a three-way selector)
   - IF (arithmetic expression) N1, N2, N3

   Bad aspects:
   - Not encapsulated
     (selectable segments could be anywhere)
   - Segments require GOTO's

Modern Multiple Selectors

1. Pascal case (from Hoare's contribution to ALGOL W)

```
case expression of
  constant_list_1 : statement_1;
  ...
  constant_list_n : statement_n
end
```

Design Choices

1. Expression is any ordinal type
   (int, boolean, char, enum)
2. Only one segment can be executed per execution of the construct

© Copyright Virtual University of Pakistan

3. In Wirth's Pascal, result of an un-represented
control expression value is undefined
(In 1984 ISO Standard, it is a runtime error)

- Many dialects now have otherwise or else
clause

The C and C++ switch

```
switch (expression)  {
  constant_expression_1 : statement_1;
  ...
  constant_expression_n : statement_n;
  [default: statement_n+1]
}
```

Any number of segments can be executed in one execution of
the construct (there is no implicit branch at the end of
selectable segments)

- Trade-off between reliability and flexibility (convenience)

- To avoid it, the programmer must supply a break statement
for each segment

Ada's case is similar to Pascal's case, except:

1. Constant lists can include:
   - Subranges e.g., 10..15
   - Boolean OR operators
     e.g. 1..5 | 7 | 15..20

2. Lists of constants must be exhaustive
   - Often accomplished with others clause
   - This makes it more reliable

- Multiple Selectors can appear as direct extensions
to two-way selectors, using else-if clauses
(ALGOL 68, FORTRAN 77, Modula-2, Ada)

Example (Ada)

```
if ...
  then ...
elsif ...
  then ...
elsif ...
  then ...
  else ...
end if
```


© Copyright Virtual University of Pakistan

- Far more readable than deeply nested if's
- Allows a boolean gate on every selectable group

Iterative Statements

- The repeated execution of a statement or compound statement is accomplished either by iteration or recursion; here we look at iteration, because recursion is a unit-level control

- *General design Issues for iteration control statements are:*
  1. How is iteration controlled?
  2. Where is the control mechanism in the loop?

Counter-Controlled Loops

Design Issues

1. What is the type and scope of the loop variable?

2. What is the value of the loop variable at loop termination?

3. Should it be legal for the loop variable or loop parameters to be changed in the loop body, and if so, does the change affect loop control?

4. Should the loop parameters be evaluated only once, or once for every iteration?

1. FORTRAN 77 and 90

- Syntax: DO label var = start, finish [, stepsize]

  - Stepsize can be any value but zero
  - Parameters can be expressions

- Design choices:
  1. Loop variables can be INTEGER, REAL, or DOUBLE
  2. Loop variable always has its last value
  3. The loop variable cannot be changed in the loop, but the parameters can; because they are evaluated only once, it does not affect loop control
  4. Loop parameters are evaluated only once

FORTRAN 90's 'Other DO'

- Syntax:
  [name:] DO variable = initial, terminal [, stepsize]

© Copyright Virtual University of Pakistan

…
END DO [name]

- Loop variable must be an INTEGER

2. ALGOL 60

- Syntax: for var := <list_of_stuff> do statement
where <list_of_stuff> can have:
- List of expressions
- expression step expression until expression
- expression while boolean_expression

for index := 1 step 2 until 50,
60, 70, 80,
index + 1 until 100 do

(index = 1, 3, 5, 7, ..., 49, 60, 70, 80,
81, 82, ..., 100)

ALGOL 60 Design choices

1. Control expression can be int or real; its scope is whatever it is declared to be

2. Control variable has its last assigned value after loop termination

3. Parameters are evaluated with every iteration, making it very complex and difficult to read

4. The loop variable cannot be changed in the loop, but the parameters can, and when they are, it affects loop control

3. Pascal

- Syntax:
for variable := initial (to | downto) final do
statement

- Design Choices:
1. Loop variable must be an ordinal type of usual scope
2. After normal termination, loop variable is undefined
3. The loop variable cannot be changed in the loop; the loop parameters can be changed, but they are evaluated just once, so it does not affect loop control

© Copyright Virtual University of Pakistan

4. *Ada*

- Syntax:

```
for var in [reverse] discrete_range loop
  ...
 end loop
```

Ada Design choices

1. Type of the loop var is that of the discrete range; its scope is the loop body (it is implicitly declared)
2. The loop var does not exist outside the loop
3. The loop var cannot be changed in the loop, but the discrete range can; it does not affect loop control
4. The discrete range is evaluated just once

5. C

- Syntax:

```
for ([expr_1] ; [expr_2] ; [expr_3]) statement
```

- The expressions can be whole statements, or even statement sequences, with the statements separated by commas
- The value of a multiple-statement expression is the value of the last statement in the expression
  e.g.

```
for (i = 0, j = 10; j == i;  i++) ...
```

- If the second expression is absent, it is an infinite loop

-C Design Choices

1. There is no explicit loop variable
2. Irrelevant
3. Everything can be changed in the loop
4. Pretest
5. The first expression is evaluated once, but the other two are evaluated with each iteration

- This loop statement is the most flexible

6. C++

- Differs from C in two ways:
  1. The control expression can also be Boolean
  2. The initial expression can include variable definitions (scope is from the definition to the end of the function in which it is defined)

7. Java

- Differs from C++ in two ways:

© Copyright Virtual University of Pakistan

1. Control expression must be Boolean
2. Scope of variables defined in the initial expression is only the loop body

Logically-Controlled Loops

- Design Issues
  1. Pre-test or post-test?
  2. Should this be a special case of the counting loop statement (or a separate statement)?

Examples

1. Pascal has separate pretest and post-test logical loop statements (while-do and repeat-until)

2. C and C++ also have both, but the control expression for the post-test version is treated just like in the pretest case (while - do and do - while)

3. Java is like C, except the control expression must be Boolean (and the body can only be entered at the beginning- Java has no goto)

4. Ada has a pretest version, but no post-test

5. FORTRAN 77 and 90 have neither

User-Located Loop Control Mechanisms

- Design issues

1. Should the conditional be part of the exit?
2. Should the mechanism be allowed in an already controlled loop?
3. Should control be transferable out of more than one loop?

1. C , C++, and Java - break

- Unconditional; for any loop or switch; one level only (Java's can have a label)
- There is also a continue statement for loops; it skips the remainder of this iteration, but does not exit the loop

2. FORTRAN 90 - EXIT

- Unconditional; for any loop, any number of

© Copyright Virtual University of Pakistan

levels
- FORTRAN 90 also has a CYCLE, which has the same semantics as C's continue

Examples:

1. Ada - conditional or unconditional exit; for any loop and any number of levels

```
for ... loop
  ...
  exit when ...
  ...
end loop
```

Example (Ada)

```
        LOOP1:
          while ... loop
                  ...
            LOOP2:
                  for ... loop
            ...
            exit LOOP1 when ..
            ...
        end loop LOOP2;
          ...
          end loop LOOP1;
```

Unconditional Branching

- All classical languages have it

- Problem: readability
  Edsger W. Dijkstra,
-Go To Statement Considered Harmful,
  CACM, Vol. 11, No. 3, March 1968, pp. 147-148
- Some languages do not have them e.g. Modula-2 and Java
- Advocates: Flexibility
  KNUTH D E, Structured programming with go to statements, ACM Computing Surveys 6, 4 (1974)

Conclusion

Choice of control statements beyond selection and logical pretest loops is a trade-off between language size and writability!

Connection between control statements and program verification is intimate

© Copyright Virtual University of Pakistan

- Verification is impossible with goto's
- Verification is possible with only selection and logical pretest loops
- Verification is relatively simple with only guarded commands

© Copyright Virtual University of Pakistan

Modern Programming Languages Lecture 45

Actual/Formal Parameter Correspondence:

1. Positional
2. Keyword

e.g. SORT(LIST => A, LENGTH => N);

Default Parameter Values

```
procedure SORT(LIST : LIST_TYPE;
               LENGTH : INTEGER := 100);
...
SORT(LIST => A);
```

Parameters and Parameter Passing

Semantic Models

- in mode, out mode, in-out mode

Conceptual Models of Transfer

1. Physically move a value

2. Move an access path

Implementation Models

1. Pass-by-value (in mode)

- Either by physical move or access path

2. Pass-by-result (out mode)

- Local's value is passed back to the caller

- Physical move is usually used

- Disadvantages: Collision

Example:

```
procedure sub1(y: int, z: int);
            ...

sub1(x, x);
```

3. Pass-by-reference (in-out mode)

i. Actual parameter collisions

e.g.

```
procedure sub1(a: int, b: int);
```


© Copyright Virtual University of Pakistan

```
...
sub1(x, x);
```

ii. Array element collisions

e.g.

```
sub1(a[i], a[j]);  /* if i = j  */
```

iii. Collision between formals and globals

Root cause of all of these is: The called subprogram is provided wider access to Non-locals than is necessary

Type checking parameters

- Now considered very important for reliability

FORTRAN 77 and original C: none

Pascal, Modula-2, FORTRAN 90, Java, and Ada: it is always required

- ANSI C and C++: choice is made by the user

Implementing Parameter Passing

ALGOL 60 and most of its descendants use the run-time stack

- Value copied to the stack; references are indirect to the stack

- Result : same

- Reference : regardless of form, put the address on the stack

Design Considerations for Parameter Passing

1. Efficiency
2. One-way or two-way

- These two are in conflict with one another!

Good programming =>
limited access to variables, which means one-way whenever possible

Efficiency =>
pass by reference is fastest way to pass structures of significant size

Concluding Remarks

- Different programming languages for different problems
  Imperative, Declarative, Functional, Object-Oriented, Scripting
- Readability – maintainability

© Copyright Virtual University of Pakistan

- Side effects
- Mainly because of the assignment statement and aliasing
- Reduces readability and causes errors
- Operand evaluation order
- Data types and data sizes
- Static-Dynamic activation records
- Necessary for recursion

http://www.cs.utep.edu/cheon/cs3360/exam/sample/chap7.php

© Copyright Virtual University of Pakistan