

Virtual University

4-Year Experience



Cell No : 0342-7193822

All Services Available Very Reasonable Prices 100 % Correct
Solutions Assignments, GDBs, PDF Handouts, PDF Notes, Past
paper Files , Current Paper Officials
Special Guidelines (Sir Muhammad Usman) Owner YouTube
Channel Learn For Success
Cell No : 0342-7193822 (Only WhatsApp)

Question: 47 (Marks: 5)

Given is the code for the class myClass.

```
class myClass
{
private:
    int x ;
    int y;

public:
    myClass()
    {
        x = 0;
        y = 0;
    }
};
```

You are required to write the code to perform the following task in the main() function.

Number of objects to be created

```
myClass()
{
    x = 0;
    y = 0;
}
```

```
};
```

You are required to write the code to perform the following task in the main() function.

- Prompt the user to enter the number of objects to be created.
- Dynamically allocate memory to objects according to the size entered by user.
- De-allocate memory that was allocated to objects.

Answer:




Question: 50 (Marks: 5)

Write a C++ program to meet the following requirements:

1. Take an integer number as input from the user and calculates the cube of that number using macro.
2. Add 3 to the user entered number and calculates the cube of updated number using macro.
3. Display output of the above computed values.

Answer:



Question: **49** (Marks: 5)

Write the code for showing the sum of the following series:
 $1^2+3^2+5^2+7^2+9^2+11^2$



Answer:



Given is the code of a class Matrix.

```
class Matrix
{
private:
int Elements[3][3];
};
```

Write the operator function of Insertion operator (<<) for this class.

Question: 6 (Marks: 1)

The setprecision manipulator is used to set _____.

Choices:

☐ The number of digits after the decimal point

☐ The number of digits before the decimal point

Introduction to Programming (CS201)

Question: 6 (Marks: 1)

The setprecision manipulator is used to set _____.

Choices:

The number of digits after the decimal point



Choices:


The number of digits after the decimal point



The number of digits before the decimal point

Choices:

The number of digits after the decimal point

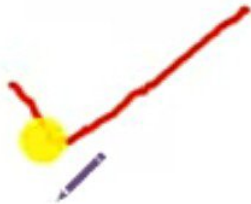

The number of digits before the decimal point

The number of digits in a number

The number of digits in a number

Total zeros in the number



Introduction to Programming (CS201)

Question: 4 (Marks: 1)

Every data member or function inside the structure is _____ by default whereas everything declared inside a class is _____ by default.



Choices:

private, public

public, private



private, protected



public, protected



An object of _____ class can be created for saving the current position of any opened file before reading from the file.

Choices:

Filepos



Streampos

Choices:

Filepos

Streampos





Stream



Filestream

Question: 1 (Marks: 1)

Friend functions are _____ of a class.



Choices:

Static Member functions



Private member functions



Non-member functions



Question: 17 (Marks: 1)

A class member function that has been defined for overloading a unary operator takes _____ arguments ?

Choices:

Zero



Introduction to Programming (CS201)

Question: 17 (Marks: 1)

A class member function that has been defined for overloading a unary operator takes _____ arguments ?

Choices:

Zero



Question: 15 (Marks: 1)

Which one is the correct syntax for defining an identifier PI with preprocessor directive?

Choices:

☐ #undef PI 3.1415926

Choices:

`#undef PI 3.1415926`

`#define PI 3.1415926`



Question: 10 (Marks: 1)

Apowersoft
Screen Recorder

The appropriate data type to store the number of rows and columns of the matrix is _____.

Choices:

☐ float

☒ int

int



char

Question: 30 (Marks: 1)


int and char data types take _____ and _____ bytes respectively.

Choices:

☐ 2, 3☐☒ 4, 1



4,1



1,4

Question: 28 (Marks: 1)

When we are talking about pointers, we actually refer to pointing to an area in

_____.

Choices:

program

☐

array

array

memory



Question: 24 (Marks: 1)**What will be the output of the following code segment?**

```
int arr[]={23,56,32,44,55,3,6,88,99};  
int * ptr= &arr[2];  
cout<<*(ptr+4);
```

Choices:☐ 6

```
cout<<*(ptr+4);
```

Submit Answer

Choices:

6



56



Question: 19 (Marks: 1)

Apowersoft
Screen Recorder

Which of the following function calling mechanism is true for the function prototype given below?

`float func(float &);`

Choices:

Call by value



Call by reference using pointer

Choices:

Call by value



Call by reference using pointer



TIME LEFT

75



Type here to search



iii



Virtual University Overseas Examination System V2.1 (x86)

Introduction to Programming (CS201)

Question: 40 (Marks: 1)

RAID stands for _____.



Choices:

Redundant Allocation of Inexpensive Devices

Redundant Allocation of Inexpensive Disks

Redundant Array of Inexpensive Devices



Question 30 (1 mark)

The new[] and delete[] operators are overloaded to _____.

Choices:

☐ Control the allocation of arrays of objects.

☐ Allocate and deallocate memory dynamically for pointers of primitive data types.

Choices:

Control the allocation of arrays of objects.



Allocate and deallocate memory dynamically for pointers of primitive data types.



Virtual University Overseas Examination System V2.1 (x86)

Introduction to Programming (CS201)

Question: 33 (Marks: 1)

For explicitly calling a destructor, which symbol is used with the class name?



Choices:

@



^

~



Question: 32 (Marks: 1)

Instance of a class is called _____.

Choices:

☐ Friend function

Choices:

Friend function



Object



Introduction to Programming (CS201)

Question: 35 (Marks: 1)

Which of the following is used for generic programming?


Choices:

Virtual functions



Modules

Templates

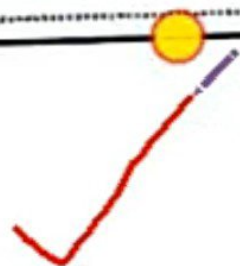

Question: 39 (Marks: 1)

Which of the following is a correct description of a unary operator?

Choices:

1

++, -



Question: 38 (Marks: 1)

If a Matrix A with order 3 rows, 2 columns is multiplied with another Matrix B of 2 rows and 3 columns then the resultant Matrix AB will have _____.

Choices:

☒ 3 rows and 3 columns

☐ 3 rows and 2 columns

3 rows and 3 columns

3 rows and 2 columns



2 rows and 3 columns

Question: 37 (Marks: 1)

Apowersoft
Screen Recorder

Initializing the data members in the definition of the class shows _____.

Choices:

☒ Run time error

☐ Logical error

Warning message

Syntax error



Question: 27 (Marks: 1)

What is the syntax of class template?




Choices:

☐ template <paramaters> class declaration

Choices:

template <paramaters> class declaration

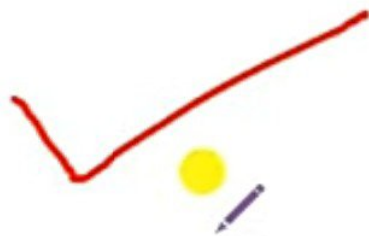

Template <paramaters> class declaration



Question: 26 (Marks: 1)

In how many ways templates concept can be used?

Choices:

1



2

3



Lets consider that Matrix is a class, then in `Matrix m2=m1;` the _____ is being used

Choices:

☒ Default constructor

☐ Overloaded constructor

Parameterized constructor

Copy constructor



Introduction to Programming (CS201)

Question: 21 (Marks: 1)

In the member initializer list, the data members are initialized _____.

Choices:

From left to right

There is no order for initialization

In the order in which they are declared in the class



Introduction to Programming (CS201)

Question: 22 (Marks: 1)

If we do not define the overloaded assignment operator in a class, the ----- will be done for member data.

Choices:

☐ Memory allocation

Default destruction



Shallow copy



Question: 11 (Marks: 1)

The initializer list is used to initialize the contained objects of a class at _____.



Choices:

Run time



Debugging time

Construction time



Introduction to Programming (CS201)

Question: 12 (Marks: 1)

The difference between `cin.get()` and `cin.read()` methods is _____.



Choices:

`cin.read()` returns one character at a time and `cin.get()` returns a buffer.



Choices:

☐ `cin.read()` returns one character at a time and `cin.get()` returns a buffer.



☒ `cin.get()` returns a character at a time and `cin.read()` returns a buffer.



Question: 14 (Marks: 1)

Which of the following is NOT a common error that can happen with memory allocation?

Choices:

Memory leak



Unreferenced memory

Void pointers



Question: 16 (Marks: 1)

The first parameter of overloaded stream insertion operator is _____ whereas second parameter is _____.

Choices:

input stream, object of class

Choices:

input stream, object of class



object of class, output stream



output stream, object of class

TIME LEFT

75

University of
Salford

University Overseas Examination System V2.1 (x86)
Introduction to Programming (CS201)

Question: 5 (Marks: 1)

Both endl and flush are _____.

Choices:

Functions



Operators

Manipulators



Question: 8 (Marks: 1)

The static data members of a class will be _____.

Choices:

☐ shared by objects

☐ created for each object


Introduction to Programming (CS201)

Question: 8 (Marks: 1)

The static data members of a class will be _____.

Choices:

☒ shared by objects

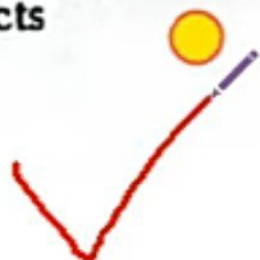

Virtual University

4-Year Experience



Cell No : 0342-7193822

All Services Available Very Reasonable Prices 100 % Correct
Solutions Assignments, GDBs, PDF Handouts, PDF Notes, Past
paper Files , Current Paper Officials
Special Guidelines (Sir Muhammad Usman) Owner YouTube
Channel Learn For Success
Cell No : 0342-7193822 (Only WhatsApp)