Q.1 In stack, which node will be considered as the Top of stack?

A. Any node

B. Last node

C. Middle node

D. First node

Q.2 Which of the following is used to navigate from one node to another node in the linked list?

A. Null pointer

B. None of the given options

C. Object field of node

D. Next part of node

Q.3 Each operator in a postfix expression refers to the previous _____ operand(s).

A. 0

B. 2

C. 1

D. 3

Q.4 How many times a for loop will be executed if we use the find() method of list data structure to find the value 10 from the given list?

A	2	6	8	9	1				current	size
	1	2	3	4	5				5	5

A. 5

B. 10

C. 7

D. 4

Q.5 Which of the following statement declares an array 'x' with 6 integers?


A. int x = 6;

B. int [6] x;

C. int x[6];

D. float x[6];

Q.6 Consider a list {2,6,8,7,1} represented as a linked list. In this list "current" is a:

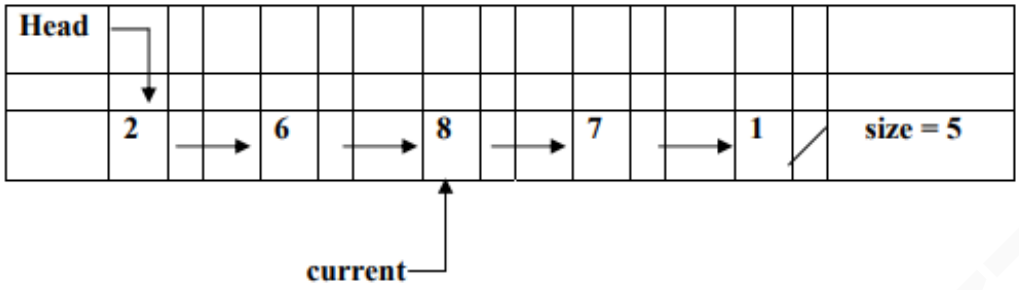

A. Head node

B. Pointer

C. List element

D. List object

Q.7 What does the following method do for a given linked list class? void traverse(List list) { Node* savedCurrentNode = list.currentNode; list.currentNode = list.headNode; for(int i = 1; list.next(); i++) {cout << "\n Element " << i << " " << list.get(); } list. currentNode = savedCurrentNode; }

A. Adding new nodes

B. Displaying the values of nodes

C. Updating the values of nodes

D. Deleting nodes

Q.8 What value will be returned by the given function if the values of 'a' and 'b' are 6 and 5? int i_avg (int a, int b) { return (a++ + ++b) / 2; }

A. 6

B. 5

C. 4

D. 7

Q.9 In a doubly linked list, we can traverse the list in _____.

A. Forward direction

B. Reverse direction

C. No direction

D. Both directions

Q.10 In C++, a single stack can be used for different types by using _____.

A. Static variables

B. Templates

C. Postfix expressions

D. Linked Lists
