CS301P - Quiz No.5

Date: 20 November 2025

Q.1 In which traversal method left subtree is visited in first step?


A. Preorder traversal

B. In-order traversal

C. Not possible to traverse left subtree

D. level-order traversal

Q.2 Which of the following traversal method will be used, if we want the output as 3,4,7,9,14,15,16,18,20?

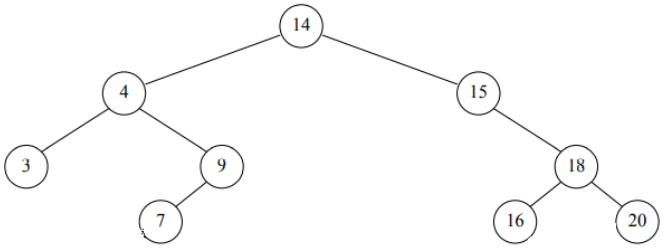

A. Level-order traversal

B. In-order traversal

C. Post-order traversal

D. Preorder traversal

Q.3 Which of the following condition will be true if a node is NULL during the in-order traversal using recursive calls?

A. Node can contain only one child

B. Node does not contain both left and right children

C. Node contains only right child

D. Node contains only left child

Q.4 The code of BST traversal methods becomes very short by using:

A. Friend functions

B. Heap

C. Recursive calls

D. Non-recursive calls

Q.5 What does the following traversal code do? void func (TreeNode* treeNode) { if(treeNode != NULL) { func(treeNode->getLeft()); func(treeNode->getRight()); cout << *(treeNode->getInfo())<<" "; } }

A. Preorder traversal

B. Post-order traversal

C. Level-order traversal

D. In-order traversal
