Question # 1 of 3 **Time Left: 79 sec(s)**

Which of the following will be a correct SQL subquery command, to display information of all those employees who are earning minimum salary but employees are neither working as Salesmen nor Clerk?

Select the correct option

Reload Math Equations

○	SELECT ename, sal, deptno FROM emp WHERE sal = (SELECT MIN (sal) FROM emp AND job <> 'Salesmen' and job !='CLERK');
○	SELECT ename, sal, deptno FROM emp WHERE job <> 'Salesmen' and job !='CLERK';
✓	SELECT ename, sal, deptno FROM emp WHERE sal = (SELECT MIN (sal) FROM emp) AND job <> 'Salesmen' and job !='CLERK';
○	SELECT MIN (sal) FROM emp) Where job <> 'Salesmen' and job !='CLERK';

Activate Windows
Go to Settings to activate

Which of the following will be a correct SQL subquery command, to display all those deptno where minimum salary is less than average salary of all the salary among all the employees?

Select the correct option

Reload Math Equations

○	SELECT e.deptno, MIN (sal) FROM emp e, dept d WHERE d.deptno=e.deptno GROUP BY e.deptno HAVING MIN (sal) < AVG (sal);
○	SELECT* FROM emp e, dept d WHERE d.deptno=e.deptno HAVING MIN (sal) < (SELECT AVG (sal);
○	SELECT e.deptno, MIN (sal) FROM emp e, dept d WHERE d.deptno=e.deptno GROUP BY e.deptno HAVING MIN (sal) < (SELECT AVG (sal) FROM emp); ✓
○	SELECT e.deptno, MIN (sal) WHERE d.deptno=e.deptno GROUP BY e.deptno HAVING MIN (sal) < (SELECT AVG (sal) FROM emp);

Activate Windows

Which of the following will be a correct SQL subquery command, to display all those deptno where minimum salary is less than average salary of all the salary among all the employees?

Select the correct option

Reload Math Equations

○	SELECT e.deptno, MIN (sal) WHERE d.deptno=e.deptno GROUP BY e.deptno HAVING MIN (sal) < (SELECT AVG (sal) FROM emp);
○	SELECT* FROM emp e, dept d WHERE d.deptno=e.deptno HAVING MIN (sal) < (SELECT AVG (sal);
◉	SELECT e.deptno, MIN (sal) FROM emp e, dept d WHERE d.deptno=e.deptno GROUP BY e.deptno HAVING MIN (sal) < (SELECT AVG (sal) FROM emp); ✓
○	SELECT e.deptno, MIN (sal) FROM emp e, dept d WHERE d.deptno=e.deptno GROUP BY e.deptno HAVING MIN (sal) < AVG (sal);

Activate Windows

Which of the following is the correct syntax for subquery?

Select the correct option

○	SELECT * FROM table1 WHERE column1 = (SELECT column1 FROM table2);
○	SELECT * FROM table1 WHERE column1 = (SELECT FROM table2);
○	SELECT * FROM table1 WHERE column1 (SELECT column1 FROM table2);
○	SELECT * FROM table1 WHERE Table1 = (SELECT column1 FROM table2); ✓

Which of the following will be a correct SQL subquery command, to display information of all those employees who are earning minimum salary?

Select the correct option

Reload Math Equa

○	SELECT MIN(sal) FROM emp WHERE sal = (SELECT MIN (sal) FROM emp)
○	SELECT * FROM Salary WHERE sal = (SELECT MIN (sal) FROM emp)
○	SELECT * FROM emp WHERE sal = (SELECT MIN (sal) FROM emp)
○	SELECT * FROM emp WHERE sal(SELECT MIN (sal) FROM emp)

Activate Wir
Go to Settings t

Which of the following will be a correct SQL subquery command, to display all those deptno where minimum salary is less than average salary of all the salary among all the employees?

Select the correct option

Reload Math Equations

○	SELECT e.deptno, MIN (sal) WHERE d.deptno=e.deptno GROUP BY e.deptno HAVING MIN (sal) < (SELECT AVG (sal) FROM emp);
○	SELECT e.deptno, MIN (sal) FROM emp e, dept d WHERE d.deptno=e.deptno GROUP BY e.deptno HAVING MIN (sal) < AVG (sal);
○	SELECT* FROM emp e, dept d WHERE d.deptno=e.deptno HAVING MIN (sal) < (SELECT AVG (sal);
○	SELECT e.deptno, MIN (sal) FROM emp e, dept d WHERE d.deptno=e.deptno GROUP BY e.deptno HAVING MIN (sal) < (SELECT AVG (sal) FROM emp);

Activate Windows

Identify the subquery from the given PL/SQLI block.

```
SELECT e.deptno, MIN (sal) FROM emp e, dept d  WHERE d.deptno=e.deptno
 AND loc like ('---K')
GROUP BY e.deptno HAVING MIN (sal) < (SELECT AVG (sal) FROM emp);
```

Select the correct option

○	GROUP BY e.deptno HAVING MIN (sal)
○	SELECT e.deptno, MIN (sal) FROM emp e, dept d;
○	(SELECT AVG (sal) FROM emp);
◉	WHERE d.deptno=e.deptno AND loc like ('---K') GROUP BY e.deptno

h va queries ko implement kr k un ki output pics ko submit krwana h. Aur queries likh k submit

PL/SQL program units are compiled by the _____ and are stored inside the database.

Select the correct option

○	Compiler
◉	Oracle Database server
○	SQL server
○	PL/SQL server

SQL is _____ language and PL/SQL is a _____ language.

Select the correct option

◉	Procedural, programming 
○	Built in, user define
○	Procedural, non procedural 
○	Non procedural, procedural

_____ extends SQL by adding programming structures and subroutines.

Select the correct option

○	Oracle
◉	PL/SQL
○	Java
○	C++

Which of the following construct/constructs is/are are used to write generic programming?

Select the correct option

○	loops
●	All of the mentioned
○	Functions
○	Procedure

Which of the following programming construct/constructs is/are NOT supported by SQL?

Select the correct option

○	Functions
○	Loops
○	All of the mentioned ✓
○	Procedure

Any application which need to access database need _____ to access DB.

Select the correct option

○	Forms
○	Interface ✓
○	Database server
○	Text base interface

PLSQL engine breaks the code into two parts, which are _____ and _____.

Select the correct option

○	Programming construct, SQL
○	Executable, object code
○	Procedural, SQL ✓
○	Non procedural, SQL

Which of the followings handle PL?

Select the correct option

○	PL statement Executor
○	SQL executor
○	PL executor
○	Procedural statement executor ✓

Which of the following is responsible to compile, execute and generate output of PL/SQL code?

Select the correct option

○	PL/SQL server
○	Server
○	Compiler
○	PL/SQL engine ✓

Click to Sav

Which of the following is the the basic unit of a PL/SQL source program?

Select the correct option

○	Box
●	Block
○	Interface
○	Session

Which of the following is related to the PL/SQL block?

Select the correct option

◉	Block can switch to other block
○	Block can not have SQL commands
○	Block can be empty
○	Block can be nested

Block is minimum executable unit of PL/SQL which consists of _____ and _____ Parts.

Select the correct option

●	Mandatory, optional
○	Executable, Running
○	Compiled, executable
○	Static and dynamic

Which of the following is equivalent to cout or printf in C++/C?

Select the correct option

○	OUTPUT.PUT_LINE
○	DBMS.PUT_LINE
◉	DBMS_OUTPUT.PUT_LINE
○	COUT_OUTPUT.PUT_LINE

PL/SQL executable section is enclosed between_____ and _____.

Select the correct option

○	Begin, exception
○	Declare, exception
◉	Begin, End
○	Declare, End

Which of the following represents correct syntax for executable section in PL/SQL?

Select the correct option

◉	BEGIN DBMS_OUTPUT.PUT_LINE ('First Program in Oracle 11i'); END;
○	BEGIN END;
○	Declare DBMS_OUTPUT.PUT_LINE ('First Program in Oracle 11i'); END;
	Define

Which of the following is the correct PL/SQL syntax to declare an integer type variable which can store values up to 10 digits?

Select the correct option

Reloc

○	I integer (10)
○	I char (10)
●	I number (10):=0;
○	I digit(10):=0;

Ac
Go

Which of the following operator is used to join the output of multiple variables?

Select the correct option

◉	Concatenation operator (||)
○	Concatenation operator (&&)
○	Concatenation operator (*)
○	Concatenation operator (^)

Varchar data type store _____ type data.

Select the correct option

○	Variety
●	Variable
○	Varietal
○	Fixed

Which of the following is the correct PL/SQL syntax to declare a numeric type variable?

Select the correct option

○	a char: = 10;
●	a numeric: = 10;
○	a digit(10):=0;
○	a integer: = 10;

What will be the output of given PL/SQL statement?

```
DECLARE
a integer: = 10;
b integer: = 20;
c integer;
BEGIN
c: = a + b;
dbms_output.put_line ('Value of c: ' || c);
END; /
```

Select the correct option

◉	Value of c: 30

Variable declared in inner block is accessible in _____.

Select the correct option

●	Outer block only
○	Both inner block and outer block
○	Inner block only
○	Globally

_____ is the correct syntax to declare and initialize a variable in PL/SQL.

Select the correct option

Re

○	Dim num1 as number=95
○	num1 number :=95; ✓
○	var num1=95;
◉	num1 number = 95; ✗

We can comment a statement in PL/SQL using _____.

Select the correct option

○	@@
◉	//
○	--
○	<-- -->

_____ is the correct syntax to declare and initialize a variable in PL/SQL

Select the correct option

○	num1 number = 95;
○	var num1=95;
○	num1 number :=95;
○	Dim num1 as number=95

We can comment a statement in PL/SQL using _____.

Select the correct option

◉	<-- -->
○	@@
○	//
○	--

Variable declared in inner block is accessible in _____.

Select the correct option

○	Inner block only ✓
○	Both inner block and outer block
○	Outer block only
○	Globally

In Select into statement the _____ before into and _____ after into must be same.

Select the correct option

○	columns ,rows
○	rows,columns
○	rows,variables
○	columns ,variables ✓

In Select into statement the variables must be declared after _____ and before _____.

Select the correct option

○	From,where
○	Into,where
○	Into,from ✓
○	From,into

Select into clause selects the columns into _____.

Select the correct option

○	Objects
○	Arrays
◉	Variables
○	Views

_____ is the correct way to print some string as it is in PL/SQL.

Select the correct option

○	“Some string”
○	‘Some string’ ✓
○	*Some string*
○	@Some string@

_____ is the correct syntax to print in PL/SQL

Select the correct option

○	dbms_output.drop_line()
●	dbms_output.put_line()
○	dbms_output.write_line()
○	dbms_output.print_line()

_____ is used to concatenate strings while printing in PL/SQL.

Select the correct option

○	+
○	+=
○	concat
◉	||

_____is correct syntax to declare a variable in PL/SQL.

Select the correct option

◉	Name emp.ename%type;
○	Name emp.ename@type;
○	Name emp.ename:type;
○	Name emp.ename.type;

If we have column as contactno and variable name is contact, which of the following is correct syntax for select into statement.

Select the correct option

○	select contactno,contact into
○	select contact into contactno
○	select into contactno,contact
○	select contactno into contact ✓

_____ is used to automatically map the type of column to variable in PL/SQL

Select the correct option

- ○ %auto
- ◉ %maptype
- ○ %map
- ○ %type

Click to S

If Some table have only one row, select into statement will _____.

Select the correct option

○	cause Invalid Identifier exception
○	be Successful ✓
○	cause ORA-06550
○	cause ORA-01422

If select into returns more than rows _____.

Select the correct option

○	Last row will be displayed
○	First row will be displayed
○	Oracle will raise the exception ✓
○	Data will be shown in tabular form

If column name is incorrect in where clause, _____ exception will be raised.

Select the correct option

○	Invalid Identifier 
○	Invalid prefix
○	Invalid character
○	Invalid string

_____function is used to check the duration in months between two dates.

Select the correct option

○	duration
○	between
○	months_duration
○	months_between ✓

_____ keyword is required to be used before declaring any variable in PL/SQL.

Select the correct option

○	declare ✓
○	announce
○	state
○	new

_____ function is used to get the maximum value from a column named age in PL/SQL

Select the correct option

- [x] select max(age)
- [ ] select biggest(age)
- [ ] select top(age)
- [ ] select maximum(age)

Which SQL command is NOT a DML statement?

Select the correct option

◉	CREATE
○	DELETE
○	INSERT
○	UPDATE

Which of the following command is used to add rows into a table in PL/SQL?

Select the correct option

◉	INSERT
○	Add
○	ENTER
○	PUT

The UPDATE command can be used to update _____.

Select the correct option

◉	Any number of rows
○	Only last 10 rows
○	1 row only
○	Only first 10 rows

Which of the following is the correct syntax of INSERT command in PL/SQL.

Select the correct option

○	INSERT values (n) INTO emp (empno);
○	INSERT TO emp (empno) values (n);
○	INSERT emp (empno) INTO values (n);
◉	INSERT INTO emp (empno) values (n);

From the following insert command, _____ will be the name of column whereas _____ will be name of table.

```
DECLARE
num number (10):=2;
BEGIN
INSERT INTO emp (empno) values (num);
END;
```

Select the correct option

Reload Mo

- ○ emp, num
- ○ num, empno
- ○ empno, emp ✓

Activa
Go to Se

From the following insert command, _____ will be the value to be inserted and _____ will be name of column.

```
DECLARE

num number (10):=2;

BEGIN

INSERT INTO emp (empno) values (num);


END;
```

Select the correct option

- ○ empno, num
- ◉ num, empno
- ○ empno, emp

We can use DML and SQL under_____PL/SQL block.

Select the correct option

○	Exception section
○	Declare section of
○	Two or more
○	One

SELECT max (sal) INTO salary FROM emp;

In above given command _____ is name of column and _____ is the name of tabl

Select the correct option

○	Max sal, max emp
○	Sal, emp ✓
○	Emp, sal
○	Max salary, employee

Which of the following command is NOT a SQL Command?

Select the correct option

- (●) Addition
- ( ) Insert
- ( ) Update
- ( ) Delete

If empno will be a primary key, then In the given SQL statement "max_no+1"will ensure_____.

SELECT MAX (empno) INTO max_no FROM emp;

INSERT INTO emp (empno, ename) values (max_no+1, 'xyz');

Select the correct option

○	Referential integrity
○	Secondary integrity
○	Entity Integrity ✓
○	Primary integrity

DECLARE max_no emp.empno%type;

BEGIN

SELECT MAX (empno) INTO max_no FROM emp;

INSERT INTO emp (empno, ename) values (max_no+1, 'ALLEN'); dbms_output.put_line ('Row added');

END;

What will be the output of above given command?

Select the correct option

○	Row updated
◉	Row added
○	Max_no+1, allen

If max_no=560 and following statement will be executed 3 times, then what will be the value of max_no+1 ?

SELECT MAX (empno) INTO max_no FROM emp;

INSERT INTO emp (empno, ename) values (max_no+1, 'xyz');

Select the correct option

○	563 ✓
○	562
○	560
○	Error

Which of the following is related to logic building for any Database language ?

Select the correct option

○	Syntax
○	English skill
○	Listening
○	Practice ✓

If sal=20000 and empno=150, then what will be the output of a given PL/SQL block?

```
UPDATE emp set sal = sal*0.15 + sal  WHERE empno=150;

SELEC sal from emp,

Dbms_output.put_line('Salary of employee is:' || sal);
```

Select the correct option

○	Salary of employee is: 23000 ✓
○	Salary of employee is: 30000
○	Salary of employee is: 3000
○	Salary of employee is: 20000

_____ is the correct syntax for the above given problem statement.

Select the correct option

◉	BEGIN UPDATE emp set sal = sal*0.15 + sal WHERE months_between (sysdate, hiredate)>120; dbms_output.put_line('Salary updated'); END;
○	BEGIN UPDATE emp set sal = sal*50 + sal WHERE months_between (sysdate, hiredate)>120; dbms_output.put_line('Salary updated');

The default data type for a sequence object is _____.

Select the correct option

○	int
○	decimal
○	bigint ✓
○	tinyint

What does this piece of code means:

supplier_seq.NEXTVAL;

Select the correct option

○	Retrieve the next value from *supplier_seq*
○	Fetch the next value from *supplier_seq*
○	Execute the next value from *supplier_seq*
○	Drop the next value from *supplier_seq*

Which of the following returns the current value in a specified sequence in PL/SQL?

Select the correct option

○	CURRVAL 
○	NEXTVAL
○	CURVALUE
○	Both A & B

Sequence object can be restarted by using _____.

Select the correct option

◉	ALTER SEQUENCE
○	NO CYCLE
○	CONTROL SEQUENCE
○	RESTART SEQUENCE

What does *cache* options mean?

Select the correct option

○	Table size
○	Index value
○	Array size
◉	How many sequence values will be stored in memory for faster access

What does a COMMIT statement do to a CURSOR?

Select the correct option

○	Close the Cursor
○	None of these ✓
○	Fetch the Cursor
○	Open the Cursor

Which of the following is/are transaction control command(s) in SQL?

Select the correct option

◉	Commit & Rollback both
○	Select
○	Commit
○	Rollback

The COMMIT statement makes permanent any changes made to the database during the _____.

Select the correct option

○	Previous transaction
○	Simple transaction
○	Transaction
◉	Current transaction

A single unit of work for all commands executed consecutively is known as:

Select the correct option

○	Transaction
○	Control
○	Commit
○	Rollback

A commit also makes the changes visible to other _____.

Select the correct option

○	Transaction
○	Tables ✓
○	Database
○	Users

Which of the following command is used to start the transaction?

Select the correct option

○	Mysql > START TRANSACTION;
○	Mysql > START ROLLBACK;
○	Mysql > START COMMIT;
○	Mysql > START OLTP

Which of the following result(s) is / are true, when a ROLLBACK statement is issued to the database, and the transaction has ended?

Select the correct option

Reloc

○	permanently saves the changes made by the current transaction
○	All work done by the transaction is undone, as if it had not been issued. ✓
○	statement lets a user save any changes or alterations on the current transaction
○	Any locks aquired by the transaction are maintained

To get the table's previous permanent status, use the ____ command.

Select the correct option

○	Commit
○	Rollback 
○	Truncate
○	Transaction

If we do not need the changes made by the update statement then in that case we need to use ROLLBACK statement with a _____ clause.

Select the correct option

Reload Math

- ◯ Savepoint ✓
- ◯ Where
- ◯ Using
- ◯ Commit

Activate

Set transaction use rollback segment is used to create user objects in a particular tablespace.

Select the correct option

○	Invalid
○	Partially True
○	False ✓
○	True

The ROLLBACK statement is the inverse of the _____ statement.

Select the correct option

○	IF-ELSE
○	CASE
●	COMMIT
○	Savepoint

What is a savepoint inside a PL/SQL block used for?

Select the correct option

◉	To rollback until the savepoint and end the transaction
○	To rollback until the savepoint only
○	To commit or rollback until the savepoint
○	To rollback the entire transaction

Savepoint command is used with _____ command in SQL

Select the correct option

○	Transaction
○	Commit
◉	Rollback
○	Where Clause

Select the correct syntax for Savepoint.

Select the correct option

◉	Mysql > Savepoint ini;
○	Mysql > START Transaction;
○	Mysql > Transaction ini;
○	Mysql > &Savepoint;

If you create a second savepoint with the same identifier as an earlier savepoint, then the earlier savepoint is _____.

Select the correct option

Relo

○	Saved
○	Update
○	Bypass
●	Erased

The transactions before the SAVEPOINT cannot be undone, and the transaction remains _____ even when the command is given.

Select the correct option

Reload M

- ○ inactive
- ○ invalid
- ○ valid
- ○ active ✓

Activa
Go to S

Savepoints are sort of markers that help in splitting a long transaction into smaller units by setting some _____.

Select the correct option

Reload Math

- ○ Target
- ○ Errors
- ○ Statements
- ○ Checkpoints



Activate
Go to Sett

With _____, you can randomly mark your work at any point within a long transaction.

Select the correct option

○	ACID Properties
○	Savepoints ✓
○	Rollback
○	Commit

Conditional control allows you to control the program's flow of the execution based on _____.

Select the correct option

○	Target
●	Condition
○	Statements
○	Errors

How many nested IF clauses can be included within an IF clause?

Select the correct option

○	3
◉	Any number
○	0
○	1

Which portion is optional in IF statements?

Select the correct option

○	Condition
○	THEN
○	ELSE ✓
◉	IF ✗

If the condition is true, the statements get executed and if the condition is false or NULL then the IF statement does _____.

Select the correct option

Reload

- ○ nothing
- ○ show error
- ○ repetition
- ○ conditions check

Activ
Go to


IF-THEN syntax is used:

Select the correct option

Reload Math Equations

◉	If the condition is TRUE, then you want statements to be executed
○	Depending on whether the condition is TRUE or FALSE, you may want to execute one set of statements or another set.
○	As long as condition1 is TRUE, then one set of statements will be executed, and when condition2 is TRUE, another set will be executed.
○	When condition1 is TRUE, one set of statements will be executed, and when both conditions are FALSE, a different set of statements will be executed.

Activate Windows
Go to Settings to activate Windo

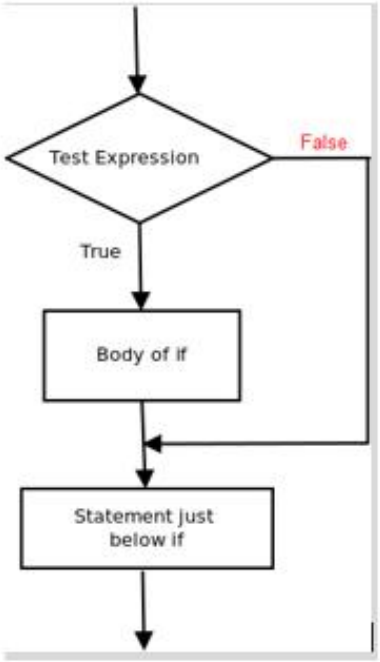

Correct Ans

IF-Then Statement

This image shows which type of conditional control.

Identify the missing statement to complete the syntax of IF – ELSE statement.

```
IF condition THEN
  sequence_of_statements;
_________
```

Select the correct option

○	IF END;
●	END IF;
○	IF END
○	END IF

```
 -- check the boolean condition using if statement
  IF( a < 20 ) THEN
    -- if condition is true then print the following
    dbms_output.put_line('a is less than 20 ' );
  END IF;
  dbms_output.put_line('value of a is : ' || a);
END;
/
```

Output of this code will be:

Select the correct option

Reload Math Equation

- a is less than 20

  value of a is : 10

Activate Windc
Go to Settings to ac

Which of the following is not true about PL/SQL decision making structures?

Select the correct option

○	The IF-THEN-ELSIF statement allows you to choose between several alternatives.
◉	PL/SQL does not have a CASE statement
○	The IF statement associates a condition with a sequence of statements enclosed by THEN and END IF.
○	The IF statement also adds the keyword ELSE followed by an alternative sequence of statement.

The if/then statement, as well as its optional else clause, only takes _____statement to be executed for each of the two cases.

Select the correct option

○	Functional
○	Multiple
○	Major
○	A single ✓

To execute more than one statement, multiple statements can be grouped using a begin/end _____.

Select the correct option

○	Valid Statement
○	True Statement
○	Single Statement
○	Block Statement ✓

What is the maximum number of ELSE clauses that can be included in an IF clause, that is not nested?

Select the correct option

○	Any number
○	0
○	1 ✓
○	15

The _____ of *If...Then...Else* provides more structure and flexibility than the single-line form and is usually easier to read, maintain, and debug.

Select the correct option

Reload Math Equa

- ○ Single form
- ○ Simple form
- ○ Multiple form
- ○ Block form

Activate Wir

The *thenpart* is executed if condition is true; if condition is false, then *elsepart* is executed.

Select the correct option

○	Partially Correct
○	Statement is incorrect
○	True ✓
◉	False ✗

In the absence of a condition, the ELSE part of the _____ statement will be executed.

Select the correct option

○	IF statement
○	IF-THEN-ELSIF statement
◉	IF-THEN-ELSE statement
○	IF-THEN-ELSIF-ELSE statement

_____ executes the corresponding code whenever a TRUE condition is found. Otherwise, the condition cannot be checked again.

Select the correct option

Reloc

○	IF-THEN-ELSIF-ELSE statement
○	IF-THEN-ELSIF statement
○	IF-THEN statement
●	IF-THEN-ELSE statement

Ac
Go

If the condition is false or NULL, then only the alternative sequence of statements get executed.

Select the correct option

○	IF-THEN-ELSE statement ✓
○	IF-THEN-ELSIF statement
○	Case statement
◉	IF - THEN statement

Introduces a Boolean expression that is evaluated if none of the preceding conditions returned TRUE.

Select the correct option

○	Case statement
○	ELSIF statements ✓
○	IF-THEN-ELSIF-ELSE statement
○	IF-THEN-ELSIF statement

If no condition is true, the else statements run, if they exist; otherwise, the IF THEN ELSIF statement _____.

Select the correct option

○	Shows error
○	Aborted
◉	Executed
○	Does nothing

Checks for a Boolean condition in sequential order. The first block in the sequence which returns TRUE condition will be executed. If none of the conditions in the sequence is TRUE, then code in 'ELSE' block is executed.

Select the correct option

Reload Math Equations

◯	IF-THEN-ELSE statement
◯	IF - THEN statement
◯	Case statement
◯	IF-THEN-ELSIF statement

It allows you to choose between several alternatives.

Select the correct option

○	IF - THEN statement
○	Case statement
○	IF-THEN-ELSE statement
○	IF-THEN-ELSIF statement ✓

Allows one or more IF-THEN or IF-THEN-ELSIF statement inside another IF-THEN or IF-THEN-ELSIF statement(s).

Select the correct option

○	Nested IF statements
○	IF-THEN-ELSE statement
○	IF - THEN statement
○	Case statement

How many nested IF clauses can be included within an IF clause?

Select the correct option

○	4
○	1
○	0
○	Any number ✓