



PyLotto Freshness Calculation

Flow diagram for singles, doublets, triplets, and next-draw ranking

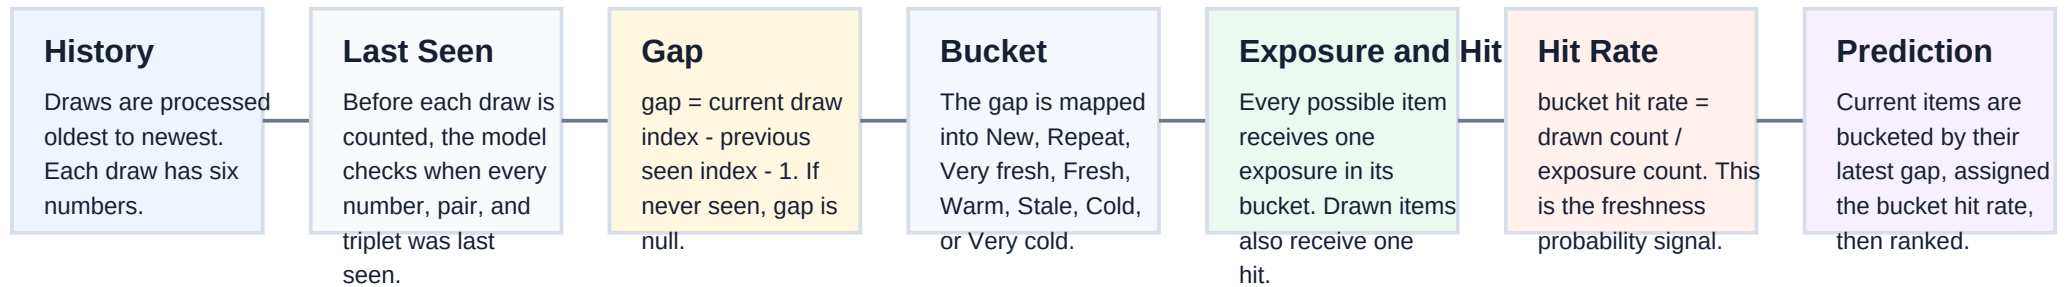

One historical draw update

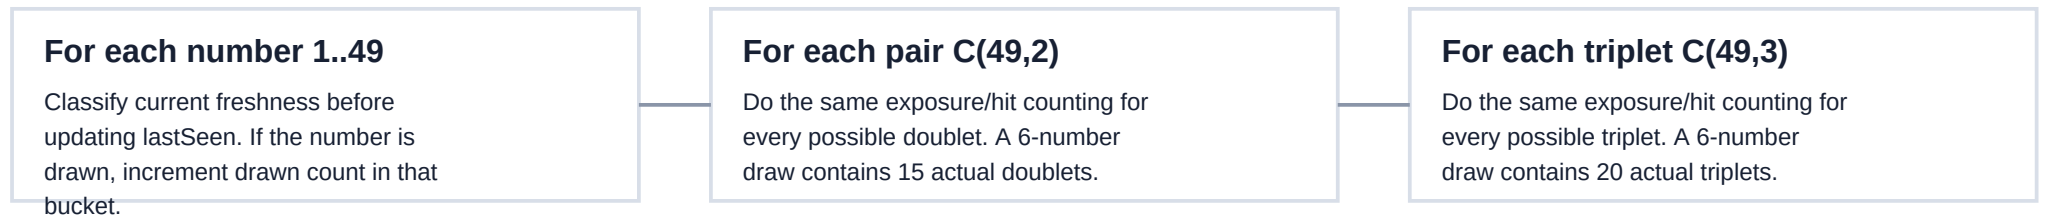

Important ordering detail

A draw is evaluated against the state before that draw. Only after exposures and hits are counted does the model update lastSeen for the numbers, doublets, and triplets in the draw.

Freshness Buckets and Core Formulas

The model turns last-seen gaps into bucket-level historical hit rates

New	gap = null	Repeat	gap = 0	Very fresh	gap 1-2	Fresh	gap 3-5
Warm	gap 6-10	Stale	gap 11-20	Cold	gap 21-35	Very cold	gap >= 36

Single-number counting

For each historical draw and for each number from 1 to 49:

1. `previousIndex = lastSeen[number]`
2. `gap = null` if `previousIndex` is null, otherwise `drawIndex - previousIndex - 1`
3. `bucket = bucketForGap(gap)`
4. `exposureByBucket[bucket] += 1`
5. if number is in this draw: `drawnByBucket[bucket] += 1`
6. after the draw is fully counted: `lastSeen[number] = drawIndex` for drawn numbers

`itemsPerDraw` is 6 for singles, 15 for doublets, and 20 for triplets.

Formulas

Gap

$\text{gap} = \text{currentDrawIndex} - \text{previousSeenIndex} - 1$

Hit rate

$\text{hitRate}(\text{bucket}) = \frac{\text{drawnCount}(\text{bucket})}{\text{exposureCount}(\text{bucket})}$


Draw share

$\text{drawShare}(\text{bucket}) = \frac{\text{drawnCount}(\text{bucket})}{(\text{drawCount} * \text{itemsPerDraw})}$

Prediction Ranking and Evaluation

How the report ranks next-draw candidates

Next draw prediction

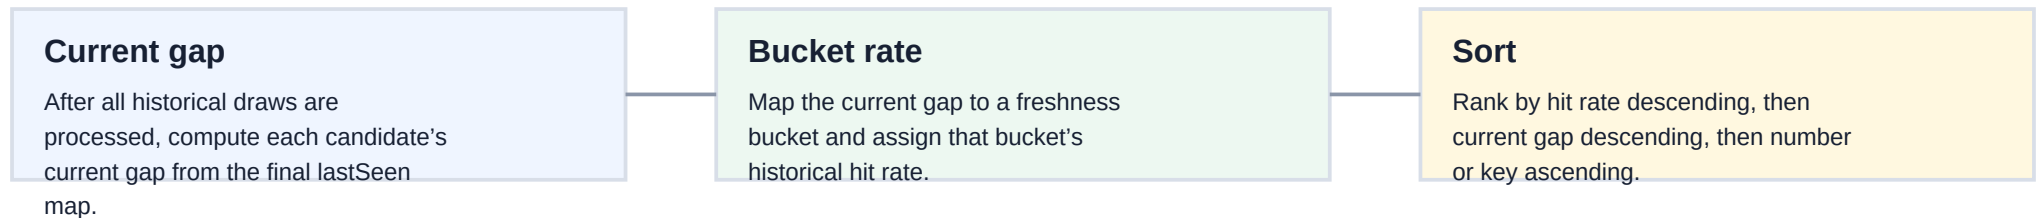

Scopes

Singles: 49 candidates, one per lottery number. Doublets: all $C(49,2) = 1176$ possible pairs. Triplets: all $C(49,3) = 18424$ possible triples. The same freshness bucket logic is applied to all three scopes.

Backtest score used by Draw Scores and Score Graphs

For each draw after the first, the app builds a prediction using only previous draws. It ranks the 49 numbers, then compares the actual draw to those ranks.

