10-Day Bootstrap Classes Guide

Detailed Edition • Bootstrap 5.3 • Beginner friendly

A step-by-step practice plan. Every day has a **goal mockup** with numbered callouts, the classes you need, a concept example, build steps, a **complete solution**, a checklist, a stretch challenge and the most common mistakes. You do not have to memorize everything: learn what each class changes, then test it in your browser.

Your 10-day roadmap

Day	Topic	Daily build goal	Time
1	Setup + Utilities	Personal Profile Card	60–90 min
2	Bootstrap Grid	Responsive 3-Column Layout	60–90 min
3	Flexbox Utilities	Flexbox Navigation Bar	60–90 min
4	Typography + Buttons	Landing Page Hero	60–90 min
5	Cards + Images	3-Product Card Layout	75–100 min
6	Forms	Login / Registration Form	75–100 min
7	Navbar + Responsive Design	Responsive Website Navbar	75–100 min
8	Components	Student Dashboard	90–120 min
9	Modals + Advanced Components	Product Details + Modal	90–120 min
10	Final Project: POS Dashboard	POS Dashboard	2–3 hours

How to use each day

1. Look at the **goal mockup** first. The orange numbers match the legend below it.
2. Read **What you will learn** and skim the class table. Do not memorize it.
3. Type the **mini example** and change values to see what happens.
4. Follow the **build steps** and try to build the goal *before* peeking at the full solution.
5. Compare with the **complete solution**, tick the **checklist**, then try the **challenge**.

> **Time plan**
> Aim for 1–2 hours per day. Days 8–10 are bigger; it is fine to spread Day 10 over two sessions.

Setup before Day 1

Bootstrap CDN

Put the CSS link inside <head>. Put the JavaScript bundle just before </body> (needed for navbar toggler, dropdown, modal, accordion, tabs, offcanvas and tooltips).

Starter template (copy this into index.html)

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <title>Bootstrap Practice</title>

  <!-- Bootstrap CSS -->
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.min.css"
        rel="stylesheet">
</head>
<body>

  <!-- Put each day's code here -->
  <div class="container py-5">
    <h1 class="text-primary">Hello Bootstrap!</h1>
    <button class="btn btn-primary">It works</button>
  </div>

  <!-- Bootstrap JS bundle (modal, dropdown, navbar toggler, tabs...) -->
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min.js"></script>
</body>
</html>
```

Do not forget the viewport meta tag
Without **<meta name="viewport" ...>** phones pretend to be a desktop and none of your responsive classes will behave. It must be in every page.

Suggested folder

```
bootstrap-practice/
  day01-profile-card.html
  day02-grid.html
  day03-flex-navbar.html
  ...
  day10-pos-dashboard.html
```

Test responsive layouts

- Open the page in Chrome or Edge → press **F12** → click the **device toolbar** icon (or Ctrl+Shift+M).
- Test widths **375px** (phone), **768px** (tablet), **992px** (laptop) and **1400px** (desktop).
- Right-click an element → **Inspect** to see which Bootstrap classes are applied and what they do.
- Use the **Elements** panel to add or remove a class live and see the result instantly.

Reference: the spacing scale (m-*, p-*, gap-*, g-*)

Number	Size	Example
`0`	0	m-0 removes margin
`1`	0.25rem = 4px	`p-1`
`2`	0.5rem = 8px	`gap-2`
`3`	1rem = 16px	mb-3 (very common)
`4`	1.5rem = 24px	`py-4`
`5`	3rem = 48px	py-5 for big sections
`auto`	auto	mx-auto centers a block

Side letters: **t** top, **b** bottom, **s** start (left), **e** end (right), **x** left+right, **y** top+bottom. Responsive: **mt-md-4** = margin-top 24px from md up.

Reference: breakpoints

Breakpoint	Min width	Class prefix (device)
`xs`	< 576px	none (default) (Phones, portrait)
`sm`	≥ 576px	col-sm-*, d-sm-* (Phones, landscape)
`md`	≥ 768px	col-md-*, d-md-* (Tablets)
`lg`	≥ 992px	col-lg-*, d-lg-* (Laptops / small desktops)
`xl`	≥ 1200px	col-xl-*, d-xl-* (Desktops)
`xxl`	≥ 1400px	col-xxl-*, d-xxl-* (Large screens)

Bootstrap is **mobile first**: a class without a prefix applies to every screen; a prefix like **md** applies from that width *and up*.

DAY 1 OF 10

Setup + Utilities


DAILY BUILD GOAL

Personal Profile Card

Estimated time: 60–90 min

Connect Bootstrap to a page, then style a small card using only utility classes. No custom CSS needed.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

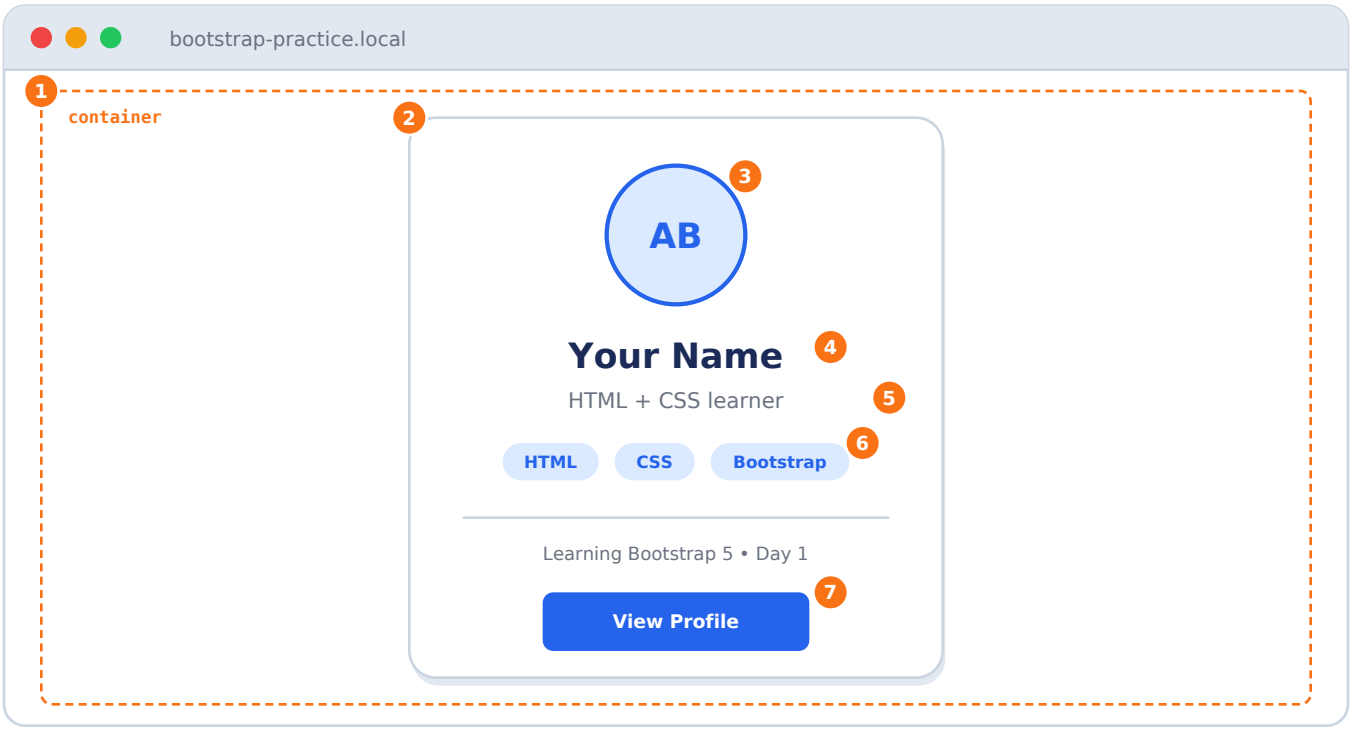

1. `container py-5` — centers the page and limits its width
2. `card p-4 shadow-sm rounded-3` — the profile card with padding and soft shadow
3. `rounded-circle bg-primary-subtle` — round avatar placeholder
4. `fw-bold text-primary fs-3` — name heading
5. `text-muted` — softer subtitle text
6. `badge rounded-pill text-bg-primary` — skill tags
7. `btn btn-primary` — main action button

WHAT YOU WILL LEARN

- Load Bootstrap from the CDN and confirm it works (a styled button proves it).
- Wrap content with container / container-fluid and understand the difference.
- Control white space with margin (m-*) and padding (p-*), including the side letters t, b, s, e, x, y.
- Style with text-*, bg-*, border, rounded and shadow utilities instead of writing CSS.

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`container`	Centered wrapper with a max-width that changes at each breakpoint (540 / 720 / 960 / 1140 / 1320 px).	`Main page wrapper: <div class="container">`
`container-fluid`	Always 100% wide, at every screen size.	Full-width header or dashboard shell.
`container-md`	Fluid until the md breakpoint, then fixed width.	Use when you want mobile to be edge-to-edge.
`m-0 … m-5, m-auto`	Margin on all sides. Scale: 1 = 4px, 2 = 8px, 3 = 16px, 4 = 24px, 5 = 48px.	m-3 = 16px margin. mx-auto centers a block with a set width.
`p-0 … p-5`	Padding on all sides, same scale as margin.	p-4 = 24px padding inside a card.
`mt- mb- ms- me- mx- my-`	Margin per side: top, bottom, start (left), end (right), x = left+right, y = top+bottom.	mb-0 removes bottom margin; px-4 adds side padding.
`d-none / d-block / d-inline-block`	Controls the CSS display property.	d-none d-md-block = hidden on phones, visible from md.
`text-center / start / end`	Text alignment.	text-center on the card.
`text-primary / success / danger`	Theme text colors. Also text-white, text-dark, text-body-secondary.	text-primary on the name.
`text-muted`	Soft grey text (kept for compatibility; text-body-secondary is the 5.3 name).	Subtitles and helper text.
`bg-primary / bg-light / bg-dark`	Solid background colors. -subtle variants are softer (bg-primary-subtle).	bg-light for a page section.
`w-25 / 50 / 75 / 100 / auto`	Width as a percentage of the parent.	w-100 makes a button full width.
`h-100 / min-vh-100`	h-100 = fill parent height. min-vh-100 = at least the full window height.	min-vh-100 for a centered login page.
`border / border-0 / border-2`	Adds, removes or thickens a border. border-primary colors it.	border border-2 border-primary
`rounded / rounded-3 / rounded-circle / rounded-pill`	Rounds corners. circle = round shape, pill = fully rounded ends.	rounded-circle makes a square element round.
`shadow-sm / shadow / shadow-lg`	Drop shadow in three sizes.	shadow-sm is subtle and common on cards.

MINI CODE EXAMPLE

```
<div class="container py-4">
  <div class="card p-3 shadow-sm">
    <h1 class="text-primary">My Profile</h1>
    <p class="text-muted mb-0">Learning Bootstrap</p>
  </div>
</div>
```

STEP-BY-STEP BUILD

1. Create a folder **bootstrap-practice** and inside it a file **index.html** using the starter template from page 4.
2. Inside <body>, add ** ** as the outer wrapper.
3. Inside it add the card: **card p-4 text-center shadow-sm rounded-3 mx-auto** and limit its width with **style="max-width: 360px;"**.
4. Create the avatar: a div with **rounded-circle bg-primary-subtle text-primary fw-bold**, a fixed 80 × 80 px size, and initials inside.
5. Add the name as an <h1> with **fs-3 fw-bold text-primary**, and the subtitle as a <p> with **text-muted**.
6. Add three **badge** tags (HTML, CSS, Bootstrap) with **text-bg-primary rounded-pill**.
7. Finish with **btn btn-primary** and open the page in your browser. Resize the window to confirm the card stays centered.

COMPLETE SOLUTION (body content — paste inside <body>)

```
<div class="container py-5">
  <div class="card p-4 text-center shadow-sm rounded-3 mx-auto" style="max-width: 360px;">

    <!-- Avatar placeholder -->
    <div class="rounded-circle bg-primary-subtle text-primary fw-bold
                d-flex align-items-center justify-content-center mx-auto mb-3"
         style="width: 80px; height: 80px;">AB</div>

    <h1 class="fs-3 fw-bold text-primary mb-1">Your Name</h1>
    <p class="text-muted">HTML + CSS learner</p>

    <!-- Skill tags -->
    <div class="mb-3">
      <span class="badge rounded-pill text-bg-primary">HTML</span>
      <span class="badge rounded-pill text-bg-primary">CSS</span>
      <span class="badge rounded-pill text-bg-primary">Bootstrap</span>
    </div>

    <hr>
    <p class="small text-muted">Learning Bootstrap 5 &bull; Day 1</p>
    <a href="#" class="btn btn-primary px-4">View Profile</a>
  </div>
</div>
```

CHECKLIST — TICK WHEN DONE

- ■ The page loads Bootstrap (the button is blue and rounded).
- ■ The card is centered and never wider than 360px.
- ■ You used at least 3 different spacing classes (p-, m-, mb-, py-).
- ■ The avatar is a perfect circle.
- ■ No custom CSS except the width/height inline styles.

Stretch challenge
Add a second card next to the first by wrapping both in **d-flex gap-3 flex-wrap justify-content-center**, and give the second card **border-primary border-2**.

Watch out for these mistakes
• Forgetting **mx-auto**: a card with max-width sticks to the left unless it has auto side margins.
• Typos in class names (for example **bg-primary-subtlle**): Bootstrap silently ignores unknown classes, so check spelling first.

DAY 2 OF 10

Bootstrap Grid


DAILY BUILD GOAL

Responsive 3-Column Layout

Estimated time: 60–90 min

Learn the 12-column grid and make a layout that shows 3 columns on desktop, 2 on tablet and 1 on phones.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

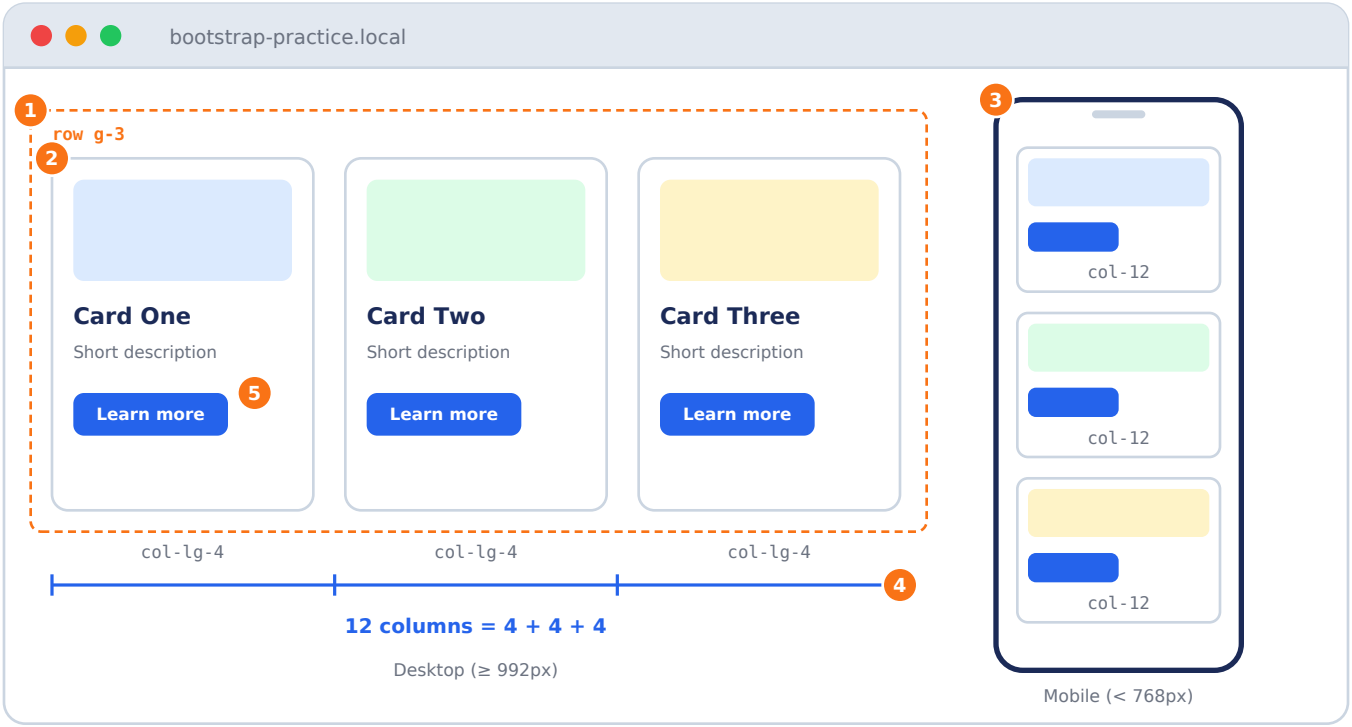

1. **`container > row g-3`** — grid wrapper; g-3 adds spacing between columns
2. **`col-12 col-md-6 col-lg-4`** — 1 column on phones, 2 on tablets, 3 on desktops
3. **`col-12`** — on mobile every column stacks at full width
4. **`4 + 4 + 4 = 12`** — every row is built from 12 grid units
5. **`card h-100 + btn btn-primary btn-sm`** — equal-height cards with a button

WHAT YOU WILL LEARN

- Understand the chain: container → row → col. Columns always live inside a row.
- Think in 12 units: col-6 = 6/12 = half, col-4 = a third, col-3 = a quarter.
- Use breakpoint prefixes (col-md-6, col-lg-4) to change the layout per screen size.
- Control spacing with gutters (g-*, gx-*, gy-*) instead of margin.

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`container`	Outer wrapper that centers the grid.	Start every grid with one container.
`row`	Horizontal group of columns; removes column overflow with negative margins.	Columns must be direct children of a row.
`col`	Equal-width flexible column that shares remaining space.	Three .col = three equal columns.

Class / Pattern	What it does	Example / reminder
`col-1 … col-12`	Fixed width in 12ths, at every screen size.	col-12 = full width; col-6 = half.
`col-auto`	Column that is only as wide as its content.	Buttons next to an input.
`col-sm / md / lg / xl / xxl-*`	Applies from that breakpoint upward; below it the column is full width.	col-md-6: half width from 768px up.
`row-cols-1 / row-cols-md-3`	Sets how many columns fit per row without writing col-* on each child.	row row-cols-1 row-cols-md-3 g-3
`g-0 … g-5 / gx-* / gy-*`	Gutter (space) between columns: both / horizontal / vertical.	g-3 = 1rem; gy-4 only vertical.
`offset-md-3`	Pushes a column to the right by N columns.	col-md-6 offset-md-3 centers a half-width column.
`order-1 / order-md-2`	Changes visual order of columns.	order-first moves an item to the start.
`justify-content-center (on row)`	Centers columns that do not fill the whole row.	row justify-content-center
`align-items-center (on row)`	Vertically centers columns of different heights.	row align-items-center

Breakpoints used today

Breakpoint	Min width	Class prefix (device)
`xs`	< 576px	none (default) (Phones, portrait)
`sm`	≥ 576px	col-sm-*, d-sm-* (Phones, landscape)
`md`	≥ 768px	col-md-*, d-md-* (Tablets)
`lg`	≥ 992px	col-lg-*, d-lg-* (Laptops / small desktops)
`xl`	≥ 1200px	col-xl-*, d-xl-* (Desktops)
`xxl`	≥ 1400px	col-xxl-*, d-xxl-* (Large screens)

MINI CODE EXAMPLE

```
<div class="container">
  <div class="row g-3">
    <div class="col-12 col-md-6 col-lg-4">Column 1</div>
    <div class="col-12 col-md-6 col-lg-4">Column 2</div>
    <div class="col-12 col-md-6 col-lg-4">Column 3</div>
  </div>
</div>
```

STEP-BY-STEP BUILD

1. Add ** ** and put a heading (**h2 mb-4**) inside it.
2. Below the heading add ** **.
3. Inside the row create three children with **col-12 col-md-6 col-lg-4**.
4. In each column put a **card h-100** so the three cards have equal height.
5. In each card add a colored block (**bg-primary-subtle rounded**, height 100px), a **card-title**, **card-text** and a small button.
6. Open DevTools (F12) → device toolbar. Test 375px (1 column), 800px (2 columns) and 1200px (3 columns).

COMPLETE SOLUTION (body content — paste inside <body>)

```
<div class="container py-4">
  <h2 class="mb-4">Responsive 3-Column Layout</h2>

  <div class="row g-3">

    <div class="col-12 col-md-6 col-lg-4">
      <div class="card h-100">
        <div class="card-body">
          <div class="bg-primary-subtle rounded mb-3" style="height: 100px;"></div>
          <h5 class="card-title">Card One</h5>
          <p class="card-text text-muted">Short description.</p>
          <a href="#" class="btn btn-primary btn-sm">Learn more</a>
        </div>
      </div>
    </div>

    <div class="col-12 col-md-6 col-lg-4">
      <div class="card h-100">
        <div class="card-body">
          <div class="bg-success-subtle rounded mb-3" style="height: 100px;"></div>
          <h5 class="card-title">Card Two</h5>
          <p class="card-text text-muted">Short description.</p>
          <a href="#" class="btn btn-primary btn-sm">Learn more</a>
        </div>
      </div>
    </div>

    <div class="col-12 col-md-6 col-lg-4">
      <div class="card h-100">
        <div class="card-body">
          <div class="bg-warning-subtle rounded mb-3" style="height: 100px;"></div>
          <h5 class="card-title">Card Three</h5>
          <p class="card-text text-muted">Short description.</p>
          <a href="#" class="btn btn-primary btn-sm">Learn more</a>
        </div>
      </div>
    </div>

  </div>
</div>
```

CHECKLIST — TICK WHEN DONE

- ■ Phone width: cards stack in one column.
- ■ Tablet width (≈ 800px): two columns, third card wraps below.
- ■ Desktop width: three equal columns with equal height.
- ■ Every col-* is a direct child of a .row.
- ■ You can explain why col-md-6 means "half width from md up".

Stretch challenge
Make the middle card wider on desktop only: **col-lg-6** for the middle and **col-lg-3** for the other two (3 + 6 + 3 = 12).

Watch out for these mistakes
• Putting **col-*** directly inside a container without a **row**: the gutters and widths break.
• Columns adding up to more than 12 in one row: the extra column wraps to the next line (that is how Bootstrap works, not a bug).

DAY 3 OF 10

Flexbox Utilities


DAILY BUILD GOAL

Flexbox Navigation Bar

Estimated time: 60–90 min

Use d-flex and alignment utilities to build a navigation bar and to center any element both ways.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

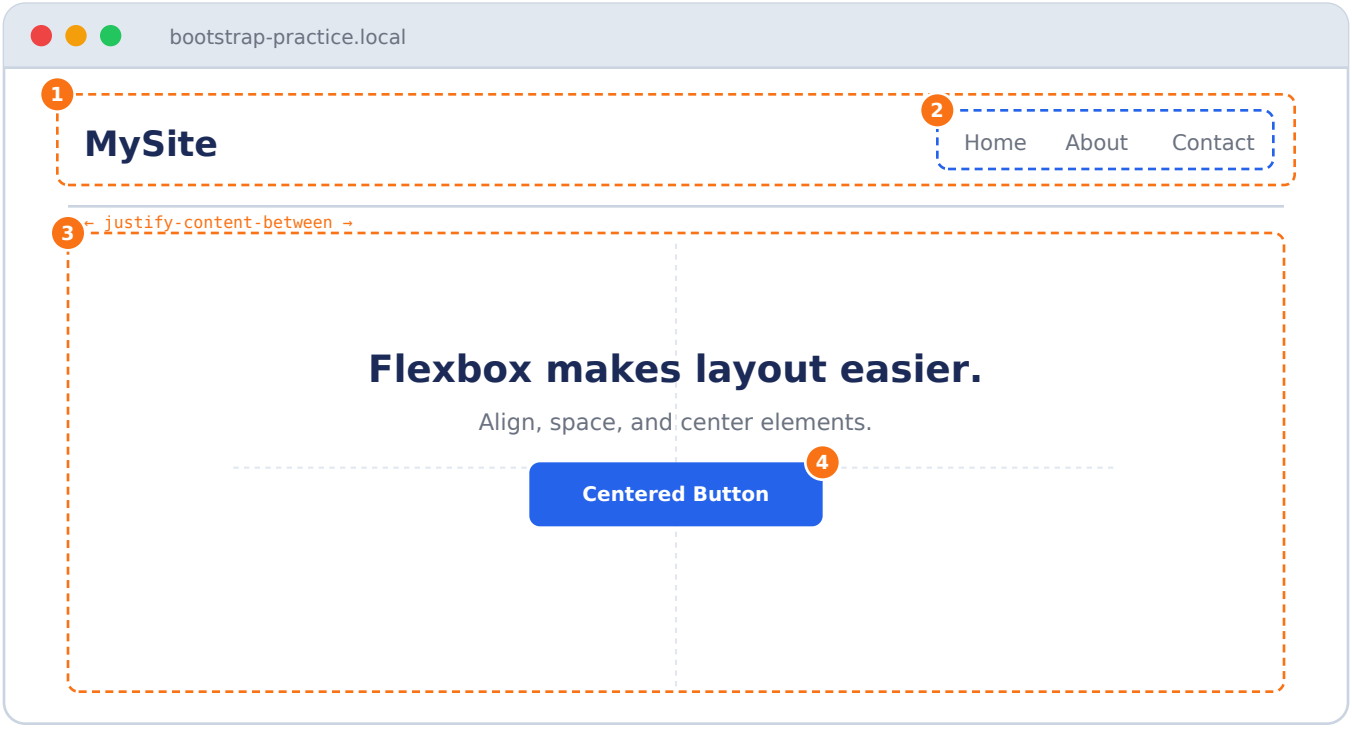

1. `d-flex justify-content-between align-items-center` — brand on the left, links on the right
2. `d-flex gap-3` — link group with equal spacing
3. `d-flex justify-content-center align-items-center` — centers content horizontally and vertically
4. `btn btn-primary` — the centered button

WHAT YOU WILL LEARN

- Know the two axes: main axis (direction of the row/column) and cross axis (perpendicular).
- Use justify-content-* for the main axis and align-items-* for the cross axis.
- Use gap-* instead of margins between flex children.
- Center something perfectly with three classes: d-flex justify-content-center align-items-center.

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`d-flex / d-inline-flex`	Turns an element into a flex container; its direct children become flex items.	Put it on the parent, not the child.
`flex-row / flex-column`	Sets direction: row (default) or column.	flex-column stacks items vertically.
`flex-row-reverse / flex-column-reverse`	Reverses the order of items.	Useful for reordering on mobile.
`justify-content-start / center / end`	Aligns items along the main axis.	`justify-content-center`

Class / Pattern	What it does	Example / reminder
`justify-content-between / around / evenly`	Distributes space between items.	between pushes first and last to the edges.
`align-items-start / center / end / stretch`	Aligns items along the cross axis.	align-items-center vertically centers in a row.
`align-self-*`	Overrides alignment for one item.	align-self-end on a single child.
`flex-wrap / flex-nowrap`	Allows or prevents wrapping to a new line.	flex-wrap for rows of tags or buttons.
`flex-grow-1 / flex-fill`	Item expands to take the remaining space.	A search box that fills the navbar.
`gap-0 … gap-5`	Space between children (also row-gap-*, column-gap-*).	d-flex gap-3
`ms-auto / me-auto`	Auto margin pushes an item away; the free space goes to that side.	ms-auto moves links to the right.
`flex-md-row / flex-lg-row`	Responsive direction: stacked on phones, a row from md.	d-flex flex-column flex-md-row
`min-vh-100 / vh-100`	Make the container at least / exactly as tall as the window.	Full-screen centering.

MINI CODE EXAMPLE

```
<nav class="d-flex flex-row align-items-center justify-content-between gap-3">
  <strong>MySite</strong>
  <div class="d-flex gap-3">
    <a href="#">Home</a>
    <a href="#">About</a>
  </div>
</nav>

<div class="d-flex justify-content-center align-items-center min-vh-100">
  <button class="btn btn-primary">Centered</button>
</div>
```

STEP-BY-STEP BUILD

1. Create a **<header class="container">** and inside it a **<nav>**.
2. Add **d-flex justify-content-between align-items-center py-3** to the nav. The first child is the brand; the second is a link group.
3. Turn the link group into its own flex row with **d-flex gap-3**. Remove underlines with **text-decoration-none**.
4. Add a divider under the navbar using **border-bottom** on the header.
5. Create a hero area: **d-flex flex-column justify-content-center align-items-center text-center** with a min-height of 70vh.
6. Place a heading, a muted paragraph and a button inside the hero. They should stay in the exact center when you resize.

COMPLETE SOLUTION (body content — paste inside <body>)

```
<header class="container border-bottom">
  <nav class="d-flex justify-content-between align-items-center py-3">
    <strong class="fs-4 text-primary">MySite</strong>

    <div class="d-flex gap-3">
      <a href="#" class="text-decoration-none">Home</a>
      <a href="#" class="text-decoration-none">About</a>
      <a href="#" class="text-decoration-none">Contact</a>
    </div>
  </nav>
</header>

<main class="container d-flex flex-column justify-content-center
             align-items-center text-center"
      style="min-height: 70vh;">
  <h1 class="fs-2 fw-bold">Flexbox makes layout easier.</h1>
  <p class="text-muted">Align, space, and center elements.</p>
  <button class="btn btn-primary px-4">Centered Button</button>
</main>
```

CHECKLIST — TICK WHEN DONE

- ■ Brand sits on the left and links on the right without any float or position CSS.
- ■ Links have equal spacing from gap-3.
- ■ The hero content stays centered on every screen size.
- ■ You can explain main axis vs cross axis in one sentence.

Stretch challenge
Make the navbar stack on phones and become a row from md up: **d-flex flex-column flex-md-row**. Then push a "Sign in" button to the far right with **ms-md-auto**.

Watch out for these mistakes
• Adding **justify-content-center** to the child instead of the parent: flex alignment classes always go on the flex *container*.
• Expecting **align-items-center** to center vertically with no height: the parent needs extra height (min-vh-100 or a fixed height) to have space to center in.

DAY 4 OF 10

Typography + Buttons


DAILY BUILD GOAL

Landing Page Hero

Estimated time: 60–90 min

Make text look professional and build a clear call-to-action with Bootstrap buttons.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

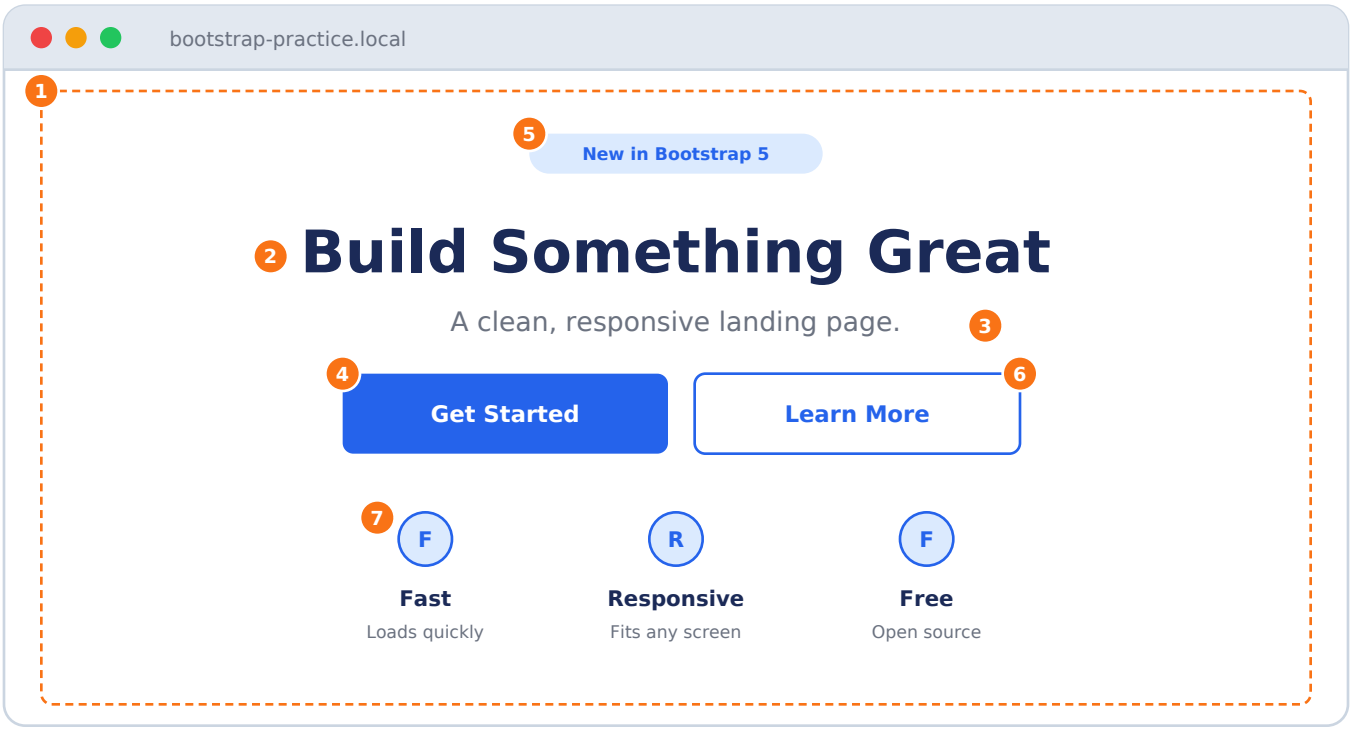

1. `container py-5 text-center` — roomy centered section
2. `display-5 fw-bold` — large headline
3. `lead text-muted` — short subtitle under the headline
4. `btn btn-primary btn-lg` — primary call to action
5. `badge rounded-pill text-bg-primary` — small label above the title
6. `btn btn-outline-primary btn-lg` — secondary action
7. `row row-cols-1 row-cols-md-3` — feature columns (grid review)

WHAT YOU WILL LEARN

- Pick the right text size: display-* for heroes, fs-* for any element, h1–h6 for semantic headings.
- Control weight, style, case and spacing with fw-*, fst-*, text-uppercase, lh-*.
- Understand button variants and sizes, and when to use outline vs filled.
- Group buttons with gap utilities and make them full width on phones.

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`text-start / center / end`	Text alignment. Responsive: text-md-start.	text-center on a hero.
`fw-light / normal / semibold / bold`	Font weight.	fw-bold on headings.
`fst-italic / fst-normal`	Italic or normal style.	Quotes and notes.
`fs-1 … fs-6`	Font size scale. fs-1 is the largest.	fs-4 for card titles.
`display-1 … display-6`	Extra-large heading sizes for hero sections.	display-5 fw-bold
`lead`	Slightly larger, lighter intro paragraph.	Subtitle under the hero headline.
`text-uppercase / lowercase / capitalize`	Text transform.	Small labels: text-uppercase small.
`text-decoration-none / underline`	Removes or adds underline.	Clean navigation links.
`lh-1 / lh-sm / lh-base / lh-lg`	Line height.	lh-lg for long paragraphs.
`text-truncate`	Cuts long text with an ellipsis (needs a width).	Product names in tight cards.
`btn`	Base button class. Always combine with a variant.	btn btn-primary
`btn-primary / success / danger / warning / secondary`	Filled button variants. Choose by meaning.	danger for delete, success for confirm.
`btn-outline-*`	Outlined variant for secondary actions.	btn btn-outline-primary
`btn-sm / btn-lg`	Small or large button.	btn-lg in heroes.
`d-grid gap-2`	Makes buttons stack at full width.	d-grid d-md-flex gap-2 = stacked on mobile, row on md.
`disabled`	Greys out a button and blocks clicks (on links also add aria-disabled).	btn btn-primary disabled

MINI CODE EXAMPLE

```
<section class="container py-5 text-center">
  <h1 class="display-5 fw-bold">Welcome to My Website</h1>
  <p class="lead text-muted">A short description of the page.</p>
  <a href="#" class="btn btn-primary btn-lg">Get Started</a>
  <button class="btn btn-outline-secondary btn-lg">Learn More</button>
</section>
```

STEP-BY-STEP BUILD

1. Create **<section class="container py-5 text-center">**.
2. Add a small badge above the title: **badge rounded-pill text-bg-primary mb-3**.
3. Add the headline: **display-5 fw-bold**. Add the subtitle with **lead text-muted**.
4. Wrap the two buttons in **d-grid gap-2 d-sm-flex justify-content-sm-center**: stacked on phones, side by side from sm up.
5. Use **btn btn-primary btn-lg px-4** for "Get Started" and **btn btn-outline-primary btn-lg px-4** for "Learn More".
6. Add a 3-column feature row below with **row row-cols-1 row-cols-md-3 g-4 mt-4**.

COMPLETE SOLUTION (body content — paste inside <body>)

```
<section class="container py-5 text-center">
  <span class="badge rounded-pill text-bg-primary mb-3">New in Bootstrap 5</span>

  <h1 class="display-5 fw-bold">Build Something Great</h1>
  <p class="lead text-muted mx-auto" style="max-width: 560px;">
    A clean, responsive landing page.
  </p>

  <!-- Stacked on phones, side by side from sm up -->
  <div class="d-grid gap-2 d-sm-flex justify-content-sm-center mt-4">
    <a href="#" class="btn btn-primary btn-lg px-4">Get Started</a>
    <a href="#" class="btn btn-outline-primary btn-lg px-4">Learn More</a>
  </div>

  <!-- Feature row -->
  <div class="row row-cols-1 row-cols-md-3 g-4 mt-4">
    <div class="col">
      <h5 class="fw-semibold">Fast</h5>
      <p class="text-muted small">Loads quickly.</p>
    </div>
    <div class="col">
      <h5 class="fw-semibold">Responsive</h5>
      <p class="text-muted small">Fits any screen.</p>
    </div>
    <div class="col">
      <h5 class="fw-semibold">Free</h5>
      <p class="text-muted small">Open source.</p>
    </div>
  </div>
</section>
```

CHECKLIST — TICK WHEN DONE

- ■ Headline is large and bold; subtitle is lighter and smaller.
- ■ Buttons use both a filled and an outline variant.
- ■ On a phone the two buttons are stacked at full width.
- ■ You used btn together with a variant on every button.

Stretch challenge
Add a third, text-only link button: **btn btn-link**. Then try **btn-success** and **btn-dark** and decide which color best fits your site.

Watch out for these mistakes
• Writing **class="btn-primary"** without **btn**: the button gets no padding or shape.
• Choosing heading tags by size: **fs-*** and **display-*** change only the look. Pick h1–h6 for document structure and keep one h1 per page.

DAY 5 OF 10

Cards + Images


DAILY BUILD GOAL

3-Product Card Layout

Estimated time: 75–100 min

Combine the grid and cards to build a product list with responsive images, prices and buttons.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

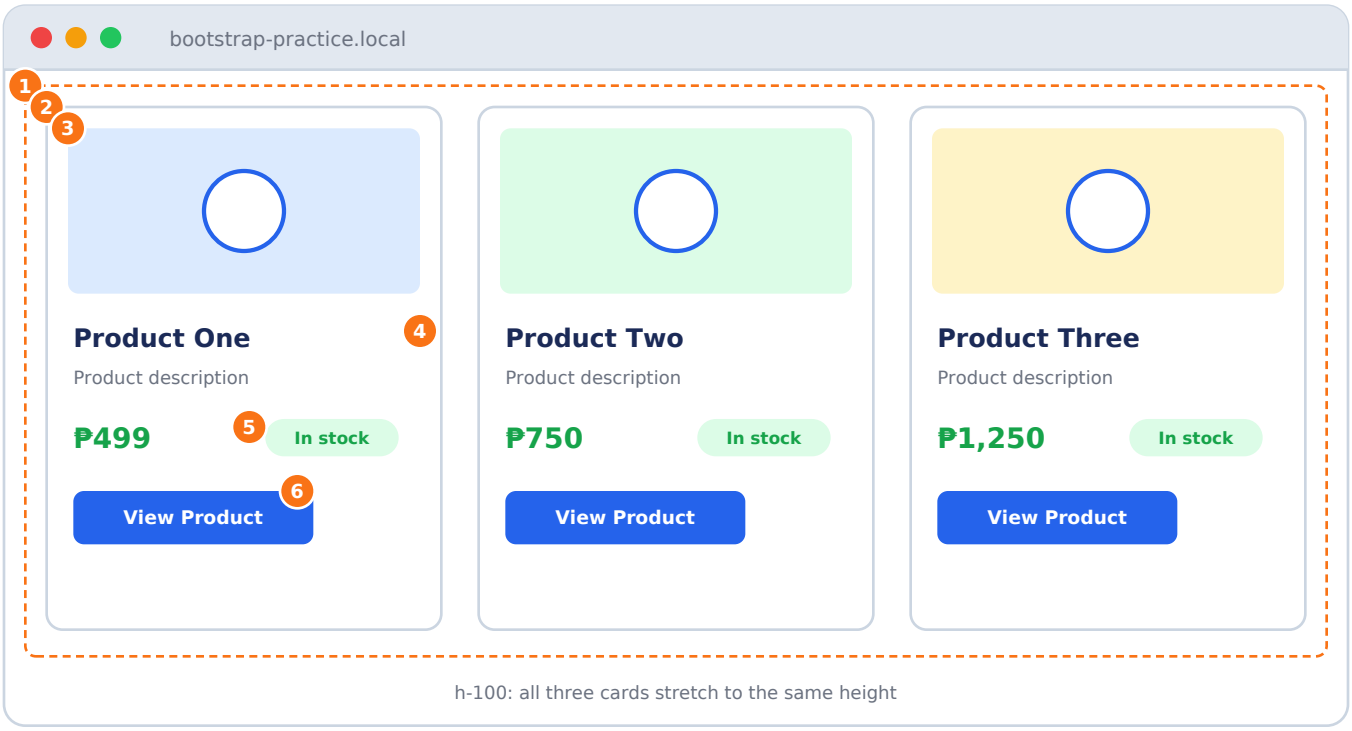

1. `row g-3 > col-12 col-md-4` — three products per row on md and up
2. `card h-100` — every card fills the same height
3. `card-img-top img-fluid object-fit-cover` — responsive, cropped product image
4. `card-body + card-title + card-text` — text area inside the card
5. `text-success fw-bold` — price
6. `btn btn-primary` — action button

WHAT YOU WILL LEARN

- Know the card anatomy: card > card-img-top + card-body (+ card-header / card-footer).
- Make images responsive and uniform in size with img-fluid, ratio and object-fit-cover.
- Combine grid + cards and keep equal heights with h-100.
- Push buttons to the bottom of each card with mt-auto and flex utilities.

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`card`	Bordered content container with rounded corners.	Products, profiles, posts.
`card-body`	Padded content area of a card.	Put titles, text and buttons here.
`card-title / card-subtitle / card-text`	Heading, secondary heading and paragraph styles for card content.	`h5.card-title`
`card-img-top / card-img-bottom`	Image at the top or bottom edge, with matching corner rounding.	`<img class="card-img-top">`
`card-header / card-footer`	Optional top and bottom bars.	Footer for price or date.
`card-link`	Inline link inside a card with proper spacing.	Secondary links.
`img-fluid`	max-width: 100%; height: auto so images never overflow.	Use on almost every image.
`object-fit-cover / contain`	Controls how an image fills a fixed-size box (cover crops, contain shows all).	object-fit-cover + inline height.
`ratio ratio-4x3 / ratio-16x9`	Keeps a box (image, video) at a fixed aspect ratio.	ratio ratio-4x3 around an img.
`rounded-top / rounded-circle`	Rounds specific corners of an image.	rounded-circle for avatars.
`h-100`	Makes the card fill the column, so cards in a row have equal height.	card h-100
`d-flex flex-column + mt-auto`	Pins a button to the bottom of the card body.	card-body d-flex flex-column; button mt-auto
`list-group list-group-flush`	Borderless list inside a card.	Specs list under the description.

MINI CODE EXAMPLE

```
<div class="card h-100">
  <img src="product.jpg" class="card-img-top" alt="Product">
  <div class="card-body">
    <h5 class="card-title">Product One</h5>
    <p class="card-text">A short product description.</p>
    <a href="#" class="btn btn-primary">View</a>
  </div>
</div>
```

STEP-BY-STEP BUILD

1. Create **container py-4** with a heading, then **row g-3** underneath.
2. Add three columns with **col-12 col-md-4**. Inside each, create **card h-100 shadow-sm**.
3. Add an image with **card-img-top object-fit-cover** and **style="height: 180px;"** so all images have the same height. Use **https://placehold.co/600x400** for placeholders (needs internet).
4. Inside **card-body d-flex flex-column**, add a title, a description, and a price line (**text-success fw-bold fs-5**).
5. Add a stock badge next to the price (**badge text-bg-success**).
6. Give the button **mt-auto** so it stays at the bottom even if one description is longer.

COMPLETE SOLUTION (body content — paste inside <body>)

```
<div class="container py-4">
  <h2 class="mb-4">Our Products</h2>

  <div class="row g-3">

    <div class="col-12 col-md-4">
      <div class="card h-100 shadow-sm">
        <img src="https://placehold.co/600x400?text=Product+1"
             class="card-img-top object-fit-cover" style="height: 180px;" alt="Product One">
        <div class="card-body d-flex flex-column">
          <h5 class="card-title">Product One</h5>
          <p class="card-text text-muted">Product description goes here.</p>
          <div class="d-flex justify-content-between align-items-center mb-3">
            <span class="text-success fw-bold fs-5">&#8369;499</span>
            <span class="badge text-bg-success">In stock</span>
          </div>
          <a href="#" class="btn btn-primary mt-auto">View Product</a>
        </div>
      </div>
    </div>

    <div class="col-12 col-md-4">
      <div class="card h-100 shadow-sm">
        <img src="https://placehold.co/600x400?text=Product+2"
             class="card-img-top object-fit-cover" style="height: 180px;" alt="Product Two">
        <div class="card-body d-flex flex-column">
          <h5 class="card-title">Product Two</h5>
          <p class="card-text text-muted">A slightly longer description to test equal heights.</p>
          <div class="d-flex justify-content-between align-items-center mb-3">
            <span class="text-success fw-bold fs-5">&#8369;750</span>
            <span class="badge text-bg-success">In stock</span>
          </div>
          <a href="#" class="btn btn-primary mt-auto">View Product</a>
        </div>
      </div>
    </div>

    <div class="col-12 col-md-4">
      <div class="card h-100 shadow-sm">
        <img src="https://placehold.co/600x400?text=Product+3"
             class="card-img-top object-fit-cover" style="height: 180px;" alt="Product Three">
        <div class="card-body d-flex flex-column">
          <h5 class="card-title">Product Three</h5>
          <p class="card-text text-muted">Product description goes here.</p>
          <div class="d-flex justify-content-between align-items-center mb-3">
            <span class="text-success fw-bold fs-5">&#8369;1,250</span>
            <span class="badge text-bg-warning">Low stock</span>
          </div>
          <a href="#" class="btn btn-primary mt-auto">View Product</a>
        </div>
      </div>
    </div>

  </div>
</div>
```

CHECKLIST — TICK WHEN DONE

- ■ All three images have identical height and are never stretched.
- ■ Buttons line up at the bottom of the cards.
- ■ Layout becomes 1 column on phones.
- ■ Every img has an alt attribute.

Stretch challenge
Add **card-footer** with the text "Free delivery" to the cards, and make the card lift on hover with the utility pair **shadow-sm** + a custom class that raises to **shadow** on :hover.

Watch out for these mistakes
• Images of different sizes making uneven cards: always set a height + **object-fit-cover**.
• Forgetting **h-100**: cards in the same row will have different heights if the text length differs.

DAY 6 OF 10

Forms


DAILY BUILD GOAL

Login / Registration Form

Estimated time: 75–100 min

Build clean, accessible forms and show validation states with Bootstrap.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

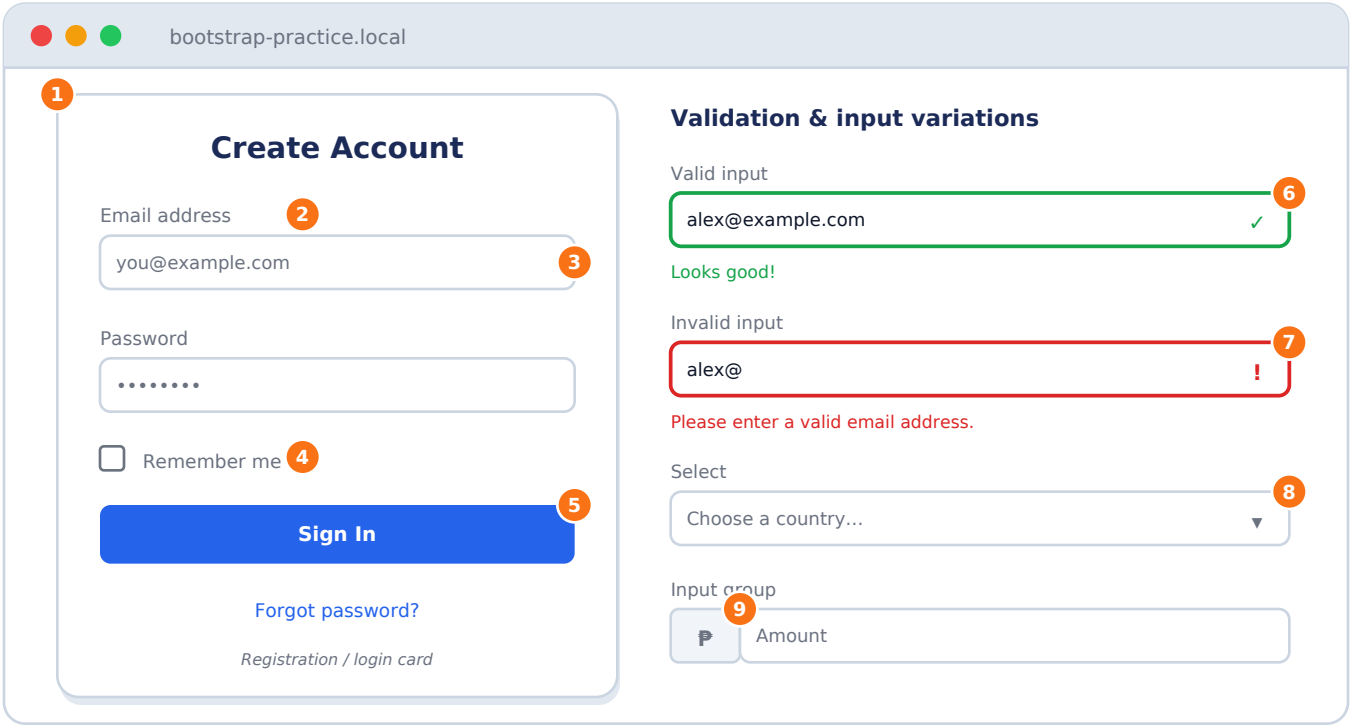

1. **`card p-4 shadow-sm`** — form wrapper
2. **`form-label + for="email"`** — label connected to its input id
3. **`form-control`** — text, email and password inputs
4. **`form-check / -input / -label`** — checkbox with label
5. **`btn btn-primary w-100`** — full-width submit button
6. **`is-valid + valid-feedback`** — success state and message
7. **`is-invalid + invalid-feedback`** — error state and message
8. **`form-select`** — styled dropdown
9. **`input-group + input-group-text`** — currency symbol joined to an input

WHAT YOU WILL LEARN

- Pair every label with an input: label for="x" and input id="x".
- Style inputs, selects, checkboxes, radios and switches with the form-* classes.
- Combine fields with input-group and floating labels.
- Show validation using .needs-validation + a few lines of JavaScript.

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`form-label`	Styles a label above its input.	`<label for="email" class="form-label">`
`form-control`	Styles input, textarea and file fields at full width.	type="email" class="form-control"
`form-control-sm / -lg`	Smaller or larger inputs.	form-control form-control-lg
`form-text`	Helper text under an input.	Password must be 8+ characters.
`form-select`	Styles a <select> dropdown.	`<select class="form-select">`
`form-check / form-check-input / form-check-label`	Checkbox and radio structure.	Keep the three classes together.
`form-switch`	Turns a checkbox into a toggle switch.	form-check form-switch
`input-group / input-group-text`	Attaches text or a button to an input.	Currency ₱ or a search button.
`form-floating`	Label floats inside the input; needs placeholder on the input.	form-floating mb-3
`is-valid / is-invalid`	Green or red validation styling (visual only).	form-control is-invalid
`valid-feedback / invalid-feedback`	Message shown below a validated field.	Only visible next to is-valid / is-invalid.
`needs-validation + novalidate`	Lets Bootstrap show feedback after JS adds was-validated.	`<form class="needs-validation" novalidate>`
`row g-3 inside a form`	Place two fields side by side.	col-md-6 for first and last name.
`w-100 / d-grid`	Full-width submit button.	btn btn-primary w-100

MINI CODE EXAMPLE

```
<form class="container py-4">
  <div class="mb-3">
    <label for="email" class="form-label">Email address</label>
    <input type="email" class="form-control" id="email" placeholder="name@example.com">
  </div>
  <div class="form-check mb-3">
    <input class="form-check-input" type="checkbox" id="remember">
    <label class="form-check-label" for="remember">Remember me</label>
  </div>
  <button class="btn btn-primary" type="submit">Sign in</button>
</form>
```

STEP-BY-STEP BUILD

1. Create a centered card: **container py-5 → row justify-content-center → col-12 col-md-8 col-lg-5 → card p-4 shadow-sm**.
2. Add the title "Create Account" (**h3 text-center fw-bold mb-4**) and a **<form class="needs-validation" novalidate>**.
3. For each field use a wrapper **mb-3** with **form-label** and **form-control**. Add **required** to inputs.
4. Add a **form-select** (country), a **form-check** (terms) and a **w-100** submit button.
5. Add **invalid-feedback** text under each required field.
6. Paste the validation script before the Bootstrap bundle and test submitting an empty form.

COMPLETE SOLUTION (body content — paste inside <body>)

```
<div class="container py-5">
  <div class="row justify-content-center">
    <div class="col-12 col-md-8 col-lg-5">
      <div class="card p-4 shadow-sm">
        <h3 class="text-center fw-bold mb-4">Create Account</h3>

        <form class="needs-validation" novalidate>

          <div class="mb-3">
            <label for="name" class="form-label">Full name</label>
            <input type="text" class="form-control" id="name" required>
            <div class="invalid-feedback">Please enter your name.</div>
          </div>

          <div class="mb-3">
            <label for="email" class="form-label">Email address</label>
            <input type="email" class="form-control" id="email"
                   placeholder="you@example.com" required>
            <div class="invalid-feedback">Please enter a valid email address.</div>
          </div>

          <div class="mb-3">
            <label for="password" class="form-label">Password</label>
            <input type="password" class="form-control" id="password" minlength="8" required>
            <div class="form-text">Use at least 8 characters.</div>
            <div class="invalid-feedback">Password must be 8+ characters.</div>
          </div>

          <div class="mb-3">
            <label for="country" class="form-label">Country</label>
```

```
            <select class="form-select" id="country" required>
              <option value="" selected disabled>Choose...</option>
              <option>Philippines</option>
              <option>Other</option>
            </select>
            <div class="invalid-feedback">Please choose a country.</div>
          </div>

          <div class="form-check mb-3">
            <input class="form-check-input" type="checkbox" id="terms" required>
            <label class="form-check-label" for="terms">I agree to the terms</label>
            <div class="invalid-feedback">You must agree first.</div>
          </div>

          <button class="btn btn-primary w-100" type="submit">Create Account</button>
        </form>
      </div>
    </div>
  </div>
</div>

<script>
  // Show Bootstrap validation styles only after the first submit attempt
  document.querySelectorAll('.needs-validation').forEach(form => {
    form.addEventListener('submit', event => {
      if (!form.checkValidity()) {
        event.preventDefault();
        event.stopPropagation();
      }
      form.classList.add('was-validated');
    });
  });
</script>
```

CHECKLIST — TICK WHEN DONE

- ■ Clicking a label focuses its input (for/id are matched).
- ■ Submitting an empty form shows red messages under each field.
- ■ The submit button is full width.
- ■ The select, checkbox and text inputs all look consistent.

Stretch challenge
Convert the email field to a floating label (**form-floating**) and add an **input-group** with a ₱ prefix for a "Starting balance" field. Add a show-password button with JavaScript.

Watch out for these mistakes
• Using **is-invalid** by hand and thinking the browser validates: it is only styling. Use **required**, **type**, **minlength** and **checkValidity()** for real checks.
• Wrong **for**/**id** pairs: screen readers and clicking labels will not work.

DAY 7 OF 10

Navbar + Responsive Design


DAILY BUILD GOAL

Responsive Website Navbar

Estimated time: 75–100 min

Build a navbar that shows links on desktop and collapses into a hamburger menu on phones.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

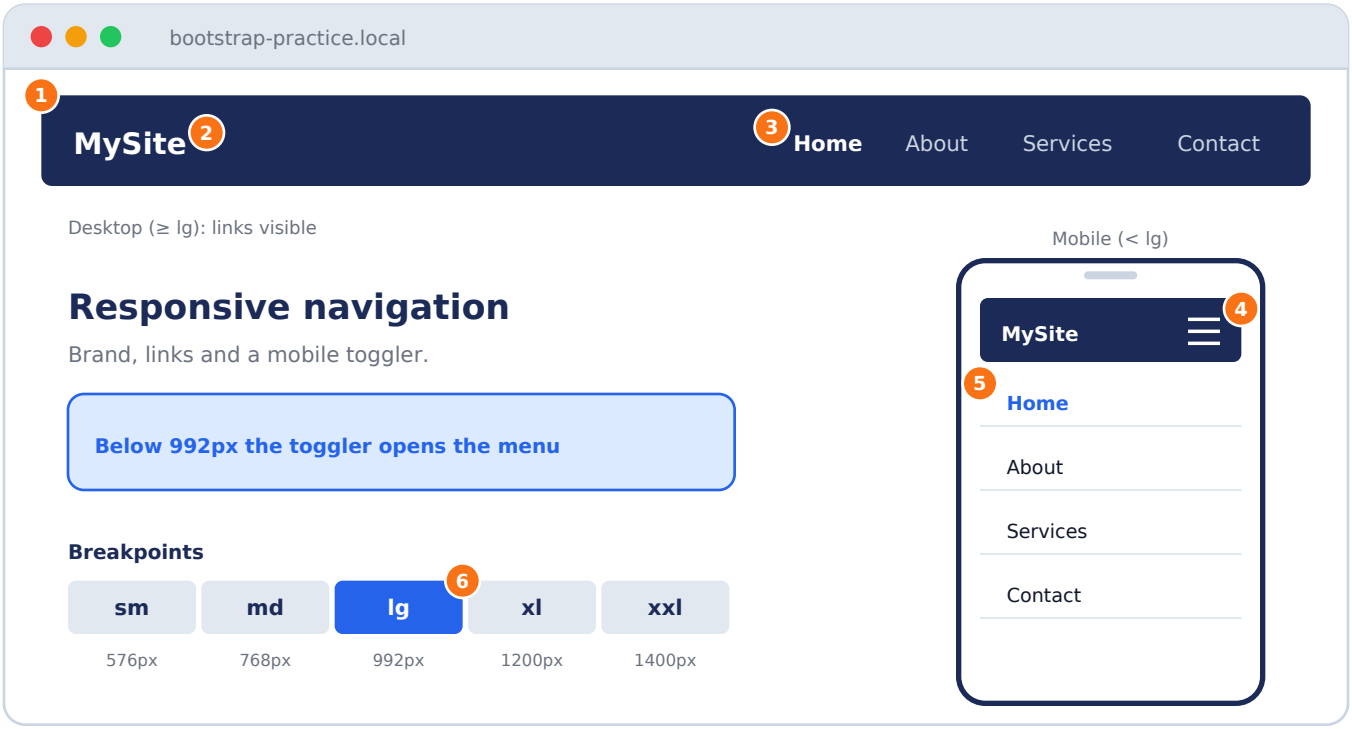

1. `navbar navbar-expand-lg navbar-dark bg-dark` — dark navbar that expands at lg (992px)
2. `navbar-brand` — site name / logo
3. `navbar-nav ms-auto` — link list pushed to the right
4. `navbar-toggler` — hamburger button on small screens
5. `collapse navbar-collapse` — menu area that collapses on mobile
6. `navbar-expand-lg` — the breakpoint where the menu expands

WHAT YOU WILL LEARN

- Know the navbar structure: nav > container > brand + toggler + collapse > ul > li > a.
- Link the toggler to the collapse area: data-bs-target="#id" must match the id.
- Choose the breakpoint (navbar-expand-sm / md / lg) where the links appear.
- Test responsive design with the browser device toolbar and breakpoints.

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`navbar`	Base navbar component. Needs a color scheme and an expand class.	`<nav class="navbar navbar-expand-lg bg-dark">`
`navbar-expand-lg`	Links are visible from lg up and collapsed below it. Use -sm, -md, -xl as needed.	Most sites use lg or md.
`navbar-dark + bg-dark`	Light text on a dark background. In 5.3 you can also use data-bs-theme="dark".	bg-dark navbar-dark
`navbar-light + bg-light`	Dark text on a light background.	bg-body-tertiary is the 5.3 alternative.
`navbar-brand`	Brand link style.	Place first in the navbar.
`navbar-toggler / navbar-toggler-icon`	Hamburger button and its icon.	Needs data-bs-toggle + data-bs-target.
`collapse navbar-collapse`	Part that hides on small screens and toggles open.	id must match the toggler target.
`navbar-nav / nav-item / nav-link`	List and link styling.	Add active to the current page link.
`active / disabled`	Highlights the current link or greys out an unavailable one.	nav-link active
`ms-auto / me-auto`	Pushes the links right (ms-auto) or keeps them left (me-auto).	`ul.navbar-nav.ms-auto`
`dropdown inside navbar`	nav-item dropdown + dropdown-toggle + dropdown-menu.	Needs the JS bundle.
`sticky-top / fixed-top`	Keeps the navbar visible while scrolling.	navbar sticky-top
`d-none d-lg-block`	Show an element only from lg up.	Desktop-only button.
`d-lg-none`	Hide an element from lg up (mobile only).	Mobile-only call button.

Breakpoints used today

Breakpoint	Min width	Class prefix (device)
`xs`	< 576px	none (default) (Phones, portrait)
`sm`	≥ 576px	col-sm-*, d-sm-* (Phones, landscape)
`md`	≥ 768px	col-md-*, d-md-* (Tablets)
`lg`	≥ 992px	col-lg-*, d-lg-* (Laptops / small desktops)
`xl`	≥ 1200px	col-xl-*, d-xl-* (Desktops)
`xxl`	≥ 1400px	col-xxl-*, d-xxl-* (Large screens)

MINI CODE EXAMPLE

```
<nav class="navbar navbar-expand-lg navbar-dark bg-dark">
  <div class="container">
    <a class="navbar-brand" href="#">MySite</a>
    <button class="navbar-toggler" type="button"
            data-bs-toggle="collapse" data-bs-target="#mainNav"
            aria-controls="mainNav" aria-expanded="false" aria-label="Toggle navigation">
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="mainNav">
      <ul class="navbar-nav ms-auto">
        <li class="nav-item"><a class="nav-link active" href="#">Home</a></li>
        <li class="nav-item"><a class="nav-link" href="#">About</a></li>
      </ul>
    </div>
  </div>
</nav>
```

STEP-BY-STEP BUILD

1. Check that **bootstrap.bundle.min.js** is included before </body>. The toggler and dropdown will not work without it.
2. Create **<nav class="navbar navbar-expand-lg navbar-dark bg-dark sticky-top">** with an inner **container**.
3. Add **navbar-brand** first, then the **navbar-toggler** button with **data-bs-target="#mainNav"**.
4. Create ** ** and put a **ul.navbar-nav.ms-auto** inside.
5. Add 4 links (Home active, About, Services, Contact). Add a Services dropdown as a stretch task.
6. Add content below and test 375px (toggler), 991px (still collapsed) and 992px (links visible).

COMPLETE SOLUTION (body content — paste inside <body>)

```
<nav class="navbar navbar-expand-lg navbar-dark bg-dark sticky-top">
  <div class="container">
    <a class="navbar-brand fw-bold" href="#">MySite</a>

    <button class="navbar-toggler" type="button"
            data-bs-toggle="collapse" data-bs-target="#mainNav"
            aria-controls="mainNav" aria-expanded="false" aria-label="Toggle navigation">
      <span class="navbar-toggler-icon"></span>
    </button>

    <div class="collapse navbar-collapse" id="mainNav">
      <ul class="navbar-nav ms-auto mb-2 mb-lg-0">
        <li class="nav-item"><a class="nav-link active" href="#">Home</a></li>
        <li class="nav-item"><a class="nav-link" href="#">About</a></li>

        <li class="nav-item dropdown">
          <a class="nav-link dropdown-toggle" href="#" role="button"
             data-bs-toggle="dropdown" aria-expanded="false">Services</a>
          <ul class="dropdown-menu">
            <li><a class="dropdown-item" href="#">Web design</a></li>
            <li><a class="dropdown-item" href="#">Development</a></li>
            <li><hr class="dropdown-divider"></li>
            <li><a class="dropdown-item" href="#">Support</a></li>
          </ul>
        </li>

        <li class="nav-item"><a class="nav-link" href="#">Contact</a></li>
      </ul>
    </div>
  </div>
```

```
</nav>

<main class="container py-5">
  <h1 class="fw-bold">Responsive navigation</h1>
  <p class="text-muted">Desktop: links visible.</p>
  <div class="alert alert-primary">Mobile: toggler opens the collapsed menu.</div>
</main>
```

CHECKLIST — TICK WHEN DONE

- ■ Below 992px you see the hamburger; at 992px+ the links appear.
- ■ The hamburger opens and closes the menu.
- ■ The dropdown opens (JS is loaded).
- ■ The active link is highlighted.
- ■ Navbar stays visible while scrolling (sticky-top).

Stretch challenge
Change the breakpoint to **navbar-expand-md** and compare. Then add a mobile-only "Call us" button with **d-lg-none** and a desktop-only "Sign up" button with **d-none d-lg-inline-block**.

Watch out for these mistakes
• The toggler does nothing: the **id** of the collapse and the **data-bs-target** do not match, or the JS bundle is missing.
• Putting links directly in **navbar-collapse** without the **navbar-nav** list: the links will not be styled or spaced correctly.

DAY 8 OF 10

Components


DAILY BUILD GOAL

Student Dashboard

Estimated time: 90–120 min

Use Bootstrap components to communicate status, progress and navigation in a dashboard.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

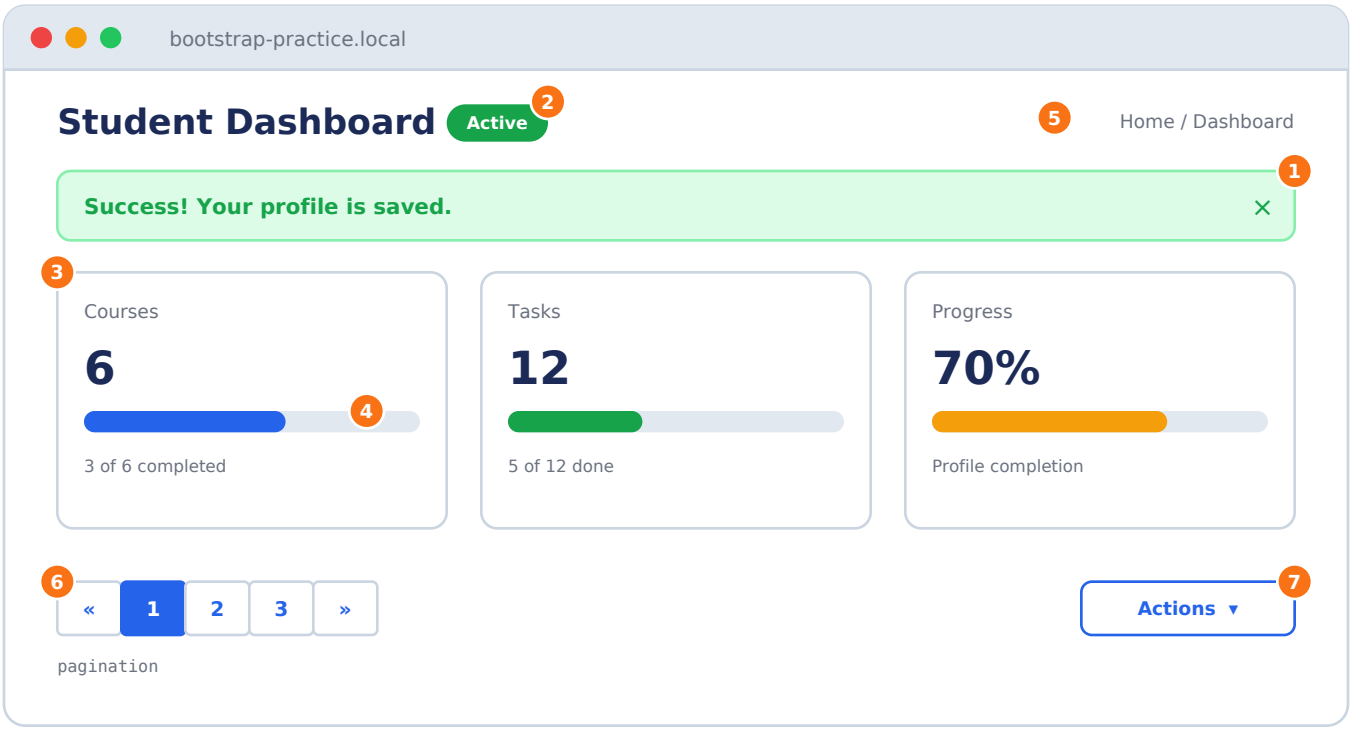

1. `alert alert-success alert-dismissible` — closable status message
2. `badge text-bg-success rounded-pill` — status label
3. `card + card-body` — one stat per card
4. `progress > progress-bar` — completion bar (width = percent)
5. `breadcrumb / breadcrumb-item` — location trail
6. `pagination / page-item / page-link` — page navigation
7. `dropdown + dropdown-menu` — action menu

WHAT YOU WILL LEARN

- Pick the right component for the job: alert, badge, progress, pagination, breadcrumb, dropdown, accordion.
- Use contextual colors consistently (success, warning, danger, info).
- Add accessibility attributes (role, aria-label, aria-valuenow).
- Know which components need JavaScript (dropdown, accordion, dismissible alert).

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`alert alert-success / info / warning / danger`	Message box in a contextual color. Add role="alert".	alert alert-success
`alert-dismissible + btn-close`	Adds a close button (needs JS).	`data-bs-dismiss="alert"`
`alert-heading / alert-link`	Bold heading and a link that matches the alert color.	Inside an alert.
`badge text-bg-*`	Small label. text-bg-* sets background and readable text color.	badge text-bg-success
`rounded-pill`	Pill-shaped badge or button.	badge rounded-pill
`progress / progress-bar`	Container and bar. Set width inline and aria-valuenow.	style="width: 70%"
`bg-success / progress-bar-striped / -animated`	Color and stripes for progress.	progress-bar progress-bar-striped
`breadcrumb / breadcrumb-item / active`	Shows the path to the current page.	Home / Dashboard
`pagination / page-item / page-link`	Page number controls; use active and disabled states.	pagination pagination-sm
`dropdown / dropdown-toggle / dropdown-menu / dropdown-item`	Button with a menu. Needs JS.	`data-bs-toggle="dropdown"`
`accordion / accordion-item / accordion-button / accordion-body`	Collapsible FAQ-style panels. Needs JS.	`data-bs-toggle="collapse"`
`list-group / list-group-item`	Styled list for records or menus.	list-group-item list-group-item-action
`spinner-border`	Loading indicator.	spinner-border text-primary

MINI CODE EXAMPLE

```
<div class="alert alert-info" role="alert">
  Your profile was saved.
</div>
<span class="badge text-bg-success">Verified</span>

<div class="progress mt-3" role="progressbar"
     aria-label="Profile completion" aria-valuenow="70"
     aria-valuemin="0" aria-valuemax="100">
  <div class="progress-bar" style="width: 70%">70%</div>
</div>
```

STEP-BY-STEP BUILD

1. Create **container py-4**. At the top add a **nav aria-label="breadcrumb"** with a **breadcrumb** list.
2. Add a flex header: **d-flex justify-content-between align-items-center** with the title, an "Active" badge and an Actions dropdown.
3. Add a dismissible success alert below the header.
4. Create **row g-3** with three **col-12 col-md-4** stat cards. Each has a label, a big number and a progress bar.
5. Add a pagination under the cards, with page 1 marked **active**.
6. Optional: add an FAQ accordion below (snippet on the next page).

COMPLETE SOLUTION (body content — paste inside <body>)

```
<div class="container py-4">

  <nav aria-label="breadcrumb">
    <ol class="breadcrumb">
      <li class="breadcrumb-item"><a href="#">Home</a></li>
      <li class="breadcrumb-item active" aria-current="page">Dashboard</li>
    </ol>
  </nav>

  <div class="d-flex justify-content-between align-items-center mb-3">
    <h2 class="mb-0">Student Dashboard
      <span class="badge text-bg-success rounded-pill fs-6 align-middle">Active</span>
    </h2>

    <div class="dropdown">
      <button class="btn btn-outline-primary dropdown-toggle" data-bs-toggle="dropdown">
        Actions
      </button>
      <ul class="dropdown-menu dropdown-menu-end">
        <li><a class="dropdown-item" href="#">Edit profile</a></li>
        <li><a class="dropdown-item" href="#">Download report</a></li>
      </ul>
    </div>
  </div>

  <div class="alert alert-success alert-dismissible fade show" role="alert">
    <strong>Success!</strong> Your profile is saved.
    <button type="button" class="btn-close" data-bs-dismiss="alert" aria-label="Close"></button>
  </div>
  <div class="row g-3 mb-4">
    <div class="col-12 col-md-4">
      <div class="card shadow-sm h-100"><div class="card-body">
        <p class="text-muted mb-1">Courses</p>
        <h3 class="fw-bold">6</h3>
        <div class="progress" role="progressbar" aria-label="Courses completed"
             aria-valuenow="60" aria-valuemin="0" aria-valuemax="100">
          <div class="progress-bar" style="width: 60%"></div>
        </div>
        <small class="text-muted">3 of 6 completed</small>
      </div></div>
    </div>

    <div class="col-12 col-md-4">
      <div class="card shadow-sm h-100"><div class="card-body">
        <p class="text-muted mb-1">Tasks</p>
        <h3 class="fw-bold">12</h3>
        <div class="progress" role="progressbar" aria-label="Tasks done"
             aria-valuenow="40" aria-valuemin="0" aria-valuemax="100">
          <div class="progress-bar bg-success" style="width: 40%"></div>
        </div>
        <small class="text-muted">5 of 12 done</small>
      </div></div>
    </div>

    <div class="col-12 col-md-4">
      <div class="card shadow-sm h-100"><div class="card-body">
        <p class="text-muted mb-1">Progress</p>
        <h3 class="fw-bold">70%</h3>
        <div class="progress" role="progressbar" aria-label="Profile completion"
```

```
            aria-valuenow="70" aria-valuemin="0" aria-valuemax="100">
          <div class="progress-bar bg-warning" style="width: 70%"></div>
        </div>
        <small class="text-muted">Profile completion</small>
      </div></div>
    </div>
  </div>

  <nav aria-label="Page navigation">
    <ul class="pagination">
      <li class="page-item disabled"><a class="page-link" href="#">&laquo;</a></li>
      <li class="page-item active"><a class="page-link" href="#">1</a></li>
      <li class="page-item"><a class="page-link" href="#">2</a></li>
      <li class="page-item"><a class="page-link" href="#">3</a></li>
      <li class="page-item"><a class="page-link" href="#">&raquo;</a></li>
    </ul>
  </nav>
</div>
```

BONUS: FAQ ACCORDION

```
<div class="accordion" id="faq">
  <div class="accordion-item">
    <h2 class="accordion-header">
      <button class="accordion-button" type="button"
              data-bs-toggle="collapse" data-bs-target="#faq1">
        How do I reset my password?
      </button>
    </h2>
    <div id="faq1" class="accordion-collapse collapse show" data-bs-parent="#faq">
      <div class="accordion-body">Use the "Forgot password" link on the login page.</div>
    </div>
  </div>
  <div class="accordion-item">
    <h2 class="accordion-header">
      <button class="accordion-button collapsed" type="button"
              data-bs-toggle="collapse" data-bs-target="#faq2">
        Where can I see my grades?
      </button>
    </h2>
    <div id="faq2" class="accordion-collapse collapse" data-bs-parent="#faq">
      <div class="accordion-body">Open the Courses tab on the dashboard.</div>
    </div>
  </div>
</div>
```

CHECKLIST — TICK WHEN DONE

- ■ Alert can be closed with the X.
- ■ Dropdown opens and closes.
- ■ Each progress bar width matches its aria-valuenow.
- ■ Page 1 is highlighted and « is disabled.
- ■ Cards have equal heights.

Stretch challenge
Create a second alert for each contextual color (info, warning, danger). Then replace the stat numbers with **spinner-border** loaders to simulate loading.

Watch out for these mistakes
• Setting **aria-valuenow="70"** but a different inline width: keep both the same.
• **text-bg-*** mixed up with old **bg-*** badges: in Bootstrap 5.2+ use **text-bg-success** so the text color is automatically readable.

DAY 9 OF 10

Modals + Advanced Components


DAILY BUILD GOAL

Product Details + Modal

Estimated time: 90–120 min

Use data-bs-* attributes to open modals, tabs and side panels without writing JavaScript.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

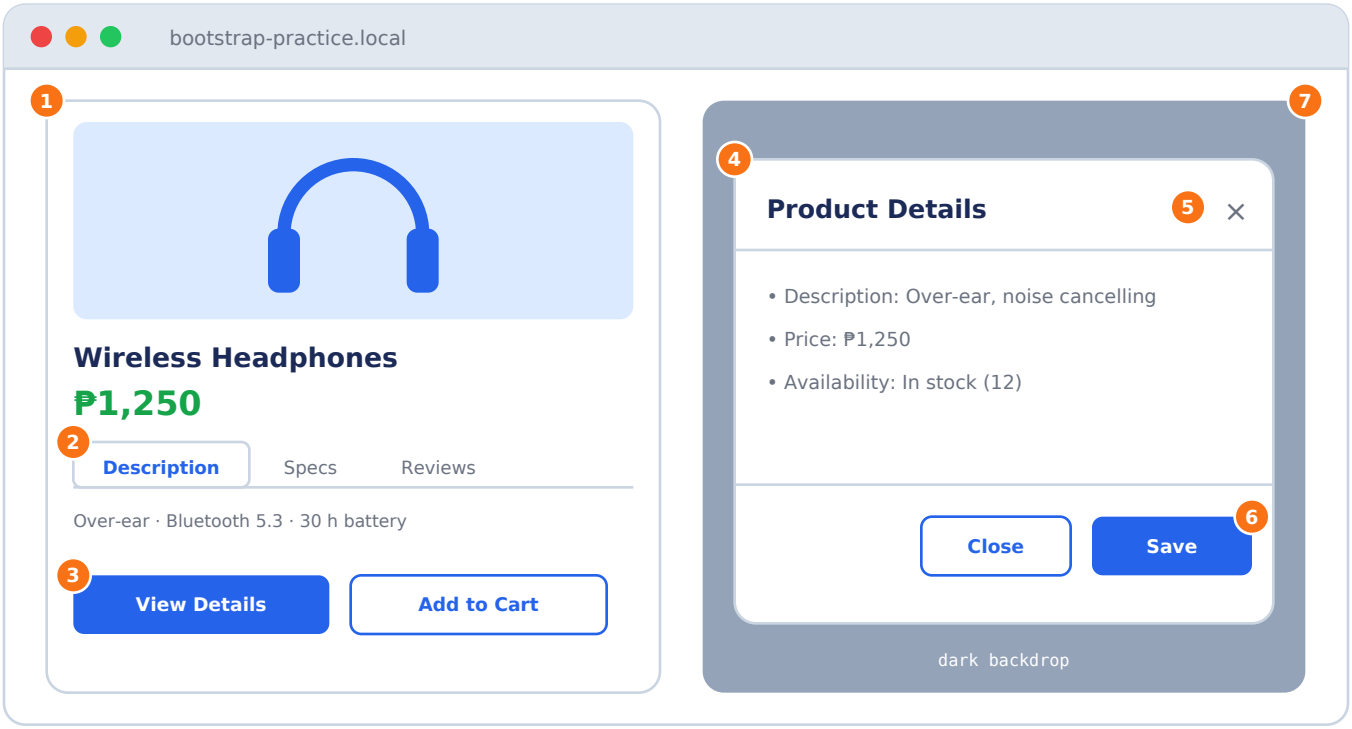

1. **`card`** — product panel
2. **`nav nav-tabs + tab-content`** — Description / Specs / Reviews
3. **`data-bs-toggle="modal" data-bs-target="#id"`** — button that opens the modal
4. **`modal-dialog > modal-content`** — dialog box
5. **`modal-header + btn-close`** — title and close icon
6. **`modal-footer`** — action buttons
7. **`modal fade`** — wrapper with animated dark backdrop

WHAT YOU WILL LEARN

- Understand the data-bs-* pattern: data-bs-toggle says what to do, data-bs-target says where.
- Build a modal with header, body and footer, and close it with data-bs-dismiss.
- Use tabs and an offcanvas side panel for extra information.
- Initialize tooltips (they need a few lines of JavaScript).

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`modal fade`	Outer wrapper. It needs a unique id, tabindex="-1" and aria-labelledby.	`<div class="modal fade" id="detailsModal">`
`modal-dialog / modal-content`	Positions and contains the dialog.	Required nesting order.
`modal-header / modal-title / modal-body / modal-footer`	The three dialog sections.	Footer holds the buttons.
`modal-dialog-centered / -scrollable / modal-lg`	Center vertically, scroll long content, or enlarge.	modal-dialog modal-dialog-centered
`btn-close`	Standard X button.	`data-bs-dismiss="modal"`
`data-bs-toggle="modal"`	On the trigger button: opens a modal.	Pair with data-bs-target="#id".
`data-bs-dismiss="modal"`	On any button inside the modal: closes it.	Close / Cancel button.
`offcanvas offcanvas-start / -end`	Side panel from left or right.	Mobile menus, cart, filters.
`offcanvas-header / -title / -body`	Parts of the offcanvas.	Close with btn-close + data-bs-dismiss="offcanvas".
`nav nav-tabs / nav-pills`	Tab buttons.	Each button uses data-bs-toggle="tab".
`tab-content / tab-pane fade show active`	Panels. The first one gets show active.	Pane id must match tab target.
`tooltip (data-bs-toggle="tooltip")`	Small hint on hover; initialize in JS.	title="Fast shipping"
`popover (data-bs-toggle="popover")`	Larger contextual popup; initialize in JS.	`data-bs-content="..."`
`data-bs-toggle / data-bs-target`	Attributes that connect triggers with components.	Works for modal, collapse, tab, offcanvas.

MINI CODE EXAMPLE

```
<button class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#detailsModal">
  View Details
</button>

<div class="modal fade" id="detailsModal" tabindex="-1"
     aria-labelledby="detailsTitle" aria-hidden="true">
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
        <h5 class="modal-title" id="detailsTitle">Product Details</h5>
        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
      </div>
      <div class="modal-body">Product information goes here.</div>
      <div class="modal-footer">
        <button class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
      </div>
    </div>
  </div>
</div>
```

STEP-BY-STEP BUILD

1. Build the product card: image area, name, price (**text-success fw-bold fs-4**) and a "View Details" button.
2. Add **data-bs-toggle="modal"** and **data-bs-target="#detailsModal"** to that button.
3. At the bottom of the body add the modal: **modal fade** → **modal-dialog modal-dialog-centered** → **modal-content** with header, body and footer.
4. Add tabs inside the card: three **nav-link** buttons with **data-bs-target** and three **tab-pane** panels.
5. Add an "Add to Cart" button that opens an **offcanvas offcanvas-end** cart panel.
6. Initialize tooltips with the script at the end of the page.

COMPLETE SOLUTION (body content — paste inside <body>)

```
<div class="container py-5">
  <div class="row g-4">

    <!-- Product card -->
    <div class="col-12 col-lg-6">
      <div class="card shadow-sm">
        <div class="bg-primary-subtle d-flex align-items-center justify-content-center"
             style="height: 200px;">
          <span class="fs-1 text-primary fw-bold">&#127911;</span>
        </div>

        <div class="card-body">
          <h4 class="card-title">Wireless Headphones</h4>
          <p class="text-success fw-bold fs-4 mb-3">&#8369;1,250</p>

          <!-- Tabs -->
          <ul class="nav nav-tabs" role="tablist">
            <li class="nav-item" role="presentation">
              <button class="nav-link active" data-bs-toggle="tab" data-bs-target="#desc"
                      type="button" role="tab">Description</button>
            </li>
            <li class="nav-item" role="presentation">
              <button class="nav-link" data-bs-toggle="tab" data-bs-target="#specs"
                      type="button" role="tab">Specs</button>
            </li>
            <li class="nav-item" role="presentation">
              <button class="nav-link" data-bs-toggle="tab" data-bs-target="#reviews"
                      type="button" role="tab">Reviews</button>
            </li>
          </ul>
```

```
          <div class="tab-content border border-top-0 rounded-bottom p-3 mb-3">
            <div class="tab-pane fade show active" id="desc" role="tabpanel">
              Over-ear, noise-cancelling wireless headphones.
            </div>
            <div class="tab-pane fade" id="specs" role="tabpanel">
              Bluetooth 5.3 &bull; 30-hour battery &bull; USB-C charging.
            </div>
            <div class="tab-pane fade" id="reviews" role="tabpanel">
              4.6 / 5 from 128 reviews.
            </div>
          </div>

          <button class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#detailsModal">
            View Details
          </button>
          <button class="btn btn-outline-primary" data-bs-toggle="offcanvas"
                  data-bs-target="#cartPanel" title="Open your cart">Add to Cart</button>
        </div>
      </div>
    </div>
  </div>
</div>

<!-- Modal -->
<div class="modal fade" id="detailsModal" tabindex="-1"
     aria-labelledby="detailsTitle" aria-hidden="true">
  <div class="modal-dialog modal-dialog-centered">
    <div class="modal-content">
      <div class="modal-header">
        <h5 class="modal-title" id="detailsTitle">Product Details</h5>
        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
      </div>
      <div class="modal-body">
        <ul class="list-unstyled mb-0">
          <li><strong>Description:</strong> Over-ear, noise cancelling</li>
          <li><strong>Price:</strong> &#8369;1,250</li>
          <li><strong>Availability:</strong> In stock (12)</li>
        </ul>
      </div>
      <div class="modal-footer">
        <button class="btn btn-outline-primary" data-bs-dismiss="modal">Close</button>
        <button class="btn btn-primary">Save</button>
      </div>
    </div>
  </div>
</div>

<!-- Offcanvas cart -->
<div class="offcanvas offcanvas-end" tabindex="-1" id="cartPanel" aria-labelledby="cartTitle">
  <div class="offcanvas-header">
    <h5 class="offcanvas-title" id="cartTitle">Your Cart</h5>
    <button type="button" class="btn-close" data-bs-dismiss="offcanvas" aria-label="Close"></button>
  </div>
  <div class="offcanvas-body">
    <p class="text-muted">Wireless Headphones &times; 1 &mdash; &#8369;1,250</p>
    <button class="btn btn-success w-100">Checkout</button>
  </div>
</div>

<script>
  // Initialize every tooltip on the page
  document.querySelectorAll('[title]').forEach(el => new bootstrap.Tooltip(el));
</script>
```

CHECKLIST — TICK WHEN DONE

- ■ "View Details" opens the modal and the backdrop dims the page.
- ■ The X, Close button and clicking outside all close the modal.
- ■ Tabs switch panels without reloading.
- ■ Offcanvas slides in from the right.
- ■ Tooltip appears on hover.

Stretch challenge
Make a "Delete" confirmation modal with a red **btn-danger** and use **modal-sm**. Then add a **popover** on a help icon with **data-bs-toggle="popover"**.

Watch out for these mistakes
• Two modals with the same id: the button always opens the first one. Every id must be unique.
• Tabs not switching: the **data-bs-target** id does not exist, or no pane has **show active**.

DAY 10 OF 10

Final Project: POS Dashboard


DAILY BUILD GOAL

POS Dashboard

Estimated time: 2–3 hours

Combine everything: sidebar layout, summary cards, filters and a responsive transactions table.

DAILY BUILD GOAL — WHAT YOUR RESULT SHOULD LOOK LIKE

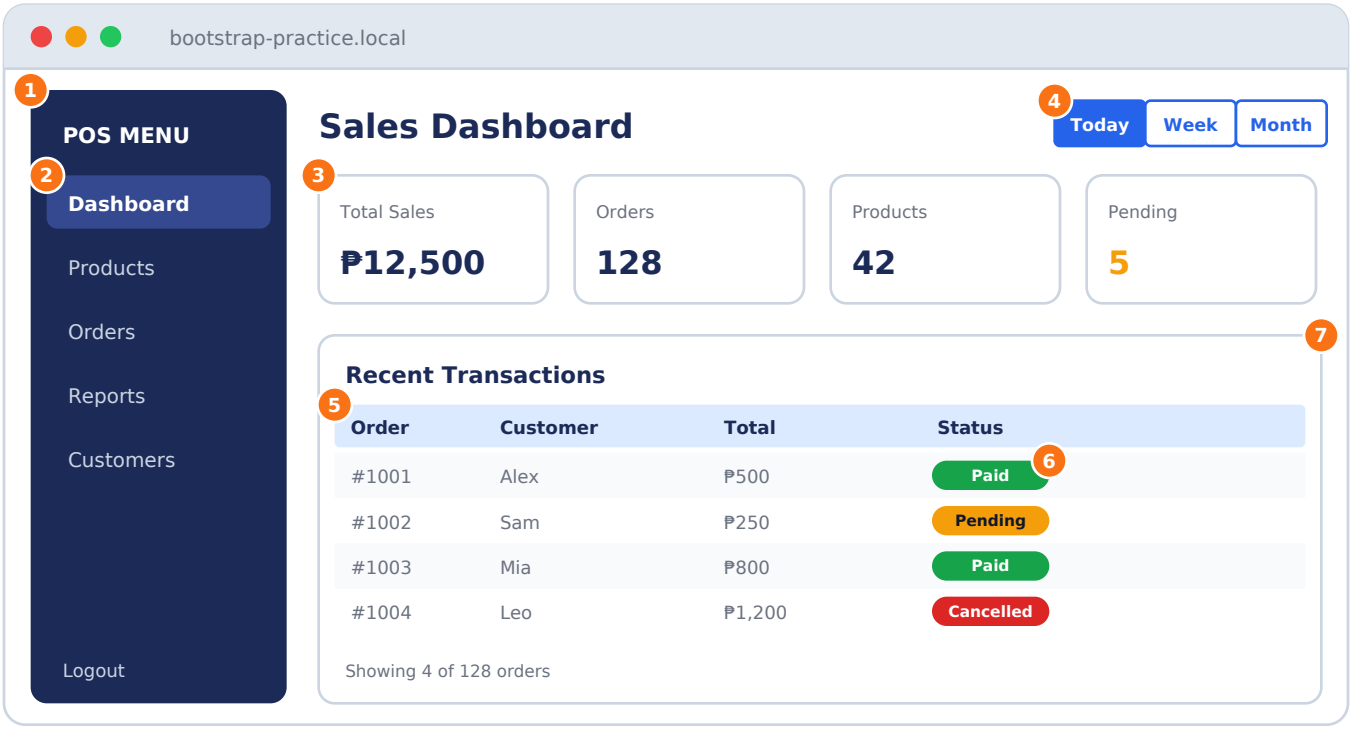

1. **`col-lg-2 bg-dark + list-group`** — sidebar menu (full width on phones)
2. **`list-group-item active`** — currently selected menu item
3. **`card shadow-sm border-0`** — KPI card (sales, orders, products)
4. **`btn-group`** — Today / Week / Month filter
5. **`table table-striped table-hover`** — recent transactions
6. **`badge text-bg-success / warning / danger`** — order status labels
7. **`table-responsive`** — wraps the table so it scrolls on phones

WHAT YOU WILL LEARN

- Plan a layout first: sidebar (2 cols) + content (10 cols) on large screens, stacked on phones.
- Combine cards, tables, badges and button groups into a real interface.
- Make tables responsive with table-responsive.
- Review: grid, flex, utilities, components and responsive classes in a single page.

CLASSES FOR TODAY

Class / Pattern	What it does	Example / reminder
`container-fluid`	Full-width shell so the sidebar touches the edge.	Outer wrapper.
`row + col-12 col-lg-2 / col-lg-10`	Sidebar and main content layout.	Stacked on mobile, side by side from lg.
`min-vh-100 bg-dark text-white`	Full-height dark sidebar.	On the aside element.
`list-group / list-group-item-action`	Clickable menu items. active marks the current one.	list-group-flush for a borderless look.
`card shadow-sm border-0`	Clean KPI cards.	One card per metric.
`row g-3 + col-12 col-md-6 col-xl-3`	1 card on phones, 2 on md, 4 on xl.	Responsive KPI grid.
`btn-group / btn-group-sm`	Joins related buttons (e.g., date filters).	role="group" aria-label="..."
`table / table-striped / table-hover`	Readable data table with zebra rows and hover highlight.	table align-middle
`table-responsive`	Horizontal scroll on small screens.	Wrap around the table.
`badge text-bg-success / warning / danger`	Status labels: Paid, Pending, Cancelled.	Choose colors by meaning.
`d-flex justify-content-between align-items-center`	Page header with title and filter buttons.	Flex review.
`fw-bold / text-muted / small`	Typography for labels and numbers.	text-muted small for card labels.
`offcanvas-lg (optional)`	Turns the sidebar into a slide-in panel below lg.	Advanced mobile pattern.

MINI CODE EXAMPLE

```
<div class="container-fluid">
  <div class="row min-vh-100">
    <aside class="col-12 col-lg-2 bg-dark text-white">Sidebar</aside>
    <main class="col-12 col-lg-10 p-4">Main content</main>
  </div>
</div>
```

STEP-BY-STEP BUILD

1. Create **container-fluid → row**. Give the row **min-vh-100**, then add **aside.col-12.col-lg-2.bg-dark.text-white.p-3** and **main.col-12.col-lg-10.p-4**.
2. Sidebar: heading "POS MENU" and a **list-group list-group-flush** with Dashboard (active), Products, Orders, Reports, Customers.
3. Main header: **d-flex justify-content-between align-items-center mb-4** with the title and a **btn-group** (Today / Week / Month).
4. KPI row: **row g-3 mb-4** with four **col-12 col-md-6 col-xl-3** cards (Total Sales, Orders, Products, Pending).
5. Transactions: a **card** with a heading and **table-responsive → table table-striped table-hover align-middle**.

6. Add status badges, then test at 375px, 800px, 1100px and 1400px. Everything should stay readable and nothing should overflow.

COMPLETE SOLUTION (body content — paste inside <body>)

```
<div class="container-fluid">
  <div class="row min-vh-100">

    <!-- Sidebar -->
    <aside class="col-12 col-lg-2 bg-dark text-white p-3">
      <h5 class="fw-bold mb-3">POS MENU</h5>
      <div class="list-group list-group-flush">
        <a href="#" class="list-group-item list-group-item-action active">Dashboard</a>
        <a href="#" class="list-group-item list-group-item-action">Products</a>
        <a href="#" class="list-group-item list-group-item-action">Orders</a>
        <a href="#" class="list-group-item list-group-item-action">Reports</a>
        <a href="#" class="list-group-item list-group-item-action">Customers</a>
      </div>
    </aside>

    <!-- Main content -->
    <main class="col-12 col-lg-10 p-4 bg-light">

      <div class="d-flex flex-wrap justify-content-between align-items-center gap-2 mb-4">
        <h2 class="fw-bold mb-0">Sales Dashboard</h2>
        <div class="btn-group btn-group-sm" role="group" aria-label="Date filter">
          <button class="btn btn-primary">Today</button>
          <button class="btn btn-outline-primary">Week</button>
          <button class="btn btn-outline-primary">Month</button>
        </div>
      </div>

      <!-- KPI cards -->
      <div class="row g-3 mb-4">
        <div class="col-12 col-md-6 col-xl-3">
          <div class="card shadow-sm border-0"><div class="card-body">
            <p class="text-muted small mb-1">Total Sales</p>
            <h3 class="fw-bold mb-0">&amp;#8369;12,500</h3>
          </div></div>
        </div>
        <div class="col-12 col-md-6 col-xl-3">
          <div class="card shadow-sm border-0"><div class="card-body">
            <p class="text-muted small mb-1">Orders</p>
            <h3 class="fw-bold mb-0">128</h3>
          </div></div>
        </div>
        <div class="col-12 col-md-6 col-xl-3">
          <div class="card shadow-sm border-0"><div class="card-body">
            <p class="text-muted small mb-1">Products</p>
            <h3 class="fw-bold mb-0">42</h3>
          </div></div>
        </div>
        <div class="col-12 col-md-6 col-xl-3">
          <div class="card shadow-sm border-0"><div class="card-body">
            <p class="text-muted small mb-1">Pending</p>
            <h3 class="fw-bold mb-0 text-warning">5</h3>
          </div></div>
        </div>
      </div>

      <!-- Recent transactions -->
      <div class="card shadow-sm border-0">
        <div class="card-body">
          <h5 class="card-title fw-bold mb-3">Recent Transactions</h5>
          <div class="table-responsive">
```

```
            <table class="table table-striped table-hover align-middle mb-0">
              <thead class="table-primary">
                <tr><th>Order</th><th>Customer</th><th>Total</th><th>Status</th></tr>
              </thead>
              <tbody>
                <tr><td>#1001</td><td>Alex</td><td>&#8369;500</td>
                    <td><span class="badge text-bg-success">Paid</span></td></tr>
                <tr><td>#1002</td><td>Sam</td><td>&#8369;250</td>
                    <td><span class="badge text-bg-warning">Pending</span></td></tr>
                <tr><td>#1003</td><td>Mia</td><td>&#8369;800</td>
                    <td><span class="badge text-bg-success">Paid</span></td></tr>
                <tr><td>#1004</td><td>Leo</td><td>&#8369;1,200</td>
                    <td><span class="badge text-bg-danger">Cancelled</span></td></tr>
              </tbody>
            </table>
          </div>
          <p class="text-muted small mt-3 mb-0">Showing 4 of 128 orders</p>
        </div>
      </div>

    </main>
  </div>
</div>
```

LEVEL UP: ADD A "TOP PRODUCTS" CARD

```
<!-- Put next to the table: table card = col-lg-8, this card = col-lg-4 -->
<div class="card shadow-sm border-0 h-100">
  <div class="card-body">
    <h5 class="card-title fw-bold mb-3">Top Products</h5>
    <ul class="list-group list-group-flush">
      <li class="list-group-item d-flex justify-content-between align-items-center">
        Wireless Headphones <span class="badge text-bg-primary rounded-pill">34</span>
      </li>
      <li class="list-group-item d-flex justify-content-between align-items-center">
        USB-C Cable <span class="badge text-bg-primary rounded-pill">27</span>
      </li>
      <li class="list-group-item d-flex justify-content-between align-items-center">
        Phone Case <span class="badge text-bg-primary rounded-pill">19</span>
      </li>
    </ul>
  </div>
</div>
```

CHECKLIST — TICK WHEN DONE

- ■ Sidebar on the left on desktop, on top on mobile.
- ■ KPI cards: 4 across (xl), 2 across (md), 1 (phone).
- ■ Table scrolls horizontally on a phone instead of breaking the layout.
- ■ Status badges use meaningful colors.
- ■ No horizontal page scroll at any width.

Stretch challenge
Turn the sidebar into an **offcanvas-lg** panel that opens with a hamburger button on phones. Then add a search **input-group** and a "New Sale" button that opens a modal form.

Watch out for these mistakes
• Sidebar background stops halfway down: put **min-vh-100** on the **row** (not only on the sidebar) so both columns stretch to the full window height.
• Wide tables overflowing the page: always wrap them in **table-responsive**.

Quick Reference — Common Patterns

Class / Pattern	What it does	Example / reminder
`Spacing`	m = margin, p = padding; t/b/s/e/x/y choose sides; 0–5 and auto.	mt-3, px-4, mb-0, py-5
`Responsive breakpoint`	Add sm, md, lg, xl or xxl to many utilities.	col-12 col-md-6; d-none d-lg-block
`Color variants`	primary, secondary, success, danger, warning, info, light, dark.	btn-success; text-danger; bg-light
`Subtle colors`	Soft backgrounds and borders (5.3).	bg-primary-subtle; border-success-subtle
`Flex alignment`	d-flex + justify-content-* + align-items-*.	d-flex justify-content-between align-items-center
`Grid`	container > row > col-*; 12 columns.	row g-3; col-12 col-md-6 col-lg-4
`Buttons`	Base .btn plus a variant.	btn btn-primary; btn btn-outline-dark btn-sm
`Form controls`	Labels with matching id/for.	form-label + form-control
`Cards`	card > card-body > card-title / card-text.	card h-100 shadow-sm
`Tables`	Wrap in table-responsive.	table table-striped table-hover
`Visibility`	Show or hide by breakpoint.	d-none d-md-block; d-lg-none
`Interactive components`	Modal, dropdown, collapse, accordion, tabs, offcanvas, tooltip, popover need Bootstrap JS.	bootstrap.bundle.min.js
`data-bs attributes`	toggle = what to do, target = where, dismiss = close.	data-bs-toggle="modal" data-bs-target="#id"

Debugging checklist: "my Bootstrap is not working"

1. Open DevTools → Network: did **bootstrap.min.css** load? (offline or wrong link = no styling).
2. Is the **viewport meta tag** present?
3. Inspect the element: is your class listed in the Styles panel, or crossed out by another rule?
4. Check spelling and the version. This guide uses Bootstrap 5 names (**ms-***, not ml-*; **data-bs-***, not data-*).
5. Components not responding? Make sure **bootstrap.bundle.min.js** is at the end of the page and ids match.
6. Layout broken? Check that every **col-*** is a direct child of a **row**, and every row is inside a container.

Common beginner mistakes to avoid

- Putting columns directly inside a container without a .row.
- Forgetting that the grid has 12 columns: col-md-6 means 6 of 12 (half).
- Using .btn-primary without .btn.
- Using navbar toggler, modal, dropdown, tabs or accordion without loading the Bootstrap JavaScript bundle.
- Expecting .is-invalid to validate by itself; it only adds styling.
- Mixing Bootstrap versions (Bootstrap 4 used ml-/mr-, float-left, data-toggle; Bootstrap 5 uses ms-/me-, float-start, data-bs-toggle).
- Writing custom CSS for something a utility already does (spacing, alignment, colors).

Suggested learning order

Grid → Utilities → Flexbox → Typography & Buttons → Cards → Forms → Navbar & Responsive Design → Components → Modals → Complete POS layout.

Progress tracker

Day	Goal	Built it	No peeking	Did challenge
1	Personal Profile Card	☐	☐	☐
2	Responsive 3-Column Layout	☐	☐	☐
3	Flexbox Navigation Bar	☐	☐	☐
4	Landing Page Hero	☐	☐	☐
5	3-Product Card Layout	☐	☐	☐
6	Login / Registration Form	☐	☐	☐
7	Responsive Website Navbar	☐	☐	☐
8	Student Dashboard	☐	☐	☐
9	Product Details + Modal	☐	☐	☐
10	POS Dashboard	☐	☐	☐

Official reference: https://getbootstrap.com/docs/5.3/getting-started/introduction/