


序号No.	配件名称 Spare Parts	材料 Material	6	连接套 Connecting sleeve	Q235 (Cr.D)	12	手轮 Handwheel	玛钢 GGG40
1	阀体 Body	CF3M	7	支架板 Yoke	304	13	并帽 Cap	Q235 (Cr.D)
2	密封橡胶 Sealing Ring	PTFE/FKM	8	阀杆 Stem	304		标准件 Bolts/Nuts	A2-70
3	闸板 Disc	316L	9	铜螺母 Nut	压铸黄铜 Brass			
4	导向垫 Guide Pad	PTFE	10	支架头 Yoke head	Q235 (Cr.D)			
5	填料 Packing	PTFE/FKM	11	轴承 Bearing	GCr15			

备注(Note): 1、设计按(Design): JB/T8691-2013
2、法兰按(Flange): GB/T9113.1-2010
3、结构长度按(Face to face):
GB/T15188.2-94 chart6-7
4、试验和验收(Testing): GB/T13927-2022

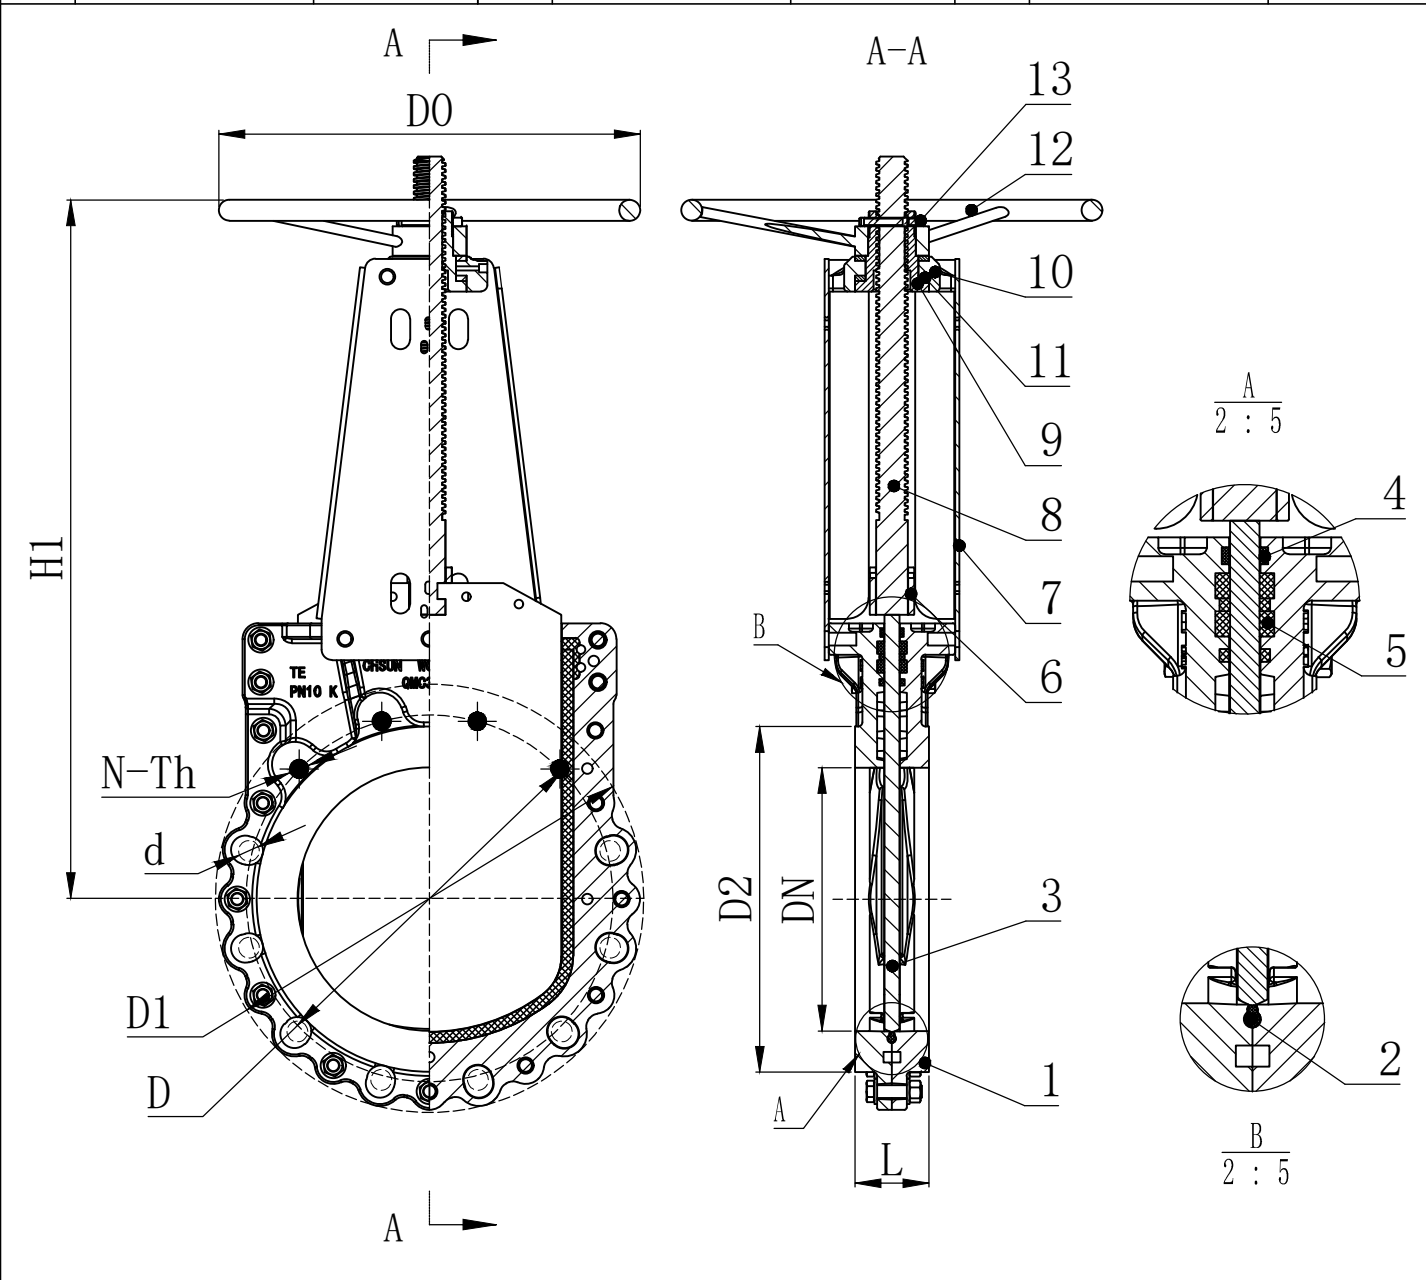

刀闸阀主要外形及连接尺寸 Outline and Dimension

型号Model: QMCZ73X-10RL

通径	尺寸 size								
DN (MM)	L	D	D1	D2	D0	N-Th	d	●	⊕
50	48	165	125	99	220	4-M16	18	2	2
65	48	185	145	118	220	8-M16	18	2	2
80	51	200	160	132	240	8-M16	18	2	6
100	51	220	180	156	260	8-M16	18	2	6
125	57	250	210	184	280	8-M16	18	2	6
150	57	285	240	211	320	8-M20	23	2	6
200	70	340	295	266	350	8-M20	23	2	6
250	70	395	350	319	400	12-M20	23	4	8
300	76	445	400	370	450	12-M20	23	4	8
350	76	505	460	429	500	16-M20	23	6	10
400	89	565	515	480	500	16-M24	27	6	10

● 盲孔(Blind threaded)

⊕ 对穿通孔(Tapping through)

刀闸阀 Knife Gate Valve

QMCZ73X-10RL

奇胜阀门有限公司

CHISUN VALVE CO., LTD

