


Make every service event traceable



FULL-STACK SERVICES

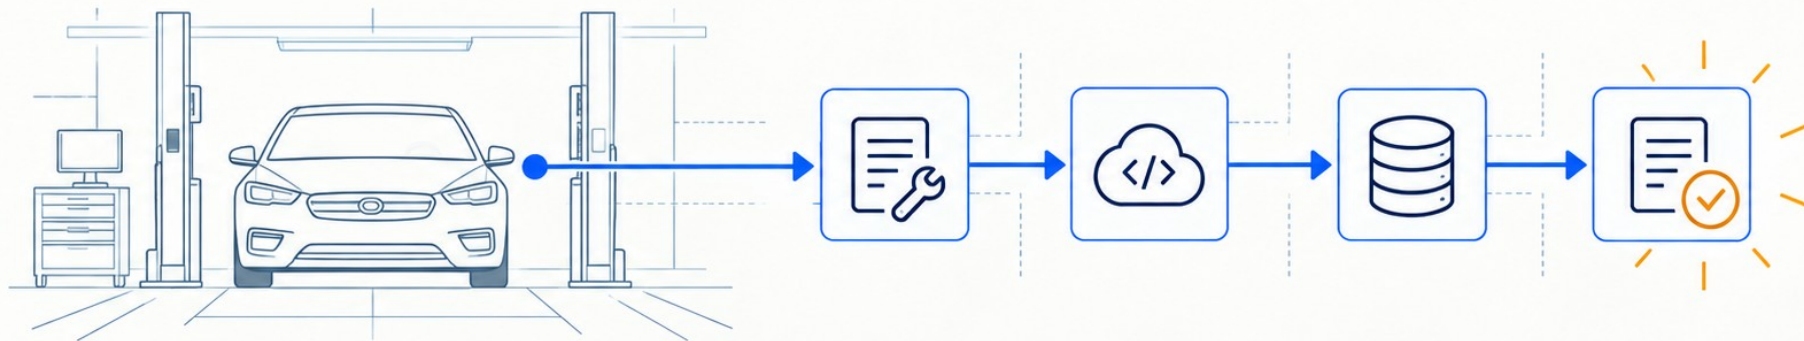

APIS + TESTING




RELIABLE HANDOFFS



The gap is not data; it is context

Operational signals become valuable when the next system can interpret them.

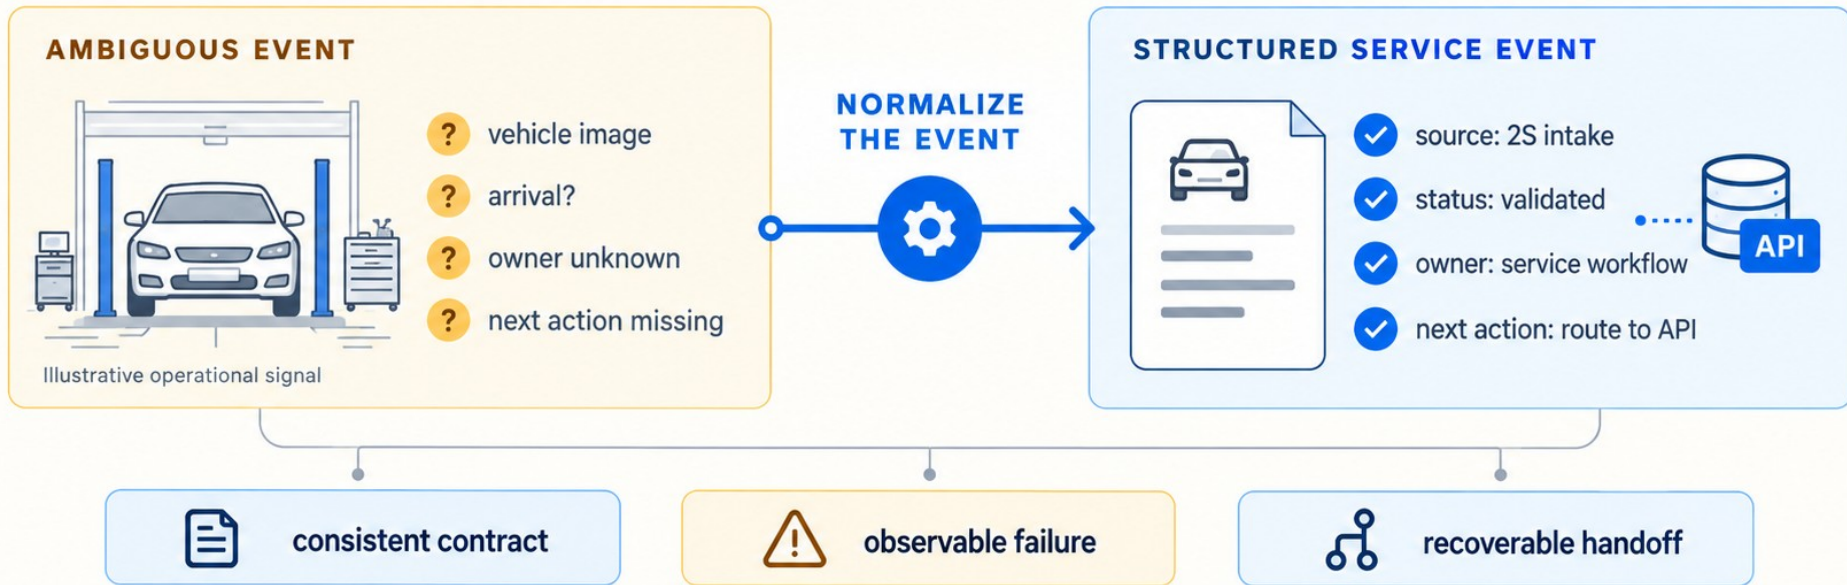

The engineering value is context that downstream systems can trust.






Real evidence: 2S Phúc Lợi

A six-month automotive service-workshop project.

Built a mini app to manage vehicle entries and exits using images.

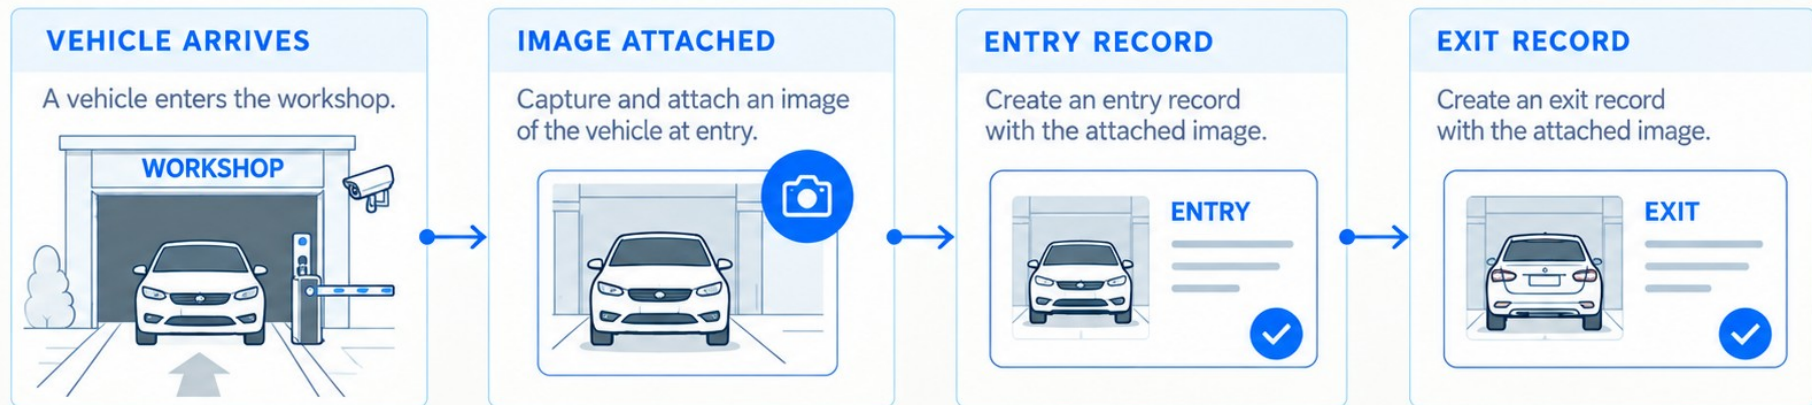

No OCR or computer-vision claim.



LESSON

A small workflow becomes useful when the record is clear enough to trust.




From a vehicle-entry app to a reliable service event

A real 2S project shows the starting point; this is how I would extend the thinking for an automotive platform.

REAL EVIDENCE

2S Phúc Lợi

Built a mini app to manage vehicle entries and exits using images.

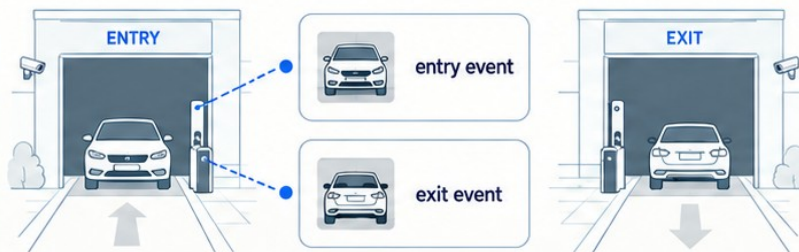


No OCR or computer-vision claim.



PROPOSED VALUE IN THIS ROLE

A traceable service event

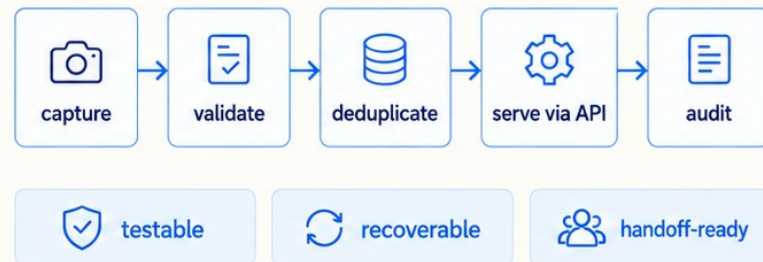

 Proposal for the role — no Keyloop internal data used.

The value is not the picture; it is a service event the next system can trust.



Reliability lives in the boundary

Validate, deduplicate, and resolve conflicts before the CRM write — so the next system can trust the event.

1. INCOMING EVENTS

Real-world events can be messy.



Malformed payload

```
{ "event_type": "vehicle_entry",  
  "plate": 123, "timestamp": null }
```



Duplicate event

```
{ "event_id": "evt_789",  
  "type": "service_complete", ... }
```



Conflicting update

```
{ "event_id": "evt_456",  
  "mileage": 32000 } // vs 28000
```



2. BOUNDARY CHECKS

Make a deliberate decision before CRM.



Validate + normalize

Check schema, required fields, normalize formats (e.g., plate, VIN).



Idempotency key

Detect and suppress duplicates using a unique event key.



Conflict detection

Identify conflicting updates (e.g., mileage, status, timestamps).



Bounded retry

Retry transient failures with limits and backoff.



3. EXPLICIT OUTCOMES

Only trusted events reach the CRM.



Accepted

Event is valid and unique.



Process

(write to CRM)



Duplicate

Already processed.



Safely ignore

(no CRM write)



Conflict

Inconsistent update detected.



Review queue

(human / rules)



Failure

Invalid or unrecoverable.



Retry /

escalate




The reliability decision happens before the CRM write.

By handling validation, deduplication, and conflicts at the boundary, we protect the CRM and keep the data trusted.



First 30 days: ship the thin vertical slice

A focused plan to create value quickly, learn from real use, and build the foundation for what comes next.

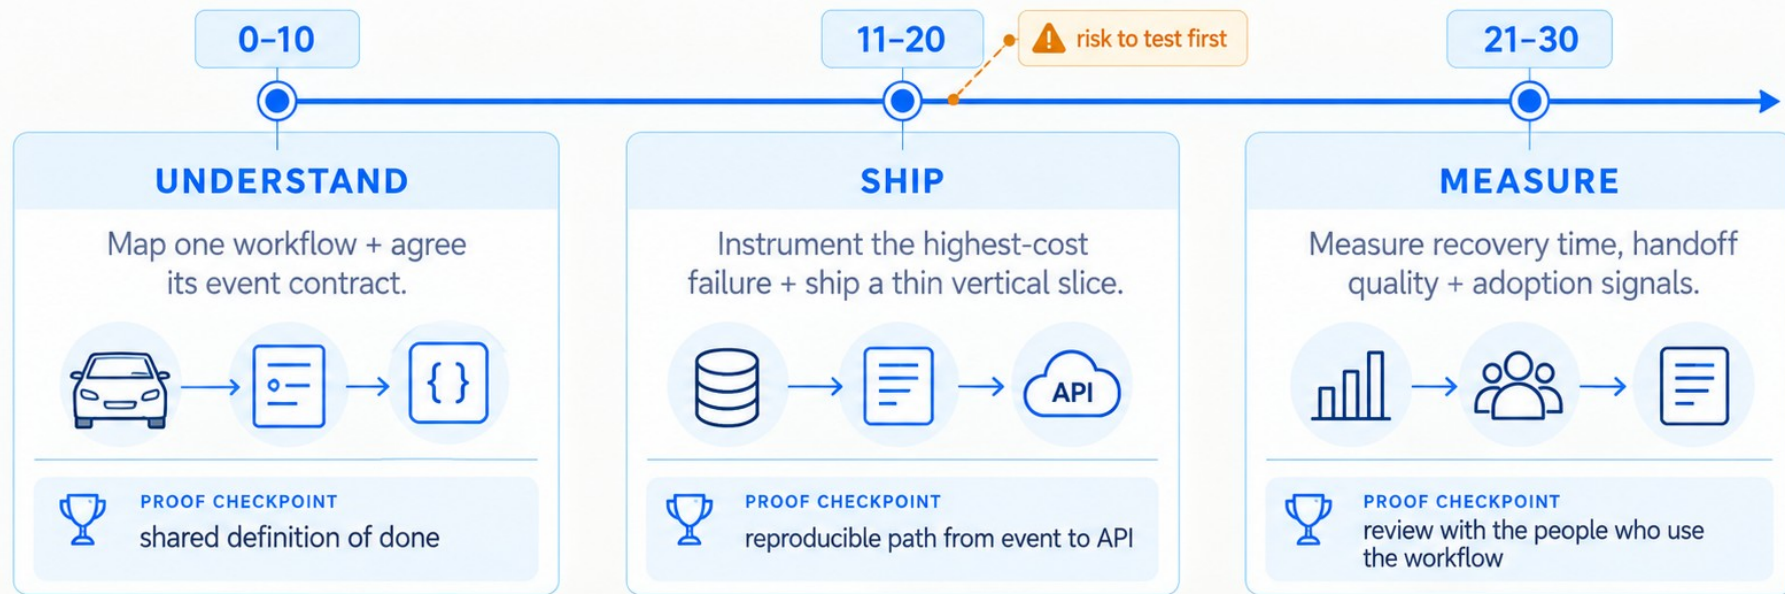

Value starts with one observable workflow, shipped end to end, then improved with evidence.

