PIC 10A 1A

TA: Bumsu Kim

This content is protected and may not be shared, uploaded, or distributed.

The author does not grant permission for these notes to be posted anywhere without prior consent.

UCLA

Today…

- HW 7 Hints
- C++ Class Example
  - Card and Deck, and a Poker Game

HW 7 Hints

HW 7 Hints: `bug.h`

- The bug is moving forward (+) or backward (-)
- What do you need to store as member variables in the Bug class?
  - Of course, you need the position of the bug
  - Secondly, you will also need to store the "direction"
  - The "direction" variable will
    - be changed when `Bug::turn()` is called
    - determine if the bug moves forward or backward, when `Bug::move()` is called

- Don't forget to mark member functions that does not modify anything in the class as `const`

UCLA

HW 7 Hints: `moth.h`

- In fact, this week we have an easier “part 2” question
- The `Moth` class only need to store its position (i.e. one member variable)
- `Moth::move_to_light()` and `Moth::get_position()` are also pretty straightforward.
- Don’t forget to mark member functions that does not modify anything in the class as `const`
- Any questions?

UCLA

C++ Classes Example

Card and Deck, and a Poker Game

Card and Deck, and a Poker Game

- We will implement two classes, `Card` and Deck, where `Deck` has a vector of `Card`s as a data member

- A Card class has its “suit” and “rank”
  - “suit” is one of `'C' (Clubs), 'D' (Diamonds), 'H' (Hearts), 'S' (Spades)`
  - “rank” is one of `'A', '2', ..., '10', 'J', 'Q', 'K'`
  - And it can also return the string for the card description, such as
    - “Ace of Clubs”, “10 of Spaces”, etc.

- A Deck class has a vector of 52 Cards, and it also can
  - Shuffle the deck
  - Deal a card from the deck

- Using Card and Deck classes, we will simulate a simple poker game
  - [See the GitHub Repo!]

Your Feedback is welcome
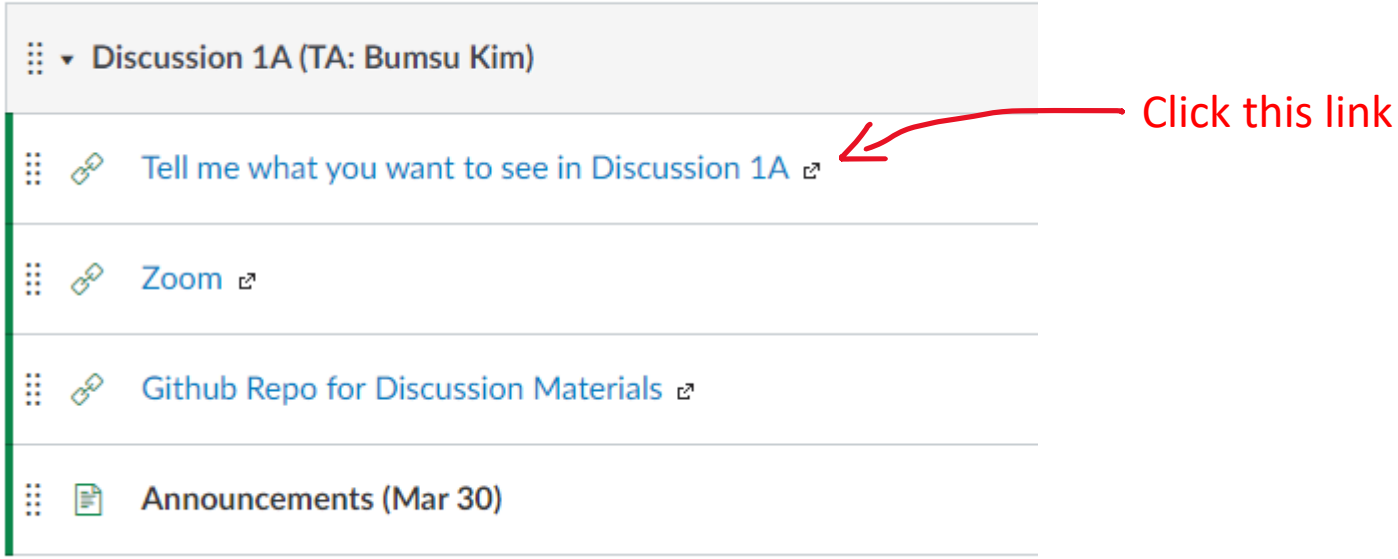
- Don’t hesitate to give a feedback on the discussion
- You can use a link in BruinLearn (Google Form)