


app.js

Our **app.js** represents
our base URL

In our case, it would
be **localhost:4000/**



Express Routes
Neighborhood

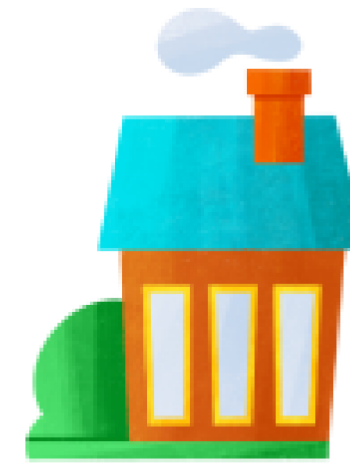

/hello-world



to-be-built



to-be-built

/practice



to-be-built



to-be-built



to-be-built

current URL: **http://localhost:4000**


app.js =
localhost:4000/

app.js

Our car is pathing to
**app.use('/practice',
practiceController);**



Express Routes
Neighborhood

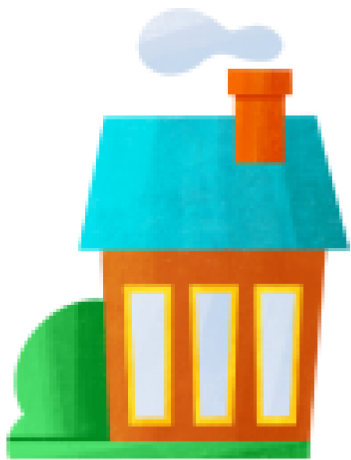

/hello-world



to-be-built



to-be-built

/practice



to-be-built



to-be-built



to-be-built

current URL: **http://localhost:4000/practice**


app.js =
localhost:4000/

app.js

Our car is pathing to
**app.use('/practice',
practiceController);**



Express Routes
Neighborhood

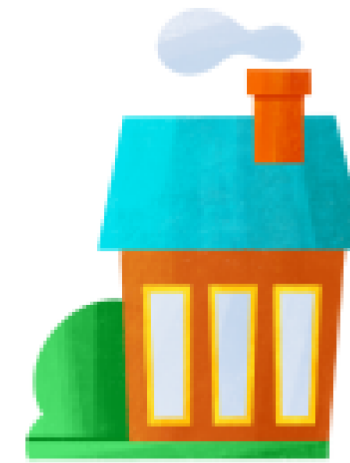

/hello-world



to-be-built



to-be-built

/practice

We have access due to the
`require('./controllers/practice.controller');`



to-be-built



to-be-built



to-be-built

current URL: **http://localhost:4000/practice**

app.js =
localhost:4000/

app.js

Our car is pathing to
`app.use('/practice', practiceController);`

Express Routes
Neighborhood



/hello-world



to-be-built



to-be-built



to-be-built



to-be-built



to-be-built


/practice

current URL: **http://localhost:4000/practice/hello-world**

app.js =
localhost:4000/

app.js

Express Routes
Neighborhood

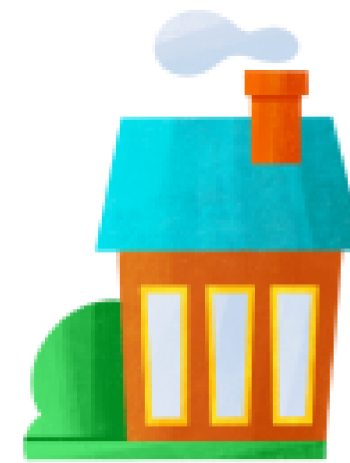

/hello-world



/greeting



to-be-built

/practice

Need to build route



to-be-built



to-be-built



to-be-built

current URL: **http://localhost:4000/practice/**

app.js =
localhost:4000/

app.js

Our car is pathing to
app.use('/practice', practiceController);

Express Routes
Neighborhood



/hello-world



/greeting



to-be-built



/practice



to-be-built



to-be-built



to-be-built

current URL: **http://localhost:4000/practice/greeting**

app.js =
localhost:4000/

app.js

Express Routes
Neighborhood



/hello-world



res.send('Good
Afternoon')

/greeting



to-be-built



Our car is pathing to
`app.use('/practice', practiceController);`

/practice



to-be-built



to-be-built




to-be-built

current URL: **http://localhost:4000/practice/greeting**

app.js =
localhost:4000/

app.js

Express Routes
Neighborhood

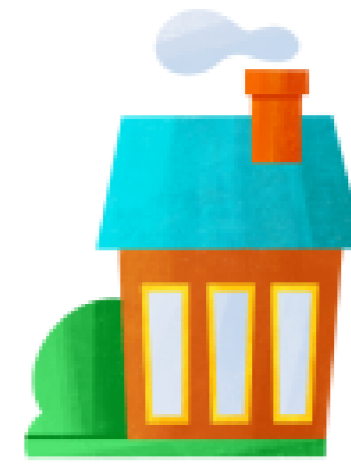

/hello-world



/greeting



/json

Going to pull data from
a JSON object

/practice



to-be-built



to-be-built




to-be-built

current URL: **http://localhost:4000/practice**

app.js =
localhost:4000/

app.js


Express Routes
Neighborhood

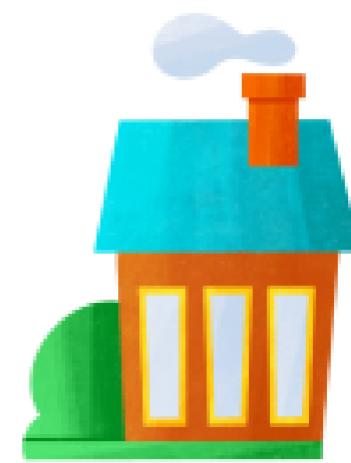

/hello-world



/greeting

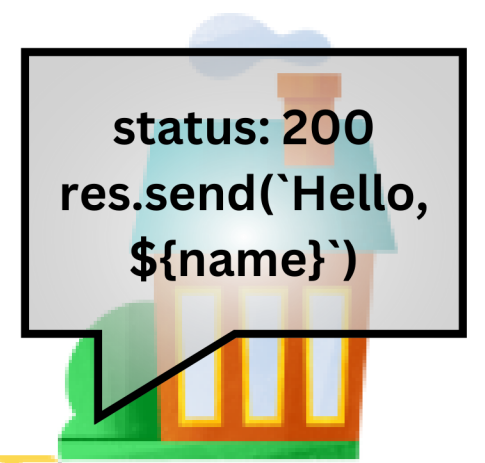

/json



Our car is pathing to
app.use('/practice', practiceController);

/practice



to-be-built



to-be-built



to-be-built

current URL: **http://localhost:4000/practice/json**

app.js =
localhost:4000/

app.js

Express Routes
Neighborhood



/hello-world



/greeting



/json

Our car is pathing to
app.use('/practice', practiceController);

/practice



to-be-built



to-be-built



to-be-built

current URL: **http://localhost:4000/practice/unknown-endpoint-placed**