

CS544

LESSON 5

JPA MAPPING 2


INHERITANCE MAPPING

Three ways to map

- You can map inheritance in one of three ways:


- **Single Table per Hierarchy**

- De-normalized schema
- Fast polymorphic queries

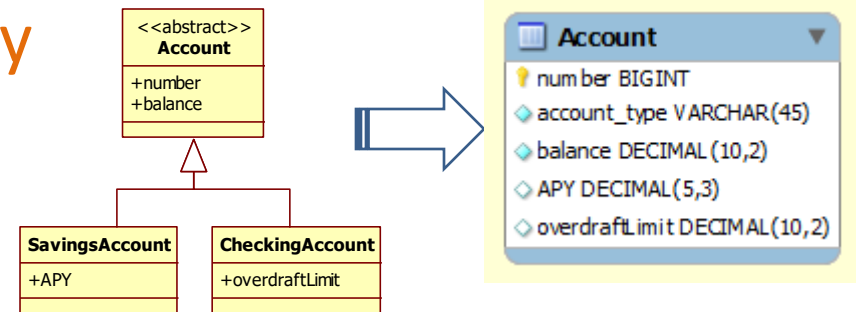


- **Joined Tables**

- Normalized & similar to classes
- Slower queries

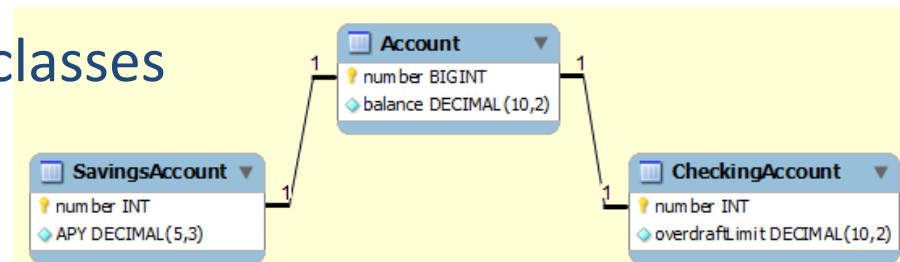

- **Table per Concrete Class**

- Uses UNION instead of JOIN
- All needed columns in each table

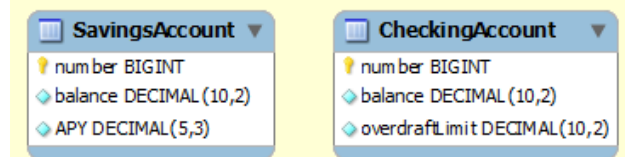

Single Table

ACCOUNT_TYPE	NUMBER	BALANCE	OVERDRAFTLIMIT	APY
checking	1	500	200	
savings	2	100		2.3
checking	3	23.5	0	

APY is null for checking accounts, overdraft limit is null for savings


- + Simple, Easy to implement
- + Good performance on all queries, polymorphic and non polymorphic
- Nullable columns / de-normalized schema
- Table may have to contain lots of columns
- A change in any class results in a change of this table

Single Table

Specify the SINGLE_TABLE strategy

```
@Entity
@Inheritance(strategy=InheritanceType.SINGLE_TABLE)
@DiscriminatorColumn(
    name="account_type",
    discriminatorType=DiscriminatorType.STRING
)
public abstract class Account
    @Id
    @GeneratedValue
    private long number;
    private double balance;
    ...
```

Optional annotation
@DiscriminatorColumn

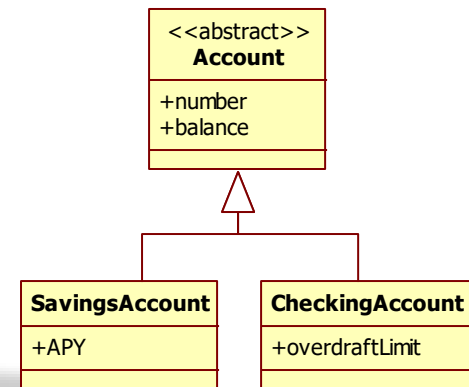


```
@Entity
@DiscriminatorValue("savings")
public class SavingsAccount extends Account {
    private double APY;
    ...
```

Specify discriminator value

```
@Entity
@DiscriminatorValue("checking")
public class CheckingAccount extends Account {
    private double overdraftLimit;
    ...
```

Specify discriminator value

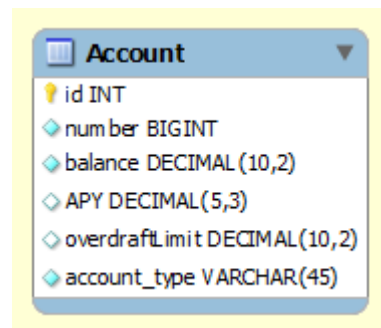

Joined Tables

Account Table

NUMBER	BALANCE
1	500
2	100
3	23.5

SavingsAccount

NUMBER	APY
2	2.3

CheckingAccount

NUMBER	OVERDRAFTLIMIT
1	200
3	0

- + Normalized Schema
- + Database view is similar to domain view
- Inserting or updating an entity results in multiple insert or update statements
- Necessary joins can give bad query performance

Joined

Just specify the inheritance strategy, nothing else

```
@Entity
@Inheritance(strategy = InheritanceType.JOINED)
public abstract class Account {
    @Id
    @GeneratedValue
    private long number;
    private double balance;

    ...
}
```

```
@Entity
public class SavingsAccount extends Account {
    private double APY;

    ...
}
```

Subclasses can be mapped as normal entity classes, but without identifiers

```
@Entity
public class CheckingAccount extends Account {
    private double overdraftLimit;

    ...
}
```

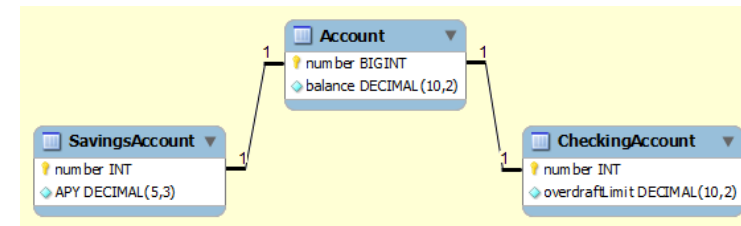
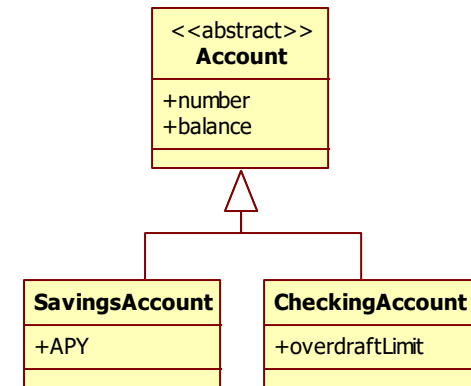


Table per Class

SavingsAccount

NUMBER	BALANCE	APY
2	100	2.3

CheckingAccount

NUMBER	BALANCE	OVERDRAFTLIMIT
1	500	200
3	23.5	0

- + Simple table structure
 - + No Null values
- + Very efficient non-polymorphic queries
 - + No joins needed
- Can not use Identity column ID generation
- JPA does not require its implementation (optional)
- Requires a UNION for polymorphic queries

Table per Class

Just specify the inheritance strategy, nothing else

```
@Entity
@Inheritance(strategy = InheritanceType.TABLE_PER_CLASS)
public class Account {
    @Id
    @GeneratedValue(strategy=GenerationType.TABLE)
    private long number;
    private double balance;
    ...
}
```

Id generation can not use identity column



Normal @Entity mapping

```
@Entity
public class SavingsAccount extends Account {
    private Double APY;
    ...
}
```

Java.util.Double instead of primitive double type

```
@Entity
public class CheckingAccount extends Account {
    private Double overdraftLimit;
    ...
}
```

Java.util.Double instead of primitive double type

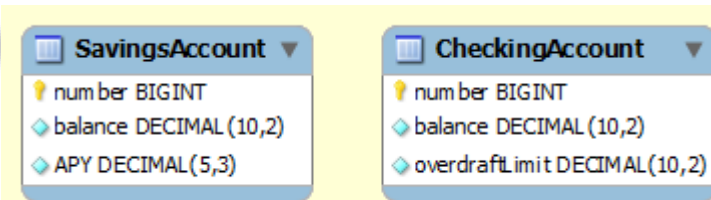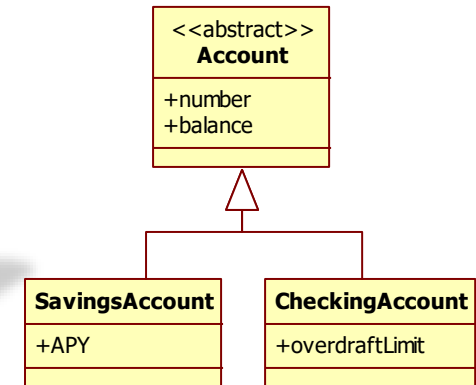

Main point

- Class inheritance can be mapped in 3 different ways in the database.

Science of Consciousness: The transcendental field of pure consciousness is the field of all possibilities.

COMPLEX MAPPING

Complex Mappings

- In this module we will cover:
 - Secondary tables – allow a class to be mapped to multiple tables
 - Embedded classes – allow multiple classes to be mapped to a single table
 - Composite keys – can be made using embedded classes

Secondary Tables

- Last module we used a secondary table to join a table to a single table per hierarchy strategy
- Secondary tables can be used anywhere to move properties into separate table(s)

```
@Entity
@DiscriminatorValue("savings")
@SecondaryTable(
    name="SavingsAccount",
    pkJoinColumns=@PrimaryKeyJoinColumn(name="number")
)
public class SavingsAccount extends Account {
    @Column(table="SavingsAccount")
    private double APY;

    ...
}
```

Secondary table example
from last module

Secondary Table

@SecondaryTables can specify multiple @SecondaryTable

pkJoinColumns can be used to specify a multi column join

JoinColumn name can differ from the referenced column



Properties need to specify the secondary table to be on it

All you really need is @SecondaryTable and a name, the rest is optional

```
@Entity
@SecondaryTables (
    @SecondaryTable(name="warehouse", pkJoinColumns = {
        @PrimaryKeyJoinColumn(name="product_id", referencedColumnName="number")
    })
)
public class Product {
    @Id
    @GeneratedValue
    private int number;
    private String name;
    private BigDecimal price;
    @Column(table="warehouse")
    private boolean available;
    ...
}
```



```
@Entity
@SecondaryTable(name="warehouse")
public class Product {
    @Id
    @GeneratedValue
    private int number;
    private String name;
    private BigDecimal price;
    @Column(table = "warehouse")
    private int available;
    ...
}
```

Product
+number
+name
+price
+available

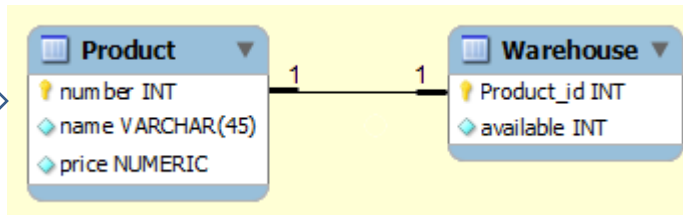

Embedded Classes

- Combine multiple **classes in a single table**
- Especially useful for tight associations
- These classes are considered **value classes** rather than entity classes

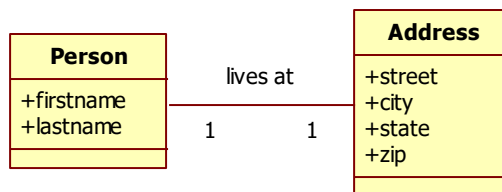

Address is embedded
inside the Person table

Person	
id	INT
firstname	VARCHAR(45)
lastname	VARCHAR(45)
street	VARCHAR(45)
city	VARCHAR(45)
state	VARCHAR(45)
zip	VARCHAR(45)

Embeddable

@Embedded annotation is used for embeddable objects

```
@Entity
public class Person {
    @Id
    @GeneratedValue
    private int id;
    private String firstname;
    private String lastname;

    @Embedded
    private Address address;




    ...
}
```

@Embeddable instead of @Entity

```
@Embeddable
public class Address {
    private String street;
    private String city;
    private String state;
    private String zip;

    ...
}
```

No @Id in embeddable

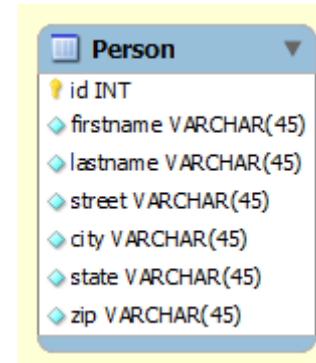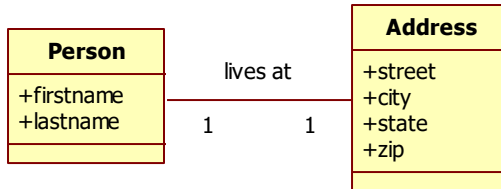

ID	FIRSTNAME	LASTNAME	STREET	CITY	STATE	ZIP
1	Frank	Brown	45 N Main St	Chicago	Illinois	51885

Multiple Embedded Addresses

```
@Entity
public class Customer {
    @Id
    @GeneratedValue
    private int id;
    private String firstname;
    private String lastname;

    @Embedded
    @AttributeOverrides( {
        @AttributeOverride(name="street", column=@Column(name="ship_street")),
        @AttributeOverride(name="city", column=@Column(name="ship_city")),
        @AttributeOverride(name="state", column=@Column(name="ship_state")),
        @AttributeOverride(name="zip", column=@Column(name="ship_zip"))
    })
    private Address shipping;

    @Embedded
    @AttributeOverrides( {
        @AttributeOverride(name="street", column=@Column(name="bill_street")),
        @AttributeOverride(name="city", column=@Column(name="bill_city")),
        @AttributeOverride(name="state", column=@Column(name="bill_state")),
        @AttributeOverride(name="zip", column=@Column(name="bill_zip"))
    })
    private Address billing;
    ...
}
```

Rename the column names
for the embedded object
using @AttributeOverrides

ID	FIRSTNAME	LASTNAME	SHIP_STREET	SHIP_CITY	SHIP_STATE	SHIP_ZIP	BILL_STREET	BILL_CITY	BILL_STATE	BILL_ZIP
1	Frank	Brown	45 N Main St	Chicago	Illinois	51885	100 W Adams St	Chicago	Illinois	60603

Composite Keys

- **Composite Keys are multi-column Primary Keys**
 - By definition these are natural keys
 - Have to be set by the application (not generated)
 - Generally found in legacy systems
 - Also create multi-column Foreign Keys

Composite Ids

@Embeddable

```
@Embeddable
public class Name implements Serializable {
    private String firstname;
    private String lastname;

    ...
}
```

Also requires hashCode and equals methods
(see next slide)

```
@Entity
public class Employee {
    @Id
    private Name name;
    @Temporal(TemporalType.DATE)
    private Date startDate;

    ...
}
```

Embeddable object as identifier
creates composite key



PK is made of
Both firstname
and lastname

equals() & hashCode()

@Embeddable

```
public class Name {  
    private String firstname;  
    private String lastname;  
  
    ...  
  
    public boolean equals(Object obj) {  
        if (this == obj)  
            return true;  
        if ((obj == null) || obj.getClass() != this.getClass())  
            return false;  
        Name n = (Name) obj;  
        if (firstname == n.firstname || (firstname != null && firstname.equals(n.firstname))  
            && lastname == n.lastname || (lastname != null && lastname.equals(n.lastname))) {  
            return true;  
        } else {  
            return false;  
        }  
    }  
  
    public int hashCode() {  
        int hash = 1234;  
        if (firstname != null)  
            hash = hash + firstname.hashCode();  
        if (lastname != null)  
            hash = hash + lastname.hashCode();  
        return hash;  
    }  
}
```

Compares object
contents for equality

Generates a unique int based
on the class contents

Foreign Keys to Composite Ids

```
@Entity
```


```
public class Employee {  
    @Id  
    private Name name;  
    @Temporal(TemporalType.DATE)  
    private Date startDate;  
    @OneToMany(mappedBy = "owner")  
    private List<Project> projects = new ArrayList<Project>();  
  
    ...  
}
```

Same Name embeddable
@Id as before

Normal mappedBy on this side

```
@Entity
```

```
public class Project {  
    @Id  
    @GeneratedValue  
    private int id;  
    private String name;  
    @ManyToOne  
    @JoinColumns({  
        @JoinColumn(name = "Emp_firstname", referencedColumnName = "firstname"),  
        @JoinColumn(name = "Emp_lastname", referencedColumnName = "lastname")  
    })  
    private Employee owner;  
  
    ...  
}
```

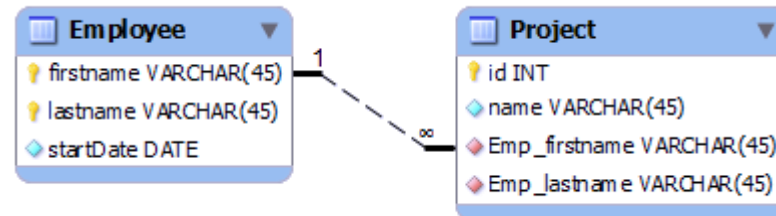


Two column
Foreign Key

Two column FK
specification

DATA TRANSFER OBJECTS (DTO)

What does findByFirstName return?

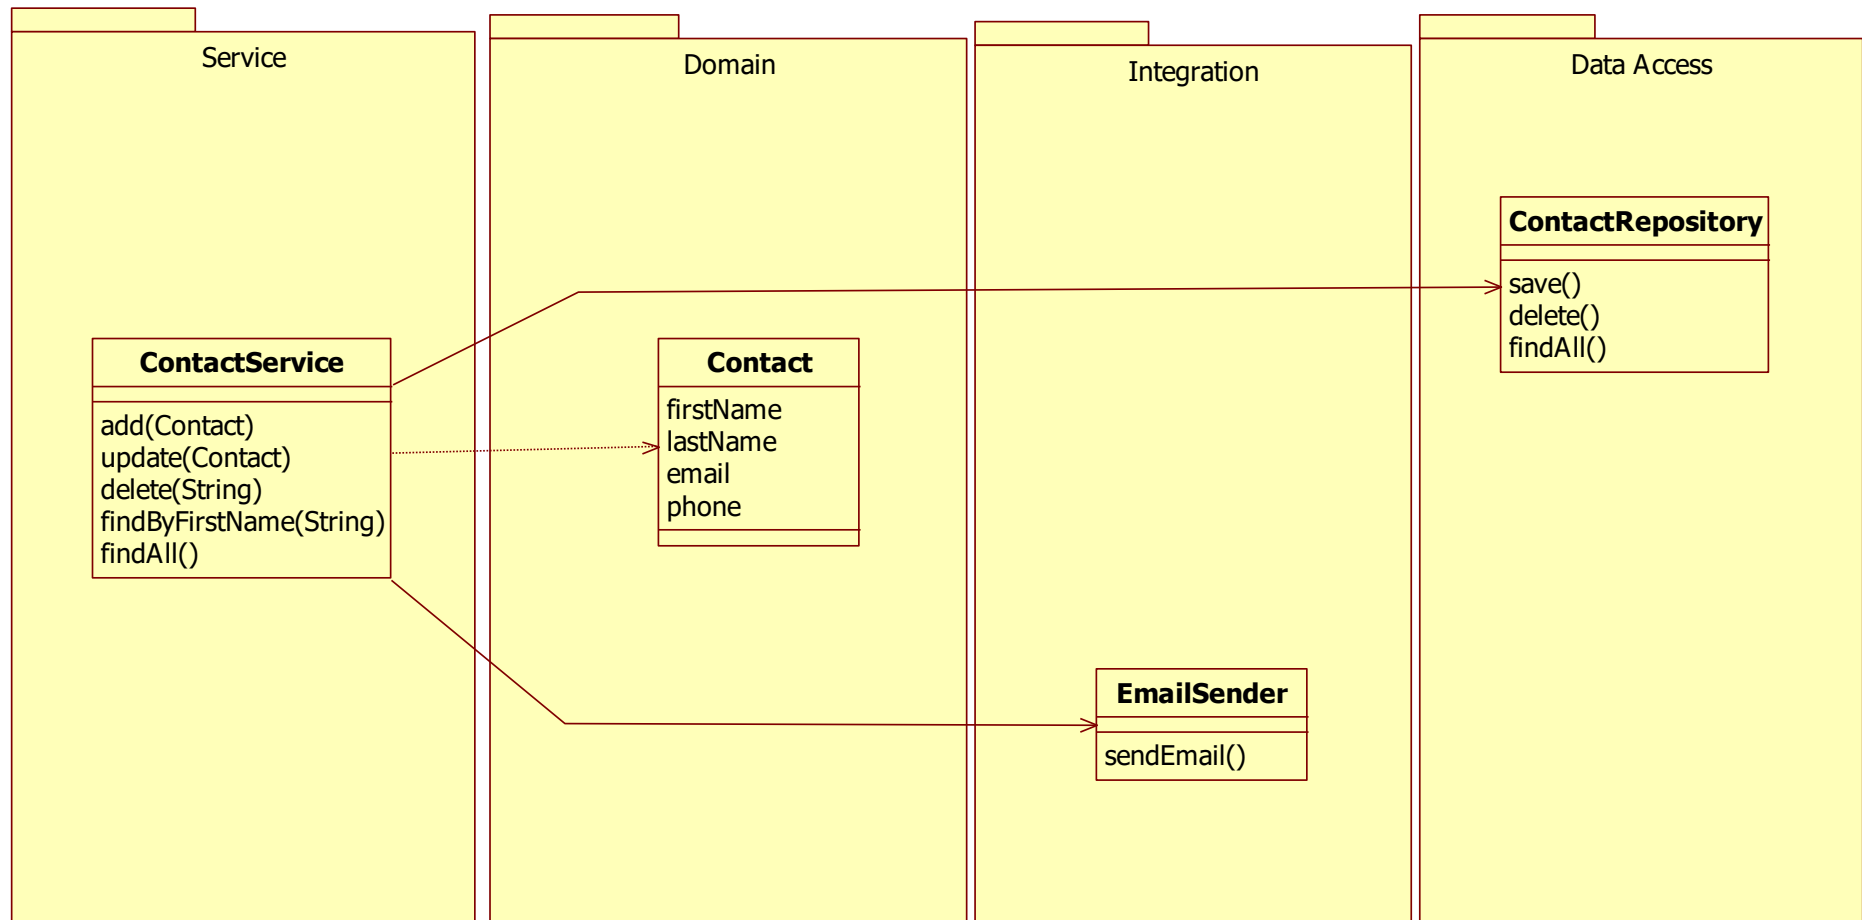

The entity and the repository

@Entity

```
public class Contact {
```

```
    @Id
```

```
    private long id;
```

```
    private String firstName;
```

```
    private String lastName;
```

```
    private String email;
```

```
    private String phone;
```

```
public interface ContactRepository extends JpaRepository<Contact, Long> {
```


```
    public Contact findByFirstName(String firstName);
```

```
}
```


The service

```
@Service
public class ContactService {
    @Autowired
    ContactRepository contactRepository;
    @Autowired
    EmailSender emailSender;

    public void add(Contact contact){
        contactRepository.save(contact);
        emailSender.sendEmail(contact.getEmail(), "Welcome");
    }
    public void update(Contact contact){
        contactRepository.save(contact);
    }
    public Contact findByFirstName(String firstName){
        return contactRepository.findByFirstName(firstName);
    }
    public void delete(String firstName){
        Contact contact = contactRepository.findByFirstName(firstName);
        emailSender.sendEmail(contact.getEmail(), "Good By");
        contactRepository.delete(contact);
    }
    public Collection<Contact> findAll(){
        return contactRepository.findAll();
    }
}
```

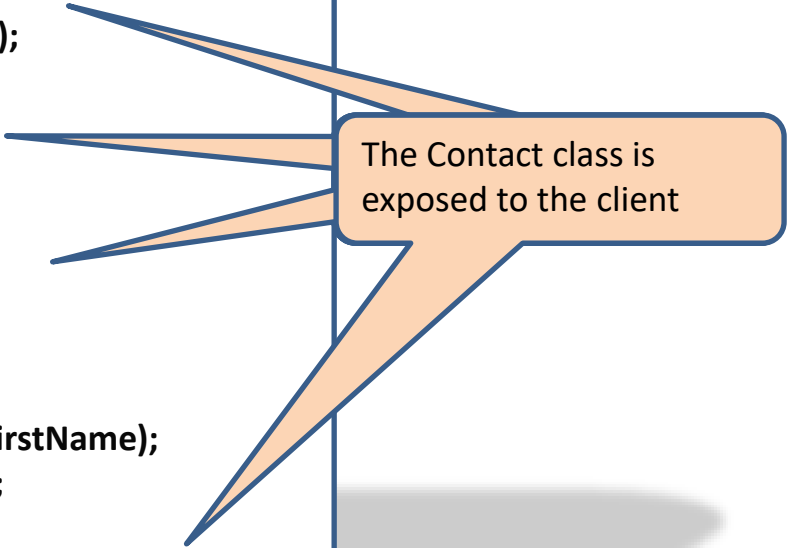

The Contact class is exposed to the client

The application

@SpringBootApplication

```
public class SpringBootDemoApplication implements CommandLineRunner {
```

@Autowired

```
private ContactService contactService;
```

```
public static void main(String[] args) {
```

```
    SpringApplication.run(SpringBootDemoApplication.class, args);
```

```
}
```

@Override

```
public void run(String... args) throws Exception {
```

```
    contactService.add(new Contact("Frank", "Brown", "fbrown@gmail.com", "4723459800"));
```


```
    System.out.println(contactService.findByFirstName("Frank"));
```

```
}
```

```
}
```

The client knows about
the Contact class

Data Transfer Objects (DTO)

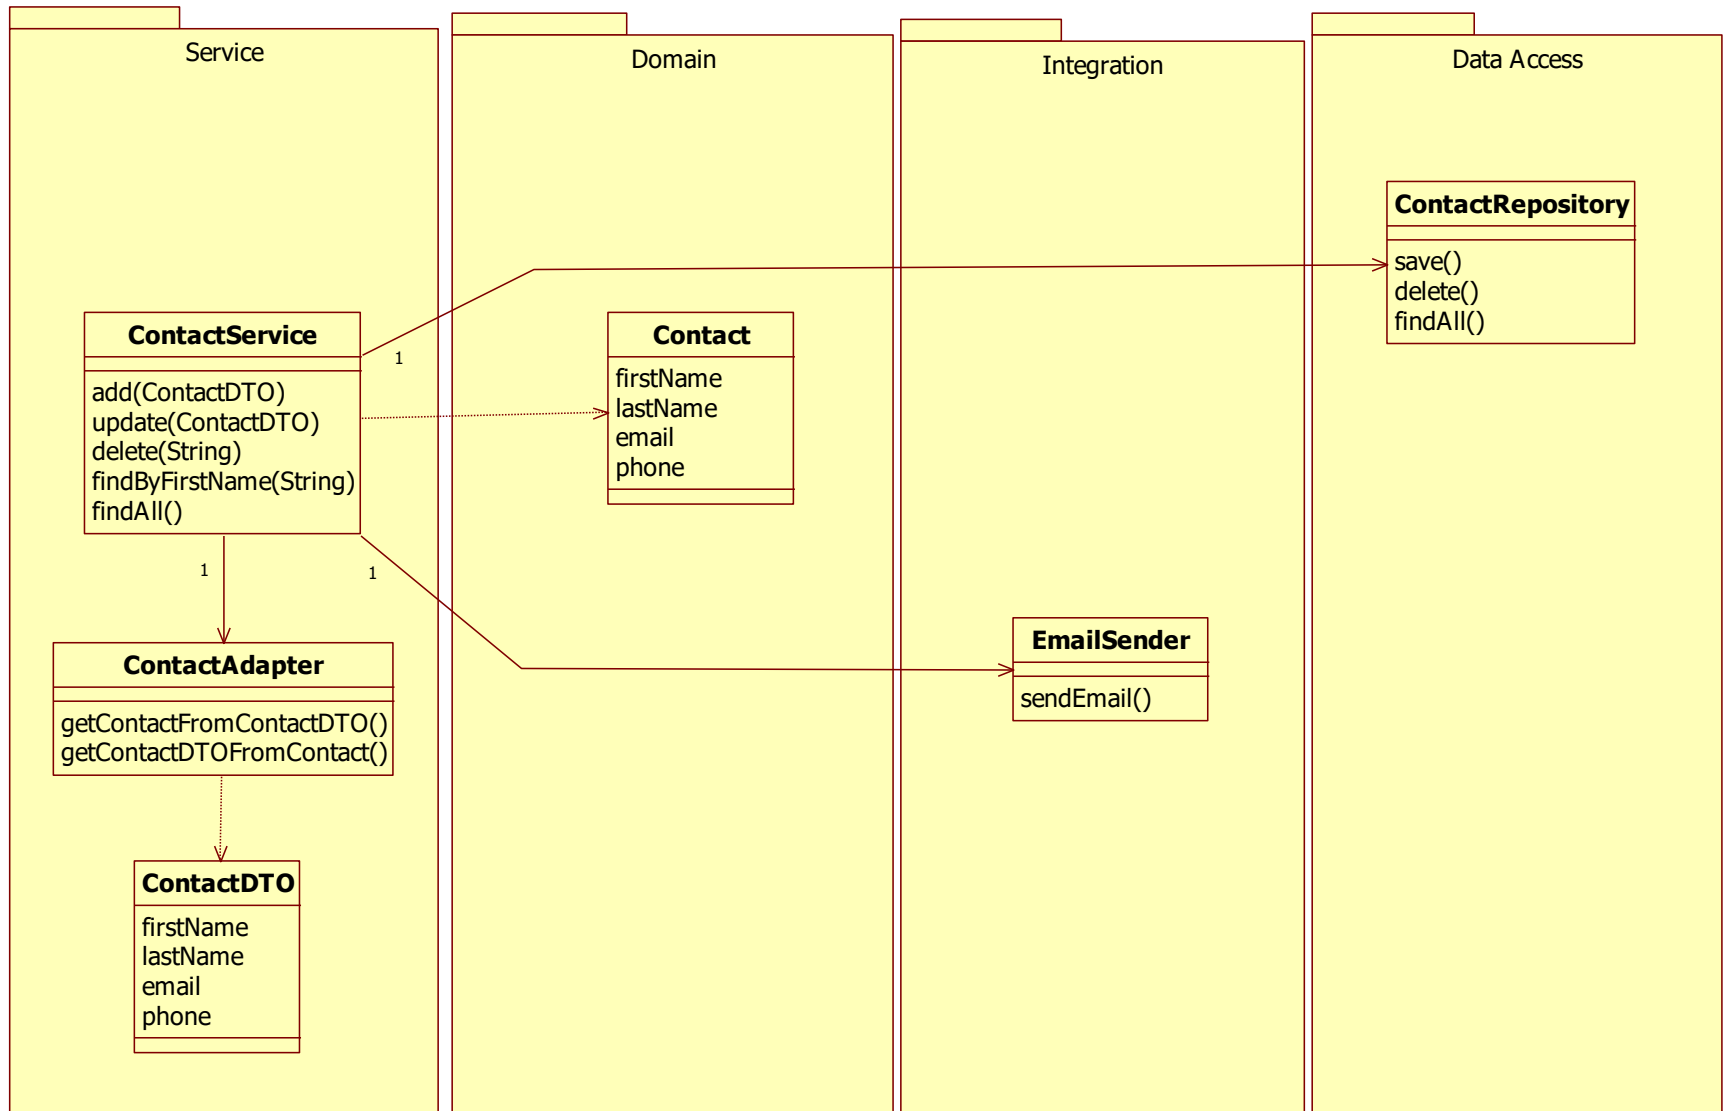

The entity and the repository

@Entity

```
public class Contact {
```

```
    @Id
```

```
    private long id;
```

```
    private String firstName;
```

```
    private String lastName;
```

```
    private String email;
```

```
    private String phone;
```

```
public interface ContactRepository extends JpaRepository<Contact, Long> {
```

```
    public Contact findByFirstName(String firstName);
```

```
}
```

The DTO and the Adapter

```
public class ContactAdapter {  
    public static Contact getContactFromContactDTO(ContactDTO contactDTO){  
        return new Contact(contactDTO.getFirstName(),  
            contactDTO.getLastName(),  
            contactDTO.getEmail(),  
            contactDTO.getPhone());  
    }  
    public static ContactDTO getContactDTOFromContact(Contact contact){  
        return new ContactDTO(contact.getFirstName(),  
            contact.getLastName(),  
            contact.getEmail(),  
            contact.getPhone());  
    }  
  
    public static List<ContactDTO> getContactDTOsFromContacts(List<Contact> contacts){  
        List<ContactDTO> contactDTOs = new ArrayList<ContactDTO>();  
        for (Contact contact: contacts){  
            contactDTOs.add(getContactDTOFromContact(contact));  
        }  
        return contactDTOs;  
    }  
}
```

```
public class ContactDTO {  
  
    private String firstName;  
    private String lastName;  
    private String email;  
    private String phone;  
}
```

The service(1/2)

Only the ContactDTO class is exposed to the client

@Service

```
public class ContactService {
```

@Autowired

```
    ContactRepository contactRepository;
```

@Autowired

```
    EmailSender emailSender;
```

```
    public void add(ContactDTO contactDTO){
```

```
        Contact contact = ContactAdapter.getContactFromContactDTO(contactDTO);
```

```
        contactRepository.save(contact);
```

```
        emailSender.sendEmail(contact.getEmail(), "Welcome");
```

```
    }
```

```
    public void update(ContactDTO contactDTO){
```

```
        Contact contact = ContactAdapter.getContactFromContactDTO(contactDTO);
```

```
        contactRepository.save(contact);
```

```
    }
```

```
    public ContactDTO findByFirstName(String firstName){
```

```
        Contact contact = contactRepository.findByFirstName(firstName);
```

```
        return ContactAdapter.getContactDTOFromContact(contact);
```

```
    }
```

The service(2/2)

```
public void delete(String firstName){  
    Contact contact = contactRepository.findByFirstName(firstName);  
    emailSender.sendEmail(contact.getEmail(), "Good By");  
    contactRepository.delete(contact);  
}  
  
public Collection<ContactDTO> findAll() {  
    return ContactAdapter.getContactDTOsFromContacts(contactRepository.findAll());  
}  
}
```

Only the ContactDTO
class is exposed to the
client

The application

@SpringBootApplication

```
public class SpringBootDemoApplication implements CommandLineRunner {
```

@Autowired

```
private ContactService contactService;
```

```
public static void main(String[] args) {
```

```
    SpringApplication.run(SpringBootDemoApplication.class, args);
```

```
}
```

@Override

```
public void run(String... args) throws Exception {
```

```
    contactService.add(new ContactDTO("Frank", "Brown", "fbrown@gmail.com", "4723459800"));
```

```
    System.out.println(contactService.findByFirstName("Frank"));
```

```
}
```

```
}
```

The client only knows
about the ContactDTO
class

DTO classes and Records

```
public class ContactDTO {  
    private String firstName;  
    private String lastName;  
    private String email;  
    private String phone;  
  
    public ContactDTO(String firstName, String lastName,  
String email, String phone) {  
        this.firstName = firstName;  
        this.lastName = lastName;  
        this.email = email;  
        this.phone = phone;  
    }  
  
    @Override  
    public boolean equals(Object o) {...}  
  
    @Override  
    public int hashCode() {...}  
  
    public String getFirstName() {return firstName;}  
    public String getLastName() {return lastName;}  
    public String getEmail() {return email;}  
    public String getPhone() {return phone;}  
  
    @Override  
    public String toString() {...}
```

```
public record ContactDTO(String firstName, String  
lastName, String email, String phone) {  
}
```

This are the same classes

Immutable

Main point

- Using DTO's gives loose coupling through information hiding.

Science of Consciousness: Through the daily practice of TM one gets more and more access to the intelligence of creation.

Connecting the parts of knowledge with the wholeness of knowledge

1. Using JPA requires that the OO domain model looks very similar as the Relational database model.
 2. All classes on the interface of the Service class should be immutable DTO classes
-
3. **Transcendental consciousness** is the most abstract field at the basis of all creation, with the greatest flexibility and power.
 4. **Wholeness moving within itself:** In Unity Consciousness, we see that all layers of creation, from completely abstract to completely relative are nothing but the Self.

