Wanderlog

Project Steps:

1. Understand requirement
2. Create the RAML
3. Develop API
4. Testing
5. Code Check In

Objective:

- Solution architecture doc is handed down to dev team
- Make use of Mulesoft out of box capabilities to make your program more efficient
- Refer to old work
- Design center for raml,
- Organize and create the mule project based on requirement
- Create mule flow and subflows
- M-unit
- Test work with postman/soapUI/ ETC

About Trip Easy:

Startup company providing a platform booking services for land, air, and sea transport across the world.
It will allow customers to query location routes and schedules from multiple transport providers, and make booking directly on the platform. Payments could be made and tickets provided.

This platform will connect directly to transport providers's backend systems to query for available routes and schedules, and make purchases, track and make changes of their bookings. The company will manage their booking systems and update if possible available changes.

API Landscape:

Schema below

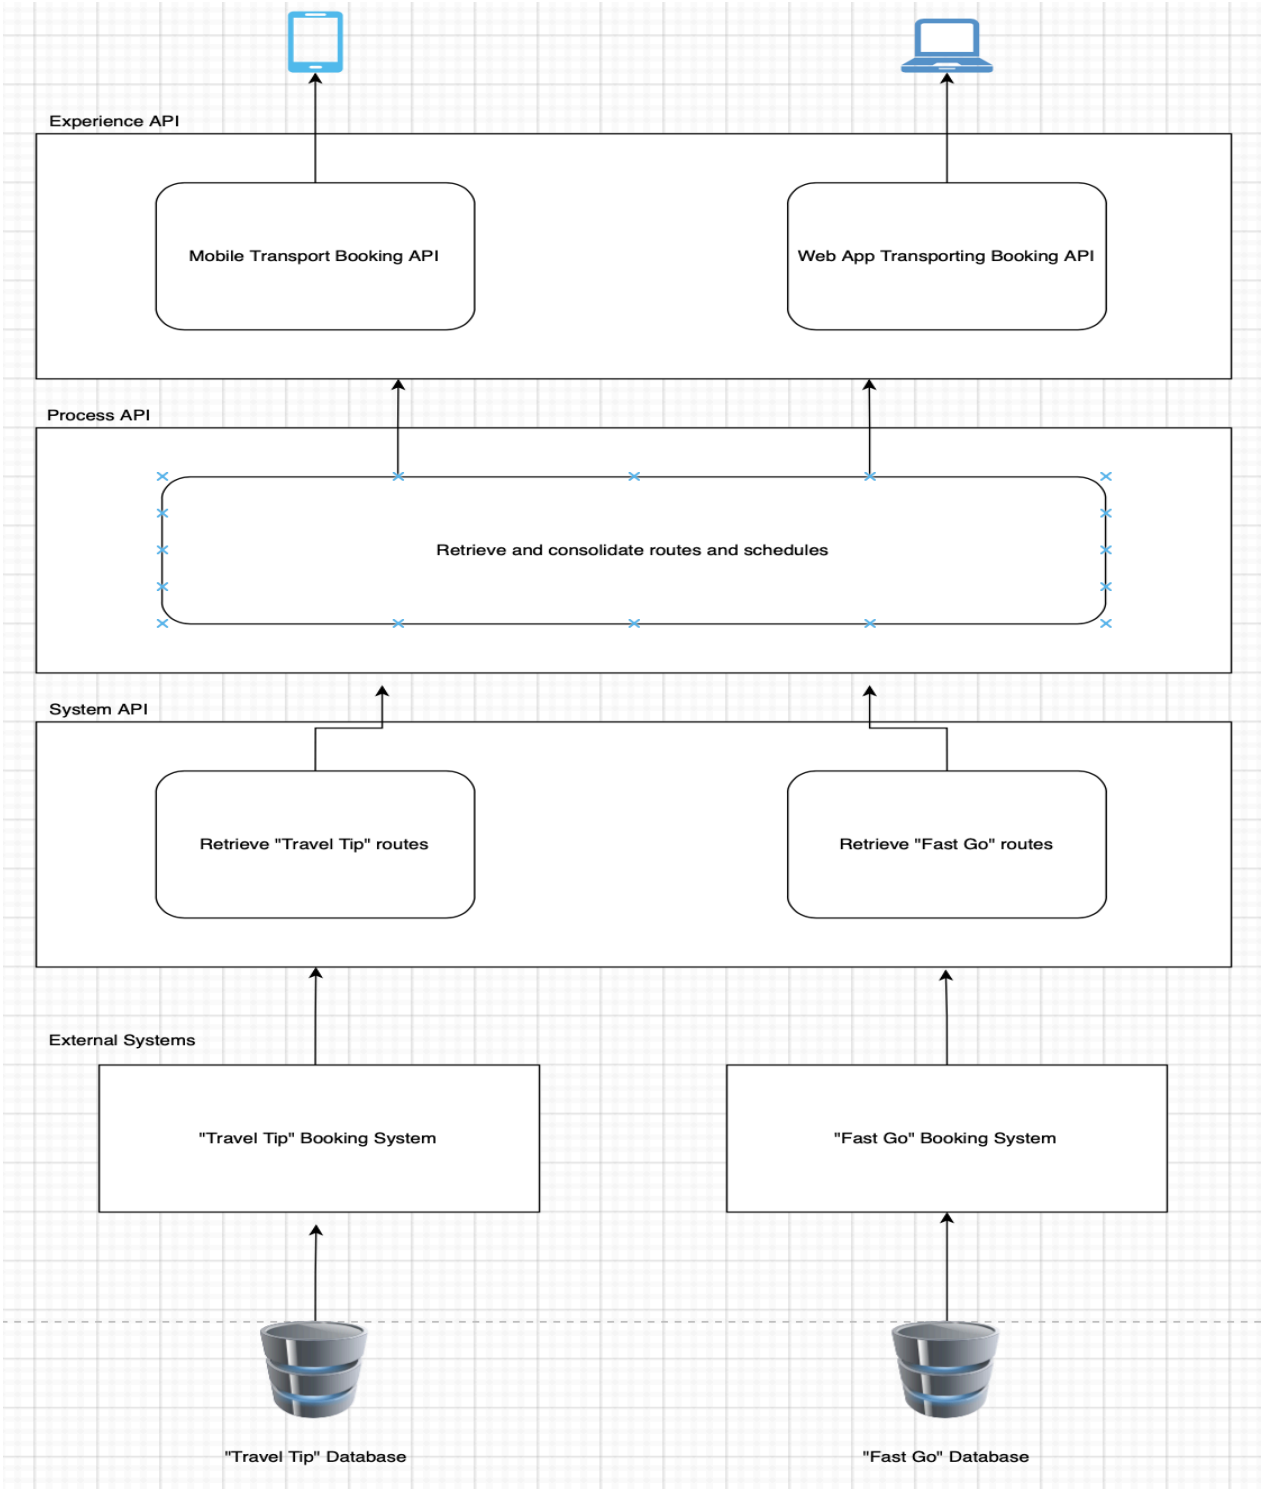

Web App Sequence Diagram (Route):

Schema below

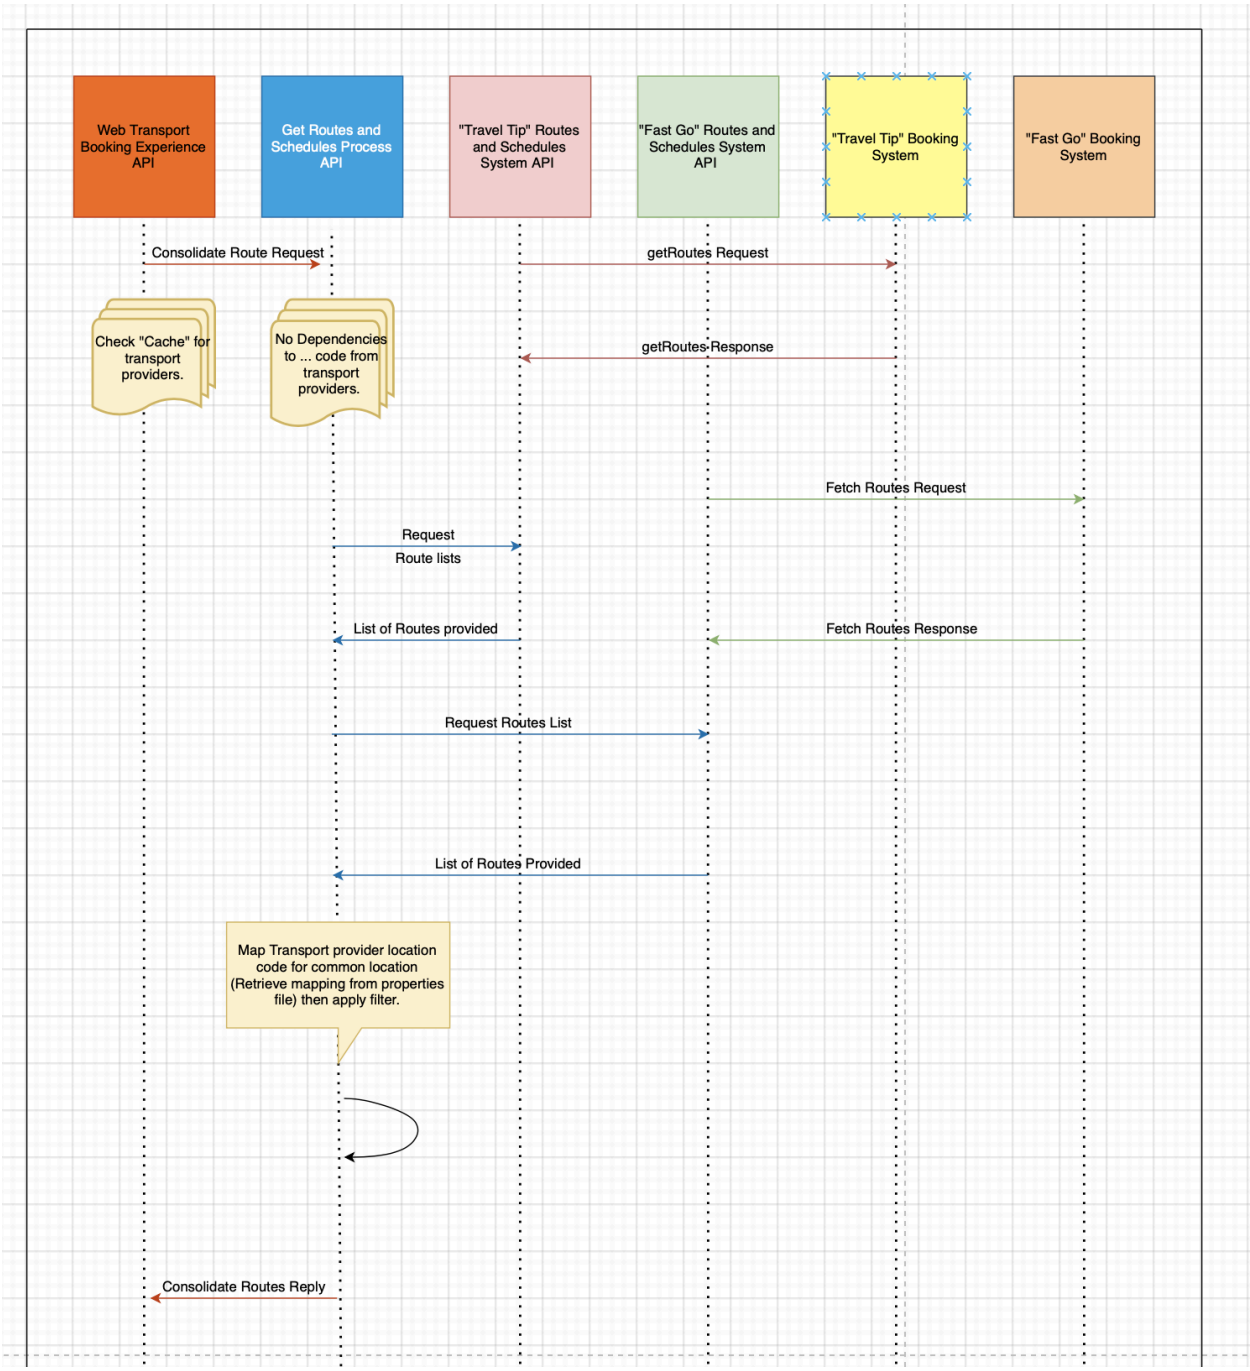

Web App Sequence Diagram (Schedule):

Schema below

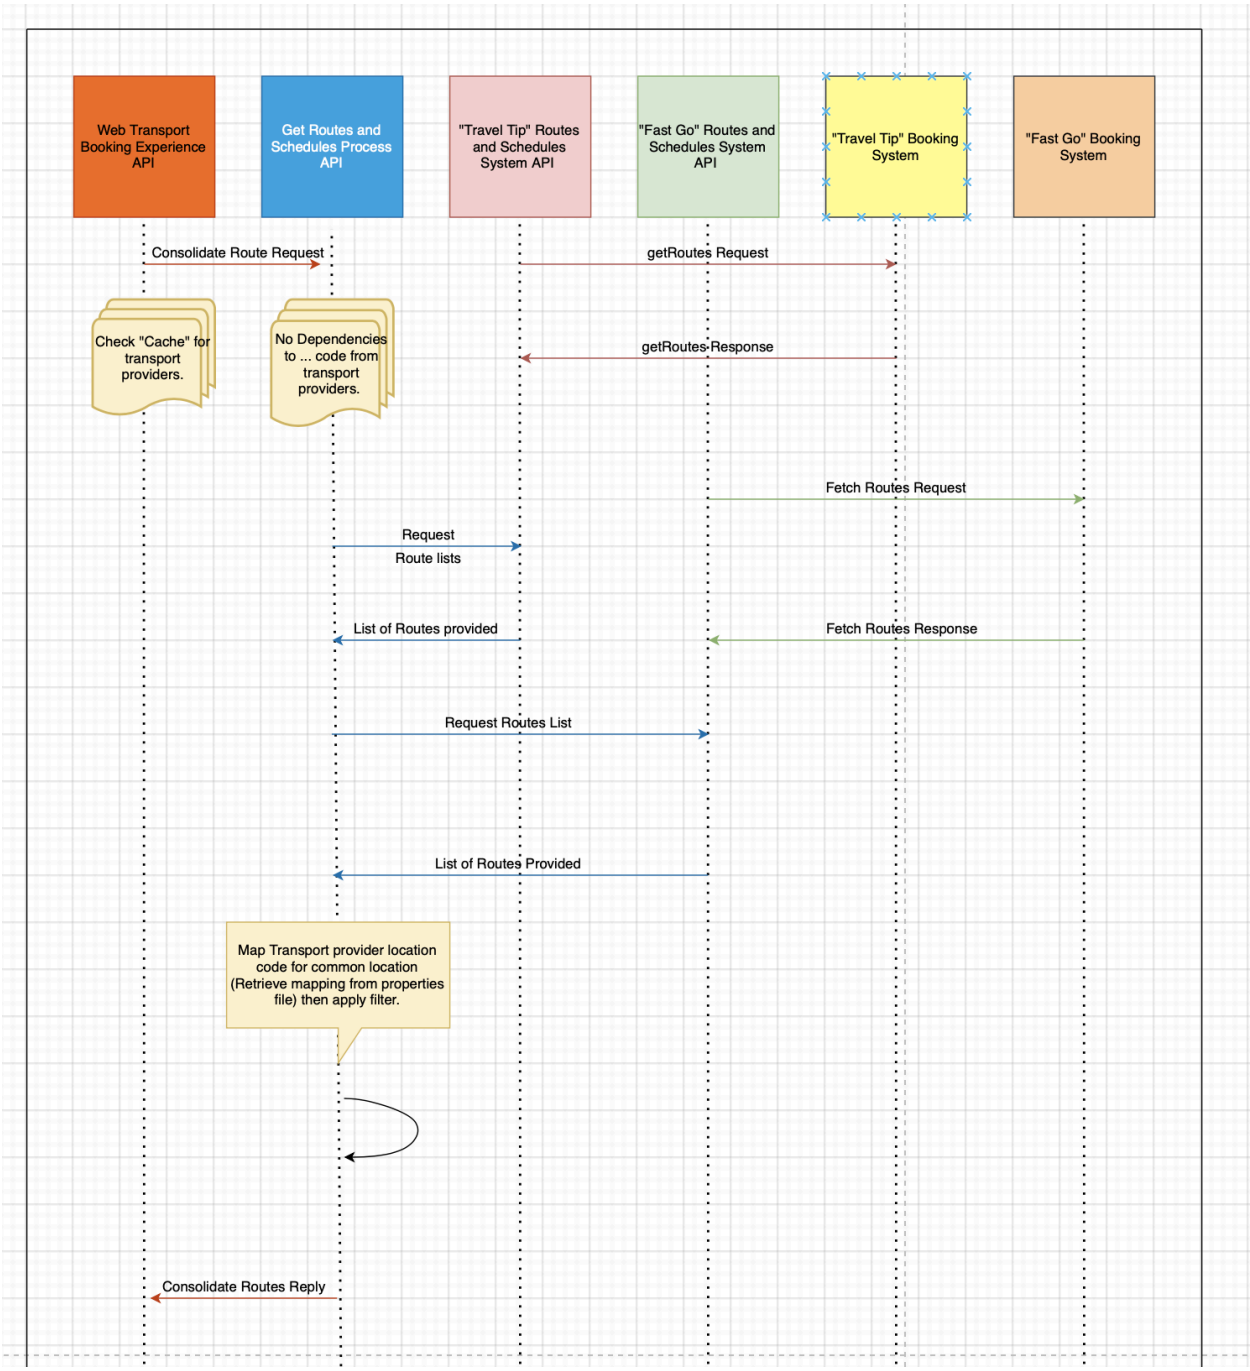

Full job Diagram - TripEasy Routes

Schema below

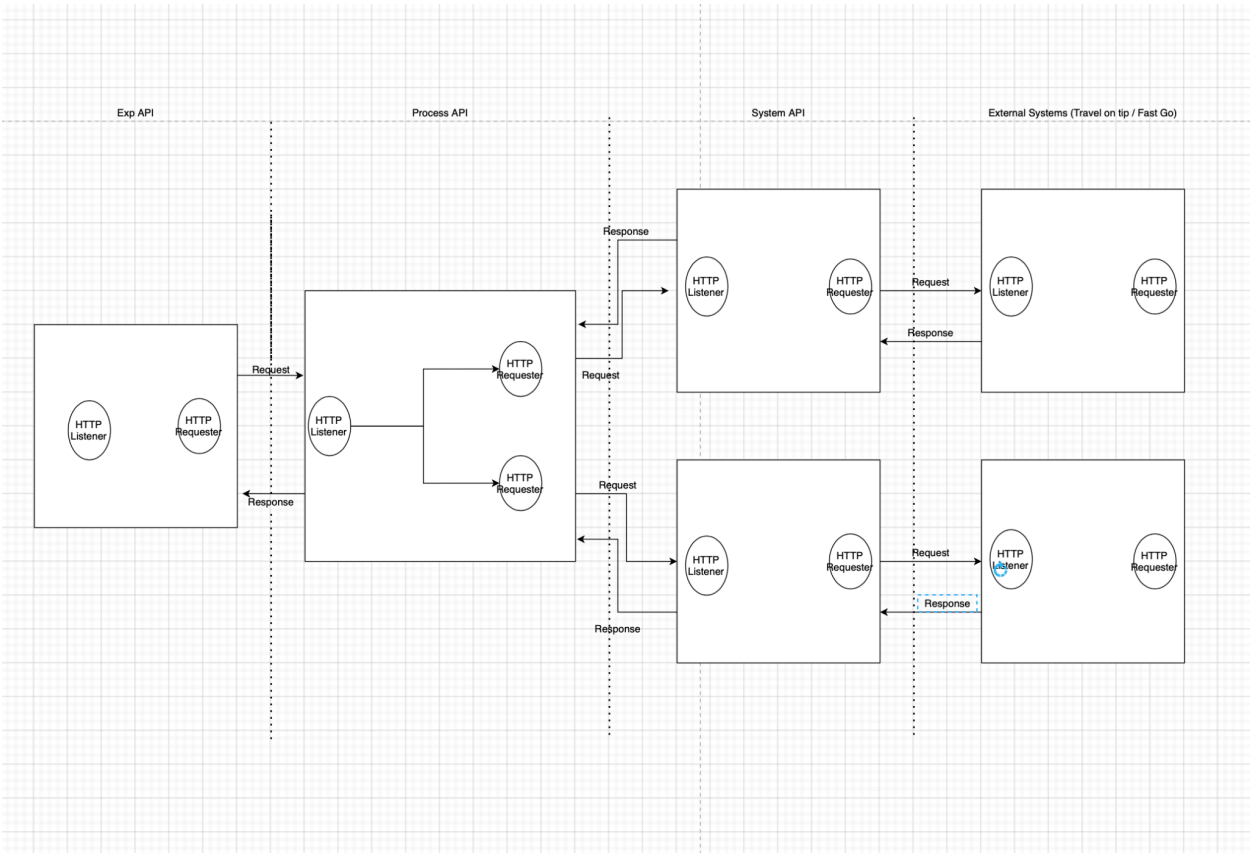

Full job Diagram - TripEasy Schedules

Schema below

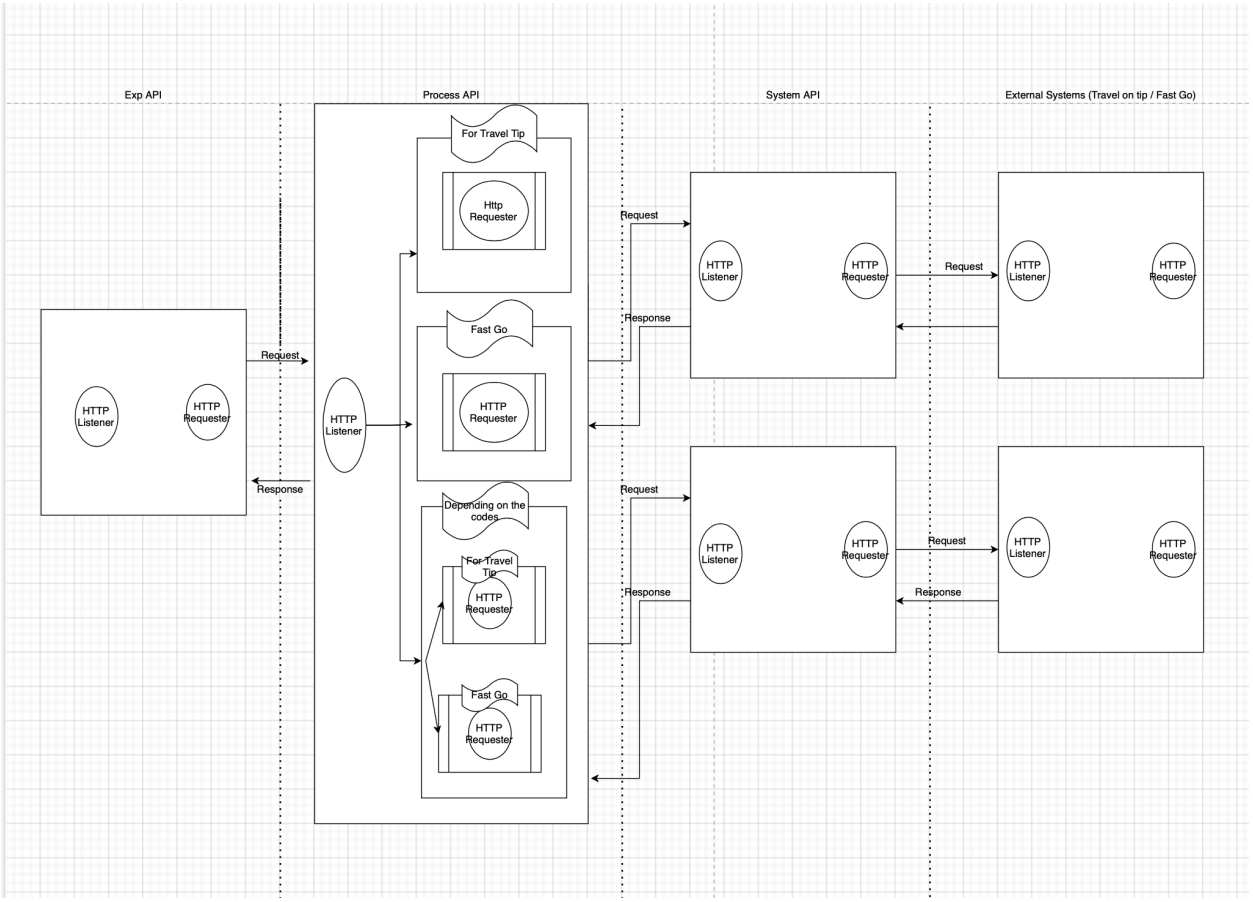

Experience API: Web app Routes

Retrieve Consolidated Routes

Version – 1.0.0

Resources : Routes

Method : GET

URL : /Booking/{transportType}/routes

Objective :

- To consolidate Routes from Multiple transport providers. Retrieval from transport providers, need to parallel to avoid dependencies between both of the transport providers.

Input

Header

Field Name	Field Rule	Mandatory	Type
transactionID	Used for logging and tracking purposes: #hdfshjdh-jxbv859-sjdf7643-3746bbd	Y	String

Query Parameter

Field Name	Field Rule	Mandatory	Type
companyName		N	String
departureLocation		N	String
destinationLocation		N	String

Output

Type: Application/JSON

Output


```
[
                    {
                      "companyCode": "TransNational",
                      "originLocation": {
                        "locationCode": "BEN-SG",
                        "locationDesc": "Beauna Vista Singapore"
                      }
                      "destinationLocation": {
                        "locationCode": "KLG-MY",
                        "locationDesc": "Klang Malaysia"
                      }
                    },
                    {
                      "companyCode": "TransNational",
                      "originLocation": {
                        "locationCode": "BEN-SG",
                        "locationDesc": "Beauna Vista Singapore"
                      }
                      "destinationLocation": {
                        "locationCode": "KLG-MY",
                        "locationDesc": "Klang Malaysia"
                      }
                    },
                    {
                      "companyCode": "TransNational",
                      "originLocation": {
                        "locationCode": "BEN-SG",
                        "locationDesc": "Beauna Vista Singapore"
                      }
                      "destinationLocation": {
                        "locationCode": "KLG-MY",
                        "locationDesc": "Klang Malaysia"
                      }
                    }]
```

Experience API: Web App Schedules

Retrieve Consolidated Schedules

Version – 1.0.0

Resources : Schedules

Method : GET

URL : /Booking/{transportType}/Schedules

Objective :

- To consolidate Schedules from Multiple transport providers. Retrieval from transport providers, need to parallel to avoid dependencies between both of the transport providers

Input:

Header

Field Name	Field Rule	Mandatory	Type
transactionID	Used for logging and tracking purposes: #	Y	String

Query Parameter

Field Name	Field Rule	Mandatory	Type
companyName		N	String
departureLocation		N	String
destinationLocation		N	String
requestTimezone		N	String

Output

Type: Application/JSON

Output


```
[
 {
   "companyName": "travelTip",
   "availableSeats": 20,
   "departureDatetime": "2019-04-30T16:41:41",
   "travelRoute": {
     "destinationLocation": {
       "locationCode": "KLG-MY",
       "locationDesc": "Klang Malaysia"
     },
     "originLocation": {
       "locationCode": "BEN-SG",
       "locationDesc": "Beauna Vista Singapore"
     }
   }
 },
   {
   "companyName": "fastGo",
   "availableSeats": 30,
   "departureDatetime": "2019-04-30T18:41:41",
   "travelRoute": {
     "destinationLocation": {
       "locationCode": "KLG-MY",
       "locationDesc": "Klang Malaysia"
     },
     "originLocation": {
       "locationCode": "BL-SG",
       "locationDesc": "Beauna Vista Singapore"
     }
   }
 }
]
```

Experience API: Mobile app Routes

Retrieve Consolidated Routes

Version – 1.0.0

Resources : Routes

Method : GET

URL : /Booking/{transportType}/routes

Objective :

- To consolidate Routes from Multiple transport providers. Retrieval from transport providers, need to parallel to avoid dependencies between both of the transport providers.

Input

Header

Field Name	Field Rule	Mandatory	Type
transactionID	Used for logging and tracking purposes: #`hdfshjdh-jxbv859-sjdf7643-3746bbd`	Y	String

Query Parameter

Field Name	Field Rule	Mandatory	Type
companyName		N	String
departureLocation		N	String
destinationLocation		N	String

Output

Type: Application/JSON

Output


```
[
  {
    "companyCode": "TransNational",
    "originLocation": {
      "locationDesc": "Beauna Vista Singapore"
    }
    "destinationLocation": {
      "locationDesc": "Klang Malaysia"
    }
  },
  {
    "companyCode": "TransNational",
    "originLocation": {
      "locationDesc": "Beauna Vista Singapore"
    }
    "destinationLocation": {
      "locationDesc": "Klang Malaysia"
    }
  },
  {
    "companyCode": "TransNational",
    "originLocation": {
      "locationDesc": "Beauna Vista Singapore"
    }
    "destinationLocation": {
      "locationDesc": "Klang Malaysia"
    }
  }
]
```

Experience API: Mobile App Schedules

Retrieve Consolidated Schedules

Version : 1.0.0

Resources : Schedules

Method : GET

URL : /Booking/{transportType}/Schedules

Objective :

- To consolidate Schedules from Multiple transport providers. Retrieval from transport providers, need to parallel to avoid dependencies between both of the transport providers

Input:
Header

Field Name	Field Rule	Mandatory	Type
transactionID	Used for logging and tracking purposes: #	Y	String

Query Parameter

Field Name	Field Rule	Mandatory	Type
companyName		N	String
departureLocation		N	String
destinationLocation		N	String
requestTimezone		N	String

Output

Type: Application/JSON

Output


```
[
 {
   "companyName": "travelTip",
   "availableSeats": 20,
   "departureDatetime": "2019-04-30T16:41:41",
   "travelRoute": {
     "destinationLocation": {
       "locationDesc": "Klang Malaysia"
     },
     "originLocation": {
       "locationDesc": "Beauna Vista Singapore"
     }
   }
 },
   {
   "companyName": "fastGo",
   "availableSeats": 30,
   "departureDatetime": "2019-04-30T18:41:41",
   "travelRoute": {
     "destinationLocation": {
       "locationDesc": "Klang Malaysia"
     },
     "originLocation": {
       "locationDesc": "Beauna Vista Singapore"
     }
   }
 }
]
```

Process API: Web App Routes

Retrieve Consolidated Routes

Version : 1.0.0

Resources : Routes

Method : GET

URL : /Booking/{transportType}/Routes

Objective :

- To consolidate Routes from Multiple transport providers. Retrieval from transport providers, need as there is no dependencies between both of the transport providers
- To map the transport provider specific location code to the common location code and description for standardization
- To filter the the result based on input filter criteria to populate the company code where the routes is being retrieve from

Input

Header

Field Name	Field Rule	Mandatory	Type
transactionID	Used for logging and tracking purposes: #hdfshjdh-jxbv859-sjdf7643-3746bbd	Y	String

Query Parameter

Field Name	Field Rule	Mandatory	Type
companyName	If provided, only retrieve the routes from this transport provider	N	String
departureLocation	If provided, only retrieve the routes from this departureLocation code	N	String
destinationLocation	If provided, only retrieve the routes from this destinationLocation code	N	String

Output

Type: Application/JSON

Output


```
[
  {
    "companyCode": "TransNational",
    "originLocation": {
      "locationCode": "BEN-SG",
      "locationDesc": "Beauna Vista Singapore"
    }
    "destinationLocation": {
      "locationCode": "KLG-MY",
      "locationDesc": "Klang Malaysia"
    }
  },
  {
    "companyCode": "TransNational",
    "originLocation": {
      "locationCode": "BEN-SG",
      "locationDesc": "Beauna Vista Singapore"
    }
    "destinationLocation": {
      "locationCode": "KLG-MY",
      "locationDesc": "Klang Malaysia"
    }
  },
  {
    "companyCode": "TransNational",
    "originLocation": {
      "locationCode": "BEN-SG",
      "locationDesc": "Beauna Vista Singapore"
    }
    "destinationLocation": {
      "locationCode": "KLG-MY",
      "locationDesc": "Klang Malaysia"
    }
  }
]
```

Process API: Web App Schedules

Retrieve Consolidated Schedules

Version : 1.0.0

Resources : Schedules

Method : GET

URL : /Booking/{transportType}/Schedules

Objective :

- To consolidate Schedules from Multiple transport providers. Retrieval from transport providers, need to parallel to avoid dependencies between both of the transport providers

Input

Header

Field Name	Field Rule	Mandatory	Type
transactionID	Used for logging and tracking purposes: #hdfshjdh-jxbv859-sjdf7643-3746bbd	Y	String

Query Parameter

Field Name	Field Rule	Mandatory	Type
companyName	If provided, only retrieve the routes from this transport provider	N	String
departureLocation	If provided, only retrieve the routes from this departureLocation code	N	String
destinationLocation	If provided, only retrieve the routes from this destinationLocation code	N	String
requestTimezone	The time zone where request is originating from ex: 0800	N	String

Output

Type: Application/JSON

Output


```
[
 {
   "companyName": "travelTip",
   "availableSeats": 20,
   "departureDatetime": "2019-04-30T16:41:41",
   "travelRoute": {
     "destinationLocation": {
       "locationCode": "KLG-MY",
       "locationDesc": "Klang Malaysia"
     },
     "originLocation": {
       "locationCode": "BEN-SG",
       "locationDesc": "Beauna Vista Singapore"
     }
   }
 },
   {
   "companyName": "fastGo",
   "availableSeats": 30,
   "departureDatetime": "2019-04-30T18:41:41",
   "travelRoute": {
     "destinationLocation": {
       "locationCode": "KLG-MY",
       "locationDesc": "Klang Malaysia"
     },
     "originLocation": {
       "locationCode": "BL-SG",
       "locationDesc": "Beauna Vista Singapore"
     }
   }
 }
]
```

No - Process API: Mobile App Schedules-

We'll have only Web App API.

System API: Web App Schedules

Retrieve Consolidated Schedules

Version : 1.0.0

Resources : Schedules

Method : GET

URL : /Booking/{transportType}/Schedules

Objective :

- To consolidate Schedules from Multiple transport providers. Retrieval from transport providers, need to parallel to avoid dependencies between both of the transport providers

Input

Header

Field Name	Field Rule	Mandatory	Type
transactionID	Used for logging and tracking purposes: #hdfshjdh-jxbv859-sjdf7643-3746bbd	Y	String

Query Parameter

Field Name	Field Rule	Mandatory	Type
companyName	If provided, only retrieve the routes from this transport provider	N	String
departureLocation	If provided, only retrieve the routes from this departureLocation code	N	String
destinationLocation	If provided, only retrieve the routes from this destinationLocation code	N	String
requestTimezone	The time zone where request is originating from ex: 0800	N	String