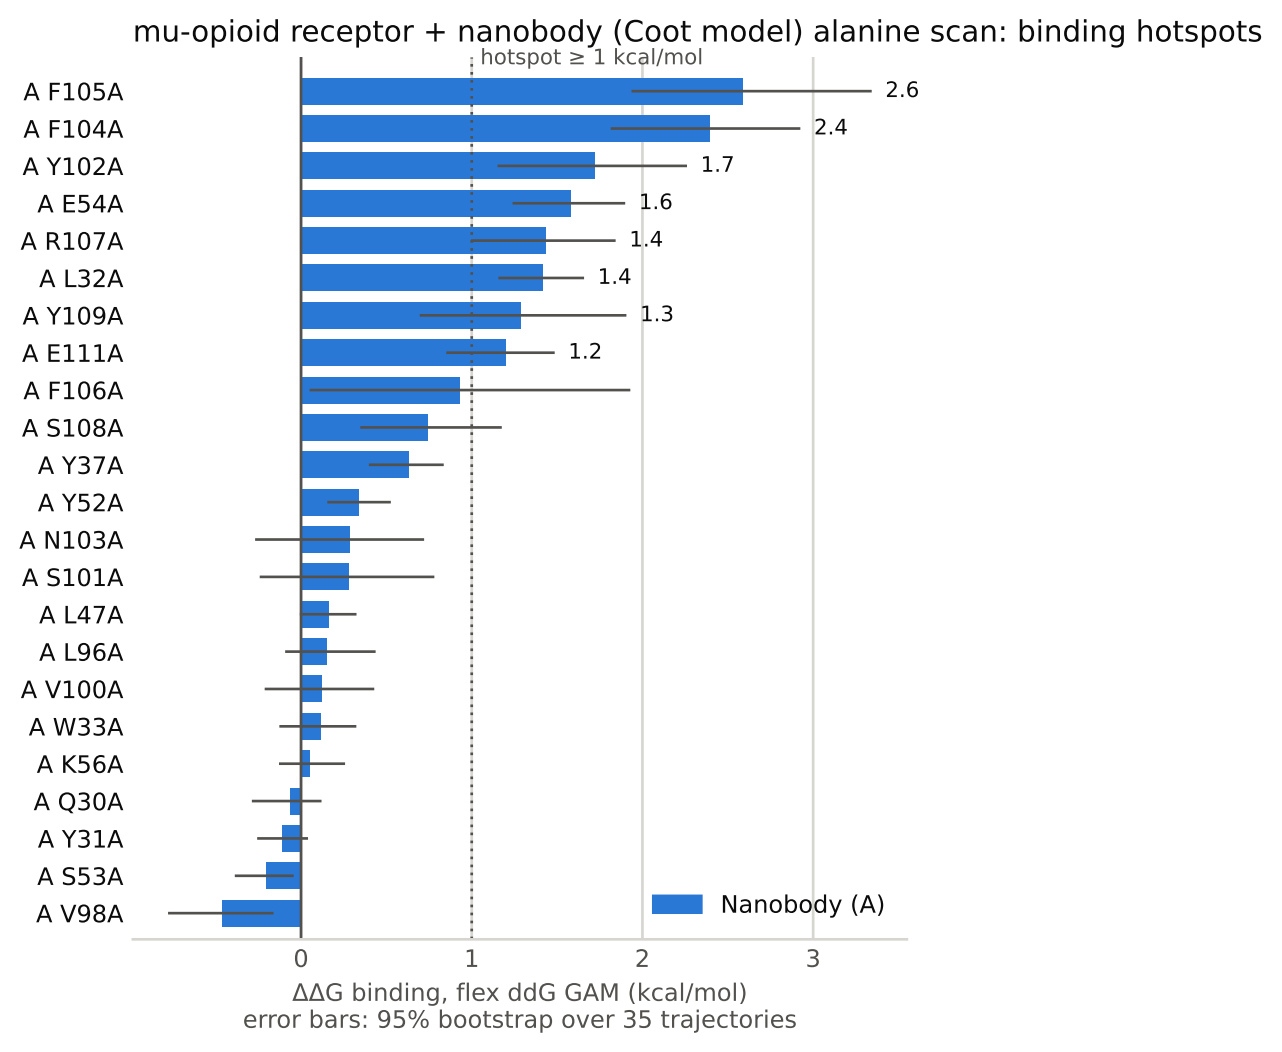
mu-opioid receptor + nanobody (Coot model) alanine scan: binding hotspots
hotspot ≥ 1 kcal/mol
A F105A
A F104A
A Y102A
A E54A
A R107A
A L32A
A Y109A
A E111A
A F106A
A S108A
A Y37A
A Y52A
A N103A
A S101A
A L47A
A L96A
A V100A
A W33A
A K56A
A Q30A
A Y31A
A S53A
A V98A
2.6
2.4
1.7
1.6
1.4
1.4
1.3
1.2
Nanobody (A)
0
1
2
3
ΔΔG binding, flex ddG GAM (kcal/mol)
error bars: 95% bootstrap over 35 trajectories