Architecture Development Part 4: Installation and Configuration of Hapi-FHIR Server

1.

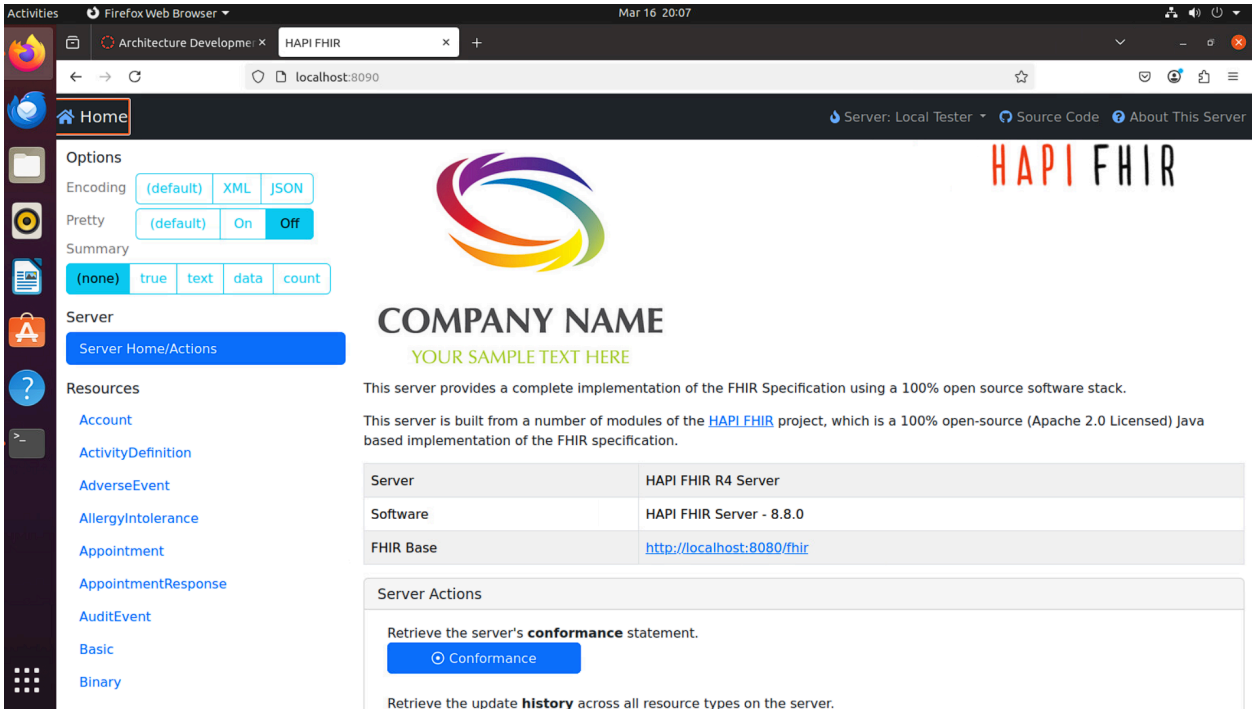

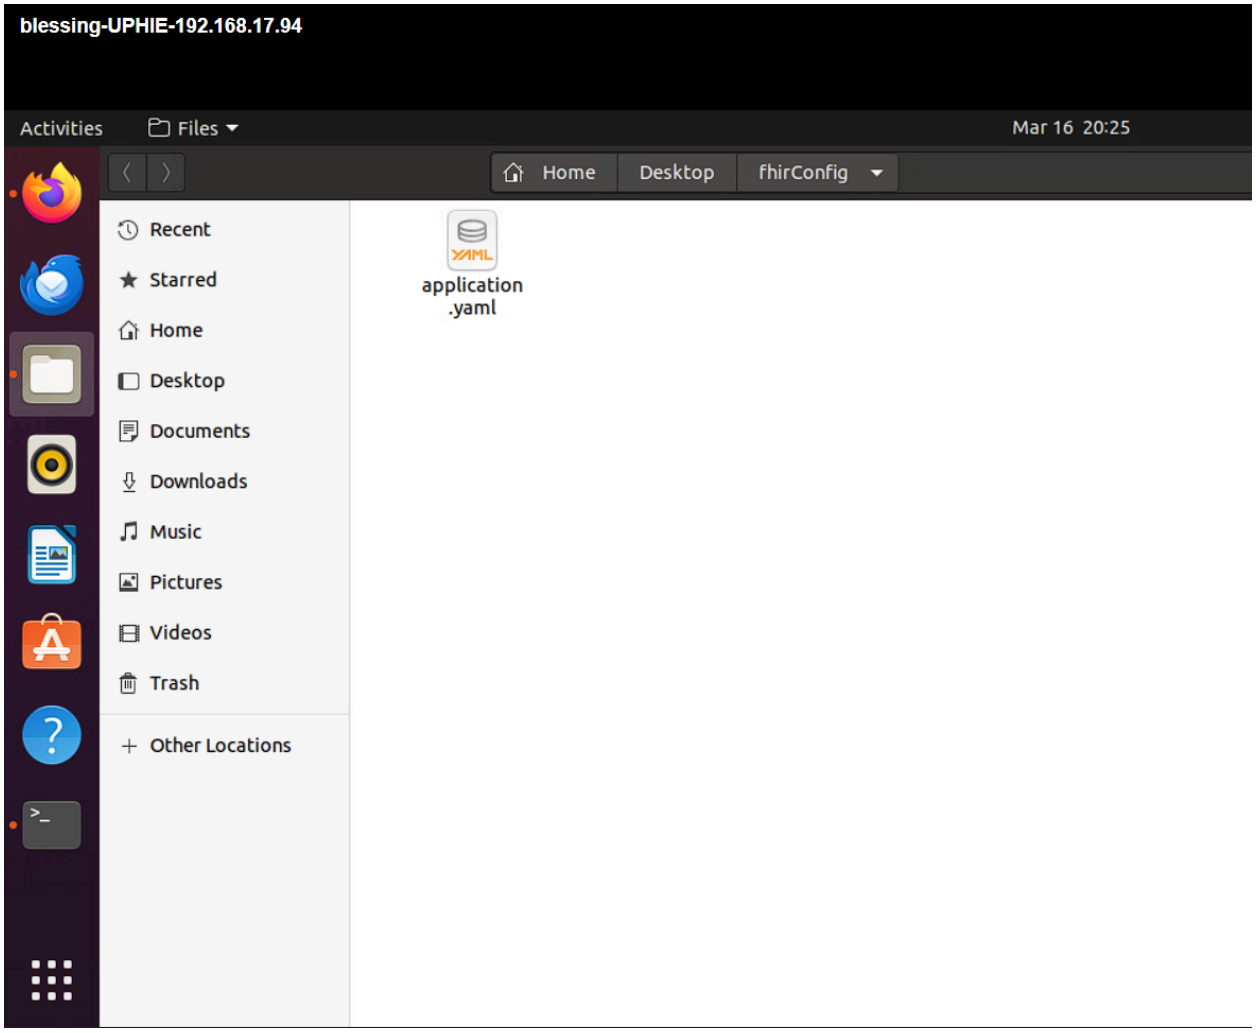
blessing-UPHIE-192.168.17.94
Activities
Files
Mar 16 20:25
Home
Desktop
fhirConfig
Recent
Starred
Home
Desktop
Documents
Downloads
Music
Pictures
Videos
Trash
Other Locations
application
.yaml

blessing-UPHIE-192.168.17.94

Activities Text Editor Mar 16 20:25

Open application.yaml ~/Desktop/fhirConfig Save

```yaml
# ------------------------------------------------------------------------------
# Server & Spring Boot
# ------------------------------------------------------------------------------
server:
  # Uncomment to serve FHIR under a non-default context path (e.g., /example/path/fhir)
  # servlet:
  #   context-path: /example/path
  port: 8080
  tomcat:
    # allow | as a separator in URLs
    relaxed-query-chars: "|"

management:
  # Actuator endpoints: only /actuator/health exposed by default
  endpoints:
    enabled-by-default: false
    web:
      exposure:
        include: "health"  # or "info,health,prometheus,metrics" or "*" for all
  endpoint:
    info:
      enabled: true
    metrics:
      enabled: true
    health:
      enabled: true
      probes:
        enabled: true
      group:
        liveness:
          include: [ "livenessState", "readinessState" ]
    prometheus:
```

YAML Tab Width: 8 Ln 1, Col 1 INS

2. Command to check total, used and free memory in the system is **`free -h`**

```
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo docker ps
CONTAINER ID   IMAGE                    COMMAND                  CREATED
   STATUS          PORTS                                       NAMES
b214752319aa   hapiproject/hapi:latest   "java --class-path /…"   16 minutes ago
   Up 10 seconds   0.0.0.0:8090->8080/tcp, :::8090->8080/tcp   hapifhir
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ free -h
              total        used        free      shared  buff/cache   available
Mem:          3.8Gi       3.5Gi       104Mi        26Mi       213Mi        80Mi
Swap:         2.0Gi       1.1Gi       885Mi
test@sat3210-virtual-machine:~/Desktop/fhirConfig$
```

3. Command to check if the port (say 8090) used by the HAPI-FHIR server is open after updating the firewall is **sudo ufw status**

```
test@sat3210-virtual-machine: ~/Desktop/fhirConfig
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo lsof -i :8080
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo netstat -tulpn | grep 80
80
sudo: netstat: command not found
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo lsof -i :8080
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo ufw status
[sudo] password for test:
Sorry, try again.
[sudo] password for test:
Status: inactive
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo ufw enable
Firewall is active and enabled on system startup
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo ufw allow 8080
Rule added
Rule added (v6)
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo ufw status
Status: active

To                         Action      From
--                         ------      ----
8080                       ALLOW       Anywhere
8080 (v6)                  ALLOW       Anywhere (v6)

test@sat3210-virtual-machine:~/Desktop/fhirConfig$
```

4. Command to check if port is in use is **sudo lsof -i :8080**

```
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo lsof -i :8089
test@sat3210-virtual-machine:~/Desktop/fhirConfig$ sudo lsof -i :8090
COMMAND    PID USER   FD   TYPE DEVICE SIZE/OFF NODE NAME
docker-pr 4732 root    4u  IPv4  86072      0t0  TCP *:8090 (LISTEN)
docker-pr 4740 root    4u  IPv6  86079      0t0  TCP *:8090 (LISTEN)
test@sat3210-virtual-machine:~/Desktop/fhirConfig$
```

Software	HAPI FHIR Server - 8.8.0