1.1. REQ_TYPE_FOR_INITIALIZATION

PUI: REQ_TYPE_FOR_INITIALIZATION
PURPOSE:

1.1.1. INTERFACE REQUIREMENT

Communication would be through TCP/SNMP/UDP.

1.1.2. DATA REQUIREMENT

Type	UINT_8
COMMENTS	1 : COMPLETE_INITIALIZATION_DATA 2 : AGENCY_LIST 3 : AIRBASE_LIST 4 : AIRBASE_WEATHER_LIST 5 : AIRCRAFT_INFO 6 : AIRCRAFT_STATUS_INFO 7 : AIRCRAFT_TYPE_INFO 8 : ALARM_CONFIG_LIST 9 : ARTILLERY_FIRE_AREA_LIST 10 : ARTY_TARGET_LIST 11 : ATS_ROUTE_LIST 12 : CONGIF_SETTING 13 : CORRIDOR_LIST 14 : EXTERNAL_SYSTEM_LIST 15 : FIREPLAN_LIST 16 : SELF_AGENCY_INFO 17 : GUN_LIST 18 : LFA_LIST 19 : NO_FIRE_LINE_LIST 20 : PILOT_INFO_LIST 21 : PILOT_STATUS_INFO_LIST 22 : PRIORITY_LIST 23 : PROMINENT_POINT_LIST 24 : RADAR_LIST 25 : ROZ_LIST 26 : TACTICAL_AREA_LIST 27 : MODE_OF_OPERATION 28 : EXERCISE_DATA 29 : FREE_TEXT_MSG_LIST 30 : POINT_LIST
LEGAL CHECK	-
PRECISION	1
RANGE	1-29 30

UNIT	NOT APPLICABLE

1. STRUCT_CORRIDOR_LIST

Type	Attribute Name
UINT_8	no_of_corridor
STRUCT_CORRIDOR_DETAIL STRUCT_COMPLETE_CORRIDOR_DETAIL	struct_corridor_details[no_of_corridor]

2. STRUCT_CORRIDOR_DETAIL

Type	Attribute Name
ID_NUMBER	corridor_id
ACTION_TYPE	action_type
STRING_20	corridor_name
RANGE	width
RANGE	min_height
RANGE	max_height
ACTIVE_INACTIVE_FLAG	active_inactive
UINT_8	no_of_points
STRUCT_LAT_LONG	struct_lat_long[no_of_points]
UINT_8	no_of_tracks
TRACK_NO	track_number[no_of_tracks]

3. STRUCT_TIME_DURATION

Type	Attribute Name
INT_8	hours

INT_8	minutes
INT_8	seconds
INT_16	millisecond

4. STRUCT_FP_ROUTE_INFO

Type	Attribute Name
STRUCT_LAT_LONG	struct_lat_long
STRUCT_TIME STRUCT_TIME_DURATION	time_over_waypoint
UINT_16	wp_height
UINT_16	loiter_speed
ROUTE_TYPE	route_type
STRING_20	pdr_name
STRING_20	airbase_name
UINT_8	sector_no
STRING_21	prominent_point_name
WAYPOINT_TYPE	waypoint_type
UINT_8	loiter_time

5. STRUCT_POINT_LIST

Type	Attribute Name
UINT_8	no_of_points
STRUCT_POINT	struct_point[no_of_points]

1.1. POINT_LIST 168

Field Name	Value

STRUCT_MESSAGE_HEADER	struct_message_header
STRUCT_POINT_LIST	struct_point_list

GEN_05_Define_Exercise

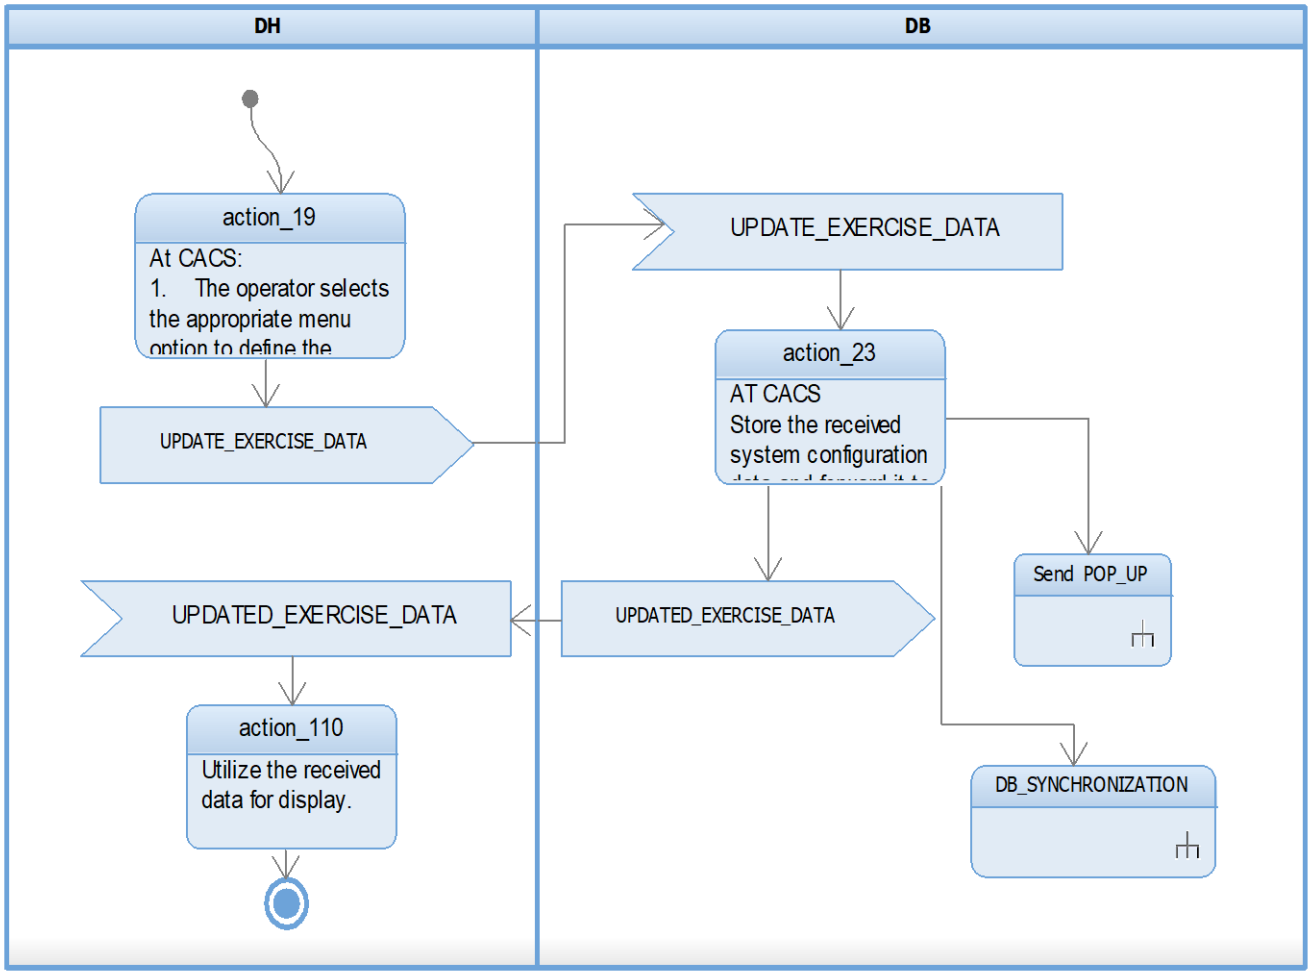

Arch PUI: GEN_05_Define_Exercise

REFRENCED ACTIVITIES
Send_POP_UP

TOPICS/MESSAGES/RESTAPI's INVOLVED
UPDATE_EXERCISE_DATA UPDATED_EXERCISE_DATA

SWIM LANE	ACTION NAME	DESCRIPTION
DH	action_19	At CACS: 1. The operator selects the appropriate menu option to define the exercise. 2. A form is presented to the operator, with all fields pre-filled with the received values. 3. Allow the operator to modify the exercise details. 4. Enable the operator to select points by clicking on the map background. 5. Validate the edited fields; if validation is successful, save the data to the database. else, display the relevant error message.
DH	action_110	Utilize the received data for display.
DB	action_23	AT CACS Store the received system configuration data and forward it to the respective modules for further processing. For Replication: Originator Agency Type is CACS and synchronization is required across all RTMS levels of the hierarchy. Note: Only one exercise is allowed to be present in the system.

Initialization of DH

RARP_01 Record_user_actions

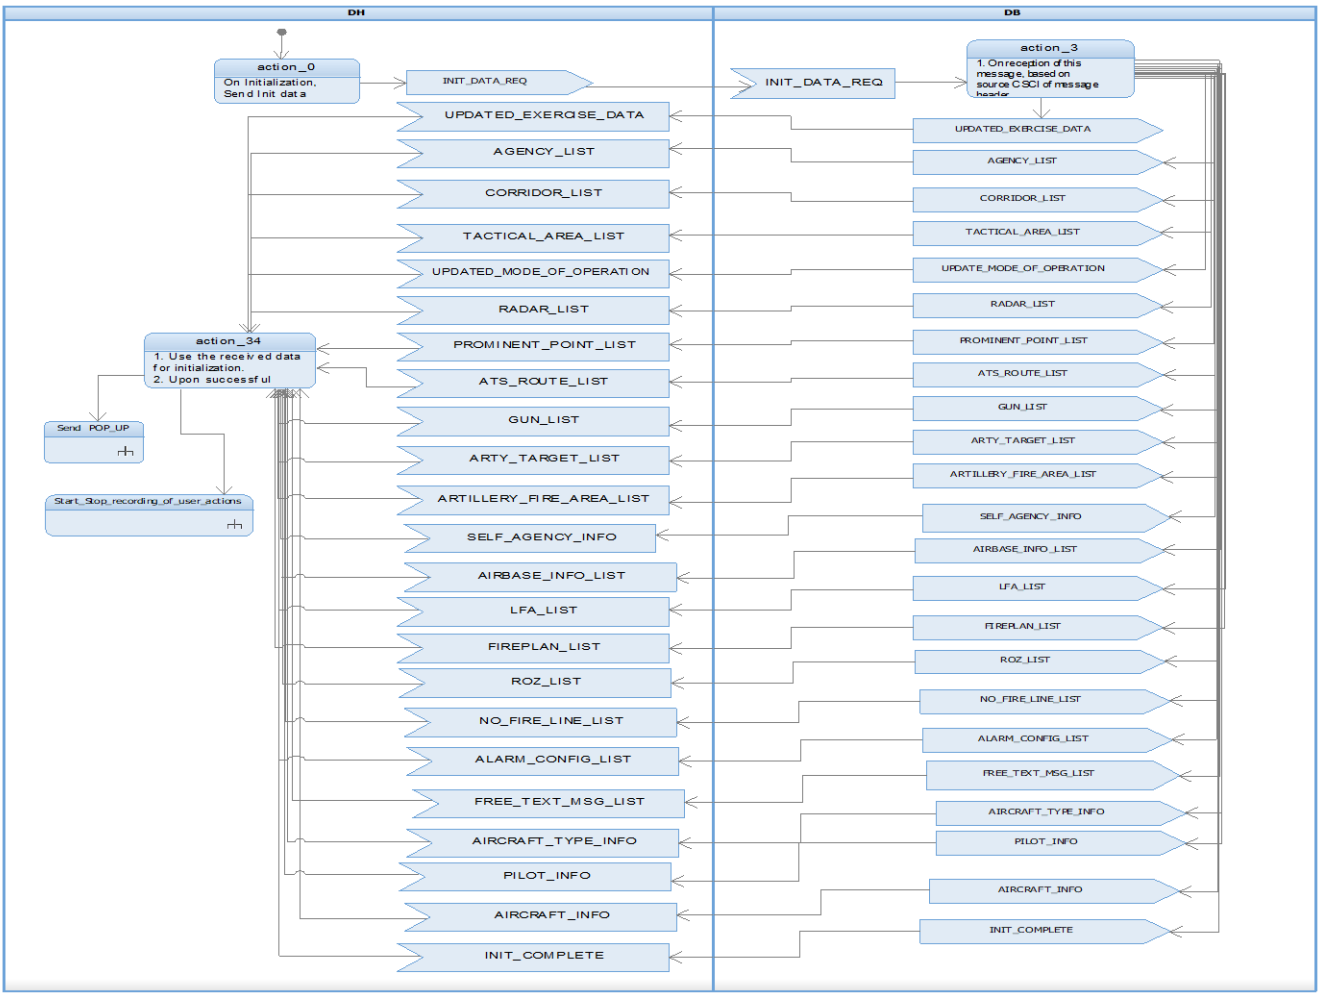

Arch PUI: Initialization of DH

REFRENCED ACTIVITIES
Start_Stop_recording_of_user_actions Send_POP_UP

TOPICS/MESSAGES/RESTAPI's INVOLVED
INIT_DATA_REQ UPDATED_EXERCISE_DATA AGENCY_LIST CORRIDOR_LIST TACTICAL_AREA_LIST

UPDATE_MODE_OF_OPERATION RADAR_LIST PROMINENT_POINT_LIST ATS_ROUTE_LIST GUN_LIST ARTY_TARGET_LIST ARTILLERY_FIRE_AREA_LIST AIRBASE_INFO_LIST LFA_LIST FIREPLAN_LIST ROZ_LIST NO_FIRE_LINE_LIST ALARM_CONFIG_LIST INIT_COMPLETE FREE_TEXT_MSG_LIST SELF_AGENCY_INFO AIRCRAFT_TYPE_INFO PILOT_INFO AIRCRAFT_INFO UPDATED_MODE_OF_OPERATION POINT_LIST

SWIM LANE	**ACTION NAME**	**DESCRIPTION**
DH	action_0	On Initialization, Send Init data request to DB with specific request type. Note: For All Init Data, set req_type_for_initialization= 1 (COMPLETE_INITIALIZATION_DATA). else Set req_type_for_initialization to specific data List. For "FP_COMPLETE_LIST", fetch FP list from DB using DB view.
DH	action_34	1. Use the received data for initialization. 2. Upon successful completion, display a success pop-up. if complete initialization fails, display a pop-up with the reason for incomplete initilization. 3. On successful initialization, Forward the message "START_STOP_RECORDING_REQ" to

		RRO with start_stop_status = START. Refer activity "Start_Stop_recording_of_user_actions" for further processing.
DB	action_3	1. On reception of this message, based on source CSCI of message header, 2. Check if req_type_for_initialization= 1 (COMPLETE_INITIALIZATION_DATA) then Send the following initialization message to that CSCI: UPDATED_EXERCISE_DATA AGENCY_LIST CORRIDOR_LIST TACTICAL_AREA_LIST UPDATE_MODE_OF_OPERATION RADAR_LIST PROMINENT_POINT_LIST ATS_ROUTE_LIST GUN_LIST ARTY_TARGET_LIST ARTILLERY_FIRE_AREA_LIST SELF_AGENCY_INFO AIRBASE_INFO_LIST LFA_LIST FIREPLAN_LIST ROZ_LIST NO_FIRE_LINE_LIST ALARM_CONFIG_LIST UPDATED_MODE_OF_OPERATION FREE_TEXT_MSG_LIST AIRCRAFT_TYPE_INFO PILOT_INFO AIRCRAFT_INFO POINT_LIST After sending all initialization message, Send INIT_COMPLETE message to that CSCI. 3. Check if req_type_for_initialization is specific data List then Send that initialization message to that CSCI.