




Neural Networks: Representation

5 questions

1. Which of the following statements are true? Check all that apply.


- ☐ The activation values of the hidden units in a neural network, with the sigmoid activation function applied at every layer, are always in the range $(0, 1)$.
- ☐ A two layer (one input layer, one output layer; no hidden layer) neural network can represent the XOR function.
- ☐ Suppose you have a multi-class classification problem with three classes, trained with a 3 layer network. Let $a_1^{(3)} = (h_{\Theta}(x))_1$ be the activation of the first output unit, and similarly $a_2^{(3)} = (h_{\Theta}(x))_2$ and $a_3^{(3)} = (h_{\Theta}(x))_3$. Then for any input x , it must be the case that $a_1^{(3)} + a_2^{(3)} + a_3^{(3)} = 1$.
- ☐ Any logical function over binary-valued (0 or 1) inputs x_1 and x_2 can be (approximately) represented using some neural network.

2. Consider the following neural network which takes two binary-valued inputs $x_1, x_2 \in \{0, 1\}$ and outputs $h_{\Theta}(x)$. Which of the following logical functions does it (approximately) compute?

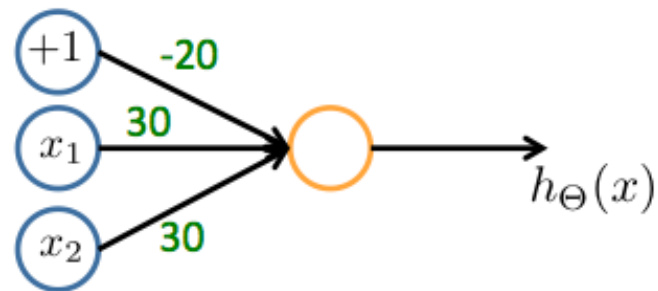

- ☐ OR
- ☐ AND
- ☐ NAND (meaning "NOT AND")
- ☐ XOR (exclusive OR)


3. Consider the neural network given below. Which of the following equations correctly computes the activation $a_1^{(3)}$?
Note: $g(z)$ is the sigmoid activation function.

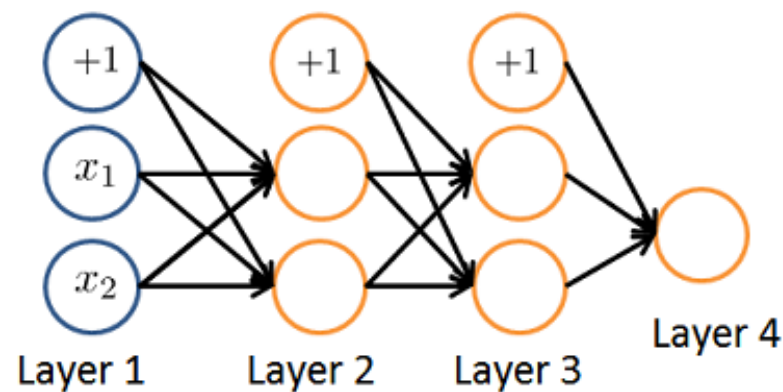

- ☐ $a_1^{(3)} = g(\Theta_{1,0}^{(2)} a_0^{(2)} + \Theta_{1,1}^{(2)} a_1^{(2)} + \Theta_{1,2}^{(2)} a_2^{(2)})$
- ☐ $a_1^{(3)} = g(\Theta_{1,0}^{(2)} a_0^{(1)} + \Theta_{1,1}^{(2)} a_1^{(1)} + \Theta_{1,2}^{(2)} a_2^{(1)})$

- ☐ $a_1^{(3)} = g(\Theta_{1,0}^{(1)}a_0^{(2)} + \Theta_{1,1}^{(1)}a_1^{(2)} + \Theta_{1,2}^{(1)}a_2^{(2)})$
- ☐ $a_1^{(3)} = g(\Theta_{2,0}^{(2)}a_0^{(2)} + \Theta_{2,1}^{(2)}a_1^{(2)} + \Theta_{2,2}^{(2)}a_2^{(2)})$

4. You have the following neural network:

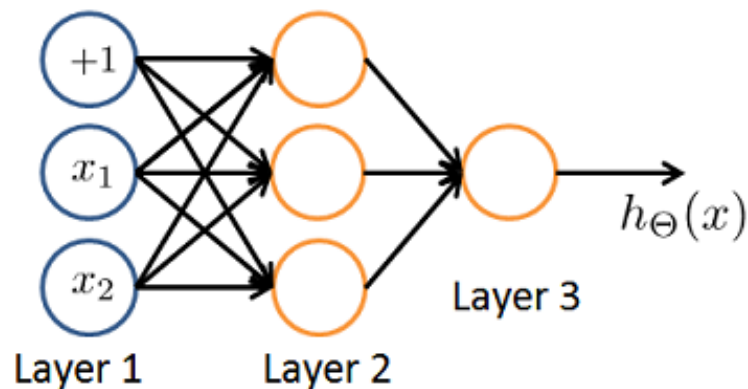

You'd like to compute the activations of the hidden layer $a^{(2)} \in \mathbb{R}^3$. One way to do so is the following Octave code:


```
% Theta1 is Theta with superscript "(1)" from lecture
% ie, the matrix of parameters for the mapping from layer 1 (input) to layer 2
% Theta1 has size 3x3
% Assume 'sigmoid' is a built-in function to compute 1 / (1 + exp(-z))

a2 = zeros (3, 1);
for i = 1:3
    for j = 1:3
        a2(i) = a2(i) + x(j) * Theta1(i, j);
    end
    a2(i) = sigmoid (a2(i));
end
```

You want to have a vectorized implementation of this (i.e., one that does not use for loops). Which of the following implementations correctly compute $a^{(2)}$? Check all that apply.

- ☐ $z = \text{Theta1} * x; a2 = \text{sigmoid}(z);$
- ☒ $a2 = \text{sigmoid}(x * \text{Theta1});$
- ☒ $a2 = \text{sigmoid}(\text{Theta2} * x);$
- ☒ $z = \text{sigmoid}(x); a2 = \text{sigmoid}(\text{Theta1} * z);$

5. You are using the neural network pictured below and have learned the parameters $\Theta^{(1)} = \begin{bmatrix} 1 & -1.5 & 3.7 \\ 1 & 5.1 & 2.3 \end{bmatrix}$ (used to compute $a^{(2)}$) and $\Theta^{(2)} = \begin{bmatrix} 1 & 0.6 & -0.8 \end{bmatrix}$ (used to compute $a^{(3)}$) as a function of $a^{(2)}$. Suppose you swap the parameters for the first hidden layer between its two units so $\Theta^{(1)} = \begin{bmatrix} 1 & 5.1 & 2.3 \\ 1 & -1.5 & 3.7 \end{bmatrix}$ and also swap the output layer so $\Theta^{(2)} = \begin{bmatrix} 1 & -0.8 & 0.6 \end{bmatrix}$. How will this change the value of the output $h_{\Theta}(x)$?

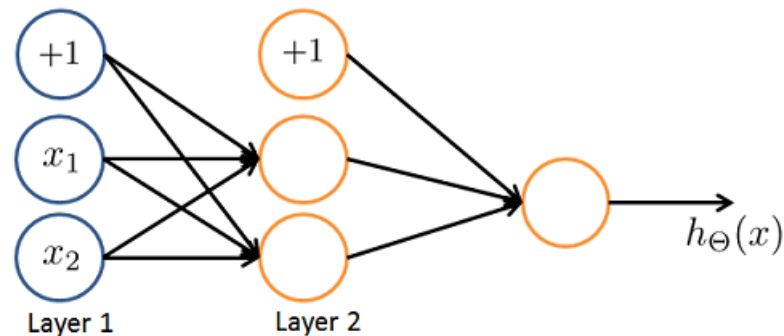

- ☐ It will stay the same.
- ☐ It will increase.
- ☐ It will decrease



Insufficient information to tell: it may increase or decrease.

Submit Quiz

