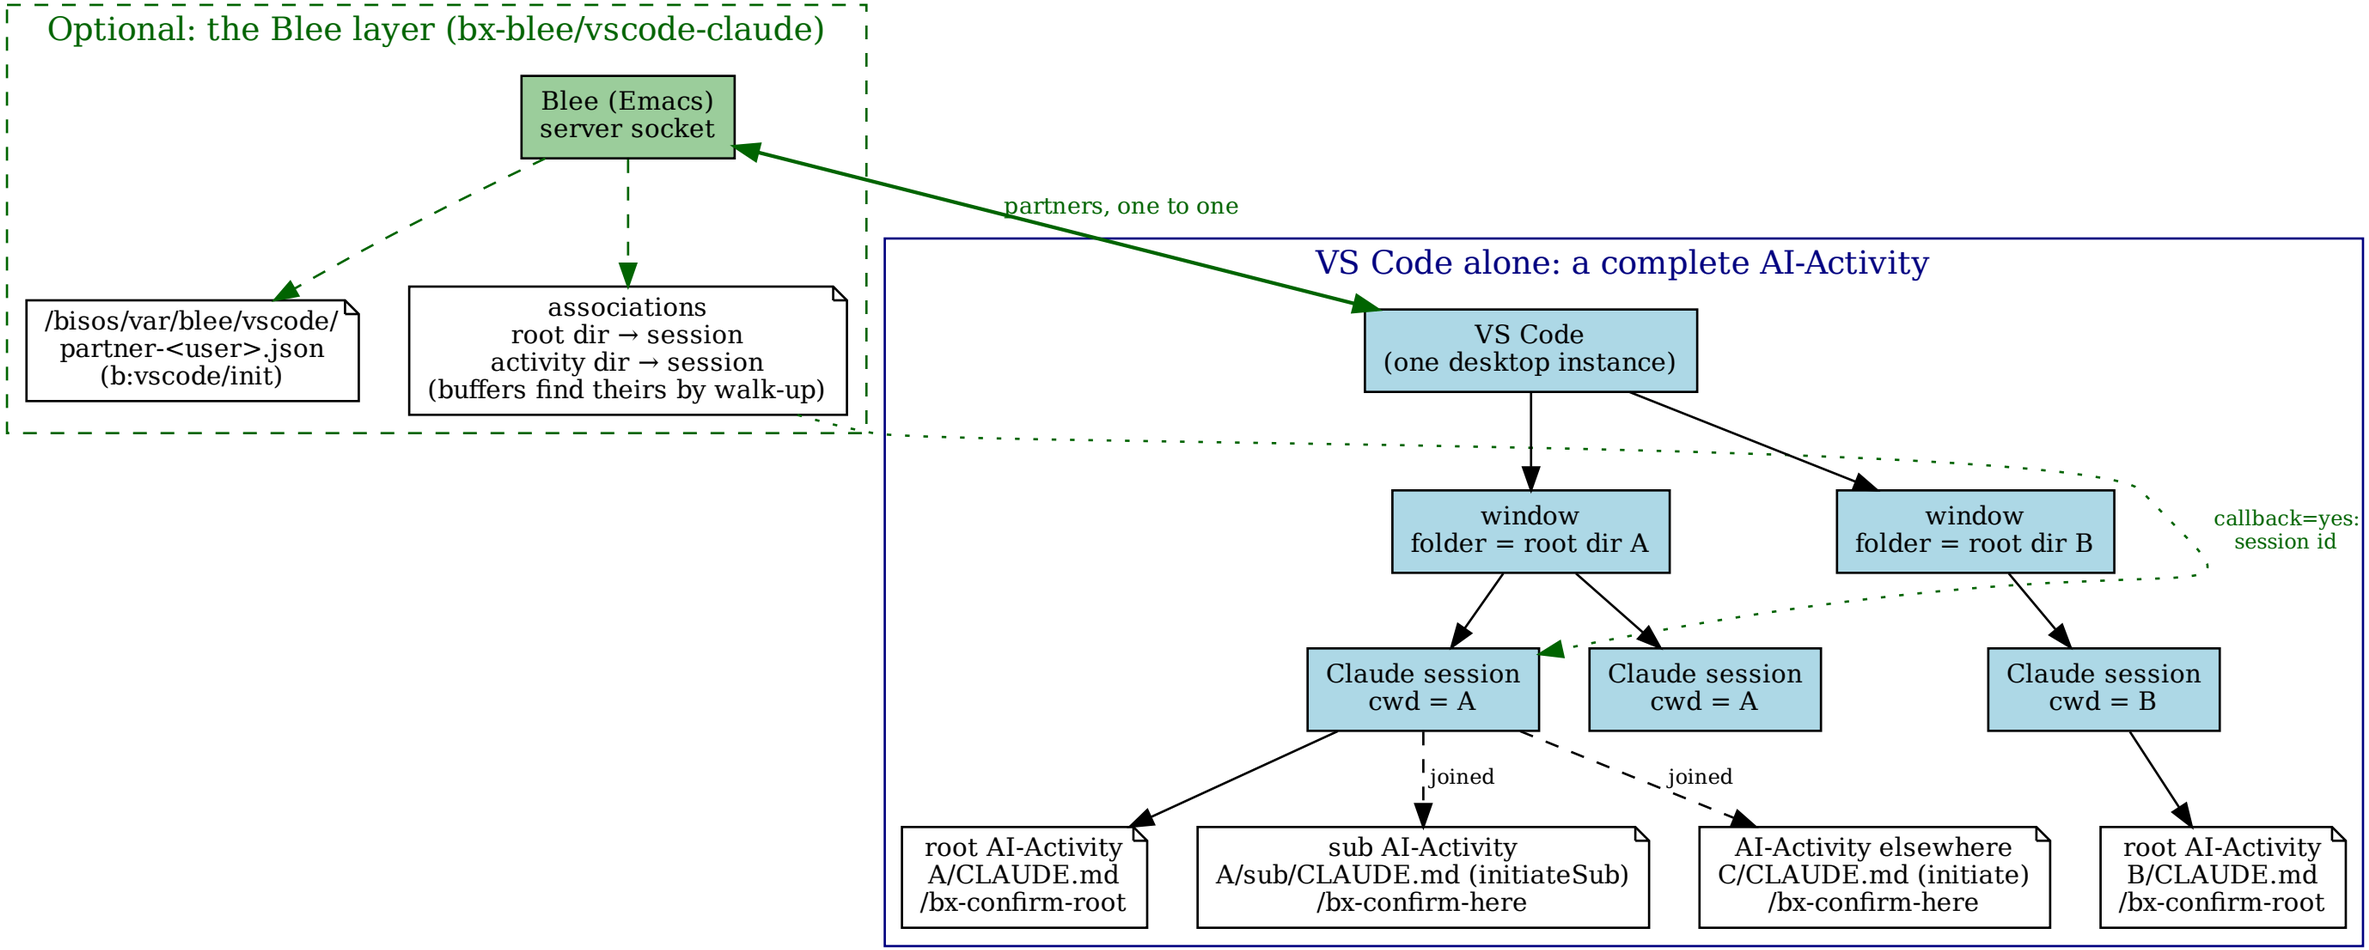
Optional: the Blee layer (bx-blee/vscode-claude)
Blee (Emacs)
server socket
/bisos/var/blee/vscode/
partner-<user>.json
(b:vscode/init)
associations
root dir → session
activity dir → session
(buffers find theirs by walk-up)
partners, one to one
VS Code alone: a complete AI-Activity
VS Code
(one desktop instance)
window
folder = root dir A
window
folder = root dir B
callback=yes:
session id
Claude session
cwd = A
Claude session
cwd = A
Claude session
cwd = B
joined
joined
root AI-Activity
A/CLAUDE.md
/bx-confirm-root
sub AI-Activity
A/sub/CLAUDE.md (initiateSub)
/bx-confirm-here
AI-Activity elsewhere
C/CLAUDE.md (initiate)
/bx-confirm-here
root AI-Activity
B/CLAUDE.md
/bx-confirm-root