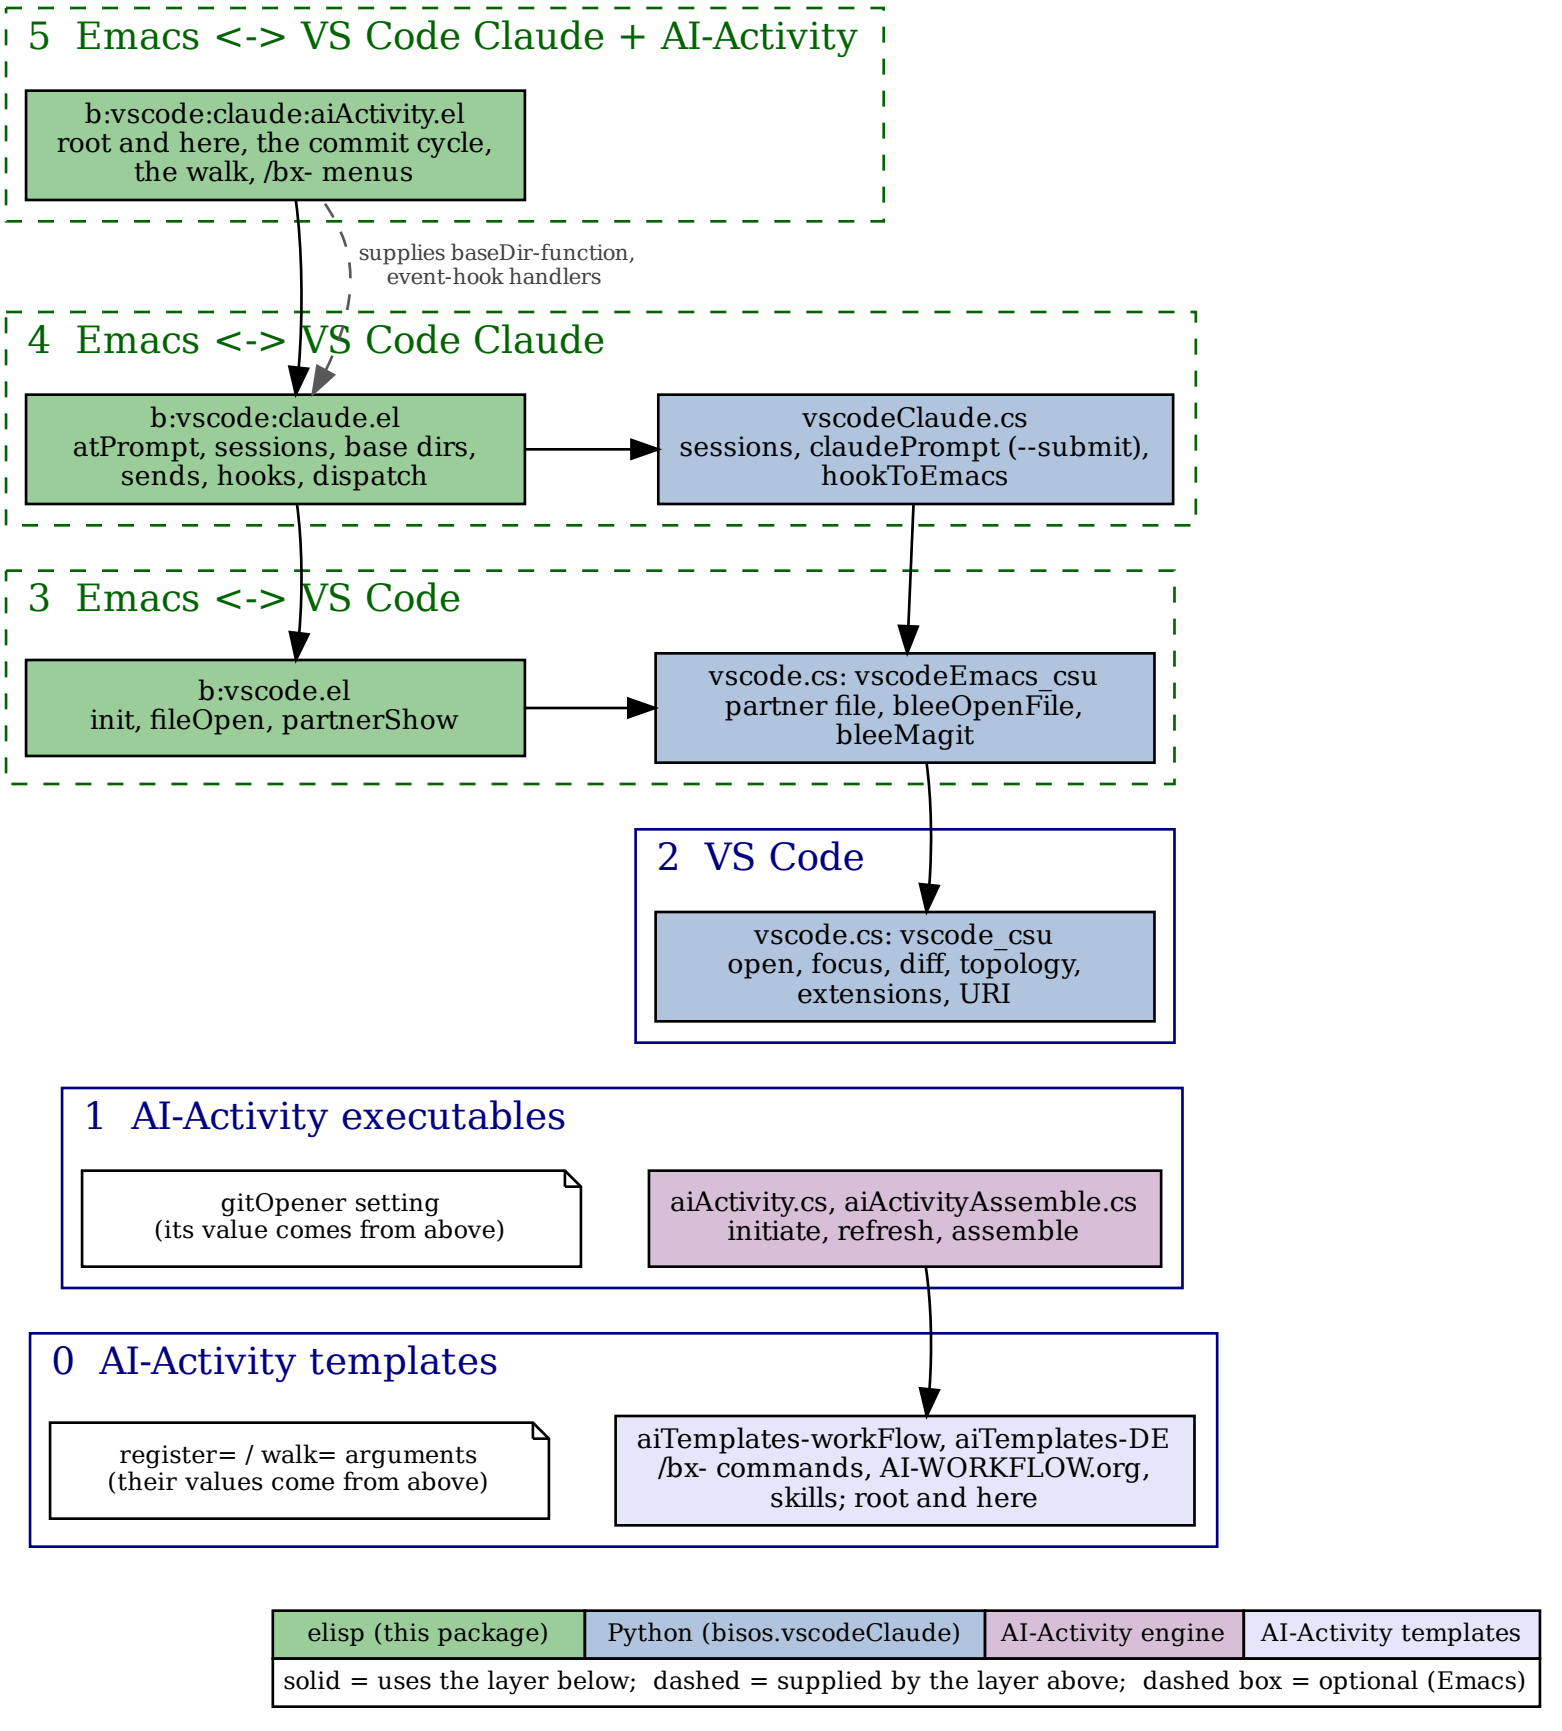
5 Emacs <-> VS Code Claude + AI-Activity
b:vscode:claude:aiActivity.el
root and here, the commit cycle,
the walk, /bx- menus
supplies baseDir-function,
event-hook handlers
4 Emacs <-> VS Code Claude
b:vscode:claude.el
atPrompt, sessions, base dirs,
sends, hooks, dispatch
vscodeClaude.cs
sessions, claudePrompt (--submit),
hookToEmacs
3 Emacs <-> VS Code
b:vscode.el
init, fileOpen, partnerShow
vscode.cs: vscodeEmacs_csu
partner file, bleeOpenFile,
bleeMagit
2 VS Code
vscode.cs: vscode_csu
open, focus, diff, topology,
extensions, URI
1 AI-Activity executables
gitOpener setting
(its value comes from above)
aiActivity.cs, aiActivityAssemble.cs
initiate, refresh, assemble
0 AI-Activity templates
register= / walk= arguments
(their values come from above)
aiTemplates-workFlow, aiTemplates-DE
/bx- commands, AI-WORKFLOW.org,
skills; root and here
elisp (this package)
Python (bisos.vscodeClaude)
AI-Activity engine
AI-Activity templates
solid = uses the layer below; dashed = supplied by the layer above; dashed box = optional (Emacs)