Use case: Admin makes object of interest available

Expert

:Admin → :System

startObjectOfInterestCreation()

createNewObjectOfInterest(String details, bool ownedByInstitution, bool auctionned)

objectOfInterest

endSession()
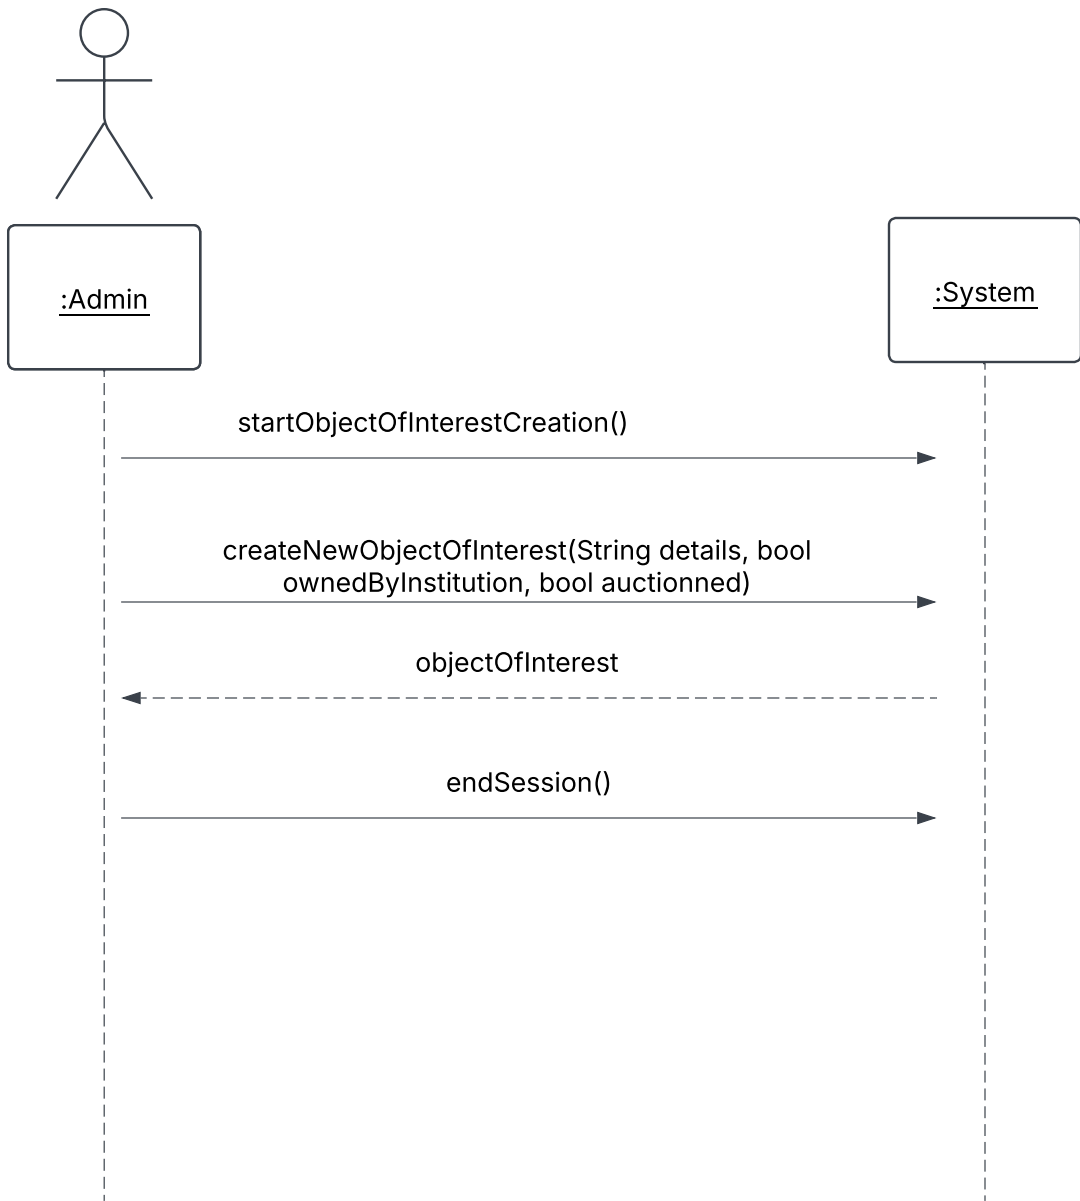
Use case: Expert views object of interest

:Admin → :Expert → :System

createExpert(String email, String password, String firstName, String lastName, String[] areaOfExpertise, String license)

expert

startObjectOfInterestViewing

browseObjectsOfInterest()

objecsOfInterest

endViewing()
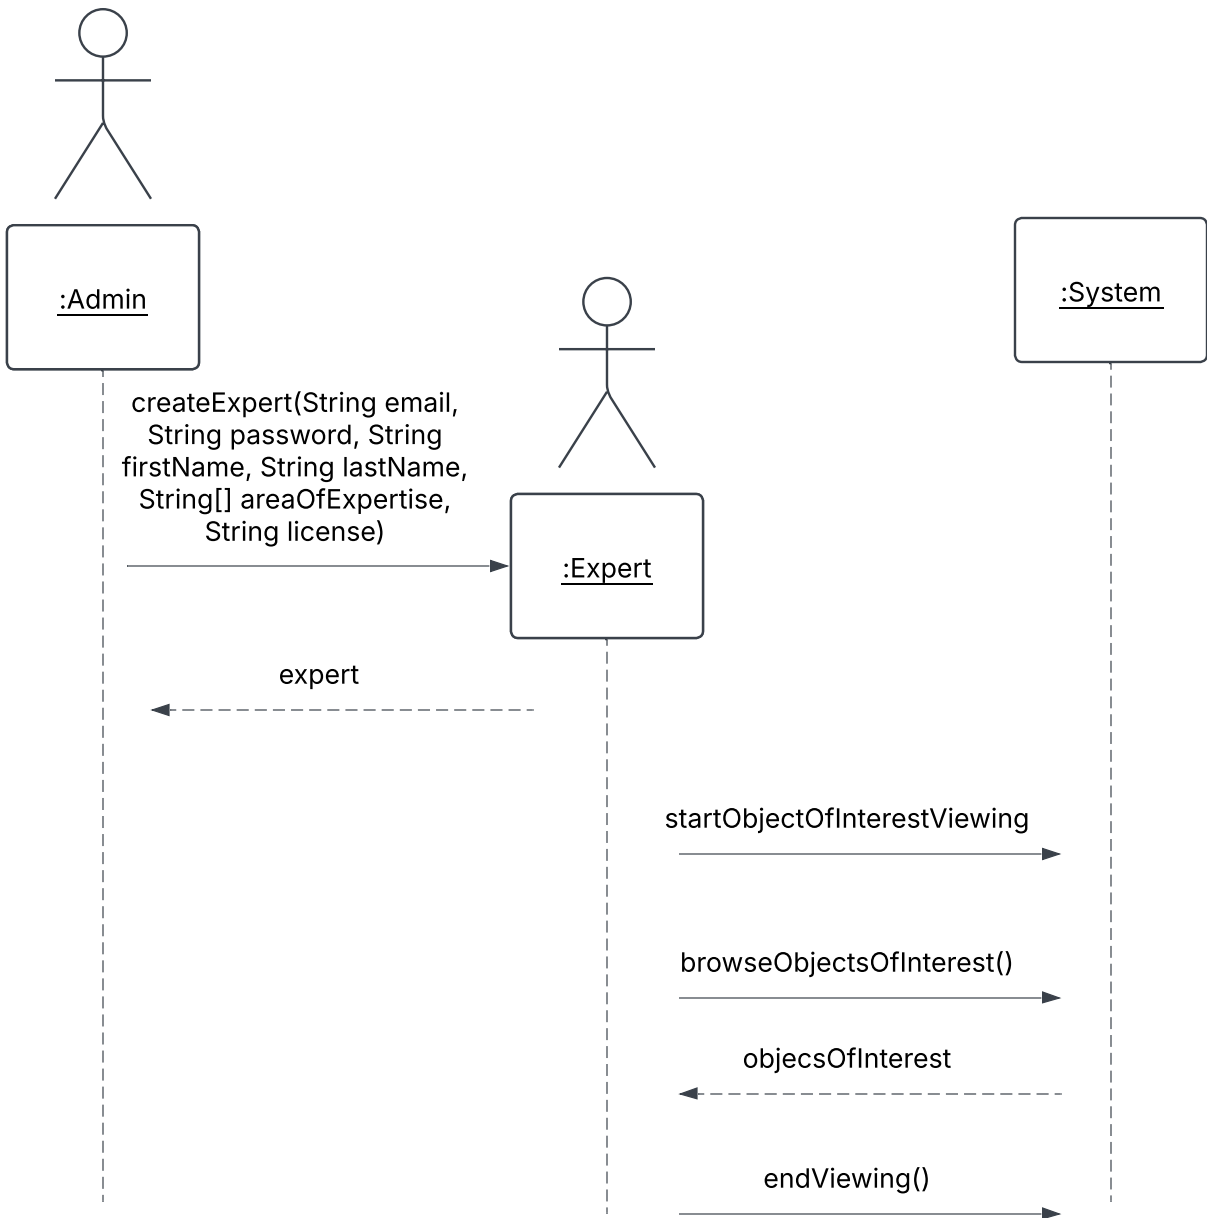
Use case: Client views object of interest

:Client → :Admin → :System

createClient(String email, String password, String firstName, String, String affiliation, Boolean accountApproved)

client added to DB

fetchAccountRequests(accountApproved==false)

accountApprovalRequests

alt [admin does not recognize client credentials]

deleteClient(id)

confirmation

endSession()

else

approveAccount(String email)

accountApproved=true

startObjectOfInterestViewing

browseObjectsOfInterest()

objecsOfInterest

endViewing()