




by_alex(Jimenez Garcia Miguel Alejandro)

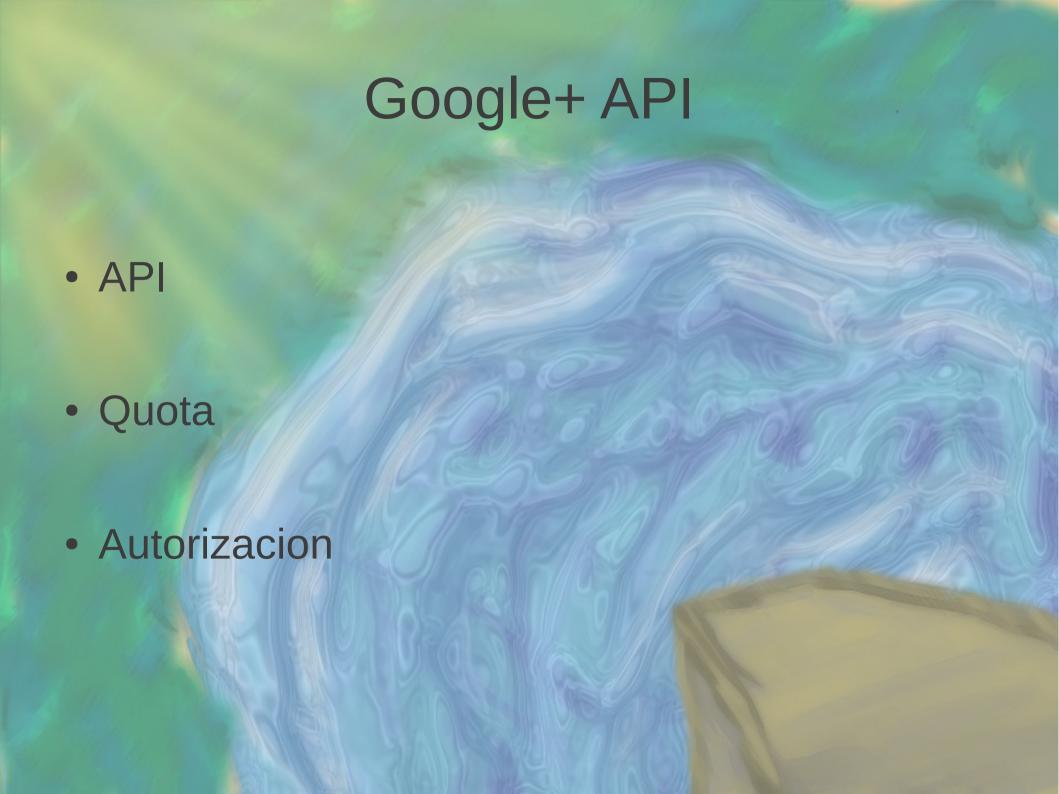

Google+ API

Llamadas al API

GET https://www.googleapis.com/plus/v1/people/ {userId}

- Parametros Comunes
 - fields
 - key
 - acces_token
 - prettyPrint
 - userlp

Google+ API

Tipo de Recursos

- API Publica
 - People
 - Activities
 - Comments
- History API
 - Moments

Google+ API

- Propiedades Comunes
 - displayName
 - id
 - Kind
 - Ej: "plus#person"
 - Url
 - nextPageToken

Google+ People

Metodo	Llamada HTTP	Requerido
get	GET /people/ {userId}	userId
search	GET /people	query
listByActi vity	GET /activities/{activitieId} /people/{collection}	activityId, collection

https://www.googleapis.com/plus/v1

Google+ Activities

Meto do	Llamada HTTP	Requerido
list	GET /people/{userId}/activities/ {collection}	collection, userId
get	GET /activities/{activityId}	activityId
searc h	GET /activities	query

https://www.googleapis.com/plus/v1

Google+ Comments


Metodo	Llamada HTTP	Requerido
list	GET /activities/{activityId}/comments	activityId
get	GET /comments/{commentsId}	commentId

https://www.googleapis.com/plus/v1


Google+ History API

Metodo	Llamada HTTP	Requerido
insert	POST /{userId}/moments/{collection}	

https://www.googleapis.com/plus/v1moments/people

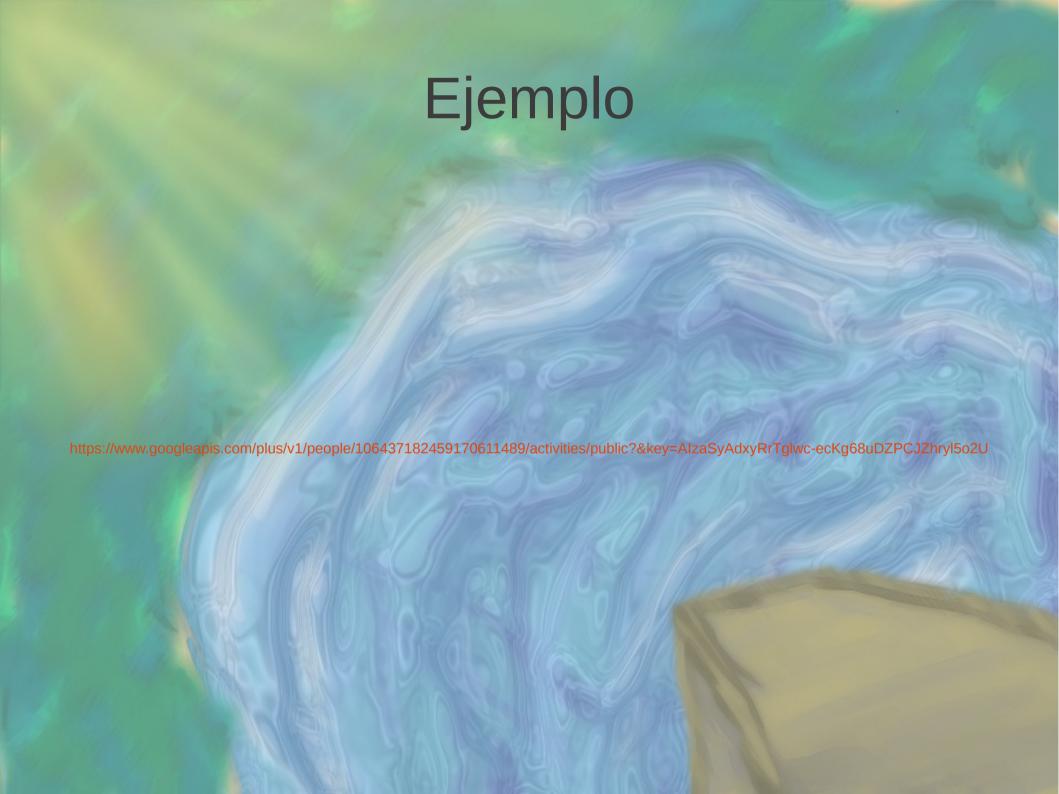

Google APIs Console

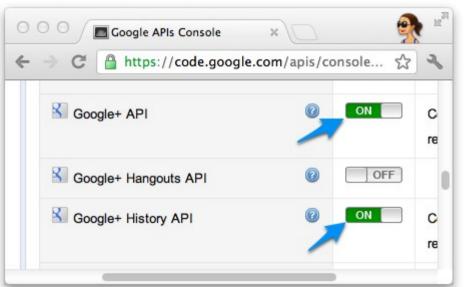





API Access

To prevent abuse, Google places limits on API requests. Using a valid OAuth token or API key allows you to exceed anonymous limits by connecting requests back to your project.

Authorized API Access

OAuth 2.0 allows users to share specific data with you (for example, contact lists) while keeping their usernames, passwords, and other information private. A logle project may contain up to 7 client IDs.



Learn more

Create an OAuth 2.0 client ID...

