


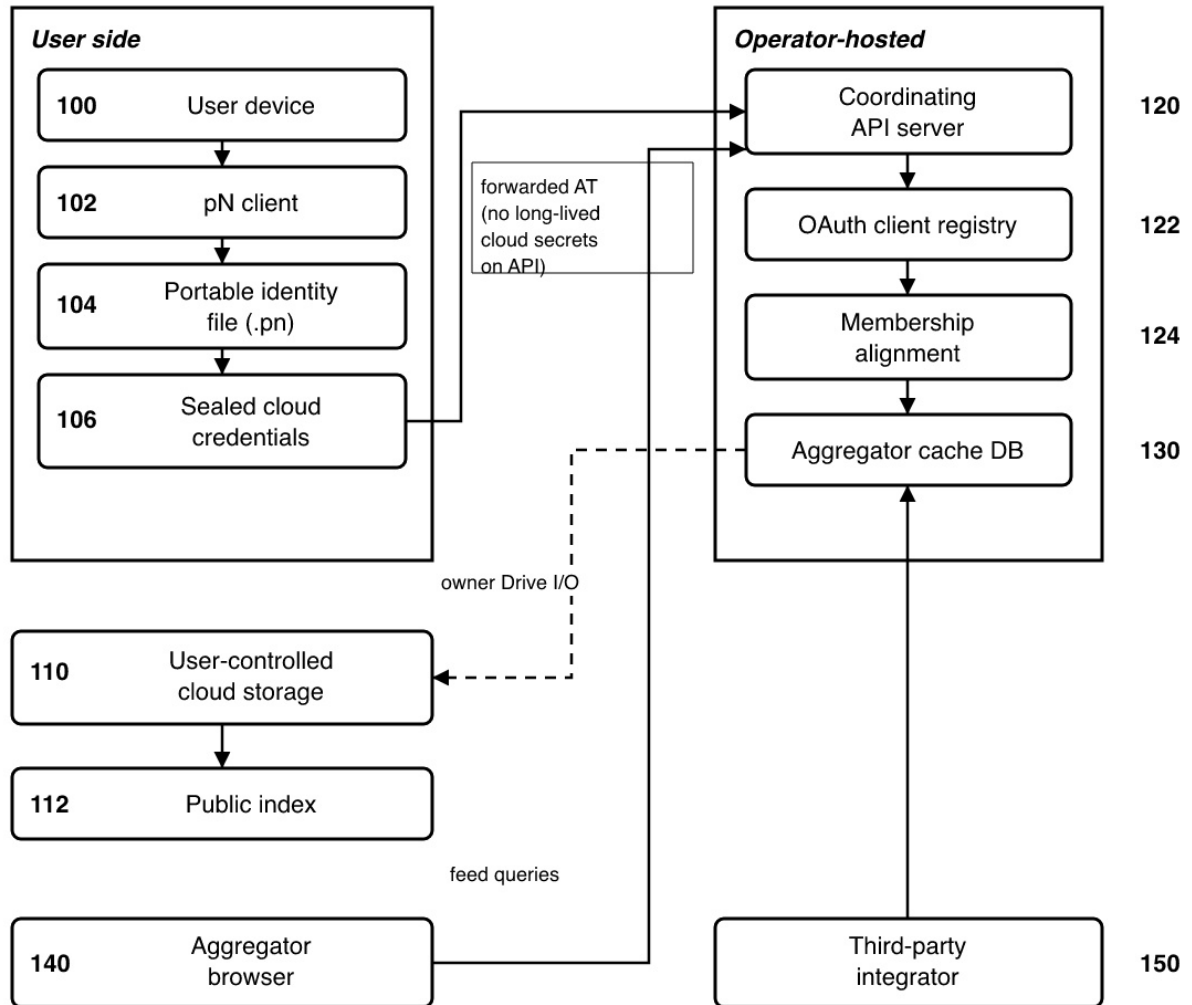

Device holds cloud credentials; API holds client registry only.

Browser 140 is API-only (no direct cloud provider API).

FIG. 1



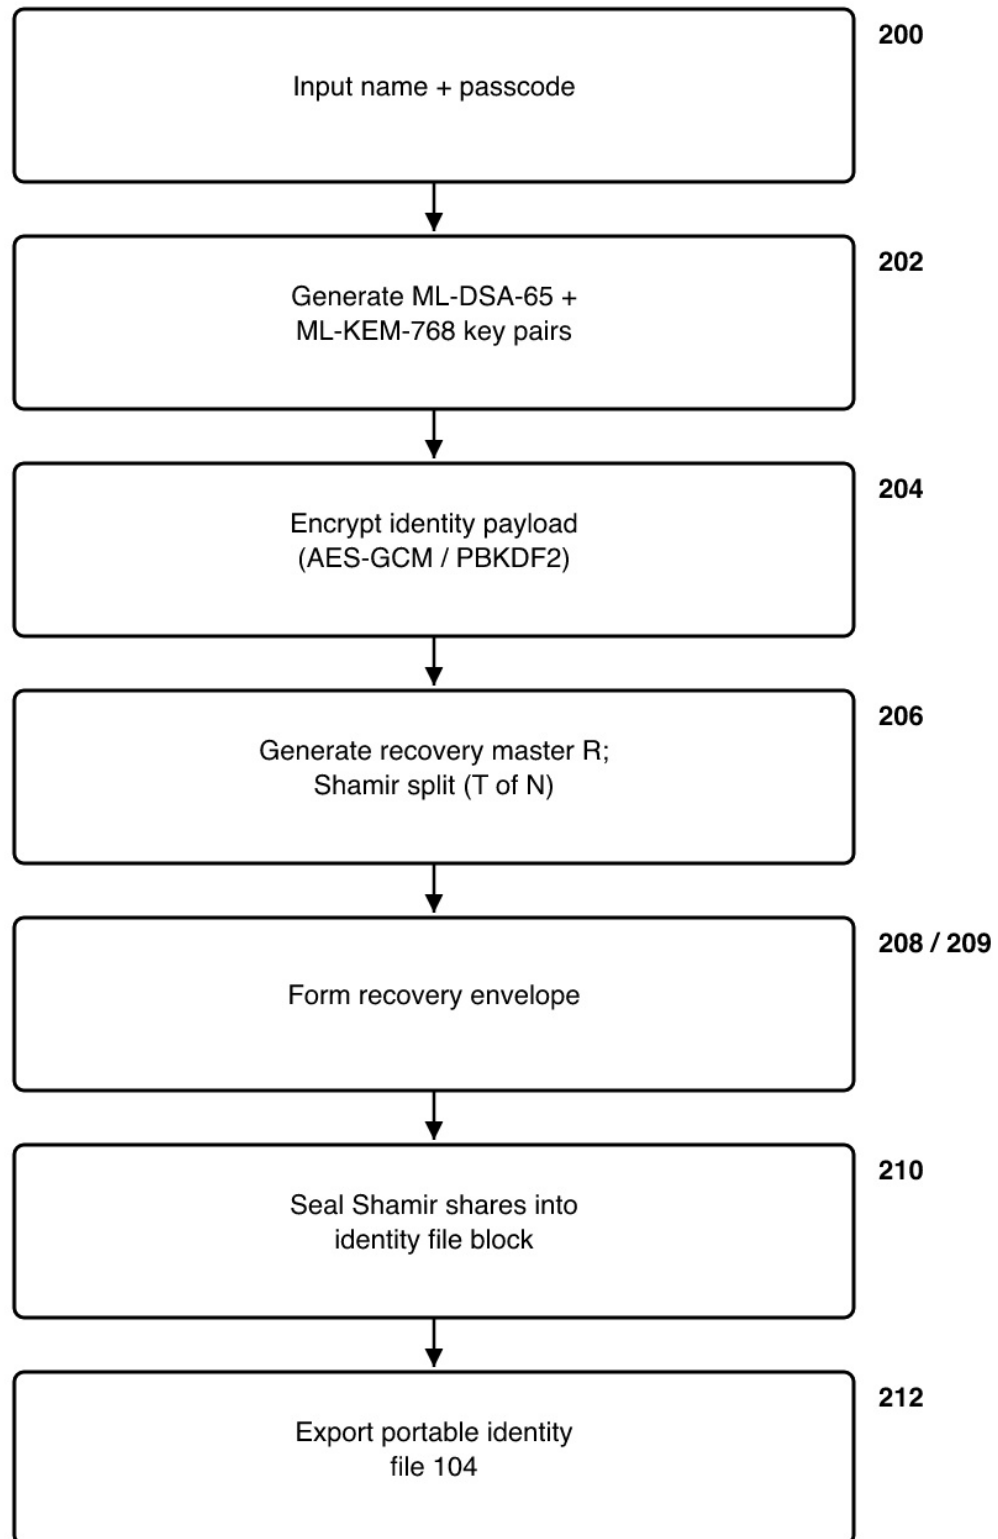


FIG. 2

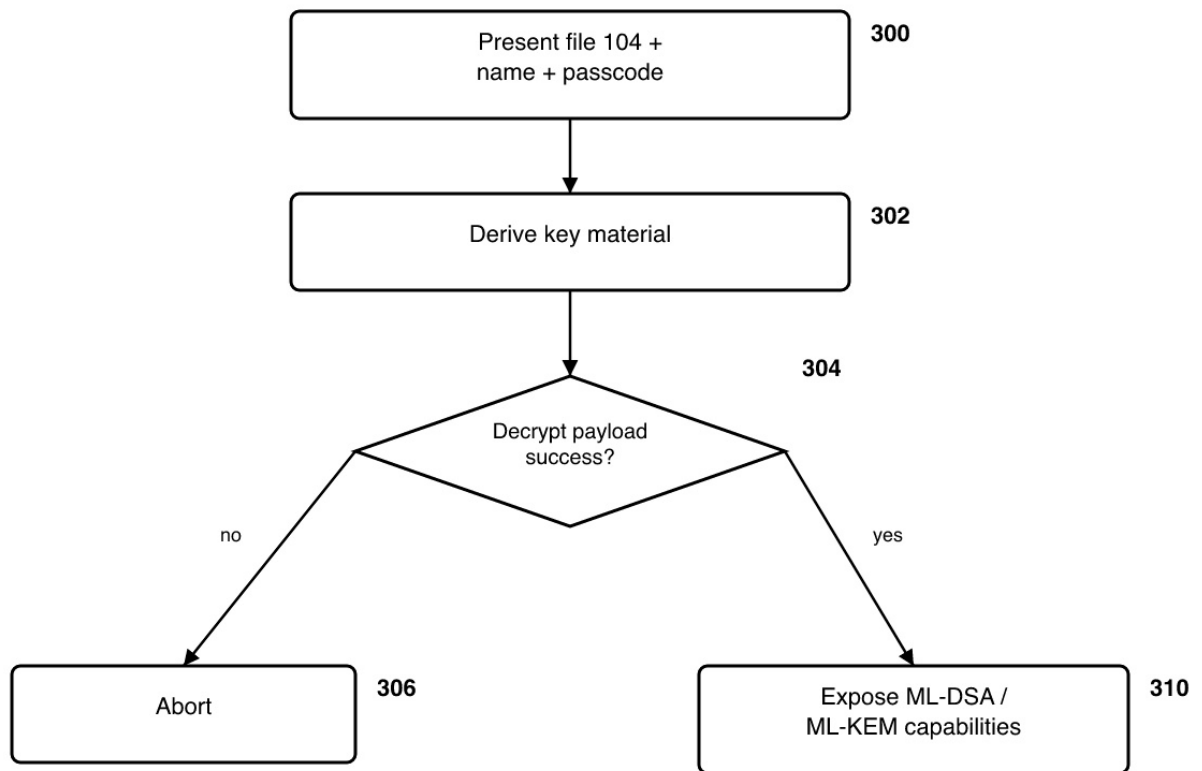


Note: all three factors required; missing any factor prevents decryption.

FIG. 3

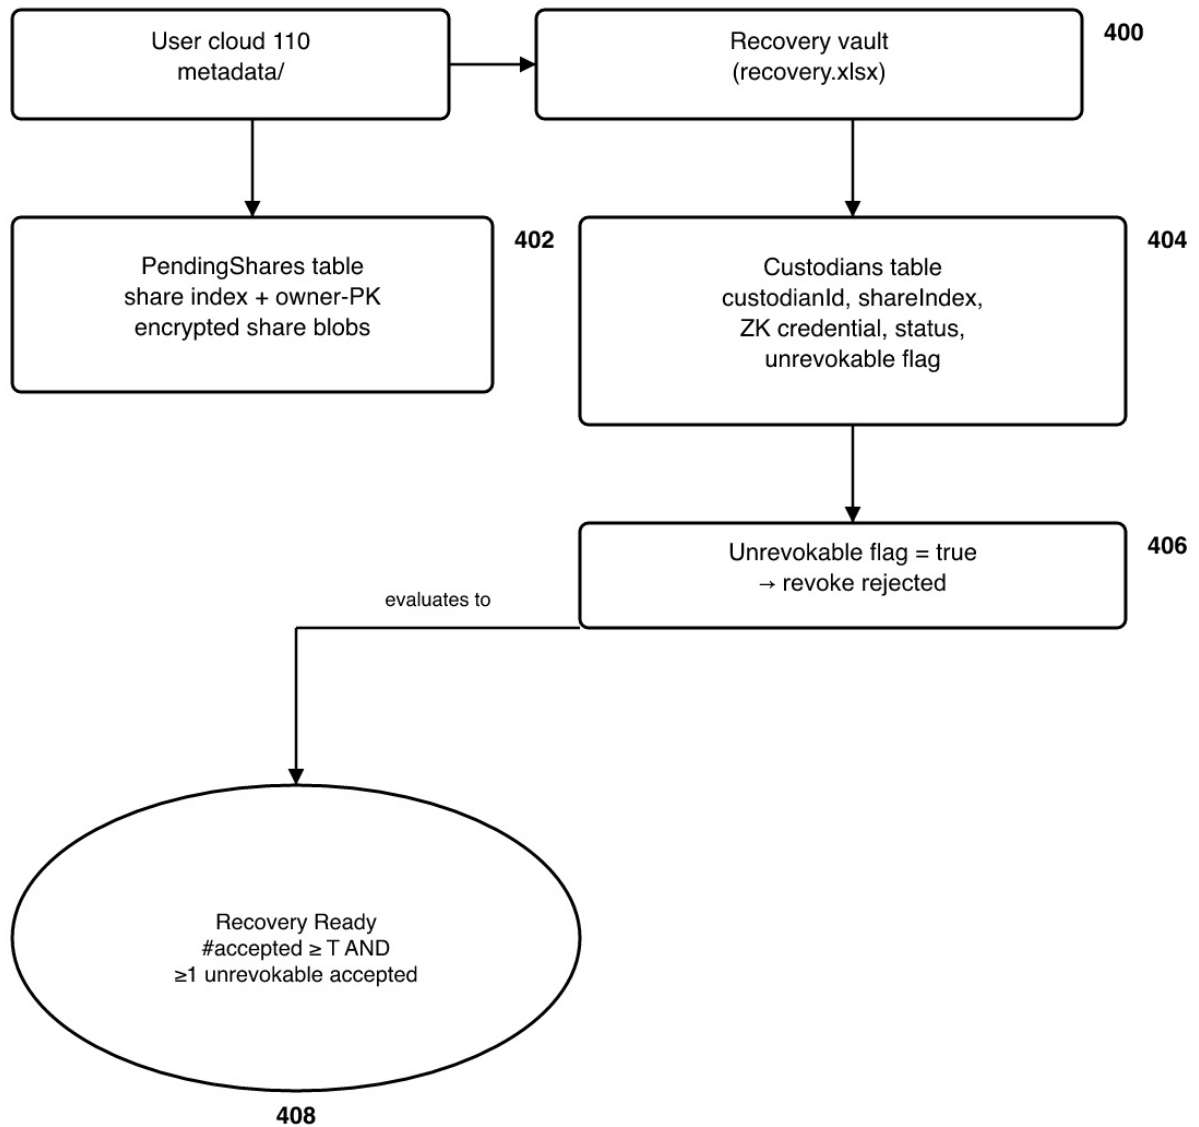

Status transitions: invited → accepted; invited/accepted → revoked (if revokable).

FIG. 4

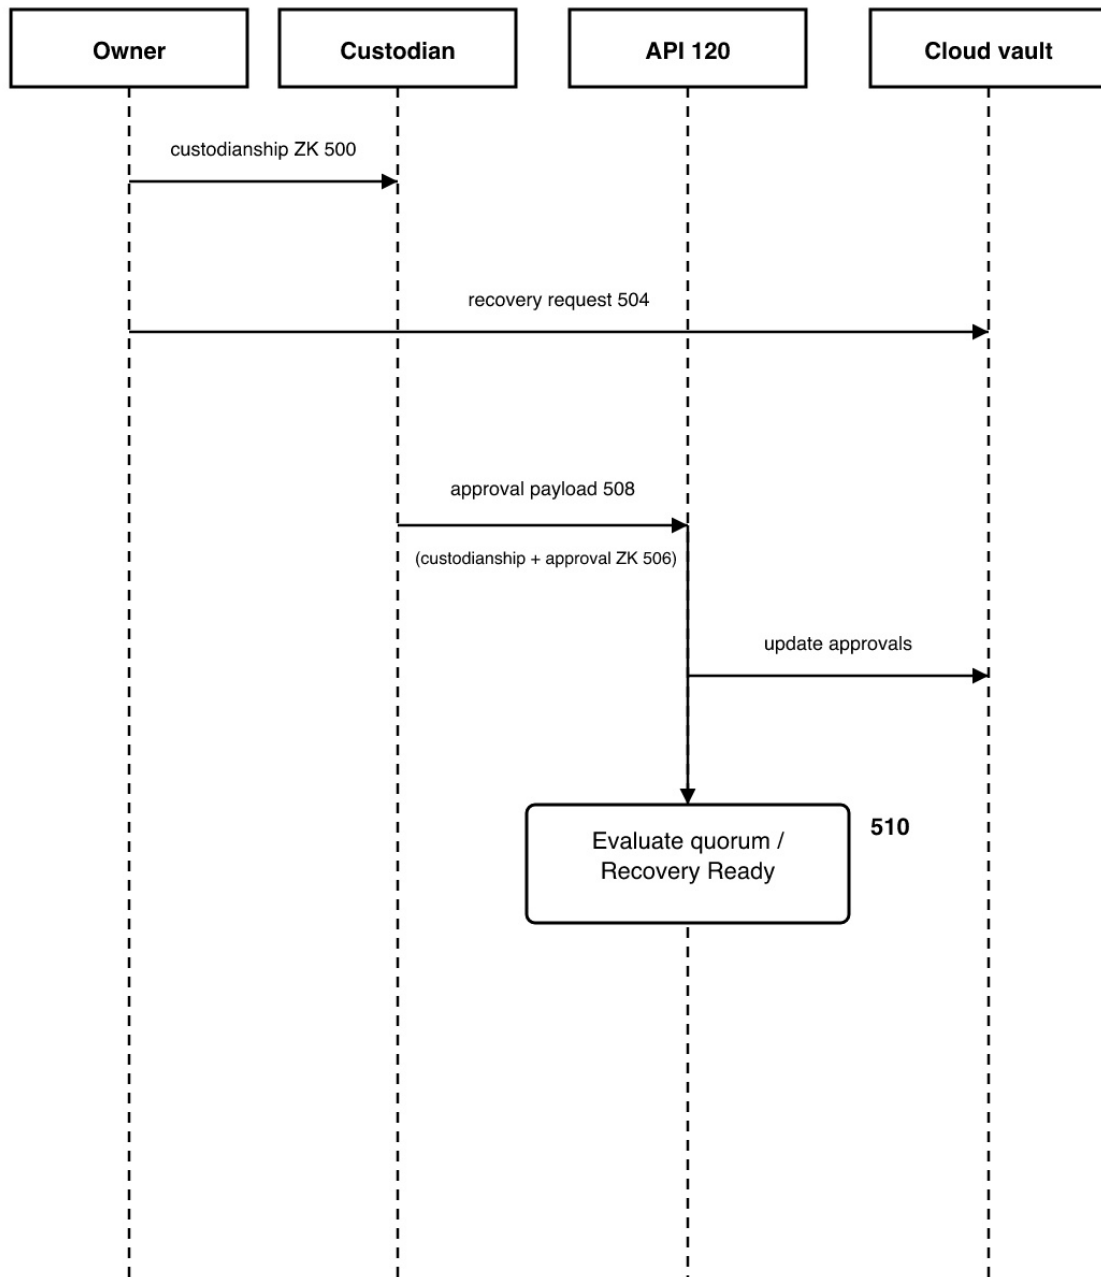

Quorum: $\#accepted \geq T$ AND ≥ 1 unrevokable approval (condition 408).

FIG. 5

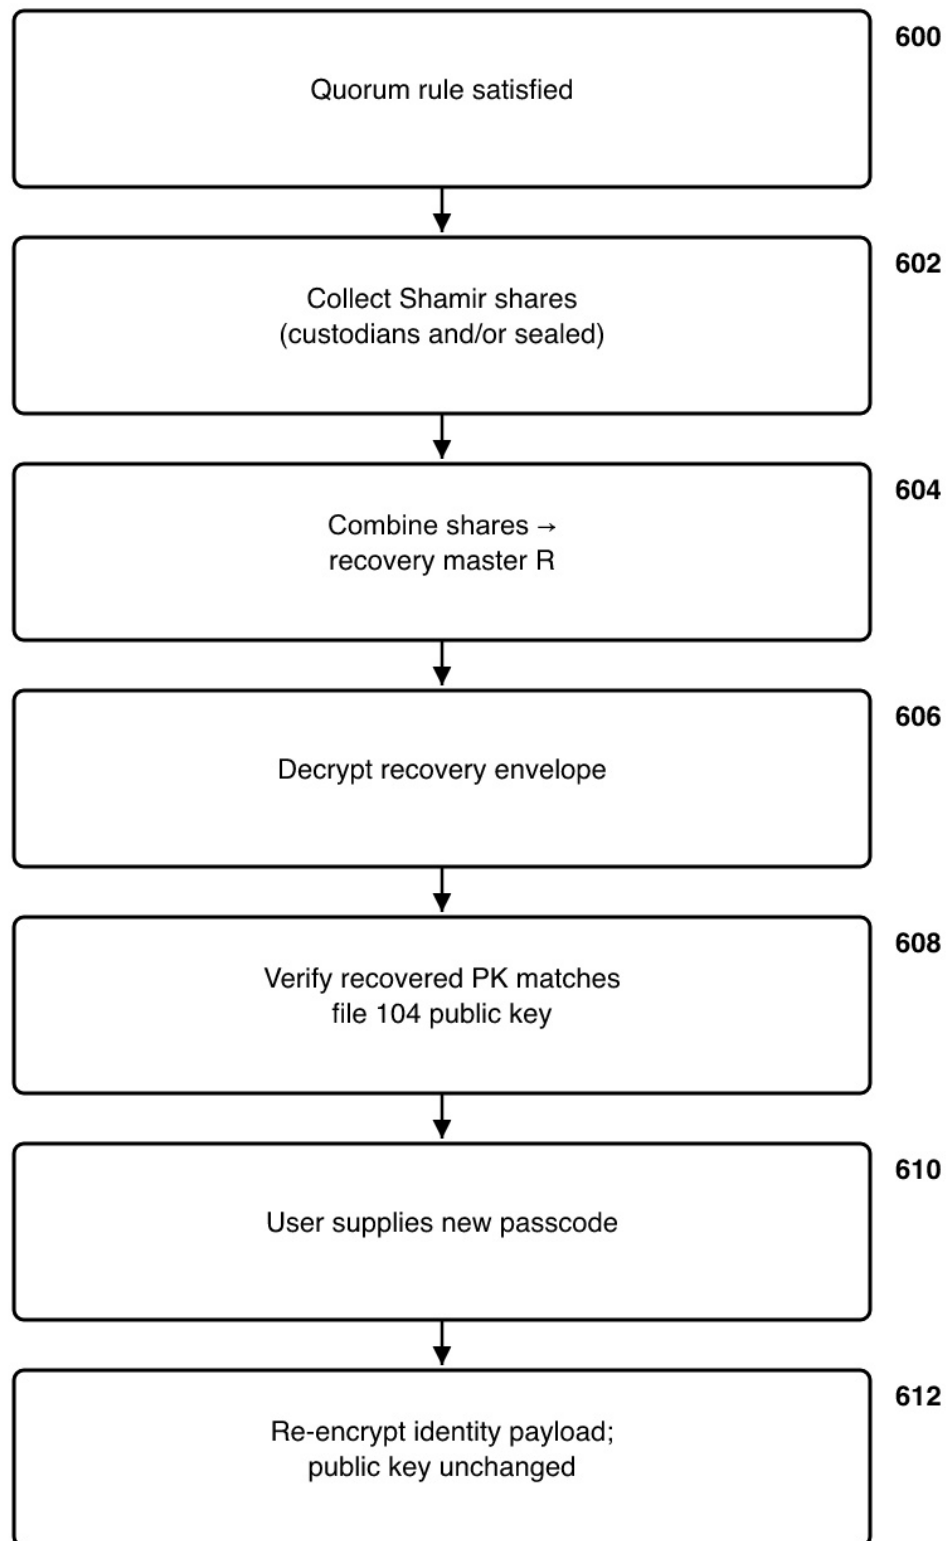


FIG. 6

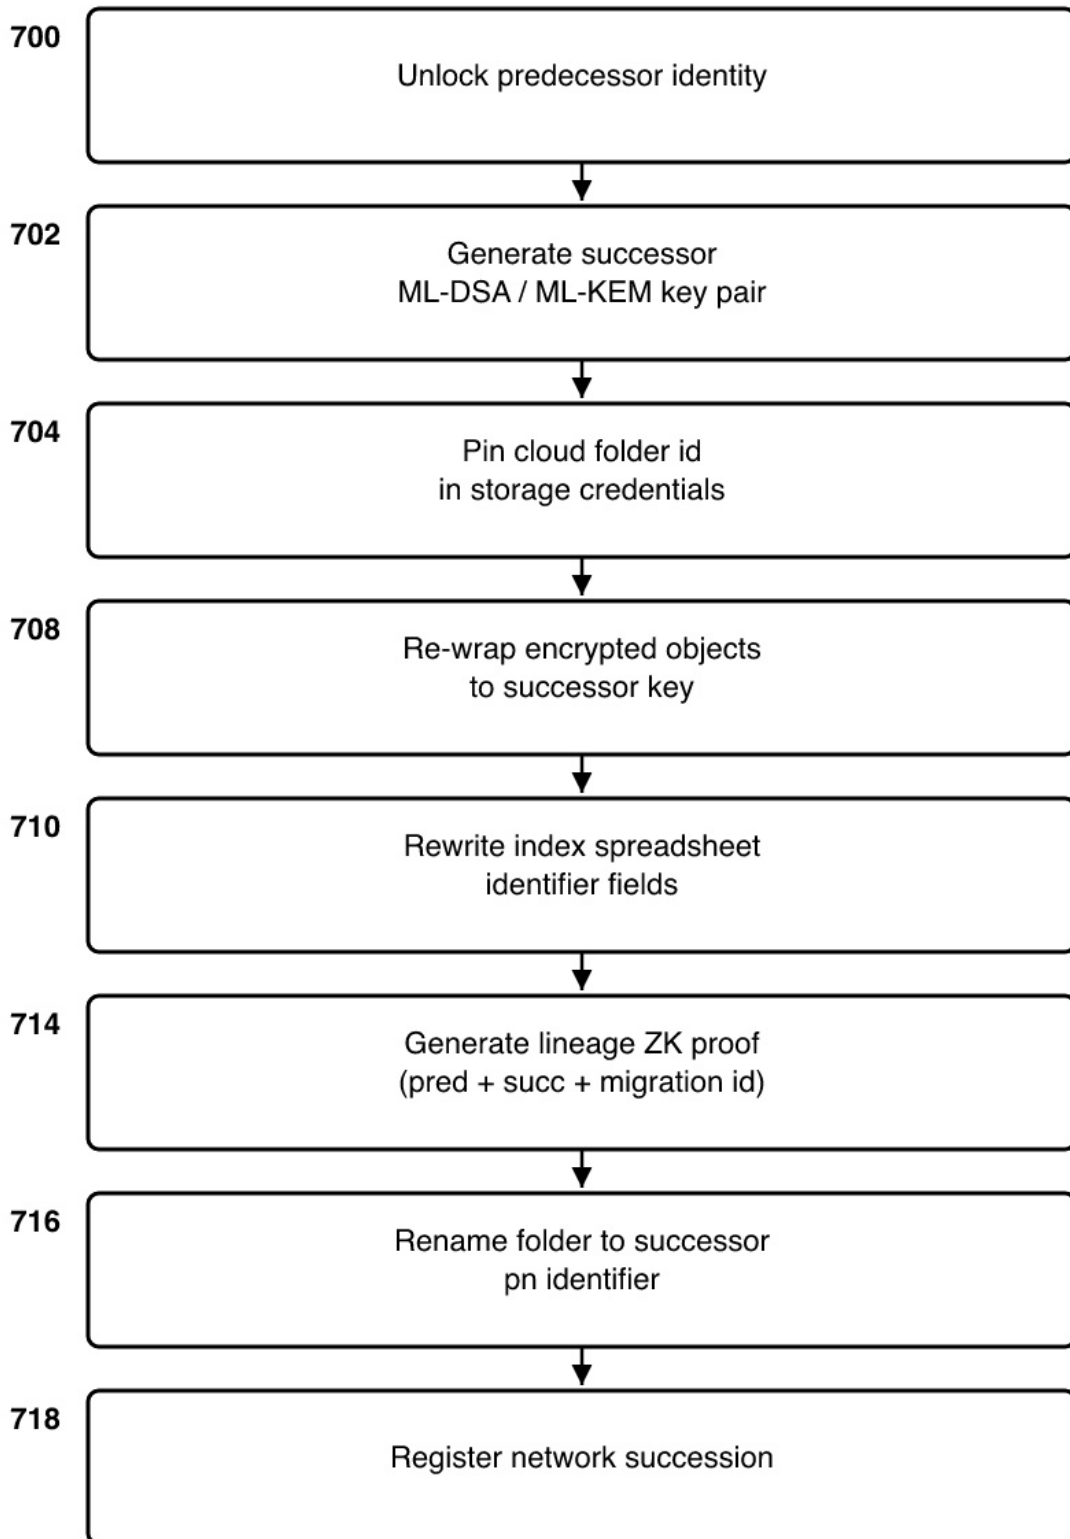


FIG. 7

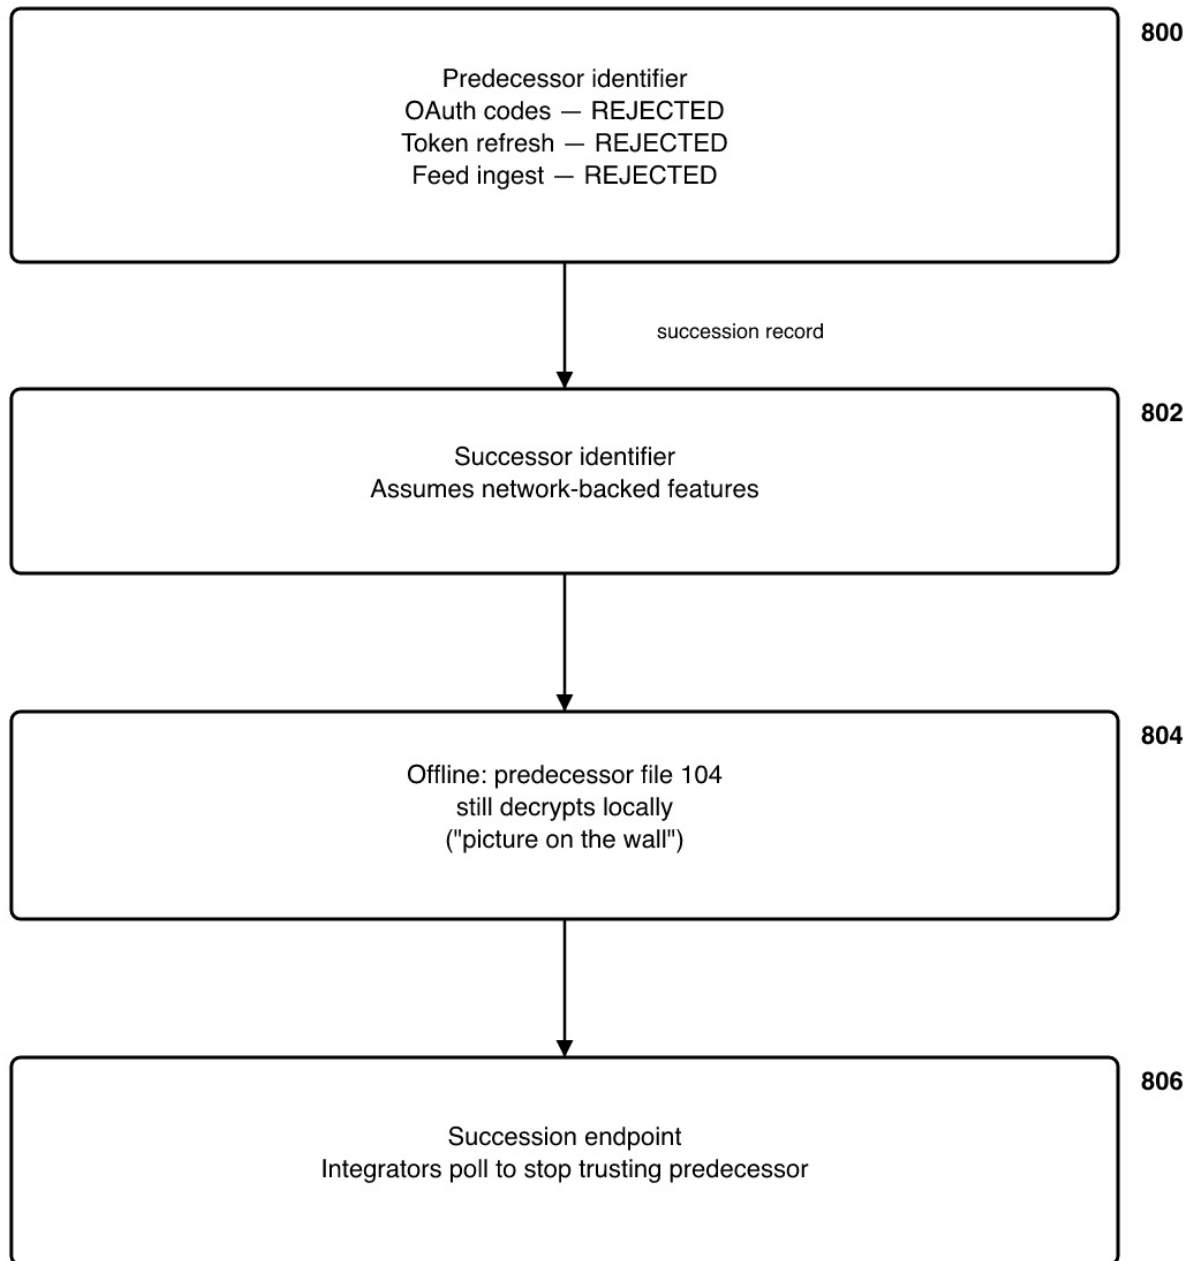


FIG. 8


par Noir - {pnIdentifier}/

└─ _metadata/	
└─ profile.json	
└─ public-file-index.xlsx	112
└─ owner-file-index.xlsx	
└─ recovery.xlsx	400
└─ zkp-data-points.xlsx	
└─ third-party-permissions.xlsx	
└─ integrators/{oauth_client_id}/	
└─ media/ thoughts/ collections/	
└─ *-public-index.xlsx	
└─ par-noir-messages/ (on demand)	
└─ _outbox/ (sender durable commit)	
└─ conversation-*.xlsx	

Public index 112 is absolute authority for feed membership.


Peer materialization is recipient-device (no cross-user Drive write).

FIG. 9

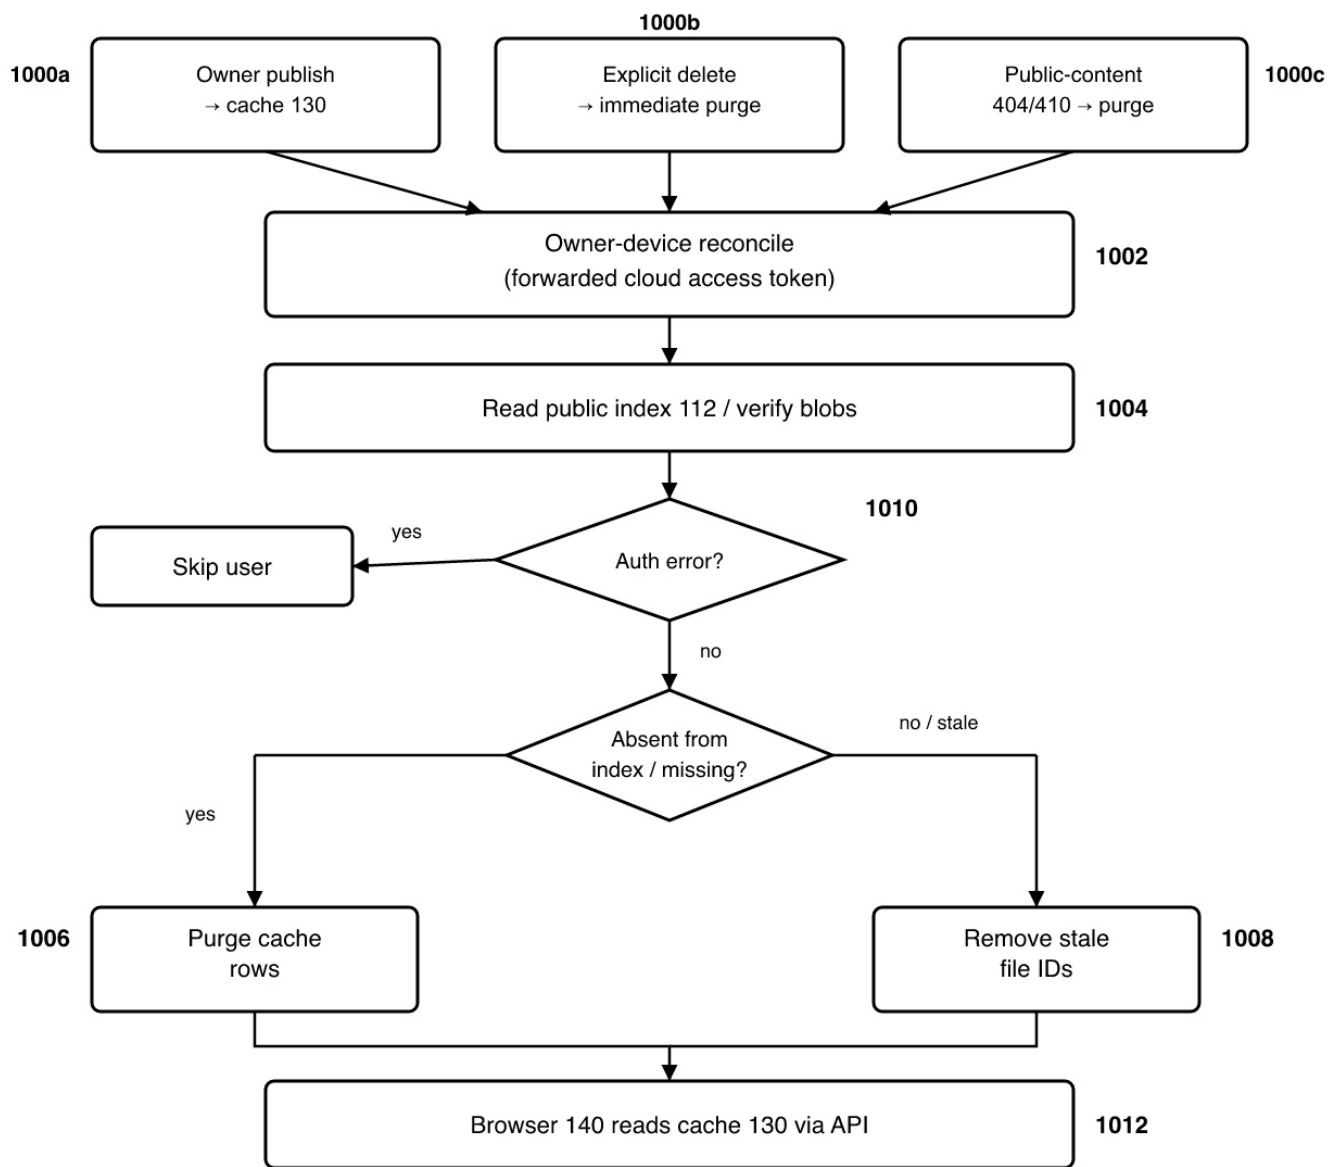


Index 112 is membership truth. API holds no long-lived cloud OAuth secrets.

FIG. 10

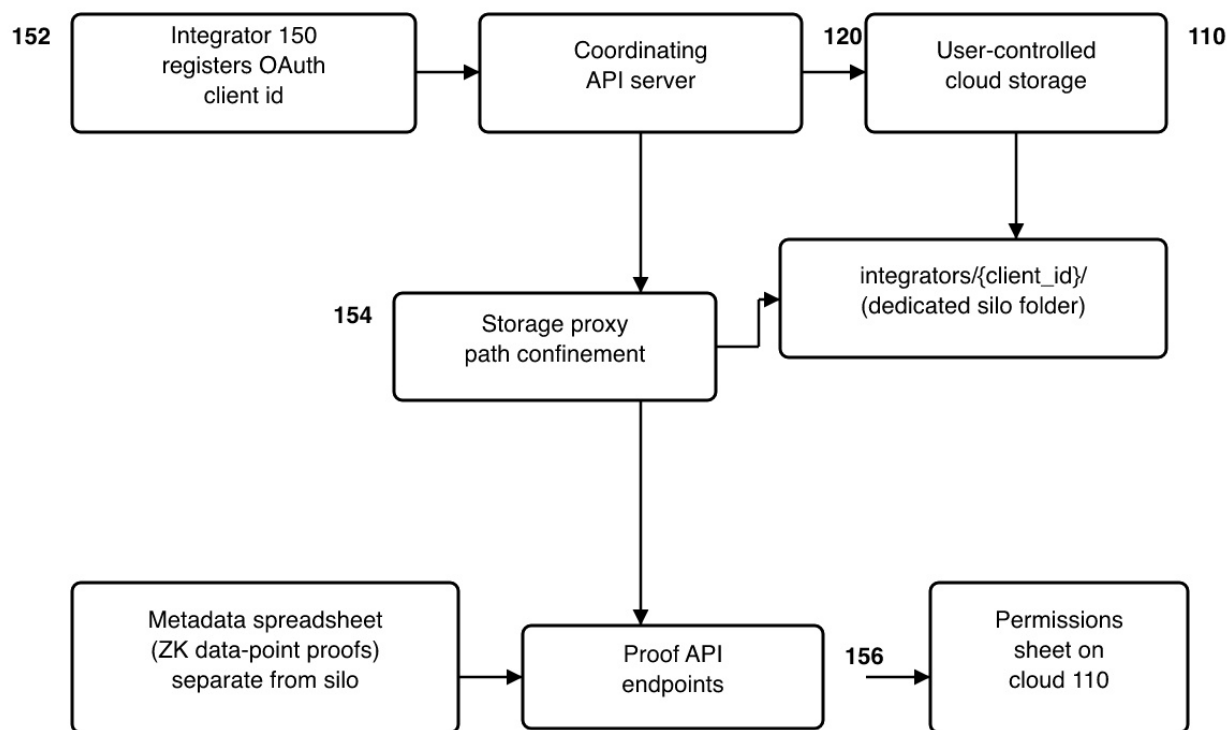

*Integrator 150 storage R/W/D confined to silo; proofs only via proof API 156.
Standard identity data-point proofs are not stored inside integrators/{client_id}/.*


FIG. 11

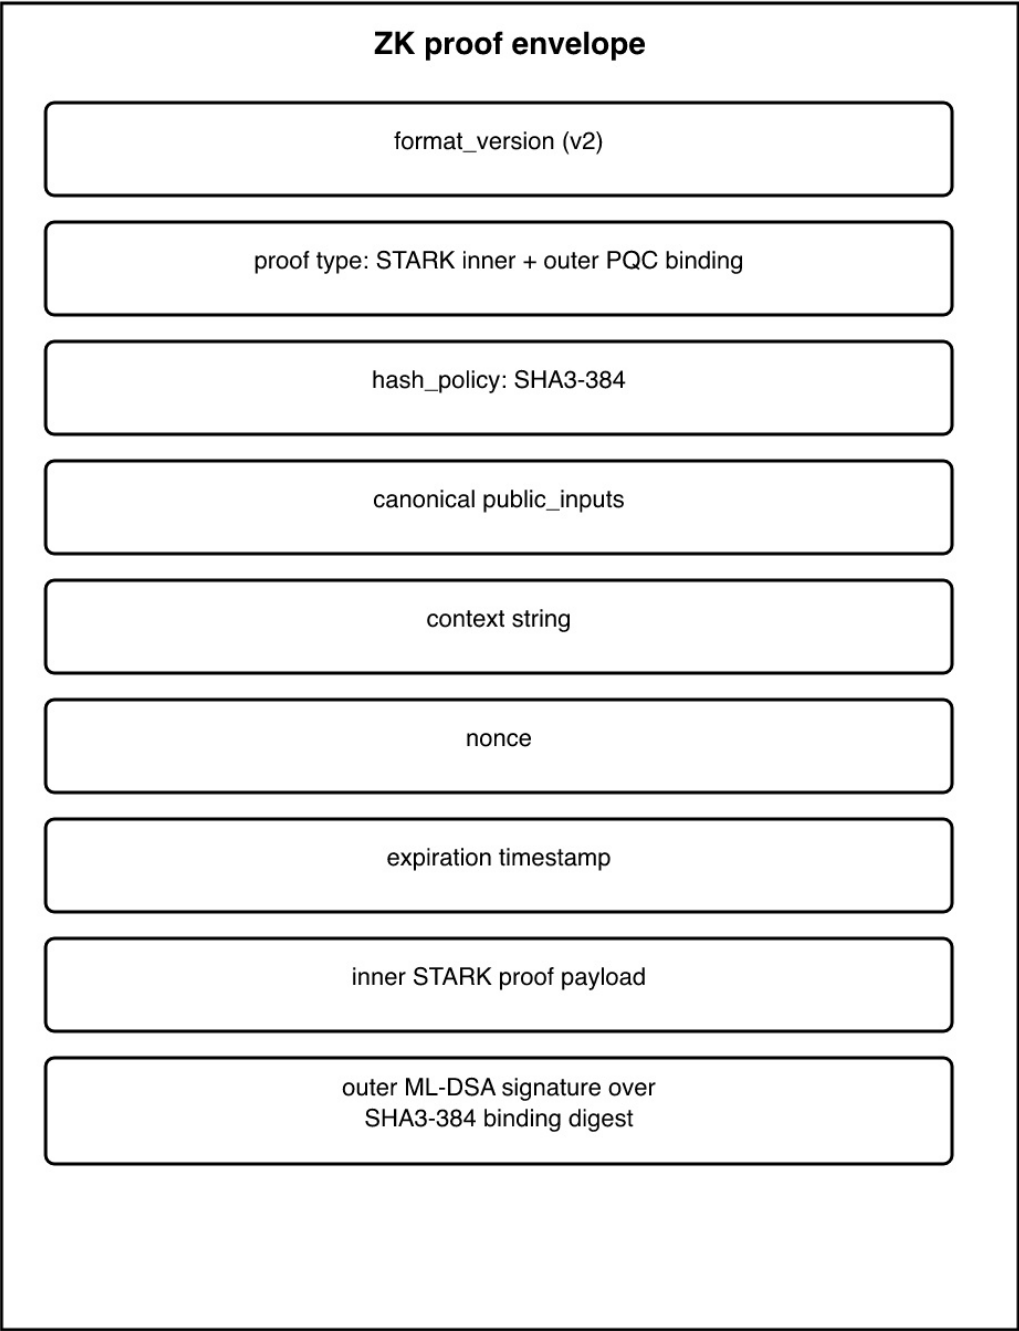

1200

Used for custodianship, recovery approvals, and selective-disclosure data points.

FIG. 12

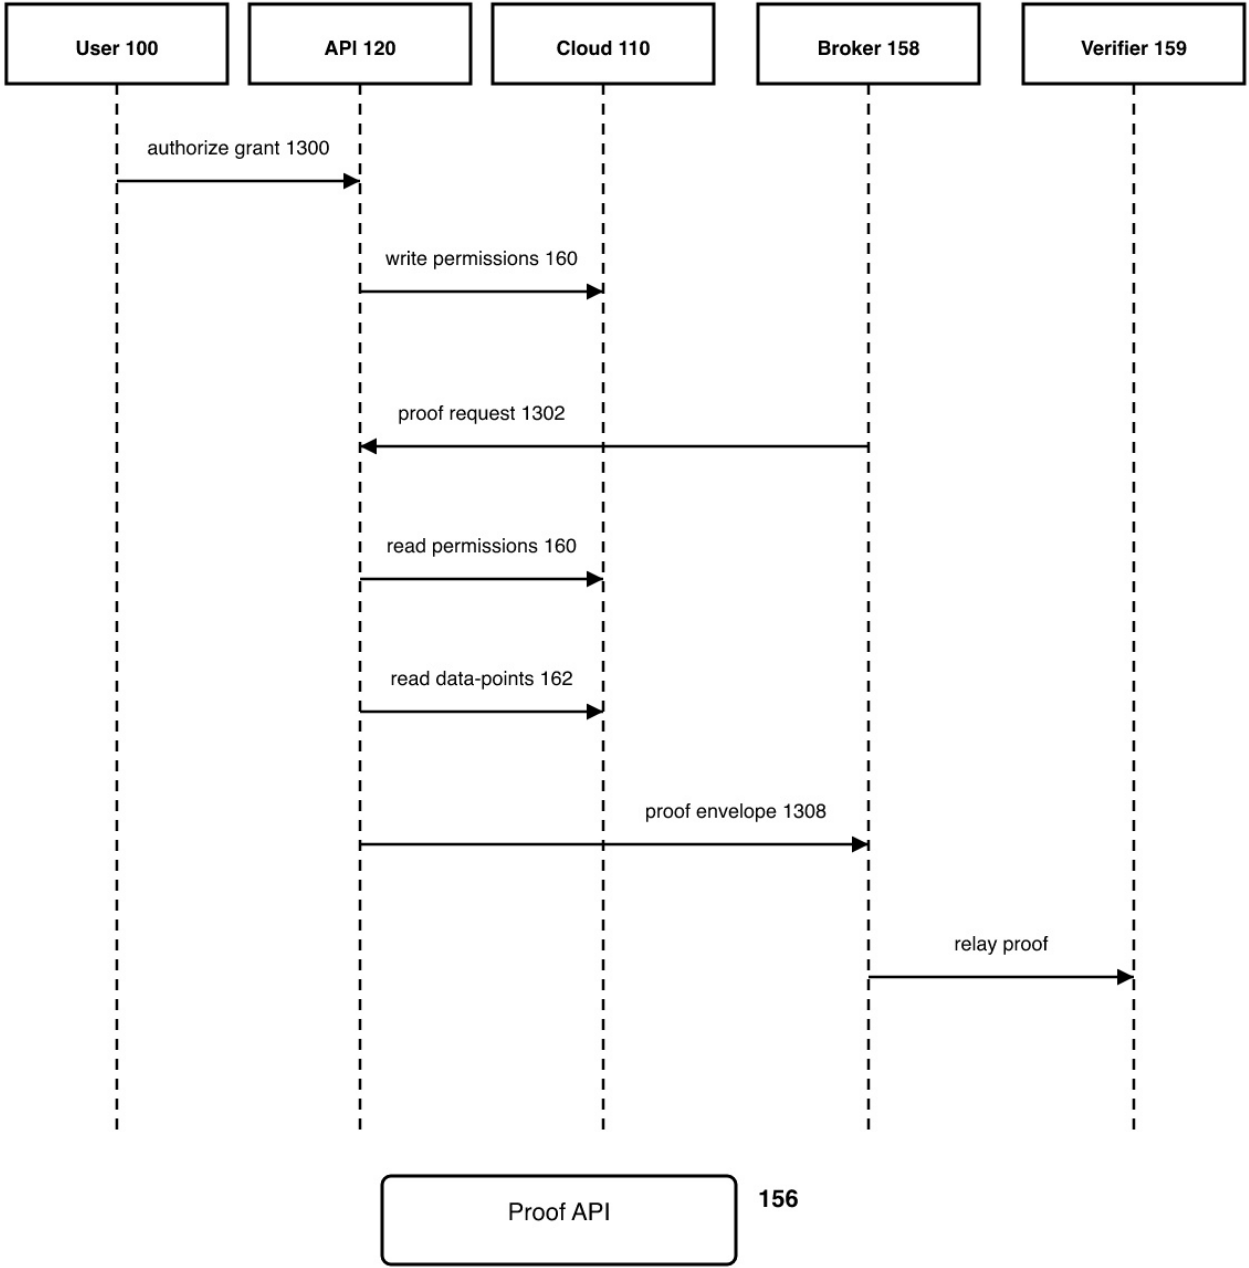

Broker 158 does not receive *pn* name, passcode, private keys, or plaintext sensitive attributes.

FIG. 13