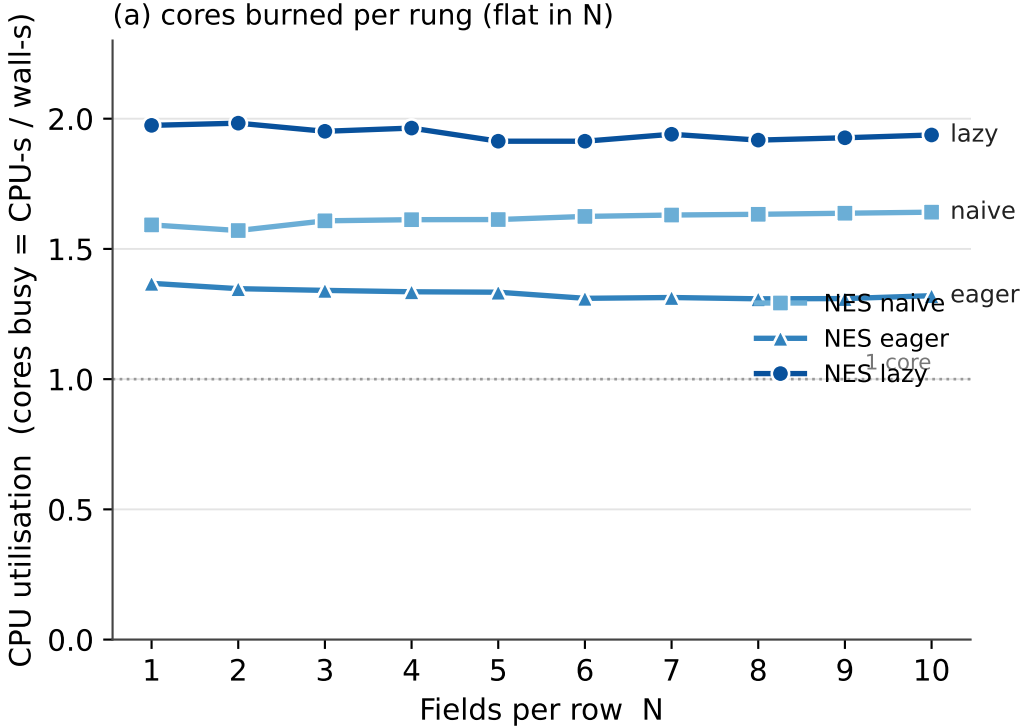
(a) cores burned per rung (flat in N)
CPU utilisation (cores busy = CPU-s / wall-s)
2.0
1.5
1.0
0.5
0.0
1 core
lazy
naive
eager
NES naive
NES eager
NES lazy
1
2
3
4
5
6
7
8
9
10
Fields per row N

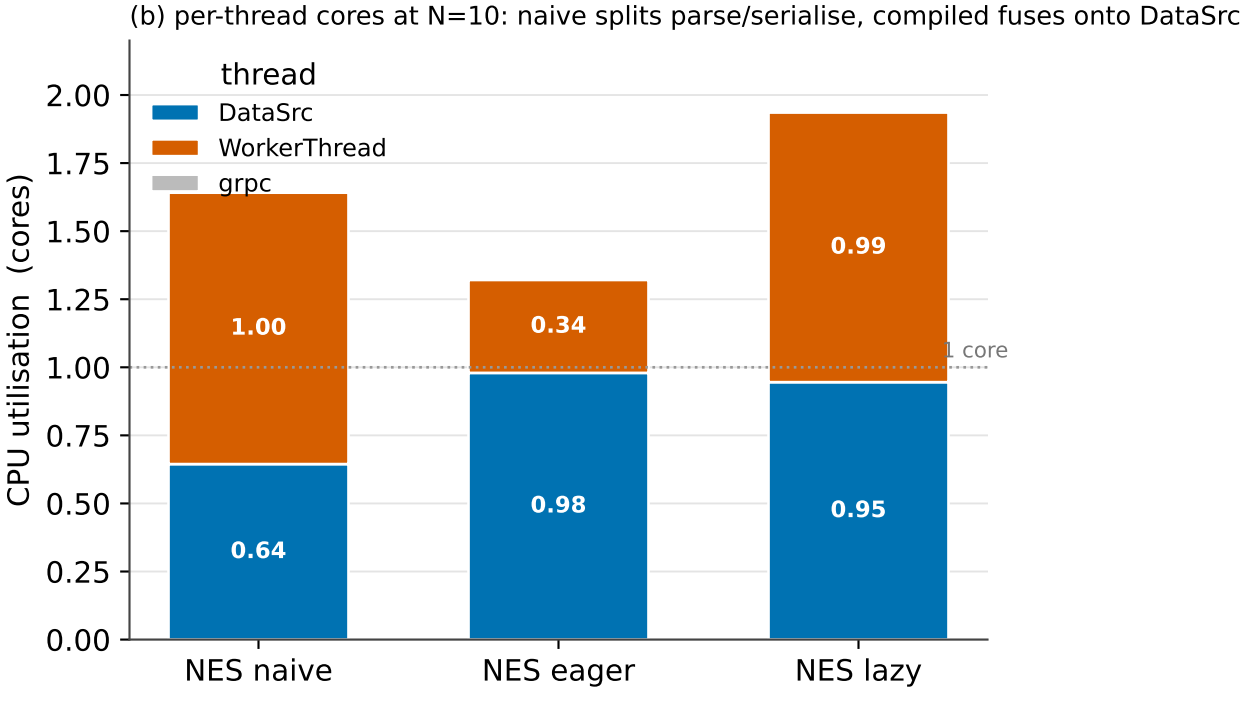
(b) per-thread cores at N=10: naive splits parse/serialise, compiled fuses onto DataSrc
CPU utilisation (cores)
thread
DataSrc
WorkerThread
grpc
2.00
1.75
1.50
1.25
1.00
0.75
0.50
0.25
0.00
1 core
1.00
0.64
0.34
0.98
0.99
0.95
NES naive
NES eager
NES lazy