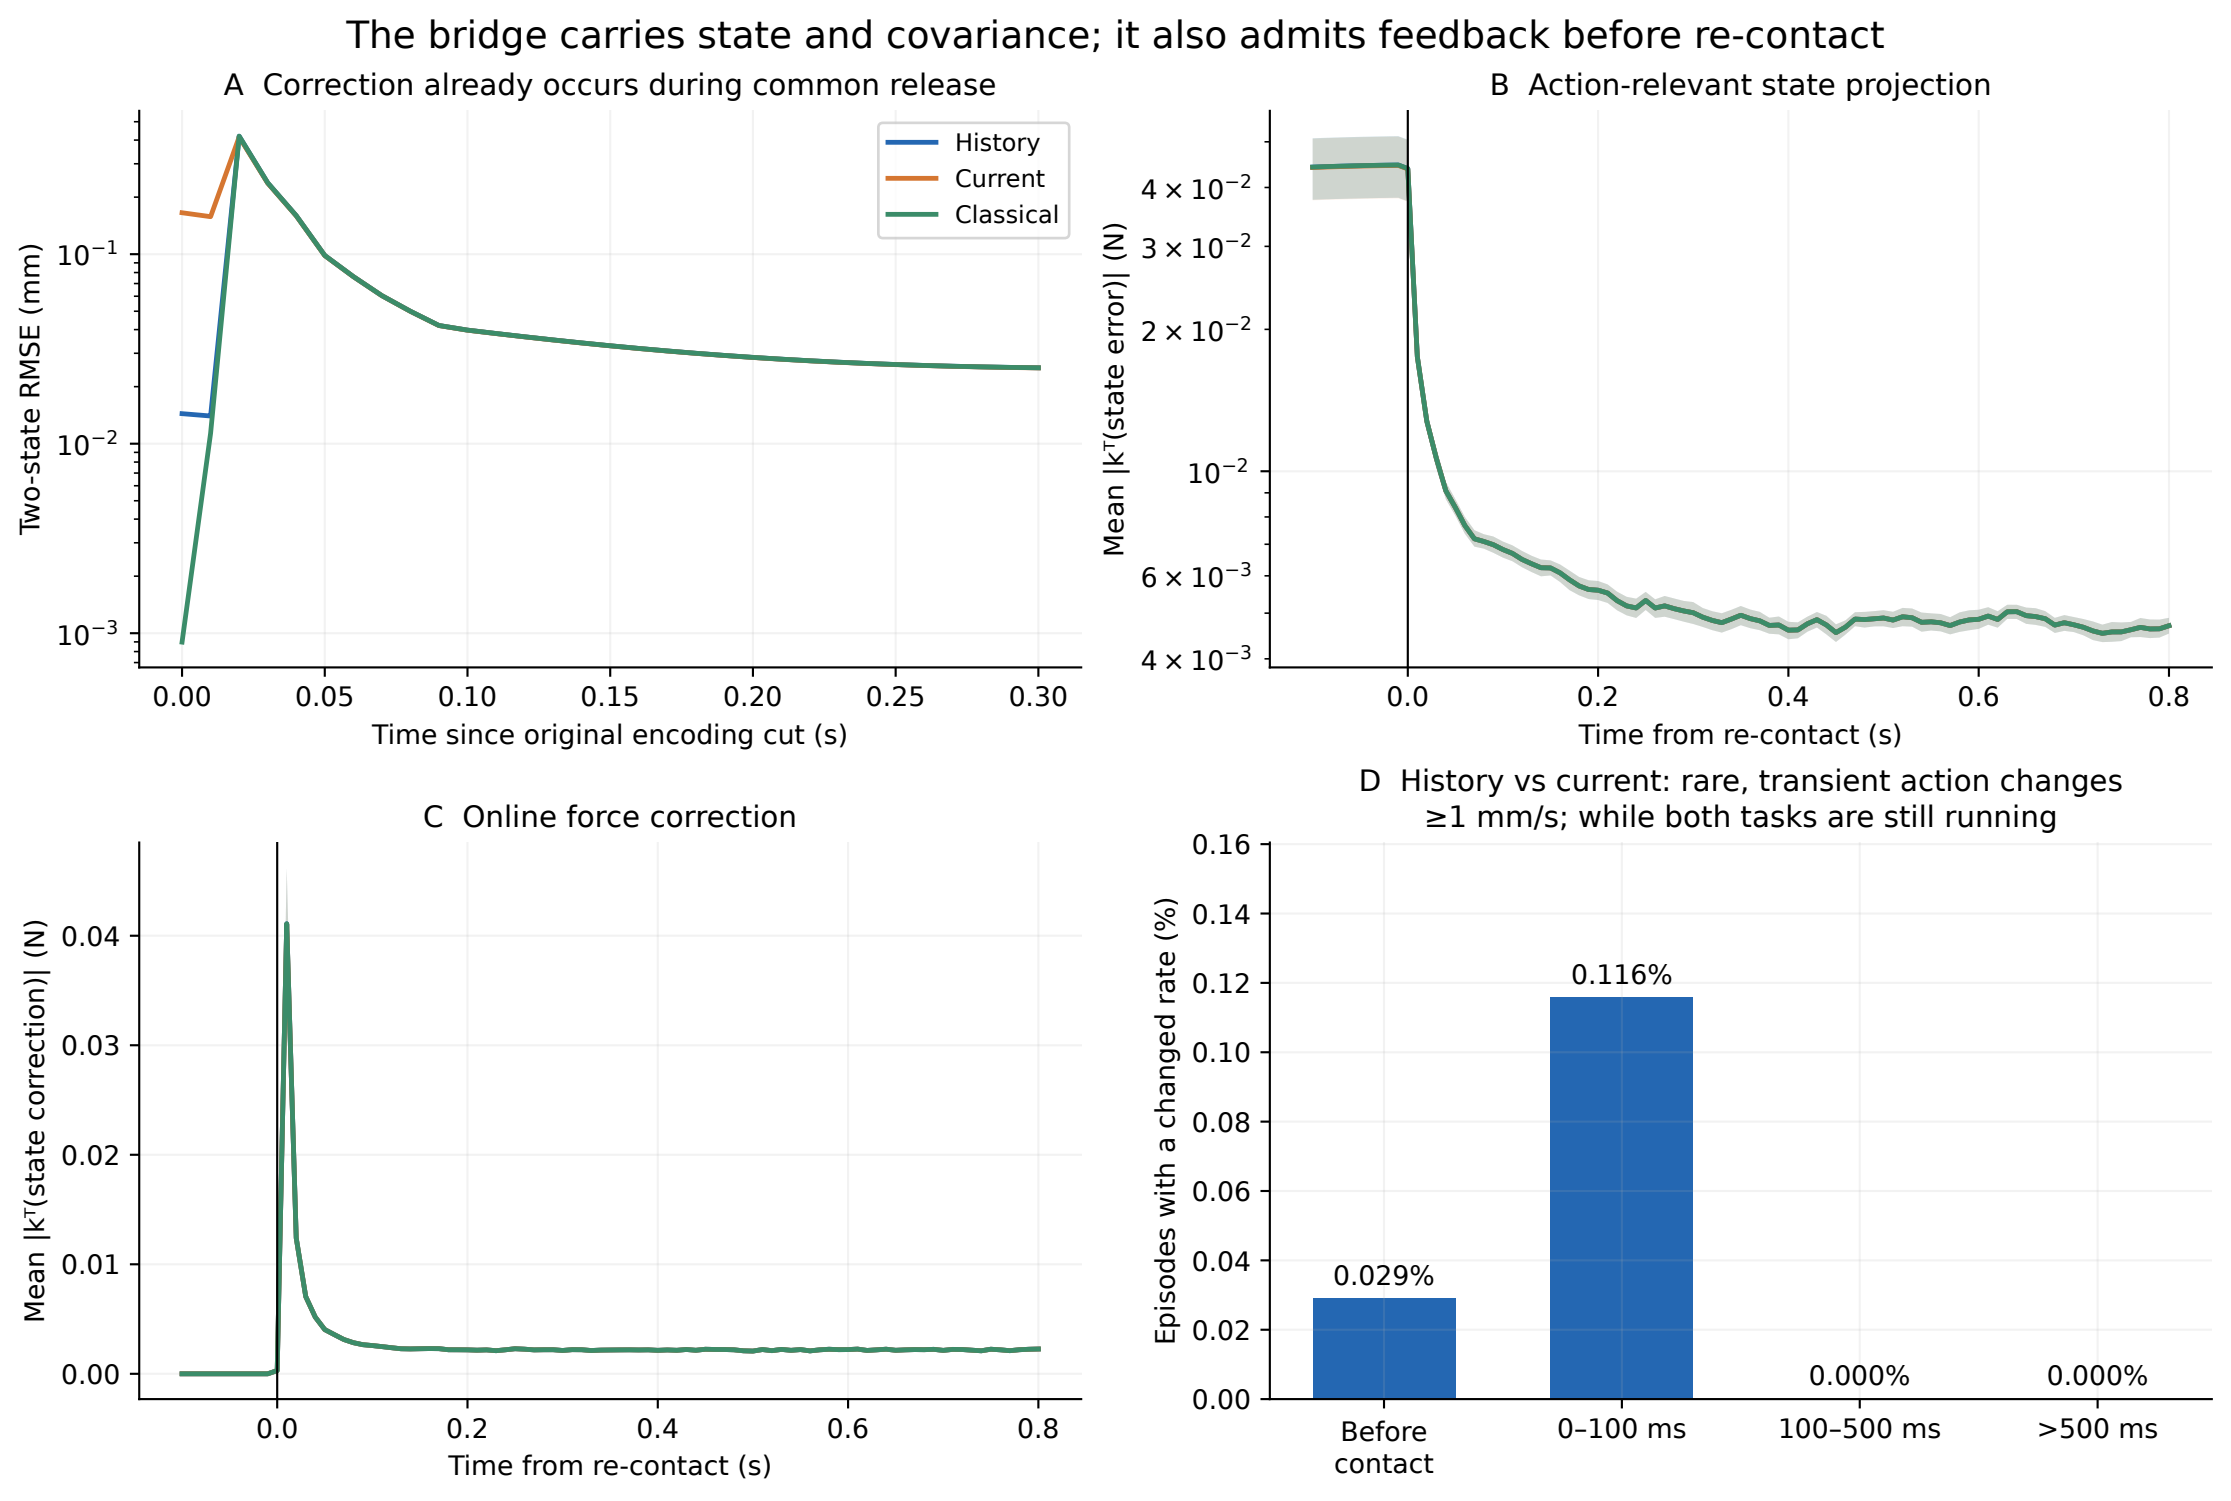

The bridge carries state and covariance; it also admits feedback before re-contact
A Correction already occurs during common release
History
Current
Classical
Two-state RMSE (mm)
10^{-1}
10^{-2}
10^{-3}
0.00
0.05
0.10
0.15
0.20
0.25
0.30
Time since original encoding cut (s)
B Action-relevant state projection
Mean $|k^T(\text{state error})|$ (N)
4×10^{-2}
3×10^{-2}
2×10^{-2}
10^{-2}
6×10^{-3}
4×10^{-3}
0.0
0.2
0.4
0.6
0.8
Time from re-contact (s)
C Online force correction
Mean $|k^T(\text{state correction})|$ (N)
0.04
0.03
0.02
0.01
0.00
0.0
0.2
0.4
0.6
0.8
Time from re-contact (s)
D History vs current: rare, transient action changes
≥1 mm/s; while both tasks are still running
Episodes with a changed rate (%)
0.16
0.14
0.12
0.10
0.08
0.06
0.04
0.02
0.00
0.029%
0.116%
0.000%
0.000%
Before contact
0–100 ms
100–500 ms
>500 ms