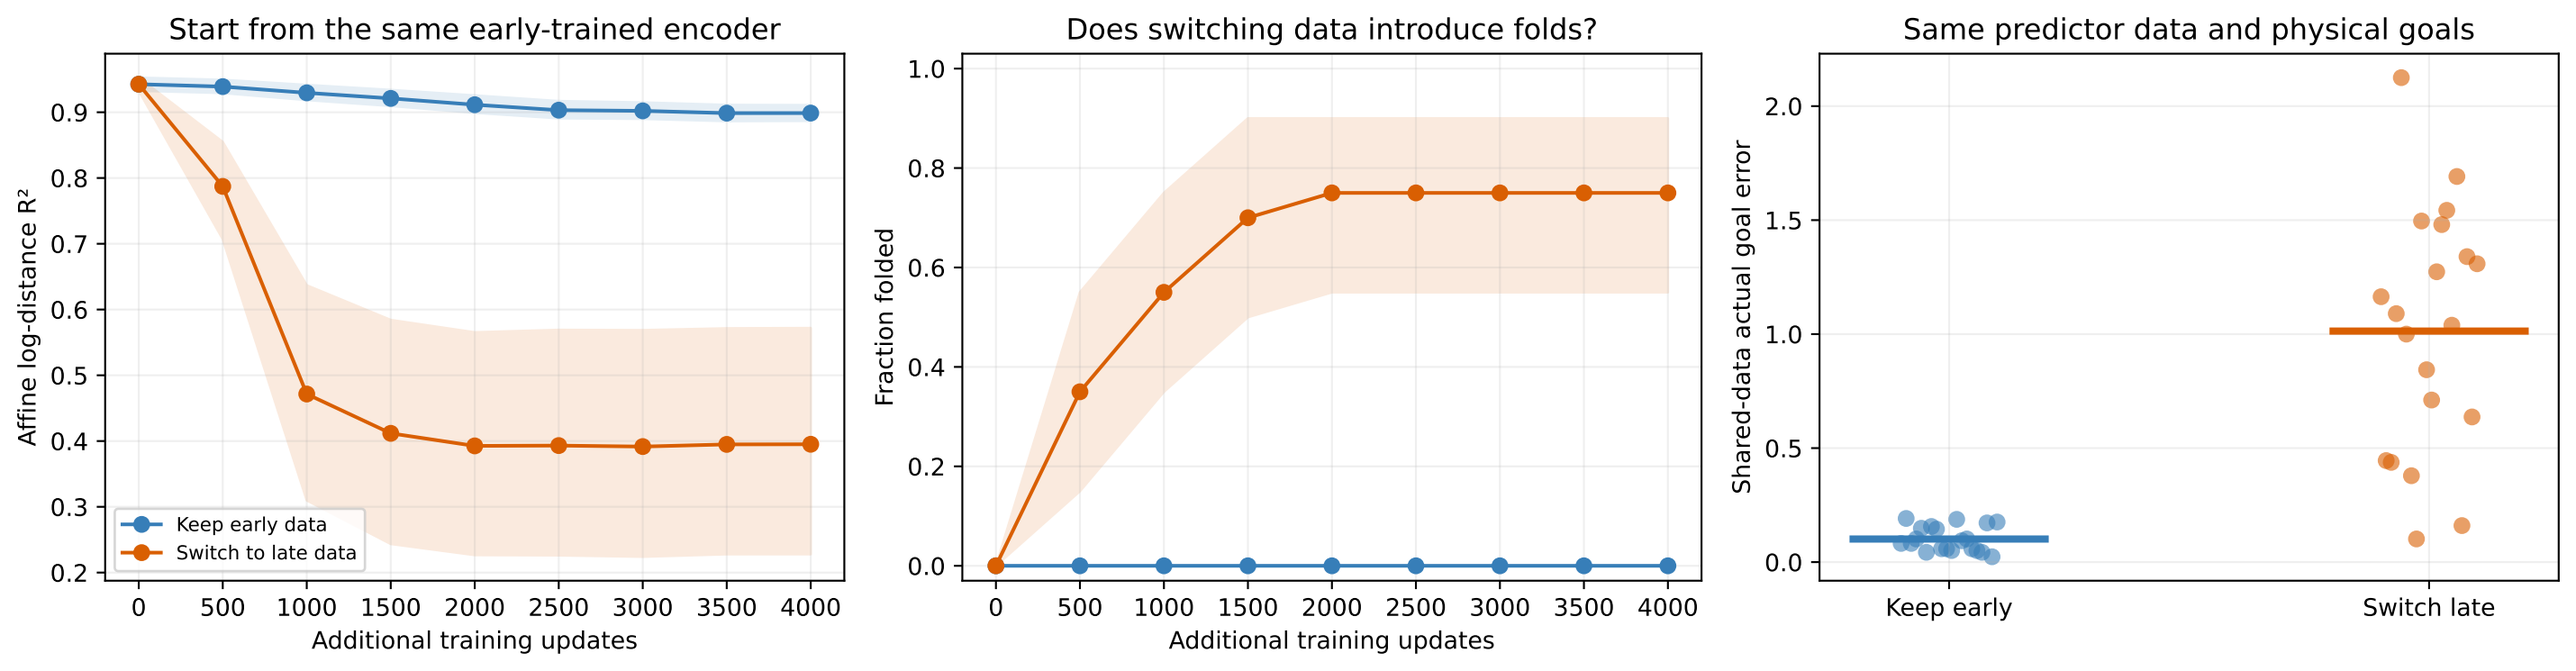
Start from the same early-trained encoder
Affine log-distance R²
Additional training updates
Keep early data
Switch to late data
Does switching data introduce folds?
Fraction folded
Additional training updates
Same predictor data and physical goals
Shared-data actual goal error
Keep early
Switch late