

Data Science Capstone Project

Generated by Doxygen 1.9.8

1 Components Module Overview	1
2 Connectors Module Overview	3
3 Core Module Overview	5
3.1 Pattern	5
3.2 Usage	5
4 Source Directory Overview	7
5 Database Example Datasets	9
6 Test Suite Overview	11
7 Namespace Index	13
7.1 Package List	13
8 Hierarchical Index	15
8.1 Class Hierarchy	15
9 Class Index	17
9.1 Class List	17
10 File Index	19
10.1 File List	19
11 Namespace Documentation	21
11.1 BlazorApp Namespace Reference	21
11.2 BlazorApp.Controllers Namespace Reference	21
11.3 BlazorApp.Hubs Namespace Reference	21
11.4 BlazorApp.Models Namespace Reference	21
11.5 src Namespace Reference	22
11.6 src.components Namespace Reference	22
11.7 src.components.book_conversion Namespace Reference	22
11.7.1 Variable Documentation	22
11.7.1.1 nlp	22
11.7.1.2 sentencizer	23
11.8 src.components.corpus Namespace Reference	23
11.8.1 Function Documentation	23
11.8.1.1 fuzzy_merge_titles()	23
11.8.1.2 load_booksum()	24
11.8.1.3 load_narrativeqa()	24
11.8.1.4 merge_dataframes()	24
11.8.1.5 normalize_title()	24
11.8.1.6 to_df_booksum()	24
11.8.1.7 to_df_nqa()	24

11.8.2 Variable Documentation	24
11.8.2.1 df	24
11.8.2.2 df_booksum	25
11.8.2.3 df_nqa	25
11.8.2.4 index	25
11.8.2.5 m	25
11.9 src.components.fact_storage Namespace Reference	25
11.10 src.components.metrics Namespace Reference	25
11.10.1 Function Documentation	25
11.10.1.1 chunk_bookscore()	25
11.10.1.2 run_bookscore()	26
11.10.1.3 run_questeval()	27
11.11 src.components.relation_extraction Namespace Reference	27
11.12 src.connectors Namespace Reference	27
11.13 src.connectors.base Namespace Reference	28
11.14 src.connectors.document Namespace Reference	28
11.14.1 Function Documentation	29
11.14.1.1 _docs_to_df()	29
11.14.1.2 _find_compatible_nested_key()	29
11.14.1.3 _flatten_recursive()	30
11.14.1.4 _sanitize_document()	30
11.14.1.5 _sanitize_json()	30
11.14.1.6 mongo_handle()	31
11.14.2 Variable Documentation	31
11.14.2.1 MongoHandle	31
11.15 src.connectors.graph Namespace Reference	31
11.15.1 Function Documentation	32
11.15.1.1 _filter_to_db()	32
11.15.1.2 _normalize_elements()	32
11.15.1.3 _tuples_to_df()	33
11.16 src.connectors.ilm Namespace Reference	33
11.17 src.connectors.relational Namespace Reference	33
11.18 src.core Namespace Reference	34
11.19 src.core.boss Namespace Reference	34
11.19.1 Detailed Description	34
11.19.2 Function Documentation	35
11.19.2.1 assign_task_to_worker()	35
11.19.2.2 clear_task_data()	35
11.19.2.3 create_app()	35
11.19.2.4 create_boss_thread()	36
11.19.2.5 load_worker_config()	36
11.19.2.6 pipeline_5b()	36

11.19.2.7 post_chunk_status()	37
11.19.2.8 post_process_full_story()	37
11.19.2.9 post_story_status()	37
11.19.3 Variable Documentation	38
11.19.3.1 MongoHandle	38
11.20 src.core.context Namespace Reference	38
11.20.1 Function Documentation	38
11.20.1.1 __getattr__()	38
11.20.1.2 get_session()	39
11.20.2 Variable Documentation	39
11.20.2.1 session	39
11.21 src.core.worker Namespace Reference	39
11.21.1 Detailed Description	40
11.21.2 Function Documentation	41
11.21.2.1 create_app()	41
11.21.2.2 get_task_info()	41
11.21.2.3 load_boss_config()	41
11.21.2.4 load_imports()	42
11.21.2.5 load_mongo_config()	42
11.21.2.6 mark_task_in_progress()	42
11.21.2.7 notify_boss()	43
11.21.2.8 process_task()	43
11.21.2.9 save_task_result()	44
11.21.3 Variable Documentation	44
11.21.3.1 app	44
11.21.3.2 args	44
11.21.3.3 boss_url	44
11.21.3.4 daemon	45
11.21.3.5 help	45
11.21.3.6 host	45
11.21.3.7 MongoHandle	45
11.21.3.8 parser	45
11.21.3.9 PORT	45
11.21.3.10 port	45
11.21.3.11 required	45
11.21.3.12 target	45
11.21.3.13 task_queue	45
11.21.3.14 task_worker	45
11.21.3.15 True	46
11.21.3.16 use_reloader	46
11.22 src.main Namespace Reference	46
11.22.1 Function Documentation	47

11.22.1.1 chunk_single()	47
11.22.1.2 convert_from_csv()	47
11.22.1.3 convert_single()	48
11.22.1.4 full_pipeline()	48
11.22.1.5 graph_triple_files()	48
11.22.1.6 old_main()	48
11.22.1.7 output_single()	48
11.22.1.8 pipeline_1()	48
11.22.1.9 pipeline_2()	49
11.22.1.10 pipeline_3()	49
11.22.1.11 pipeline_4()	49
11.22.1.12 pipeline_5a()	49
11.22.1.13 process_single()	49
11.22.1.14 test_relation_extraction()	50
11.22.2 Variable Documentation	50
11.22.2.1 book_id	50
11.22.2.2 book_title	50
11.22.2.3 BOSS_PORT	50
11.22.2.4 chapters	50
11.22.2.5 chunk	50
11.22.2.6 chunk_id	50
11.22.2.7 chunks	51
11.22.2.8 COLLECTION	51
11.22.2.9 DB_NAME	51
11.22.2.10 end	51
11.22.2.11 response	51
11.22.2.12 response_files	51
11.22.2.13 start	51
11.22.2.14 story_id	51
11.22.2.15 summary	51
11.22.2.16 tei	52
11.22.2.17 triple_files	52
11.22.2.18 triples	52
11.22.2.19 triples_string	52
11.23 src.util Namespace Reference	52
11.23.1 Function Documentation	52
11.23.1.1 check_values()	52
11.23.1.2 df_natural_sorted()	53
11.24 tests Namespace Reference	53
11.25 tests.conftest Namespace Reference	53
11.25.1 Function Documentation	54
11.25.1.1 docs_db()	54

11.25.1.2 graph_db()	54
11.25.1.3 pytest_addoption()	54
11.25.1.4 relational_db()	54
11.25.1.5 session()	54
11.26 tests.test_db_basic Namespace Reference	55
11.26.1 Function Documentation	55
11.26.1.1 test_db_docs_comprehensive()	55
11.26.1.2 test_db_docs_minimal()	55
11.26.1.3 test_db_graph_comprehensive()	55
11.26.1.4 test_db_graph_minimal()	55
11.26.1.5 test_db_relational_comprehensive()	56
11.26.1.6 test_db_relational_minimal()	56
11.27 tests.test_db_files Namespace Reference	56
11.27.1 Function Documentation	56
11.27.1.1 _exec_query_file()	56
11.27.1.2 load_examples_relational()	57
11.27.1.3 test_cypher_example_1()	57
11.27.1.4 test_cypher_example_2()	57
11.27.1.5 test_cypher_example_3()	57
11.27.1.6 test_cypher_example_4()	58
11.27.1.7 test_mongo_example_1()	58
11.27.1.8 test_mongo_example_2()	58
11.27.1.9 test_mongo_example_3()	58
11.27.1.10 test_sql_example_1()	58
11.27.1.11 test_sql_example_2()	59
11.28 tests.test_kg_triples Namespace Reference	59
11.28.1 Function Documentation	59
11.28.1.1 nature_scene_graph()	59
11.28.1.2 test_detect_community_clusters_comprehensive()	60
11.28.1.3 test_detect_community_clusters_minimal()	60
11.28.1.4 test_get_neighborhood()	60
11.28.1.5 test_get_neighborhood_comprehensive()	60
11.28.1.6 test_get_random_walk_sample()	61
11.28.1.7 test_get_random_walk_sample_comprehensive()	61
11.28.1.8 test_get_subgraph_by_nodes()	61
11.28.1.9 test_knowledge_graph_triples()	61
12 Class Documentation	63
12.1 Log.BadAddressFailure Class Reference	63
12.1.1 Detailed Description	64
12.1.2 Constructor & Destructor Documentation	65
12.1.2.1 __init__()	65

12.2 Book Class Reference	65
12.2.1 Constructor & Destructor Documentation	65
12.2.1.1 <code>__init__()</code>	65
12.2.2 Member Function Documentation	65
12.2.2.1 <code>stream_chapters()</code>	65
12.3 BookFactory Class Reference	66
12.3.1 Member Function Documentation	66
12.3.1.1 <code>create_book()</code>	66
12.4 BookStream Class Reference	67
12.4.1 Constructor & Destructor Documentation	68
12.4.1.1 <code>__init__()</code>	68
12.4.2 Member Function Documentation	68
12.4.2.1 <code>stream_segments()</code>	68
12.4.3 Member Data Documentation	68
12.4.3.1 <code>book</code>	68
12.5 Chunk Class Reference	68
12.5.1 Detailed Description	69
12.5.2 Constructor & Destructor Documentation	69
12.5.2.1 <code>__init__()</code>	69
12.5.3 Member Function Documentation	70
12.5.3.1 <code>__repr__()</code>	70
12.5.3.2 <code>char_count()</code>	70
12.5.3.3 <code>get_chunk_id()</code>	70
12.5.3.4 <code>to_mongo_dict()</code>	71
12.5.4 Member Data Documentation	71
12.5.4.1 <code>book_id</code>	71
12.5.4.2 <code>chapter_number</code>	71
12.5.4.3 <code>chapter_percent</code>	71
12.5.4.4 <code>line_end</code>	71
12.5.4.5 <code>line_start</code>	71
12.5.4.6 <code>story_id</code>	71
12.5.4.7 <code>story_percent</code>	71
12.5.4.8 <code>text</code>	72
12.6 Connector Class Reference	72
12.6.1 Detailed Description	73
12.6.2 Member Function Documentation	73
12.6.2.1 <code>check_connection()</code>	73
12.6.2.2 <code>execute_file()</code>	74
12.6.2.3 <code>execute_query()</code>	74
12.6.2.4 <code>test_operations()</code>	74
12.7 DatabaseConnector Class Reference	75
12.7.1 Detailed Description	77

12.7.2 Constructor & Destructor Documentation	77
12.7.2.1 <code>__init__()</code>	77
12.7.3 Member Function Documentation	78
12.7.3.1 <code>_is_single_query()</code>	78
12.7.3.2 <code>_parsable_to_df()</code>	78
12.7.3.3 <code>_returns_data()</code>	79
12.7.3.4 <code>_split_combined()</code>	79
12.7.3.5 <code>change_database()</code>	79
12.7.3.6 <code>configure()</code>	80
12.7.3.7 <code>create_database()</code>	80
12.7.3.8 <code>database_exists()</code>	80
12.7.3.9 <code>drop_database()</code>	81
12.7.3.10 <code>execute_combined()</code>	81
12.7.3.11 <code>execute_file()</code>	81
12.7.3.12 <code>execute_query()</code>	82
12.7.3.13 <code>get_dataframe()</code>	82
12.7.3.14 <code>temp_database()</code>	83
12.7.4 Member Data Documentation	83
12.7.4.1 <code>connection_string</code>	83
12.7.4.2 <code>db_engine</code>	83
12.7.4.3 <code>db_type</code>	83
12.7.4.4 <code>host</code>	84
12.7.4.5 <code>password</code>	84
12.7.4.6 <code>port</code>	84
12.7.4.7 <code>username</code>	84
12.7.4.8 <code>verbose</code>	84
12.8 DocumentConnector Class Reference	84
12.8.1 Detailed Description	87
12.8.2 Constructor & Destructor Documentation	87
12.8.2.1 <code>__init__()</code>	87
12.8.3 Member Function Documentation	87
12.8.3.1 <code>_parsable_to_df()</code>	87
12.8.3.2 <code>_returns_data()</code>	88
12.8.3.3 <code>_split_combined()</code>	88
12.8.3.4 <code>change_database()</code>	89
12.8.3.5 <code>check_connection()</code>	89
12.8.3.6 <code>create_database()</code>	89
12.8.3.7 <code>database_exists()</code>	90
12.8.3.8 <code>delete_dummy()</code>	90
12.8.3.9 <code>drop_database()</code>	90
12.8.3.10 <code>execute_query()</code>	91
12.8.3.11 <code>get_dataframe()</code>	91

12.8.3.12 <code>get_unmanaged_handle()</code>	92
12.8.3.13 <code>test_operations()</code>	92
12.8.4 Member Data Documentation	93
12.8.4.1 <code>_auth_suffix</code>	93
12.8.4.2 <code>connection_string</code>	93
12.8.4.3 <code>database_name</code>	93
12.8.4.4 <code>verbose</code>	93
12.9 EPUBToTEI Class Reference	93
12.9.1 Detailed Description	94
12.9.2 Constructor & Destructor Documentation	94
12.9.2.1 <code>__init__()</code>	94
12.9.3 Member Function Documentation	94
12.9.3.1 <code>_prune_bad_tags()</code>	94
12.9.3.2 <code>_sanitize_ids()</code>	95
12.9.3.3 <code>clean_tei()</code>	95
12.9.3.4 <code>convert_to_tei()</code>	95
12.9.4 Member Data Documentation	95
12.9.4.1 <code>clean_tei_content</code>	95
12.9.4.2 <code>encoding</code>	95
12.9.4.3 <code>epub_path</code>	95
12.9.4.4 <code>pandoc_xml_path</code>	96
12.9.4.5 <code>raw_tei_content</code>	96
12.9.4.6 <code>tei_path</code>	96
12.9.4.7 <code>xml_namespace</code>	96
12.10 Log.Failure Class Reference	96
12.10.1 Detailed Description	97
12.10.2 Constructor & Destructor Documentation	97
12.10.2.1 <code>__init__()</code>	97
12.10.3 Member Function Documentation	98
12.10.3.1 <code>__str__()</code>	98
12.10.4 Member Data Documentation	98
12.10.4.1 <code>msg</code>	98
12.10.4.2 <code>prefix</code>	98
12.11 GraphConnector Class Reference	98
12.11.1 Detailed Description	101
12.11.2 Constructor & Destructor Documentation	101
12.11.2.1 <code>__init__()</code>	101
12.11.3 Member Function Documentation	101
12.11.3.1 <code>_execute_retag_db()</code>	101
12.11.3.2 <code>_fetch_latest()</code>	102
12.11.3.3 <code>_parsable_to_df()</code>	103
12.11.3.4 <code>_returns_data()</code>	103

12.11.3.5 <code>_split_combined()</code>	104
12.11.3.6 <code>change_database()</code>	104
12.11.3.7 <code>check_connection()</code>	104
12.11.3.8 <code>create_database()</code>	105
12.11.3.9 <code>database_exists()</code>	105
12.11.3.10 <code>delete_dummy()</code>	106
12.11.3.11 <code>drop_database()</code>	106
12.11.3.12 <code>drop_graph()</code>	106
12.11.3.13 <code>execute_query()</code>	107
12.11.3.14 <code>get_dataframe()</code>	107
12.11.3.15 <code>get_unique()</code>	108
12.11.3.16 <code>IS_DUMMY_()</code>	108
12.11.3.17 <code>NOT_DUMMY_()</code>	109
12.11.3.18 <code>SAME_DB_KG_()</code>	109
12.11.3.19 <code>temp_graph()</code>	109
12.11.3.20 <code>test_operations()</code>	110
12.11.4 Member Data Documentation	110
12.11.4.1 <code>_graph_name</code>	110
12.11.4.2 <code>connection_string</code>	110
12.11.4.3 <code>database_name</code>	110
12.11.4.4 <code>verbose</code>	110
12.12 KnowledgeGraph Class Reference	111
12.12.1 Detailed Description	112
12.12.2 Constructor & Destructor Documentation	112
12.12.2.1 <code>__init__()</code>	112
12.12.3 Member Function Documentation	112
12.12.3.1 <code>add_triple()</code>	112
12.12.3.2 <code>detect_community_clusters()</code>	113
12.12.3.3 <code>find_element_names()</code>	113
12.12.3.4 <code>get_all_triples()</code>	114
12.12.3.5 <code>get_community_subgraph()</code>	114
12.12.3.6 <code>get_edge_counts()</code>	115
12.12.3.7 <code>get_neighborhood()</code>	116
12.12.3.8 <code>get_node_context()</code>	116
12.12.3.9 <code>get_random_walk_sample()</code>	117
12.12.3.10 <code>get_relation_summary()</code>	117
12.12.3.11 <code>get_subgraph_by_nodes()</code>	117
12.12.3.12 <code>get_summary_stats()</code>	118
12.12.3.13 <code>get_triple_properties()</code>	118
12.12.3.14 <code>print_nodes()</code>	119
12.12.3.15 <code>print_triples()</code>	119
12.12.3.16 <code>to_contextualized_string()</code>	119

12.12.3.17 to_narrative()	120
12.12.3.18 to_triple_string()	120
12.12.3.19 triples_to_names()	121
12.12.4 Member Data Documentation	121
12.12.4.1 database	121
12.12.4.2 graph_name	122
12.12.4.3 verbose	122
12.13 LLMConnector Class Reference	122
12.13.1 Detailed Description	124
12.13.2 Constructor & Destructor Documentation	124
12.13.2.1 __init__()	124
12.13.3 Member Function Documentation	124
12.13.3.1 check_connection()	124
12.13.3.2 configure()	125
12.13.3.3 execute_file()	125
12.13.3.4 execute_full_query()	125
12.13.3.5 execute_query()	125
12.13.3.6 normalize_triples()	126
12.13.3.7 test_operations()	126
12.13.4 Member Data Documentation	127
12.13.4.1 llm	127
12.13.4.2 model_name	127
12.13.4.3 system_prompt	127
12.14 Log Class Reference	127
12.14.1 Detailed Description	130
12.14.2 Member Function Documentation	130
12.14.2.1 fail()	130
12.14.2.2 fail_legacy()	130
12.14.2.3 success()	131
12.14.2.4 success_legacy()	131
12.14.2.5 warn()	131
12.14.3 Member Data Documentation	131
12.14.3.1 bad_addr	131
12.14.3.2 bad_path	132
12.14.3.3 bad_val	132
12.14.3.4 BRIGHT	132
12.14.3.5 conn_abc	132
12.14.3.6 create_db	132
12.14.3.7 db_conn_abc	132
12.14.3.8 db_exists	132
12.14.3.9 doc_db	132
12.14.3.10 drop_db	132

12.14.3.11 drop_gr	132
12.14.3.12 FAILURE_COLOR	133
12.14.3.13 FULL_DF	133
12.14.3.14 get_df	133
12.14.3.15 get_unique	133
12.14.3.16 good_val	133
12.14.3.17 gr_db	133
12.14.3.18 gr_rag	133
12.14.3.19 GREEN	133
12.14.3.20 kg	133
12.14.3.21 msg_bad_addr	134
12.14.3.22 msg_bad_coll	134
12.14.3.23 msg_bad_df_parse	134
12.14.3.24 msg_bad_exec_f	134
12.14.3.25 msg_bad_exec_q	134
12.14.3.26 msg_bad_graph	134
12.14.3.27 msg_bad_path	134
12.14.3.28 msg_bad_table	134
12.14.3.29 msg_bad_triples	134
12.14.3.30 MSG_COLOR	134
12.14.3.31 msg_compare	135
12.14.3.32 msg_db_connect	135
12.14.3.33 msg_db_current	135
12.14.3.34 msg_db_exists	135
12.14.3.35 msg_db_not_found	135
12.14.3.36 msg_fail_manage_db	135
12.14.3.37 msg_fail_manage_gr	135
12.14.3.38 msg_fail_parse	135
12.14.3.39 msg_good_coll	136
12.14.3.40 msg_good_df_parse	136
12.14.3.41 msg_good_exec_f	136
12.14.3.42 msg_good_exec_q	136
12.14.3.43 msg_good_exec_qr	136
12.14.3.44 msg_good_graph	136
12.14.3.45 msg_good_path	136
12.14.3.46 msg_good_table	136
12.14.3.47 msg_multiple_query	137
12.14.3.48 msg_none_df	137
12.14.3.49 msg_result	137
12.14.3.50 msg_success_managed_db	137
12.14.3.51 msg_success_managed_gr	137
12.14.3.52 msg_swap_db	137

12.14.3.53 msg_swap_kg	137
12.14.3.54 msg_unknown_error	137
12.14.3.55 pytest_db	138
12.14.3.56 RED	138
12.14.3.57 rel_db	138
12.14.3.58 run_f	138
12.14.3.59 run_q	138
12.14.3.60 sub_gr	138
12.14.3.61 SUCCESS_COLOR	138
12.14.3.62 swap_db	138
12.14.3.63 swap_kg	138
12.14.3.64 test_basic	139
12.14.3.65 test_df	139
12.14.3.66 test_info	139
12.14.3.67 test_ops	139
12.14.3.68 test_tmp_db	139
12.14.3.69 USE_COLORS	139
12.14.3.70 WARNING_COLOR	139
12.14.3.71 WHITE	139
12.14.3.72 YELLOW	139
12.15 Metrics Class Reference	140
12.15.1 Detailed Description	140
12.15.2 Constructor & Destructor Documentation	141
12.15.2.1 __init__()	141
12.15.3 Member Function Documentation	141
12.15.3.1 compute_basic_metrics()	141
12.15.3.2 create_summary_payload()	141
12.15.3.3 generate_default_metrics()	142
12.15.3.4 generate_example_metrics()	143
12.15.3.5 post_basic_metrics()	143
12.15.3.6 post_basic_output()	143
12.15.3.7 post_payload()	144
12.15.4 Member Data Documentation	144
12.15.4.1 HOST	144
12.15.4.2 PORT	144
12.15.4.3 timeout_seconds	144
12.15.4.4 url	144
12.16 MetricsController Class Reference	145
12.16.1 Constructor & Destructor Documentation	146
12.16.1.1 MetricsController()	146
12.16.2 Member Function Documentation	146
12.16.2.1 GetAll()	146

12.16.2.2 GetIndex()	146
12.16.2.3 Post()	146
12.16.3 Member Data Documentation	146
12.16.3.1 _hubContext	146
12.16.3.2 _logger	146
12.16.3.3 Summaries	146
12.17 MetricsHub Class Reference	147
12.17.1 Constructor & Destructor Documentation	147
12.17.1.1 MetricsHub()	147
12.17.2 Member Function Documentation	148
12.17.2.1 OnConnectedAsync()	148
12.17.2.2 OnDisconnectedAsync()	148
12.17.3 Member Data Documentation	148
12.17.3.1 _logger	148
12.18 mysqlConnector Class Reference	148
12.18.1 Detailed Description	151
12.18.2 Constructor & Destructor Documentation	151
12.18.2.1 __init__()	151
12.18.3 Member Data Documentation	151
12.18.3.1 specific_queries	151
12.19 ParagraphStreamTEI Class Reference	151
12.19.1 Detailed Description	153
12.19.2 Constructor & Destructor Documentation	153
12.19.2.1 __init__()	153
12.19.3 Member Function Documentation	154
12.19.3.1 pre_compute_segments()	154
12.19.3.2 stream_segments()	154
12.19.4 Member Data Documentation	154
12.19.4.1 allowed_chapters	154
12.19.4.2 book_id	154
12.19.4.3 chunks	154
12.19.4.4 encoding	155
12.19.4.5 end_inclusive	155
12.19.4.6 lines	155
12.19.4.7 root	155
12.19.4.8 start_inclusive	155
12.19.4.9 story_id	155
12.19.4.10 tei_path	155
12.19.4.11 xml_namespace [1/2]	155
12.19.4.12 xml_namespace [2/2]	155
12.20 postgresConnector Class Reference	156
12.20.1 Detailed Description	159

12.20.2 Constructor & Destructor Documentation	159
12.20.2.1 <code>__init__()</code>	159
12.20.3 Member Data Documentation	159
12.20.3.1 <code>specific_queries</code>	159
12.21 PRF1Metric Class Reference	159
12.21.1 Property Documentation	160
12.21.1.1 <code>F1Score</code>	160
12.21.1.2 <code>Name</code>	160
12.21.1.3 <code>Precision</code>	160
12.21.1.4 <code>Recall</code>	160
12.22 QALtem Class Reference	160
12.22.1 Property Documentation	160
12.22.1.1 <code>Accuracy</code>	160
12.22.1.2 <code>GeneratedAnswer</code>	160
12.22.1.3 <code>GoldAnswer</code>	161
12.22.1.4 <code>IsCorrect</code>	161
12.22.1.5 <code>Question</code>	161
12.23 QAMetric Class Reference	161
12.23.1 Property Documentation	161
12.23.1.1 <code>AverageAccuracy</code>	161
12.23.1.2 <code>QALtems</code>	161
12.24 RelationalConnector Class Reference	162
12.24.1 Detailed Description	164
12.24.2 Constructor & Destructor Documentation	165
12.24.2.1 <code>__init__()</code>	165
12.24.3 Member Function Documentation	165
12.24.3.1 <code>_parsable_to_df()</code>	165
12.24.3.2 <code>_returns_data()</code>	165
12.24.3.3 <code>_split_combined()</code>	166
12.24.3.4 <code>change_database()</code>	166
12.24.3.5 <code>check_connection()</code>	167
12.24.3.6 <code>create_database()</code>	167
12.24.3.7 <code>database_exists()</code>	168
12.24.3.8 <code>drop_database()</code>	168
12.24.3.9 <code>execute_query()</code>	168
12.24.3.10 <code>from_env()</code>	169
12.24.3.11 <code>get_dataframe()</code>	169
12.24.3.12 <code>test_operations()</code>	170
12.24.4 Member Data Documentation	170
12.24.4.1 <code>connection_string</code>	170
12.24.4.2 <code>database_name</code>	170
12.24.4.3 <code>db_type</code>	170

12.24.4.4 verbose	171
12.25 RelationExtractor Class Reference	171
12.25.1 Constructor & Destructor Documentation	171
12.25.1.1 __init__()	171
12.25.2 Member Function Documentation	171
12.25.2.1 extract()	171
12.25.3 Member Data Documentation	171
12.25.3.1 max_tokens	171
12.25.3.2 model	172
12.25.3.3 nlp	172
12.25.3.4 sentencizer	172
12.25.3.5 tokenizer	172
12.25.3.6 tuple_delim	172
12.26 ScalarMetric Class Reference	172
12.26.1 Property Documentation	172
12.26.1.1 Name	172
12.26.1.2 Value	172
12.27 Session Class Reference	173
12.27.1 Detailed Description	174
12.27.2 Constructor & Destructor Documentation	174
12.27.2.1 __init__()	174
12.27.3 Member Function Documentation	174
12.27.3.1 __new__()	174
12.27.4 Member Data Documentation	174
12.27.4.1 _created	174
12.27.4.2 _instance	175
12.27.4.3 _session	175
12.27.4.4 docs_db	175
12.27.4.5 graph_db	175
12.27.4.6 main_graph	175
12.27.4.7 relational_db	175
12.27.4.8 verbose	175
12.28 Story Class Reference	176
12.28.1 Constructor & Destructor Documentation	176
12.28.1.1 __init__()	176
12.28.2 Member Function Documentation	176
12.28.2.1 _make_single()	176
12.28.2.2 _merge_chunks()	176
12.28.2.3 pre_split_chunks()	177
12.28.2.4 stream_chunks()	177
12.28.3 Member Data Documentation	177
12.28.3.1 reader	177

12.29 StoryStreamAdapter Class Reference	177
12.29.1 Member Function Documentation	178
12.29.1.1 stream_paragraphs()	178
12.29.1.2 stream_segments()	178
12.29.1.3 stream_sentences()	179
12.30 SummaryData Class Reference	179
12.30.1 Property Documentation	179
12.30.1.1 BookID	179
12.30.1.2 BookTitle	179
12.30.1.3 GoldSummaryText	179
12.30.1.4 Metrics	179
12.30.1.5 QAResults	179
12.30.1.6 SummaryText	180
12.31 SummaryMetrics Class Reference	180
12.31.1 Member Function Documentation	180
12.31.1.1 GetDefault()	180
12.31.2 Property Documentation	180
12.31.2.1 PRF1Metrics	180
12.31.2.2 QA	180
12.31.2.3 ScalarMetrics	180
13 File Documentation	181
13.1 /home/runner/work/dsci-capstone/dsci-capstone/src/__init__.py File Reference	181
13.2 /home/runner/work/dsci-capstone/dsci-capstone/src/components/__init__.py File Reference	181
13.3 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/__init__.py File Reference	181
13.4 /home/runner/work/dsci-capstone/dsci-capstone/src/core/__init__.py File Reference	181
13.5 /home/runner/work/dsci-capstone/dsci-capstone/tests/__init__.py File Reference	182
13.6 /home/runner/work/dsci-capstone/dsci-capstone/src/components/book_conversion.py File Reference	182
13.7 /home/runner/work/dsci-capstone/dsci-capstone/src/components/corpus.py File Reference	182
13.8 /home/runner/work/dsci-capstone/dsci-capstone/src/components/fact_storage.py File Reference	183
13.9 /home/runner/work/dsci-capstone/dsci-capstone/src/components/metrics.py File Reference	183
13.10 /home/runner/work/dsci-capstone/dsci-capstone/src/components/README.md File Reference	184
13.11 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/README.md File Reference	184
13.12 /home/runner/work/dsci-capstone/dsci-capstone/src/core/README.md File Reference	184
13.13 /home/runner/work/dsci-capstone/dsci-capstone/src/README.md File Reference	184
13.14 /home/runner/work/dsci-capstone/dsci-capstone/tests/examples-db/README.md File Reference	184
13.15 /home/runner/work/dsci-capstone/dsci-capstone/tests/README.md File Reference	184
13.16 /home/runner/work/dsci-capstone/dsci-capstone/src/components/relation_extraction.py File Reference	184
13.17 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/base.py File Reference	185
13.18 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/document.py File Reference	185
13.19 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/graph.py File Reference	186
13.20 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/llm.py File Reference	186

13.21	/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/relational.py File Reference	187
13.22	/home/runner/work/dsci-capstone/dsci-capstone/src/core/boss.py File Reference	187
13.23	/home/runner/work/dsci-capstone/dsci-capstone/src/core/context.py File Reference	188
13.24	/home/runner/work/dsci-capstone/dsci-capstone/src/core/worker.py File Reference	188
13.25	/home/runner/work/dsci-capstone/dsci-capstone/src/main.py File Reference	189
13.26	/home/runner/work/dsci-capstone/dsci-capstone/src/util.py File Reference	191
13.27	/home/runner/work/dsci-capstone/dsci-capstone/tests/conftest.py File Reference	191
13.28	/home/runner/work/dsci-capstone/dsci-capstone/tests/test_db_basic.py File Reference	192
13.29	/home/runner/work/dsci-capstone/dsci-capstone/tests/test_db_files.py File Reference	192
13.30	/home/runner/work/dsci-capstone/dsci-capstone/tests/test_kg_triples.py File Reference	193
13.31	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/_Imports.razor File Reference	194
13.32	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/App.razor File Reference	194
13.33	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Layout/Main↔ Layout.razor File Reference	194
13.34	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Layout/Nav↔ Menu.razor File Reference	194
13.35	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/↔ Error.razor File Reference	194
13.36	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/↔ Graph.razor File Reference	194
13.37	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/↔ Home.razor File Reference	194
13.38	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/↔ Metrics.razor File Reference	194
13.39	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Routes.razor File Reference	194
13.40	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Controllers/MetricsController.cs File Reference	194
13.41	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Hubs/MetricsHub.cs File Ref- erence	195
13.42	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/PRF1Metric.cs File Reference	195
13.43	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/QAItem.cs File Refer- ence	195
13.44	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/QAMetric.cs File Ref- erence	195
13.45	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/ScalarMetric.cs File Reference	196
13.46	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/SummaryData.cs File Reference	196
13.47	/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/SummaryMetrics.cs File Reference	196

Chapter 1

Components Module Overview

This module contains all high-level pipeline functionality:

- **Corpus** — text dataset ingestion (BookSum, NarrativeQA)
- **Relation Extractor** — NLP-based relation extraction
- **Metrics** — evaluation metrics (QuestEval, BoookScore, etc.)
- **Fact Storage** — Knowledge graph operations and semantic triple sanitization
- **Book Conversion** — Gutenberg preprocessing helpers (EPUB, HTML, TEI)

These components operate on data retrieved via the connectors and support the full text-processing and knowledge-graph pipeline. Each class remains independent, with dependencies injected through the global Session.

Chapter 2

Connectors Module Overview

This module provides lightweight adapters for each supported database:

- [relational.py](#) — MySQL/PostgreSQL connector (Factory Method via `from_env`)
- [document.py](#) — MongoDB connector
- [graph.py](#) — Neo4j connector
- [llm.py](#) — LLM connector via LangChain
- [base.py](#) — shared abstract base classes

All connectors expose a consistent operational interface but differ in their underlying database engines. They are instantiated once inside the global Session, ensuring stable configuration and preventing duplicate connections.

Chapter 3

Core Module Overview

This module contains the application's orchestration layer:

- the global **Session** (singleton)
- the **Boss** and **Worker** coordination scripts

3.1 Pattern

- **Separation of Concerns** — Session manages dependency wiring so connectors and components remain focused on their own tasks

3.2 Usage

```
```python from src.core.context import session
```

```
session.relational_db.execute_query("SELECT 1") session.main_graph.add_triple("Alice", "interactsWith", "Bob")
```



## Chapter 4

# Source Directory Overview

All application code lives inside this directory, organized into clear responsibility-based modules:

- **core/** — orchestration logic (Session, Boss, Worker)
- **connectors/** — adapters for relational, document, and graph databases
- **components/** — pipeline logic (NLP, metrics, corpus processing, book parsing)
- **main.py** / **util.py** — entry points and shared logging / error-handling utilities

This layout separates low-level adapters, high-level pipeline operations, and global orchestrators, improving maintainability and readability.



## Chapter 5

# Database Example Datasets

This directory contains small, deterministic example files used by the database-related tests. Each subfolder corresponds to a specific connector type implemented in the project:

- **relational/** – SQL queries or fixture datasets for MySQL/PostgreSQL.
- **document/** – JSON or BSON-like structures for MongoDB tests.
- **graph/** – Cypher queries for Neo4j graph tests.

These examples are intentionally minimal so tests:

- run quickly,
- avoid external dependencies,
- stay stable across environments,
- and clearly demonstrate the expected input format for each connector.

All files here are for testing only and do not represent production data.



## Chapter 6

# Test Suite Overview

This project uses `pytest` with `pytest-order` and `pytest-dependency` to ensure deterministic test sequencing.

Test groups:

- **test\_db\_basic / test\_db\_files** — relational, document, and graph connector tests.
- **test\_kg\_triples** — KnowledgeGraph parsing, ID to name mapping, and graph helpers.
- **examples-db, examples-llm** — minimal deterministic datasets used by the tests.

Run the suite with:

```
pytest .
```

Or (if Docker is set up):

```
make docker-all-dbs
make docker-test
```





## Chapter 7

# Namespace Index

### 7.1 Package List

Here are the packages with brief descriptions (if available):

<a href="#">BlazorApp</a>	21
<a href="#">BlazorApp.Controllers</a>	21
<a href="#">BlazorApp.Hubs</a>	21
<a href="#">BlazorApp.Models</a>	21
<a href="#">src</a>	22
<a href="#">src.components</a>	22
<a href="#">src.components.book_conversion</a>	22
<a href="#">src.components.corpus</a>	23
<a href="#">src.components.fact_storage</a>	25
<a href="#">src.components.metrics</a>	25
<a href="#">src.components.relation_extraction</a>	27
<a href="#">src.connectors</a>	27
<a href="#">src.connectors.base</a>	28
<a href="#">src.connectors.document</a>	28
<a href="#">src.connectors.graph</a>	31
<a href="#">src.connectors.llm</a>	33
<a href="#">src.connectors.relational</a>	33
<a href="#">src.core</a>	34
<a href="#">src.core.boss</a>	
Boss microservice for orchestrating distributed task processing	34
<a href="#">src.core.context</a>	38
<a href="#">src.core.worker</a>	
Generic Flask worker microservice for distributed task processing	39
<a href="#">src.main</a>	46
<a href="#">src.util</a>	52
<a href="#">tests</a>	53
<a href="#">tests.conftest</a>	53
<a href="#">tests.test_db_basic</a>	55
<a href="#">tests.test_db_files</a>	56
<a href="#">tests.test_kg_triples</a>	59



## Chapter 8

# Hierarchical Index

### 8.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Book . . . . .	65
Chunk . . . . .	68
ControllerBase	
MetricsController . . . . .	145
EPUBToTEI . . . . .	93
Hub	
MetricsHub . . . . .	147
KnowledgeGraph . . . . .	111
Log . . . . .	127
Metrics . . . . .	140
PRF1Metric . . . . .	159
QAItem . . . . .	160
QAMetric . . . . .	161
RelationExtractor . . . . .	171
RuntimeError	
Log.Failure . . . . .	96
Log.BadAddressFailure . . . . .	63
ScalarMetric . . . . .	172
Session . . . . .	173
Story . . . . .	176
SummaryData . . . . .	179
SummaryMetrics . . . . .	180
ABC	
BookFactory . . . . .	66
StoryStreamAdapter . . . . .	177
BookStream . . . . .	67
ParagraphStreamTEI . . . . .	151
Connector . . . . .	72
DatabaseConnector . . . . .	75
DocumentConnector . . . . .	84
GraphConnector . . . . .	98
RelationalConnector . . . . .	162
mysqlConnector . . . . .	148
postgresConnector . . . . .	156
LLMConnector . . . . .	122



## Chapter 9

# Class Index

### 9.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">Log.BadAddressFailure</a>	
Raised when a database connection string or address is invalid . . . . .	63
<a href="#">Book</a> . . . . .	65
<a href="#">BookFactory</a> . . . . .	66
<a href="#">BookStream</a> . . . . .	67
<a href="#">Chunk</a>	
Lightweight container for a span of story text . . . . .	68
<a href="#">Connector</a>	
Abstract base class for external connectors . . . . .	72
<a href="#">DatabaseConnector</a>	
Abstract base class for database engine connectors . . . . .	75
<a href="#">DocumentConnector</a>	
Connector for MongoDB (document database) . . . . .	84
<a href="#">EPUBToTEI</a>	
Converts EPUB files to XML format (TEI specification) . . . . .	93
<a href="#">Log.Failure</a>	
User-facing base class for custom error handling . . . . .	96
<a href="#">GraphConnector</a>	
Connector for Neo4j (graph database) . . . . .	98
<a href="#">KnowledgeGraph</a>	
Manages a single graph within Neo4j . . . . .	111
<a href="#">LLMConnector</a>	
Connector for prompting and returning LLM output (raw text/JSON) via LangChain . . . . .	122
<a href="#">Log</a>	
Standardizes console output . . . . .	127
<a href="#">Metrics</a>	
Utility class for computing and posting evaluation metrics . . . . .	140
<a href="#">MetricsController</a> . . . . .	145
<a href="#">MetricsHub</a> . . . . .	147
<a href="#">mysqlConnector</a>	
A relational database connector configured for MySQL . . . . .	148
<a href="#">ParagraphStreamTEI</a>	
Streams paragraphs from a TEI file as Chunk objects . . . . .	151
<a href="#">postgresConnector</a>	
A relational database connector configured for PostgreSQL . . . . .	156

PRF1Metric	159
QAItem	160
QAMetric	161
RelationalConnector	
Connector for relational databases (MySQL, PostgreSQL)	162
RelationExtractor	171
ScalarMetric	172
Session	
Stores active database connections and configuration settings	173
Story	176
StoryStreamAdapter	177
SummaryData	179
SummaryMetrics	180

# Chapter 10

## File Index

### 10.1 File List

Here is a list of all files with brief descriptions:

/home/runner/work/dsci-capstone/dsci-capstone/src/__init__.py	181
/home/runner/work/dsci-capstone/dsci-capstone/src/main.py	189
/home/runner/work/dsci-capstone/dsci-capstone/src/util.py	191
/home/runner/work/dsci-capstone/dsci-capstone/src/components/__init__.py	181
/home/runner/work/dsci-capstone/dsci-capstone/src/components/book_conversion.py	182
/home/runner/work/dsci-capstone/dsci-capstone/src/components/corpus.py	182
/home/runner/work/dsci-capstone/dsci-capstone/src/components/fact_storage.py	183
/home/runner/work/dsci-capstone/dsci-capstone/src/components/metrics.py	183
/home/runner/work/dsci-capstone/dsci-capstone/src/components/relation_extraction.py	184
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/__init__.py	181
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/base.py	185
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/document.py	185
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/graph.py	186
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/llm.py	186
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/relational.py	187
/home/runner/work/dsci-capstone/dsci-capstone/src/core/__init__.py	181
/home/runner/work/dsci-capstone/dsci-capstone/src/core/boss.py	187
/home/runner/work/dsci-capstone/dsci-capstone/src/core/context.py	188
/home/runner/work/dsci-capstone/dsci-capstone/src/core/worker.py	188
/home/runner/work/dsci-capstone/dsci-capstone/tests/__init__.py	182
/home/runner/work/dsci-capstone/dsci-capstone/tests/conftest.py	191
/home/runner/work/dsci-capstone/dsci-capstone/tests/test_db_basic.py	192
/home/runner/work/dsci-capstone/dsci-capstone/tests/test_db_files.py	192
/home/runner/work/dsci-capstone/dsci-capstone/tests/test_kg_triples.py	193
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/_Imports.razor	194
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/App.razor	194
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Routes.razor	194
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Layout/MainLayout.razor	194
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Layout/NavMenu.razor	194
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/Error.razor	194
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/Graph.razor	194
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/Home.razor	194
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/Metrics.razor	194

/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Controllers/ <a href="#">MetricsController.cs</a> . .	194
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Hubs/ <a href="#">MetricsHub.cs</a> . . . . .	195
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/ <a href="#">PRF1Metric.cs</a> . . . . .	195
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/ <a href="#">QAItem.cs</a> . . . . .	195
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/ <a href="#">QAMetric.cs</a> . . . . .	195
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/ <a href="#">ScalarMetric.cs</a> . . . . .	196
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/ <a href="#">SummaryData.cs</a> . . . . .	196
/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/ <a href="#">SummaryMetrics.cs</a> . . . .	196



## Chapter 11

# Namespace Documentation

### 11.1 BlazorApp Namespace Reference

#### Namespaces

- namespace [Controllers](#)
- namespace [Hubs](#)
- namespace [Models](#)

### 11.2 BlazorApp.Controllers Namespace Reference

#### Classes

- class [MetricsController](#)

### 11.3 BlazorApp.Hubs Namespace Reference

#### Classes

- class [MetricsHub](#)

### 11.4 BlazorApp.Models Namespace Reference

#### Classes

- class [PRF1Metric](#)
- class [QAItem](#)
- class [QAMetric](#)
- class [ScalarMetric](#)
- class [SummaryData](#)
- class [SummaryMetrics](#)

## 11.5 src Namespace Reference

### Namespaces

- namespace [components](#)
- namespace [connectors](#)
- namespace [core](#)
- namespace [main](#)
- namespace [util](#)

## 11.6 src.components Namespace Reference

### Namespaces

- namespace [book\\_conversion](#)
- namespace [corpus](#)
- namespace [fact\\_storage](#)
- namespace [metrics](#)
- namespace [relation\\_extraction](#)

## 11.7 src.components.book\_conversion Namespace Reference

### Classes

- class [Book](#)
- class [BookFactory](#)
- class [BookStream](#)
- class [Chunk](#)  
*Lightweight container for a span of story text.*
- class [EPUBToTEI](#)  
*Converts EPUB files to XML format (TEI specification).*
- class [ParagraphStreamTEI](#)  
*Streams paragraphs from a TEI file as Chunk objects.*
- class [Story](#)
- class [StoryStreamAdapter](#)

### Variables

- [nlp](#) = `spacy.blank("en")`
- [sentencizer](#) = `nlp.add_pipe("sentencizer")`

### 11.7.1 Variable Documentation

#### 11.7.1.1 nlp

```
nlp = spacy.blank("en")
```

### 11.7.1.2 sentencizer

```
sentencizer = nlp.add_pipe("sentencizer")
```

## 11.8 src.components.corpus Namespace Reference

### Functions

- [load\\_booksum](#) ()
- [to\\_df\\_booksum](#) (ds)
- [load\\_narrativeqa](#) ()
- [to\\_df\\_nqa](#) (ds)
- [normalize\\_title](#) (t)
- [merge\\_dataframes](#) (df1, df2, suffix1, suffix2, key\_columns)
- [fuzzy\\_merge\\_titles](#) (df1, df2, suffix1, suffix2, key="title", threshold=90, scorer=fuzz.token\_sort\_ratio)

*Perform a two-way fuzzy merge between two DataFrames on a text column (e.g., book titles).*

### Variables

- [df\\_booksum](#) = [load\\_booksum](#)()
- [df\\_nqa](#) = [load\\_narrativeqa](#)()
- [df](#) = [fuzzy\\_merge\\_titles](#)([df\\_booksum](#), [df\\_nqa](#), "\_booksum", "\_nqa", key="title", threshold=70)
- [index](#)
- [m](#) = [Metrics](#)()

### 11.8.1 Function Documentation

#### 11.8.1.1 fuzzy\_merge\_titles()

```
fuzzy_merge_titles (
 df1,
 df2,
 suffix1,
 suffix2,
 key = "title",
 threshold = 90,
 scorer = fuzz.token_sort_ratio)
```

Perform a two-way fuzzy merge between two DataFrames on a text column (e.g., book titles).

For each row in the left DataFrame, the function searches the right DataFrame for the most similar string in the specified key column using RapidFuzz. It returns a merged DataFrame containing the best matches above a similarity threshold.

#### Parameters

<i>df1</i>	The left-hand DataFrame containing a text column to match on.
<i>df2</i>	The right-hand DataFrame containing a text column to match against.
<i>suffix1</i>	The name of the left-hand column.
<i>suffix2</i>	The name of the right-hand column.
<i>key</i>	The name of the column containing the strings to compare (default: "title").
<i>threshold</i>	Minimum similarity score (0–100) required to consider a match valid. Defaults to 90.
<i>scorer</i>	A RapidFuzz scoring function such as <code>fuzz.token_sort_ratio</code> or <code>fuzz.token_set_ratio</code> .

**Returns**

A new pandas DataFrame containing the compared strings, score, and all other columns.

**Note**

This function performs a one-to-one best match per left row. To ensure only confident matches are kept, adjust the `threshold` parameter.

**11.8.1.2 load\_booksum()**

```
load_booksum ()
```

**11.8.1.3 load\_narrativeqa()**

```
load_narrativeqa ()
```

**11.8.1.4 merge\_dataframes()**

```
merge_dataframes (
 df1,
 df2,
 suffix1,
 suffix2,
 key_columns)
```

**11.8.1.5 normalize\_title()**

```
normalize_title (
 t)
```

**11.8.1.6 to\_df\_booksum()**

```
to_df_booksum (
 ds)
```

**11.8.1.7 to\_df\_nqa()**

```
to_df_nqa (
 ds)
```

**11.8.2 Variable Documentation****11.8.2.1 df**

```
df = fuzzy_merge_titles(df_booksum, df_nqa, "_booksum", "_nqa", key="title", threshold=70)
```

### 11.8.2.2 df\_booksum

```
df_booksum = load_booksum()
```

### 11.8.2.3 df\_nqa

```
df_nqa = load_narrativeqa()
```

### 11.8.2.4 index

```
index
```

### 11.8.2.5 m

```
m = Metrics()
```

## 11.9 src.components.fact\_storage Namespace Reference

### Classes

- class [KnowledgeGraph](#)  
*Manages a single graph within Neo4j.*

## 11.10 src.components.metrics Namespace Reference

### Classes

- class [Metrics](#)  
*Utility class for computing and posting evaluation metrics.*

### Functions

- Dict[str, Any] [run\\_questeval](#) (Dict[str, Any] chunk, \*str qeval\_task="summarization", bool use\_cuda=False, bool use\_question\_weighter=True)  
*Run QuestEval metric calculation.*
- Dict[str, Any] [run\\_bookscore](#) (Dict[str, Any] chunk, \*str model="gpt-3.5-turbo", int batch\_size=10, bool use\_cuda=True)  
*Run BoookScore metric for long-form summarization.*
- str [chunk\\_bookscore](#) (str book\_text, str book\_title='book', int chunk\_size=2048)  
*Chunk a book into BoookScore segments.*

### 11.10.1 Function Documentation

#### 11.10.1.1 chunk\_bookscore()

```
str chunk_bookscore (
 str book_text,
 str book_title = 'book',
 int chunk_size = 2048)
```

Chunk a book into BoookScore segments.

Standardizes long-form input into chunks BoookScore can process. Creates a temporary directory and writes chunked pickle for later scoring. This step can be reused independently for multiple summaries.

**Parameters**

<i>book_text</i>	Full book text to be chunked.
<i>book_title</i>	Name or identifier for the book (default 'book').
<i>chunk_size</i>	Maximum chunk size for book text (default 2048).

**Returns**

Path to chunked pickle file containing BooookScore-ready segments.

**Exceptions**

<i>RuntimeError</i>	If BooookScore chunking fails.
---------------------	--------------------------------

**11.10.1.2 run\_bookscore()**

```
Dict[str, Any] run_bookscore (
 Dict[str, Any] chunk,
 *str model = "gpt-3.5-turbo",
 int batch_size = 10,
 bool use_v2 = True)
```

Run BooookScore metric for long-form summarization.

LLM-based coherence evaluation using BooookScore. Runs in CLI via subprocess. Handles full workflow: scoring summary, postprocessing. Can be run on a single chunk or entire book (if already chunked).

**Parameters**

<i>chunk</i>	MongoDB document containing: <ul style="list-style-type: none"><li>• summary: Generated summary (required)</li><li>• text: Full or partial book text (required)</li><li>• book_title: Book title for identification (optional, for pickling)</li></ul>
<i>model</i>	Model name (optional, default 'gpt-4')
<i>batch_size</i>	Sentences per batch for v2 (optional, default 10)
<i>use_v2</i>	Use batched evaluation (optional, default True)

**Returns**

Dict containing a score (range 0-1) and metadata for the provided summary. bookscore: Coherence score for one summary. annotations: True if a gold reference summary was provided. model\_used: String describing the LLM model and API used.

**Exceptions**

<i>KeyError</i>	If required fields are missing from chunk.
<i>RuntimeError</i>	If subprocess execution fails.

### 11.10.1.3 run\_questeval()

```
Dict[str, Any] run_questeval (
 Dict[str, Any] chunk,
 *str qeval_task = "summarization",
 bool use_cuda = False,
 bool use_question_weighter = True)
```

Run QuestEval metric calculation.

Question-answering based evaluation. Generates questions from source/reference, and checks if answers can be found in the summary. For more parameters, see: [https://github.com/ThomasScialom/QuestEval/blob/main/questeval/questeval\\_metric.py](https://github.com/ThomasScialom/QuestEval/blob/main/questeval/questeval_metric.py)

#### Parameters

<i>chunk</i>	MongoDB document containing keys: <ul style="list-style-type: none"> <li>summary: Generated summary (required)</li> <li>text: Source document text (required)</li> <li>gold_summary: Reference summary (optional, filters for better questions)</li> </ul>
<i>qeval_task</i>	Task performed by QuestEval (optional, default is summarization). Must be one of the following: generation / nlg, qa, dialogue, data2text, translation.
<i>use_cuda</i>	Run transformers with GPU enabled.
<i>use_question_weighter</i>	Make some questions more important based on relevancy.

#### Returns

Dict containing a score (range 0-1) and metadata for the provided summary. `questeval_score`: Overall semantic precision-recall score for one example (a Summary to evaluate, Source text, and Reference summary). `has_reference`: True if a gold reference summary was provided.

#### Exceptions

<i>ImportError</i>	If questeval package not installed.
<i>KeyError</i>	If required fields are missing from chunk.

## 11.11 src.components.relation\_extraction Namespace Reference

### Classes

- class [RelationExtractor](#)

## 11.12 src.connectors Namespace Reference

### Namespaces

- namespace [base](#)

- namespace [document](#)
- namespace [graph](#)
- namespace [llm](#)
- namespace [relational](#)

## 11.13 `src.connectors.base` Namespace Reference

### Classes

- class [Connector](#)  
*Abstract base class for external connectors.*
- class [DatabaseConnector](#)  
*Abstract base class for database engine connectors.*

## 11.14 `src.connectors.document` Namespace Reference

### Classes

- class [DocumentConnector](#)  
*Connector for MongoDB (document database)*

### Functions

- [MongoHandle mongo\\_handle](#) (str host, str alias)  
*Establish a temporary connection to MongoDB.*
- [DataFrame \\_flatten\\_recursive](#) (DataFrame df)  
*Explode all list columns and flatten dict columns until only scalars remain.*
- [str \\_sanitize\\_json](#) (str text)  
*Remove comments and other non-JSON content from a MongoDB query string.*
- [Dict\[str, Any\] \\_sanitize\\_document](#) (Dict[str, Any] doc, Dict[str, Set[Type[Any]]] type\_registry)  
*Normalize document fields to consistent types for DataFrame construction.*
- [DataFrame \\_docs\\_to\\_df](#) (List[Dict[str, Any]] docs, bool merge\_unspecified=True)  
*Convert raw MongoDB documents to a Pandas DataFrame.*
- [str \\_find\\_compatible\\_nested\\_key](#) (Type[Any] value\_type, Dict[str, Set[Type[Any]]] nested\_schema, bool merge\_unspecified)  
*Find a nested column compatible with the given primitive type.*

### Variables

- [MongoHandle](#) = Generator[`"Database[Any]"`, None, None]



## 11.14.1 Function Documentation

### 11.14.1.1 `_docs_to_df()`

```
DataFrame _docs_to_df (
 List[Dict[str, Any]] docs,
 bool merge_unspecified = True) [protected]
```

Convert raw MongoDB documents to a Pandas DataFrame.

Handles schema inconsistencies by:

1. First pass: identify all nested column names and their types
2. Second pass: sanitize and wrap primitives using type-compatible nested columns
3. Flatten structures into final DataFrame

#### Parameters

<i>docs</i>	List of MongoDB documents to convert.
<i>merge_unspecified</i>	If True, merge primitives into type-compatible nested columns using aggressive type casting (int→float, bool→int→float). If False, keep as <code>_unspecified_type</code> columns.

#### Exceptions

<i>Log.Failure</i>	If parsing query results to JSON fails.
--------------------	-----------------------------------------

### 11.14.1.2 `_find_compatible_nested_key()`

```
str _find_compatible_nested_key (
 Type[Any] value_type,
 Dict[str, Set[Type[Any]]] nested_schema,
 bool merge_unspecified) [protected]
```

Find a nested column compatible with the given primitive type.

Uses type compatibility hierarchy for aggressive merging: bool → int → float (numeric types) str (isolated, only matches str) Searches for exact match first, then compatible types.

#### Parameters

<i>value_type</i>	The type of the primitive value to map (e.g., str, int, float).
<i>nested_schema</i>	Dict mapping nested keys to sets of observed types.
<i>merge_unspecified</i>	Whether to attempt type-compatible merging.

#### Returns

The nested key name to use for wrapping the primitive.

### 11.14.1.3 `_flatten_recursive()`

```
DataFrame _flatten_recursive (
 DataFrame df) [protected]
```

Explode all list columns and flatten dict columns until only scalars remain.

Recursive Process:

1. Find columns containing lists → explode to create new rows
2. Find columns containing dicts → normalize to create new columns
3. Repeat until no lists or dicts remain

#### Parameters

<i>df</i>	DataFrame with potentially nested structures.
-----------	-----------------------------------------------

#### Returns

Fully flattened DataFrame with only scalar values.

### 11.14.1.4 `_sanitize_document()`

```
Dict[str, Any] _sanitize_document (
 Dict[str, Any] doc,
 Dict[str, Set[Type[Any]]] type_registry) [protected]
```

Normalize document fields to consistent types for DataFrame construction.

Converts all field values to lists and tracks type patterns.

- ObjectId → string
- Single value → [value]
- Mixed types tracked in `type_registry` for conflict resolution

#### Parameters

<i>doc</i>	MongoDB document to sanitize.
<i>type_registry</i>	Tracks observed types per field path (e.g., {"effects": {str, list}}).

#### Returns

Document with all fields as lists.

### 11.14.1.5 `_sanitize_json()`

```
str _sanitize_json (
 str text) [protected]
```

Remove comments and other non-JSON content from a MongoDB query string.

Removes the following elements:

- Block comments `/* ... */`
- Single-line comments `//`
- Half-line comments `... //`
- Trailing commas before closing braces
- Newlines and whitespace Preserves bad text inside JSON string values.

#### Parameters

<i>text</i>	Raw text that may contain comments.
-------------	-------------------------------------

#### Returns

Cleaned text suitable for JSON parsing.

#### 11.14.1.6 mongo\_handle()

```
MongoHandle mongo_handle (
 str host,
 str alias)
```

Establish a temporary connection to MongoDB.

#### Parameters

<i>host</i>	A valid MongoDB connection string.
<i>alias</i>	A unique name for the usage of this connection.

Allows scoped access to the low-level PyMongo handle from MongoEngine. Usage: with `mongo_↵`  
`handle(host=self.connection_string, alias="create_db") as db:` (your code here...) This will disconnect all con-  
 nections on the alias once finished. Helpful when `test_operations` wants to call `execute_query`, but continue using  
 its existing db handle after `execute_query` disconnects.

### 11.14.2 Variable Documentation

#### 11.14.2.1 MongoHandle

```
MongoHandle = Generator["Database[Any]", None, None]
```

## 11.15 src.connectors.graph Namespace Reference

### Classes

- class [GraphConnector](#)  
*Connector for Neo4j (graph database).*

## Functions

- DataFrame [\\_filter\\_to\\_db](#) (DataFrame df, str database\_name)  
*Filter a DataFrame by database context.*
- DataFrame [\\_tuples\\_to\\_df](#) (List[Tuple[Any,...]] tuples, List[str] meta)  
*Convert Neo4j query results (nodes and relationships) into a Pandas DataFrame.*
- DataFrame [\\_normalize\\_elements](#) (DataFrame df)  
*Convert Neo4j query results (nodes and relationships) into a Pandas DataFrame.*

## 11.15.1 Function Documentation

### 11.15.1.1 [\\_filter\\_to\\_db\(\)](#)

```
DataFrame _filter_to_db (
 DataFrame df,
 str database_name) [protected]
```

Filter a DataFrame by database context.

- Keeps nodes where 'db' matches the current database name and `_init` is False/absent.
- Keeps relationships if either endpoint node (by `elementId`) matches the same db.
- Works on unflattened frames where cells are dicts (node/rel maps).
- Safely ignores missing fields; drops a top-level '`_init`' column if present.

#### Parameters

<i>df</i>	DataFrame containing node and relationship rows.
<i>database_name</i>	The name of the current pseudo-database.

#### Returns

Filtered DataFrame restricted to the active database.

### 11.15.1.2 [\\_normalize\\_elements\(\)](#)

```
DataFrame _normalize_elements (
 DataFrame df) [protected]
```

Convert Neo4j query results (nodes and relationships) into a Pandas DataFrame.

- Accepts the DataFrame output of [src.connectors.graph.GraphConnector.execute\\_query](#).
- Explodes dict-cast elements from columns into rows, resulting in 1 node or relation per row.
- Normalizes node and relation properties as columns. `element_id`, `element_type` are shared.
- Node-only properties (e.g. labels) are None for relationships, and likewise for relations (e.g. `start_node`).
- Returns an empty DataFrame for no results.

## Parameters

<i>df</i>	DataFrame containing dict-cast nodes and relationships.
-----------	---------------------------------------------------------

## Returns

DataFrame suitable for downstream filtering and analysis.

## 11.15.1.3 \_tuples\_to\_df()

```
DataFrame _tuples_to_df (
 List[Tuple[Any, ...]] tuples,
 List[str] meta) [protected]
```

Convert Neo4j query results (nodes and relationships) into a Pandas DataFrame.

- Accepts the `tuples` output of `db.cypher_query()`.
- Automatically unwraps NeoModel Node/Relationship objects into plain dicts via `.__properties__`.
- Adds an 'element\_type' property distinguishing nodes vs relationships. Example Query: `MATCH (a)-[r]->(b) RETURN a AS node_1, r AS edge, b AS node_2`; Result: DataFrame with `node_1` and `node_2` columns containing Nodes converted to dicts, and an `edge` column containing a dict-cast relationship (`element_type: relation`).

## Parameters

<i>tuples</i>	List of Neo4j query result tuples.
<i>meta</i>	List of element aliases returned by the query, and used here as column names.

## Returns

DataFrame with requested columns.

## 11.16 src.connectors.llm Namespace Reference

## Classes

- class [LLMConnector](#)  
*Connector for prompting and returning LLM output (raw text/JSON) via LangChain.*

## 11.17 src.connectors.relational Namespace Reference

## Classes

- class [mysqlConnector](#)  
*A relational database connector configured for MySQL.*
- class [postgresConnector](#)  
*A relational database connector configured for PostgreSQL.*
- class [RelationalConnector](#)  
*Connector for relational databases (MySQL, PostgreSQL).*

## 11.18 src.core Namespace Reference

### Namespaces

- namespace [boss](#)  
*Boss microservice for orchestrating distributed task processing.*
- namespace [context](#)
- namespace [worker](#)  
*Generic Flask worker microservice for distributed task processing.*

## 11.19 src.core.boss Namespace Reference

Boss microservice for orchestrating distributed task processing.

### Functions

- None [pipeline\\_5b](#) (str summary, str book\_title, str book\_id, str chunk, str gold\_summary="", float bookscore=None, float questeval=None)  
*Send metrics to Blazor.*
- Dict[str, str] [load\\_worker\\_config](#) (List[str] task\_types)  
*Load worker service URLs from environment variables.*
- None [clear\\_task\\_data](#) ([MongoHandle](#) mongo\_db, str collection\_name, str chunk\_id, str task\_name)  
*Clear any existing task data before assigning new task to worker.*
- bool [assign\\_task\\_to\\_worker](#) (str worker\_url, str database\_name, str collection\_name, str chunk\_id)  
*Assign a task to a worker microservice.*
- Flask [create\\_app](#) ([DocumentConnector](#) docs\_db, str database\_name, str collection\_name, Dict[str, str] worker\_urls)  
*Create and configure Flask application for boss service.*
- None [create\\_boss\\_thread](#) (str DB\_NAME, int BOSS\_PORT, str COLLECTION)
- requests.models.Response [post\\_story\\_status](#) (int boss\_port, int story\_id, str task, str status)  
*Helpers to interact with the Flask boss thread.*
- requests.models.Response [post\\_chunk\\_status](#) (int boss\_port, str chunk\_id, int story\_id, str task, str status)  
*Send a chunk-level update to the boss Flask app.*
- requests.models.Response [post\\_process\\_full\\_story](#) (int boss\_port, int story\_id, str task\_type)  
*Process all chunks in MongoDB matching the provided story ID.*

### Variables

- [MongoHandle](#) = Generator["Database[Any]", None, None]

### 11.19.1 Detailed Description

Boss microservice for orchestrating distributed task processing.

Manages task distribution to workers and tracks completion order.

## 11.19.2 Function Documentation

### 11.19.2.1 `assign_task_to_worker()`

```
bool assign_task_to_worker (
 str worker_url,
 str database_name,
 str collection_name,
 str chunk_id)
```

Assign a task to a worker microservice.

#### Parameters

<i>worker_url</i>	Full URL of the worker's /start endpoint.
<i>database_name</i>	Name of the MongoDB database to use.
<i>collection_name</i>	The name of our primary chunk storage collection in Mongo.
<i>chunk_id</i>	Unique identifier for the chunk within the story.

#### Returns

True if task was successfully assigned, False otherwise.

### 11.19.2.2 `clear_task_data()`

```
None clear_task_data (
 MongoHandle mongo_db,
 str collection_name,
 str chunk_id,
 str task_name)
```

Clear any existing task data before assigning new task to worker.

#### Parameters

<i>mongo_db</i>	MongoDB database handle.
<i>collection_name</i>	The name of our primary chunk storage collection in Mongo.
<i>chunk_id</i>	Unique identifier for the chunk within the story.
<i>task_name</i>	Name of the task to clear.

### 11.19.2.3 `create_app()`

```
Flask create_app (
 DocumentConnector docs_db,
 str database_name,
 str collection_name,
 Dict[str, str] worker_urls)
```

Create and configure Flask application for boss service.

**Parameters**

<i>docs_db</i>	MongoDB connector class.
<i>database_name</i>	Name of the MongoDB database to use.
<i>collection_name</i>	The name of our primary chunk storage collection in Mongo.
<i>worker_urls</i>	Dictionary mapping task names to worker URLs.

**Returns**

Configured Flask application instance.

**11.19.2.4 create\_boss\_thread()**

```
None create_boss_thread (
 str DB_NAME,
 int BOSS_PORT,
 str COLLECTION)
```

**11.19.2.5 load\_worker\_config()**

```
Dict[str, str] load_worker_config (
 List[str] task_types)
```

Load worker service URLs from environment variables.

**Parameters**

<i>task_types</i>	List of valid task keys to use when searching the .env
-------------------	--------------------------------------------------------

**Returns**

Dictionary mapping task names to worker URLs.

**11.19.2.6 pipeline\_5b()**

```
None pipeline_5b (
 str summary,
 str book_title,
 str book_id,
 str chunk,
 str gold_summary = "",
 float bookscore = None,
 float questeval = None)
```

Send metrics to Blazor.

- Compute basic metrics (ROUGE, BERTScore)
- Wait for advanced metrics (QuestEval, BooookScore)
- Post to Blazor metrics page



### 11.19.2.7 post\_chunk\_status()

```
requests.models.Response post_chunk_status (
 int boss_port,
 str chunk_id,
 int story_id,
 str task,
 str status)
```

Send a chunk-level update to the boss Flask app.

#### Parameters

<i>boss_port</i>	Port the boss microservice is running on.
<i>chunk_id</i>	Unique identifier for the chunk.
<i>story_id</i>	Unique identifier for the story.
<i>task</i>	Task name (extraction, load_to_mongo, etc.).
<i>status</i>	Status (pending, assigned, in-progress, completed, failed).

#### Returns

JSON response indicating success or failure.

### 11.19.2.8 post\_process\_full\_story()

```
requests.models.Response post_process_full_story (
 int boss_port,
 int story_id,
 str task_type)
```

Process all chunks in MongoDB matching the provided story ID.

#### Parameters

<i>boss_port</i>	Port the boss microservice is running on.
<i>story_id</i>	Unique identifier for the story.
<i>task_type</i>	Worker name (questeval, bookscore).

#### Returns

JSON response indicating success or failure.

### 11.19.2.9 post\_story\_status()

```
requests.models.Response post_story_status (
 int boss_port,
 int story_id,
 str task,
 str status)
```

Helpers to interact with the Flask boss thread.

Used to process our set of example books on pipeline start.

Send a story-level update to the boss Flask app.

#### Parameters

<i>boss_port</i>	Port the boss microservice is running on.
<i>story_id</i>	Unique identifier for the story.
<i>task</i>	Task name (extraction, load_to_mongo, etc.).
<i>status</i>	Status (pending, assigned, in-progress, completed, failed).

#### Returns

JSON response indicating success or failure.

## 11.19.3 Variable Documentation

### 11.19.3.1 MongoHandle

```
MongoHandle = Generator["Database[Any]", None, None]
```

## 11.20 src.core.context Namespace Reference

### Classes

- class [Session](#)  
*Stores active database connections and configuration settings.*

### Functions

- [Session get\\_session](#) (\*Any args, \*\*Any kwargs)  
*Lazily creates a session on first call, otherwise returns the existing session.*
- Any [\\_\\_getattr\\_\\_](#) (str name)  
*Lazy attribute resolution for module-level imports.*

### Variables

- [Session session](#)  
*The global instance of the singleton Session class.*

## 11.20.1 Function Documentation

### 11.20.1.1 \_\_getattr\_\_()

```
Any __getattr__ (
 str name)
```

Lazy attribute resolution for module-level imports.

- Only called when normal attribute lookup fails (i.e., name not in module globals).
- Enables lazy session creation: `from src.core.context import session`
- Regular imports (Session, get\_session, etc.) bypass this entirely.

## Parameters

<i>name</i>	The attribute name being accessed.
-------------	------------------------------------

## Returns

The session singleton if 'session' is requested.

## Exceptions

<i>AttributeError</i>	If an unknown/undefined attribute is requested.
-----------------------	-------------------------------------------------

### 11.20.1.2 get\_session()

```
Session get_session (
 *Any args,
 **Any kwargs)
```

Lazily creates a session on first call, otherwise returns the existing session.

## Note

Will ignore any arguments passed after creation.

## Parameters

<i>*args</i>	Positional arguments forwarded to Session().
<i>**kwargs</i>	Keyword arguments forwarded to Session().

## Returns

The global instance of the Session class.

## 11.20.2 Variable Documentation

### 11.20.2.1 session

```
Session session
```

The global instance of the singleton Session class.

## 11.21 src.core.worker Namespace Reference

Generic Flask worker microservice for distributed task processing.

## Functions

- None [process\\_task](#) ([MongoHandle](#) mongo\_db, str collection\_name, str chunk\_id, str task\_name, Dict[str, Any] chunk\_doc, str [boss\\_url](#), Callable[[Dict[str, Any]], Dict[str, Any]] task\_handler, Any task\_kwargs=None)  
*Perform the assigned task in a background thread.*
- str [load\\_mongo\\_config](#) (str database)  
*Load MongoDB configuration from environment variables.*
- str [load\\_boss\\_config](#) ()  
*Load boss service callback URL from environment variables.*
- Tuple[Callable[[Dict[str, Any]], Dict[str, Any]], Dict[str, Any], Dict[str, Any]] [get\\_task\\_info](#) (str task\_name)  
*Dynamically import and return the appropriate task handler function.*
- [load\\_imports](#) (func)  
*Pre-warm the task by importing requirements.*
- None [mark\\_task\\_in\\_progress](#) ([MongoHandle](#) mongo\_db, str collection\_name, str chunk\_id, str task\_name)  
*Mark a task as in-progress in MongoDB before processing begins.*
- None [save\\_task\\_result](#) ([MongoHandle](#) mongo\_db, str collection\_name, str chunk\_id, str task\_name, Dict[str, Any] result)  
*Save completed task results to MongoDB.*
- None [notify\\_boss](#) (str [boss\\_url](#), str chunk\_id, str task\_name, str status)  
*Send completion notification to boss service.*
- Flask [create\\_app](#) (str task\_name, str [boss\\_url](#))  
*Create and configure Flask application for task processing.*

## Variables

- [MongoHandle](#) = Generator["Database[Any]", None, None]
- [parser](#) = argparse.ArgumentParser(description="Flask worker microservice")
- [required](#)
- [True](#)
- [help](#)
- [args](#) = parser.parse\_args()
- str [task\\_queue](#) = Queue()
- [target](#)
- [task\\_worker](#) ()  
*Background threading system for non-blocking task handling.*
- [daemon](#)
- str [boss\\_url](#) = [load\\_boss\\_config](#)()
- [PORT](#) = int(os.environ[fr'{args.task.upper()}\_PORT'])
- Flask [app](#) = [create\\_app](#)(args.task, [boss\\_url](#))
- [host](#)
- [port](#)
- [use\\_reloader](#)

### 11.21.1 Detailed Description

Generic Flask worker microservice for distributed task processing.

Supports multiple task types via command-line arguments and dynamic imports.

## 11.21.2 Function Documentation

### 11.21.2.1 create\_app()

```
Flask create_app (
 str task_name,
 str boss_url)
```

Create and configure Flask application for task processing.

#### Parameters

<i>task_name</i>	Type of task this worker will process.
<i>boss_url</i>	Callback URL for the boss service.

#### Returns

Configured Flask application instance.

### 11.21.2.2 get\_task\_info()

```
Tuple[Callable[[Dict[str, Any]], Dict[str, Any]], Dict[str, Any]] get_task_info (
 str task_name)
```

Dynamically import and return the appropriate task handler function.

#### Parameters

<i>task_name</i>	Name of the task type to execute.
------------------	-----------------------------------

#### Returns

Callable that processes the task data and returns results.

#### Exceptions

<i>ImportError</i>	If the task module cannot be imported.
<i>AttributeError</i>	If the task function is not found in the module.

### 11.21.2.3 load\_boss\_config()

```
str load_boss_config ()
```

Load boss service callback URL from environment variables.

#### Returns

Full callback URL for the boss service.

**Exceptions**

<i>KeyError</i>	If PYTHON_HOST environment variable is missing.
-----------------	-------------------------------------------------

**11.21.2.4 load\_imports()**

```
load_imports (
 func)
```

Pre-warm the task by importing requirements.

**Parameters**

<i>func</i>	The function to perform a dummy call on.
-------------	------------------------------------------

**11.21.2.5 load\_mongo\_config()**

```
str load_mongo_config (
 str database)
```

Load MongoDB configuration from environment variables.

**Parameters**

<i>database</i>	Name of the MongoDB database to connect to.
-----------------	---------------------------------------------

**Returns**

MongoDB connection string.

**Exceptions**

<i>KeyError</i>	If required environment variables are missing.
-----------------	------------------------------------------------

**11.21.2.6 mark\_task\_in\_progress()**

```
None mark_task_in_progress (
 MongoHandle mongo_db,
 str collection_name,
 str chunk_id,
 str task_name)
```

Mark a task as in-progress in MongoDB before processing begins.

## Parameters

<i>mongo_db</i>	MongoDB database instance.
<i>collection_name</i>	The name of our primary chunk storage collection in Mongo.
<i>chunk_id</i>	Unique identifier for the chunk within the story.
<i>task_name</i>	Name of the task being executed.

## Exceptions

<i>RuntimeError</i>	If task data already exists (preventing overwrites).
---------------------	------------------------------------------------------

**11.21.2.7 notify\_boss()**

```
None notify_boss (
 str boss_url,
 str chunk_id,
 str task_name,
 str status)
```

Send completion notification to boss service.

## Parameters

<i>boss_url</i>	Callback URL for the boss service.
<i>chunk_id</i>	Unique identifier for the chunk within the story.
<i>task_name</i>	Name of the completed task.
<i>status</i>	Task completion status ('completed' or 'failed').

**11.21.2.8 process\_task()**

```
None process_task (
 MongoHandle mongo_db,
 str collection_name,
 str chunk_id,
 str task_name,
 Dict[str, Any] chunk_doc,
 str boss_url,
 Callable[[Dict[str, Any]], Dict[str, Any]] task_handler,
 Any task_kwargs = None)
```

Perform the assigned task in a background thread.

This includes updating task status, running the handler, saving results, and notifying the boss service when complete.

## Parameters

<i>mongo_db</i>	MongoDB database instance.
<i>collection_name</i>	The name of the target MongoDB collection.

**Parameters**

<i>chunk_id</i>	Unique identifier for the chunk within the story.
<i>task_name</i>	Name of the task being executed.
<i>chunk_doc</i>	Document data for the current chunk.
<i>boss_url</i>	Callback URL for the boss service.
<i>task_handler</i>	Function that performs the actual task computation.
<i>task_kwargs</i>	Dict of configuration settings for each task.

**Exceptions**

<i>Exception</i>	Logs and reports failures to the boss service.
------------------	------------------------------------------------

**11.21.2.9 save\_task\_result()**

```
None save_task_result (
 MongoHandle mongo_db,
 str collection_name,
 str chunk_id,
 str task_name,
 Dict[str, Any] result)
```

Save completed task results to MongoDB.

**Parameters**

<i>mongo_db</i>	MongoDB database instance.
<i>collection_name</i>	The name of our primary chunk storage collection in Mongo.
<i>chunk_id</i>	Unique identifier for the chunk within the story.
<i>task_name</i>	Name of the task that was executed.
<i>result</i>	Dictionary containing task results to be stored.

**11.21.3 Variable Documentation****11.21.3.1 app**

```
Flask app = create_app(args.task, boss_url)
```

**11.21.3.2 args**

```
args = parser.parse_args()
```

**11.21.3.3 boss\_url**

```
str boss_url = load_boss_config()
```



#### 11.21.3.4 daemon

daemon

#### 11.21.3.5 help

help

#### 11.21.3.6 host

host

#### 11.21.3.7 MongoHandle

```
MongoHandle = Generator["Database[Any]", None, None]
```

#### 11.21.3.8 parser

```
parser = argparse.ArgumentParser(description="Flask worker microservice")
```

#### 11.21.3.9 PORT

```
PORT = int(os.environ[f"{args.task.upper()}_PORT"])
```

#### 11.21.3.10 port

port

#### 11.21.3.11 required

required

#### 11.21.3.12 target

target

#### 11.21.3.13 task\_queue

```
str task_queue = Queue()
```

#### 11.21.3.14 task\_worker

```
task_worker ()
```

Background threading system for non-blocking task handling.

Allows Flask to immediately respond to the boss service (202: accepted) while processing continues asynchronously in a separate thread.

Continuously process tasks from the global queue in the background.

Each task runs sequentially (or with limited concurrency if multiple workers are started).

## Exceptions

<i>Exception</i>	Logs any runtime errors that occur during task execution.
------------------	-----------------------------------------------------------

### 11.21.3.15 True

True

### 11.21.3.16 use\_reloader

use\_reloader

## 11.22 src.main Namespace Reference

### Functions

- [convert\\_single](#) ()  
*Converts one EPUB file to TEI format.*
- [convert\\_from\\_csv](#) ()  
*Converts several EPUB files to TEI format.*
- [chunk\\_single](#) ()  
*Creates a Story and many Chunks from a TEI file.*
- [test\\_relation\\_extraction](#) ()  
*Runs REBEL on a basic example; used for debugging.*
- [process\\_single](#) ()  
*Uses NLP and LLM to process an existing TEI file.*
- [graph\\_triple\\_files](#) ()  
*Loads JSON into Neo4j to test the Blazor graph page.*
- [output\\_single](#) ()  
*Generates a summary from triples stored in JSON, and posts data to Blazor.*
- [full\\_pipeline](#) (collection\_name, epub\_path, book\_chapters, start\_str, end\_str, [book\\_id](#), [story\\_id](#), [book\\_title](#))
- [old\\_main](#) (collection\_name)
- [pipeline\\_1](#) (epub\_path, book\_chapters, start\_str, end\_str, [book\\_id](#), [story\\_id](#))  
*Connects all components to convert an EPUB file to a book summary.*
- [pipeline\\_2](#) (collection\_name, [chunks](#), [book\\_title](#))  
*Extracts triples from a random chunk.*
- [pipeline\\_3](#) ([triples](#))  
*Generates a LLM summary using Neo4j triples.*
- [pipeline\\_4](#) (collection\_name, [triples\\_string](#), [chunk\\_id](#))  
*Generate chunk summary.*
- [pipeline\\_5a](#) ([summary](#), [book\\_title](#), [book\\_id](#))  
*Send book info to Blazor.*

## Variables

- str `tei` = `"/datasets/examples/trilogy-wishes-1.tei"`  
*Will revisit later - Book classes need refactoring ###.*
- str `chapters`
- str `start` = `""`
- str `end` = `"But I must say no more."`
- list `triple_files`
- list `response_files` = `["./datasets/triples/chunk-160_story-1.txt"]`
- `DB_NAME` = `os.environ["DB_NAME"]`
- `BOSS_PORT` = `int(os.environ["PYTHON_PORT"])`
- `COLLECTION` = `os.environ["COLLECTION_NAME"]`
- int `story_id` = `1`
- int `book_id` = `2`
- str `book_title` = `"The Phoenix and the Carpet"`
- `chunks`
- `triples`
- `chunk`
- `chunk_id` = `chunk.get_chunk_id()`
- `triples_string` = `pipeline_3(triples)`
- `summary` = `pipeline_4(COLLECTION, triples_string, chunk.get_chunk_id())`
- `response` = `post_process_full_story(BOSS_PORT, story_id, task_type)`

## 11.22.1 Function Documentation

### 11.22.1.1 `chunk_single()`

`chunk_single ( )`

Creates a Story and many Chunks from a TEI file.

Requires hard-coded specifications

- List of all chapter names.
- Optional start / end strings.

### 11.22.1.2 `convert_from_csv()`

`convert_from_csv ( )`

Converts several EPUB files to TEI format.

#### Note

Files are specified as rows in a CSV which contains parsing instructions.

### 11.22.1.3 convert\_single()

```
convert_single ()
```

Converts one EPUB file to TEI format.

### 11.22.1.4 full\_pipeline()

```
full_pipeline (
 collection_name,
 epub_path,
 book_chapters,
 start_str,
 end_str,
 book_id,
 story_id,
 book_title)
```

### 11.22.1.5 graph\_triple\_files()

```
graph_triple_files ()
```

Loads JSON into Neo4j to test the Blazor graph page.

### 11.22.1.6 old\_main()

```
old_main (
 collection_name)
```

### 11.22.1.7 output\_single()

```
output_single ()
```

Generates a summary from triples stored in JSON, and posts data to Blazor.

### 11.22.1.8 pipeline\_1()

```
pipeline_1 (
 epub_path,
 book_chapters,
 start_str,
 end_str,
 book_id,
 story_id)
```

Connects all components to convert an EPUB file to a book summary.

Data conversions:

- EPUB file
- XML (TEI)

### 11.22.1.9 pipeline\_2()

```
pipeline_2 (
 collection_name,
 chunks,
 book_title)
```

Extracts triples from a random chunk.

- JSON triples (NLP & LLM)

### 11.22.1.10 pipeline\_3()

```
pipeline_3 (
 triples)
```

Generates a LLM summary using Neo4j triples.

- Neo4j graph database
- Blazor graph page

### 11.22.1.11 pipeline\_4()

```
pipeline_4 (
 collection_name,
 triples_string,
 chunk_id)
```

Generate chunk summary.

### 11.22.1.12 pipeline\_5a()

```
pipeline_5a (
 summary,
 book_title,
 book_id)
```

Send book info to Blazor.

- Post to Blazor metrics page

### 11.22.1.13 process\_single()

```
process_single ()
```

Uses NLP and LLM to process an existing TEI file.

#### 11.22.1.14 test\_relation\_extraction()

```
test_relation_extraction ()
```

Runs REBEL on a basic example; used for debugging.

### 11.22.2 Variable Documentation

#### 11.22.2.1 book\_id

```
int book_id = 2
```

#### 11.22.2.2 book\_title

```
str book_title = "The Phoenix and the Carpet"
```

#### 11.22.2.3 BOSS\_PORT

```
BOSS_PORT = int(os.environ["PYTHON_PORT"])
```

#### 11.22.2.4 chapters

```
str chapters
```

##### Initial value:

```
00001 = """
00002 CHAPTER 1 BEAUTIFUL AS THE DAY\n
00003 CHAPTER 2 GOLDEN GUINEAS\n
00004 CHAPTER 3 BEING WANTED\n
00005 CHAPTER 4 WINGS\n
00006 CHAPTER 5 NO WINGS\n
00007 CHAPTER 6 A CASTLE AND NO DINNER\n
00008 CHAPTER 7 A SIEGE AND BED\n
00009 CHAPTER 8 BIGGER THAN THE BAKER'S BOY\n
00010 CHAPTER 9 GROWN UP\n
00011 CHAPTER 10 SCALPS\n
00012 CHAPTER 11 THE LAST WISH\n
00013 """
```

#### 11.22.2.5 chunk

```
chunk
```

#### 11.22.2.6 chunk\_id

```
chunk_id = chunk.get_chunk_id()
```

### 11.22.2.7 chunks

chunks

#### Initial value:

```
00001 = pipeline_1(
00002 epub_path="./datasets/examples/trilogy-wishes-2.epub",
00003 book_chapters=,
00004 start_str="",
00005 end_str="end of the Phoenix and the Carpet.",
00006 book_id=book_id,
00007 story_id=story_id,
00008)
```

### 11.22.2.8 COLLECTION

```
COLLECTION = os.environ["COLLECTION_NAME"]
```

### 11.22.2.9 DB\_NAME

```
DB_NAME = os.environ["DB_NAME"]
```

### 11.22.2.10 end

```
str end = "But I must say no more."
```

### 11.22.2.11 response

```
response = post_process_full_story(BOSS_PORT, story_id, task_type)
```

### 11.22.2.12 response\_files

```
list response_files = [".\\datasets\\triples\\chunk-160_story-1.txt"]
```

### 11.22.2.13 start

```
str start = ""
```

### 11.22.2.14 story\_id

```
int story_id = 1
```

### 11.22.2.15 summary

```
summary = pipeline_4(COLLECTION, triples_string, chunk.get_chunk_id())
```

### 11.22.2.16 `tei`

```
str tei = "../datasets/examples/trilogy-wishes-1.tei"
```

Will revisit later - Book classes need refactoring ###.

### 11.22.2.17 `triple_files`

```
list triple_files
```

#### Initial value:

```
00001 = [
00002 "../datasets/triples/chunk-160_story-1.json",
00003 "../datasets/triples/chunk-70_story-1.json",
00004]
```

### 11.22.2.18 `triples`

```
triples
```

### 11.22.2.19 `triples_string`

```
triples_string = pipeline_3(triples)
```

## 11.23 `src.util` Namespace Reference

### Classes

- class [Log](#)  
*The Log class standardizes console output.*

### Functions

- DataFrame [df\\_natural\\_sorted](#) (DataFrame df, List[str] ignored\_columns=[], List[str] sort\_columns=[])  
*Sort a DataFrame in natural order using only certain columns.*
- bool [check\\_values](#) (List[Any] results, List[Any] expected, bool verbose, str log\_source, bool raise\_error)  
*Safely compare two lists of values.*

### 11.23.1 Function Documentation

#### 11.23.1.1 `check_values()`

```
bool check_values (
 List[Any] results,
 List[Any] expected,
 bool verbose,
 str log_source,
 bool raise_error)
```

Safely compare two lists of values.

Helper for [src.connectors.relational.RelationalConnector.test\\_operations](#)



## Parameters

<i>results</i>	A list of observed values from the database.
<i>expected</i>	A list of correct values to compare against.
<i>verbose</i>	Whether to print success messages.
<i>log_source</i>	The Log class prefix indicating which method is performing the check.
<i>raise_error</i>	Whether to raise an error on connection failure.

## Exceptions

<i>Log.Failure</i>	If any result does not match what was expected.
--------------------	-------------------------------------------------

## 11.23.1.2 df\_natural\_sorted()

```
DataFrame df_natural_sorted (
 DataFrame df,
 List[str] ignored_columns = [],
 List[str] sort_columns = [])
```

Sort a DataFrame in natural order using only certain columns.

- Column order is alphabetic too, for completely predictable behavior.
- The provided DataFrame will not be modified, since inplace=False by default.
- Existing row numbers will be deleted and regenerated to match the sorted order.

## Parameters

<i>df</i>	The DataFrame containing unsorted rows.
<i>ignored_columns</i>	A list of column names to NOT sort by.
<i>sort_columns</i>	A list of column names to sort by FIRST.

## 11.24 tests Namespace Reference

## Namespaces

- namespace [confest](#)
- namespace [test\\_db\\_basic](#)
- namespace [test\\_db\\_files](#)
- namespace [test\\_kg\\_triples](#)

## 11.25 tests.confest Namespace Reference

## Functions

- [pytest\\_addoption](#) (parser)

- `session` (request)  
*Fixture to create session.*
- `RelationalConnector relational_db` (`Session session`)  
*Fixture to get relational database connection.*
- `DocumentConnector docs_db` (`Session session`)  
*Fixture to get document database connection.*
- `GraphConnector graph_db` (`Session session`)  
*Fixture to get document database connection.*

## 11.25.1 Function Documentation

### 11.25.1.1 `docs_db()`

```
DocumentConnector docs_db (
 Session session)
```

Fixture to get document database connection.

### 11.25.1.2 `graph_db()`

```
GraphConnector graph_db (
 Session session)
```

Fixture to get document database connection.

### 11.25.1.3 `pytest_addoption()`

```
pytest_addoption (
 parser)
```

### 11.25.1.4 `relational_db()`

```
RelationalConnector relational_db (
 Session session)
```

Fixture to get relational database connection.

### 11.25.1.5 `session()`

```
session (
 request)
```

Fixture to create session.

## 11.26 tests.test\_db\_basic Namespace Reference

### Functions

- None [test\\_db\\_relational\\_minimal](#) ([RelationalConnector](#) relational\_db)  
*Tests if the RelationalConnector has a valid connection string.*
- None [test\\_db\\_docs\\_minimal](#) ([DocumentConnector](#) docs\_db)  
*Tests if the DocumentConnector has a valid connection string.*
- None [test\\_db\\_graph\\_minimal](#) ([GraphConnector](#) graph\_db)  
*Tests if the GraphConnector has a valid connection string.*
- None [test\\_db\\_relational\\_comprehensive](#) ([RelationalConnector](#) relational\_db)  
*Tests if the GraphConnector is working as intended.*
- None [test\\_db\\_docs\\_comprehensive](#) ([DocumentConnector](#) docs\_db)  
*Tests if the GraphConnector is working as intended.*
- None [test\\_db\\_graph\\_comprehensive](#) ([GraphConnector](#) graph\_db)  
*Tests if the GraphConnector is working as intended.*

### 11.26.1 Function Documentation

#### 11.26.1.1 test\_db\_docs\_comprehensive()

```
None test_db_docs_comprehensive (
 DocumentConnector docs_db)
```

Tests if the GraphConnector is working as intended.

#### 11.26.1.2 test\_db\_docs\_minimal()

```
None test_db_docs_minimal (
 DocumentConnector docs_db)
```

Tests if the DocumentConnector has a valid connection string.

#### 11.26.1.3 test\_db\_graph\_comprehensive()

```
None test_db_graph_comprehensive (
 GraphConnector graph_db)
```

Tests if the GraphConnector is working as intended.

#### 11.26.1.4 test\_db\_graph\_minimal()

```
None test_db_graph_minimal (
 GraphConnector graph_db)
```

Tests if the GraphConnector has a valid connection string.

### 11.26.1.5 test\_db\_relational\_comprehensive()

```
None test_db_relational_comprehensive (
 RelationalConnector relational_db)
```

Tests if the GraphConnector is working as intended.

### 11.26.1.6 test\_db\_relational\_minimal()

```
None test_db_relational_minimal (
 RelationalConnector relational_db)
```

Tests if the RelationalConnector has a valid connection string.

## 11.27 tests.test\_db\_files Namespace Reference

### Functions

- Generator[None, None, None] [load\\_examples\\_relational](#) ([RelationalConnector](#) relational\_db)  
*Fixture to create relational tables using engine-specific syntax.*
- None [test\\_sql\\_example\\_1](#) ([RelationalConnector](#) relational\_db, Generator[None, None, None] [load\\_examples\\_relational](#))  
*Run queries contained within test files.*
- None [test\\_sql\\_example\\_2](#) ([RelationalConnector](#) relational\_db, Generator[None, None, None] [load\\_examples\\_relational](#))  
*Run queries contained within test files.*
- None [test\\_mongo\\_example\\_1](#) ([DocumentConnector](#) docs\_db)  
*Run queries contained within test files.*
- None [test\\_mongo\\_example\\_2](#) ([DocumentConnector](#) docs\_db)  
*Run queries contained within test files.*
- None [test\\_mongo\\_example\\_3](#) ([DocumentConnector](#) docs\_db)  
*Run queries contained within test files.*
- None [test\\_cypher\\_example\\_1](#) ([GraphConnector](#) graph\_db)  
*Run queries contained within test files.*
- None [test\\_cypher\\_example\\_2](#) ([GraphConnector](#) graph\_db)  
*Test social network graph with relationships and mixed query patterns.*
- None [test\\_cypher\\_example\\_3](#) ([GraphConnector](#) graph\_db)  
*Test scene and dialogue graphs with proper isolation.*
- None [test\\_cypher\\_example\\_4](#) ([GraphConnector](#) graph\_db)  
*Test event graph with property mutations and multi-hop traversal.*
- None [\\_exec\\_query\\_file](#) ([DatabaseConnector](#) db\_fixture, str filename, List[str] valid\_files)  
*Run queries from a local file through the database.*

### 11.27.1 Function Documentation

#### 11.27.1.1 \_exec\_query\_file()

```
None _exec_query_file (
 DatabaseConnector db_fixture,
 str filename,
 List[str] valid_files) [protected]
```

Run queries from a local file through the database.

## Parameters

<i>db_fixture</i>	Fixture corresponding to the current session's database.
<i>filename</i>	The name of a query file (for example <code>./tests/example1.sql</code> ).
<i>valid_files</i>	A list of file extensions valid for this database type.

**11.27.1.2 load\_examples\_relational()**

```
Generator[None, None, None] load_examples_relational (
 RelationalConnector relational_db)
```

Fixture to create relational tables using engine-specific syntax.

**11.27.1.3 test\_cypher\_example\_1()**

```
None test_cypher_example_1 (
 GraphConnector graph_db)
```

Run queries contained within test files.

Internal errors are handled by the class itself, and ruled out earlier. Here we just assert that the received results DataFrame matches what we expected.

**11.27.1.4 test\_cypher\_example\_2()**

```
None test_cypher_example_2 (
 GraphConnector graph_db)
```

Test social network graph with relationships and mixed query patterns.

Validates comment parsing, semicolon splitting, CREATE/MERGE/MATCH, relationships with properties, and TAG\_NODES\_ with/without RETURN.

**11.27.1.5 test\_cypher\_example\_3()**

```
None test_cypher_example_3 (
 GraphConnector graph_db)
```

Test scene and dialogue graphs with proper isolation.

Validates kg property isolation using a scene graph (spatial relationships) and dialogue graph (conversation flow with object references). Tests temp\_graph context manager and filter\_valid correctness across different graph contexts.

### 11.27.1.6 test\_cypher\_example\_4()

```
None test_cypher_example_4 (
 GraphConnector graph_db)
```

Test event graph with property mutations and multi-hop traversal.

Validates MERGE property updates (2-wave assignment), relationship chains in DAG structure, consistent rel\_type with varied properties, and multi-hop path queries. Tests that properties added via SET after initial CREATE are properly stored.

### 11.27.1.7 test\_mongo\_example\_1()

```
None test_mongo_example_1 (
 DocumentConnector docs_db)
```

Run queries contained within test files.

Internal errors are handled by the class itself, and ruled out earlier. Here we just assert that the received results DataFrame matches what we expected.

### 11.27.1.8 test\_mongo\_example\_2()

```
None test_mongo_example_2 (
 DocumentConnector docs_db)
```

Run queries contained within test files.

Internal errors are handled by the class itself, and ruled out earlier. Here we just assert that the received results DataFrame matches what we expected.

### 11.27.1.9 test\_mongo\_example\_3()

```
None test_mongo_example_3 (
 DocumentConnector docs_db)
```

Run queries contained within test files.

Internal errors are handled by the class itself, and ruled out earlier. Here we just assert that the received results DataFrame matches what we expected.

### 11.27.1.10 test\_sql\_example\_1()

```
None test_sql_example_1 (
 RelationalConnector relational_db,
 Generator[None, None, None] load_examples_relational)
```

Run queries contained within test files.

Internal errors are handled by the class itself, and ruled out earlier. Here we just assert that the received results DataFrame matches what we expected.

#### Note

Uses a table-creation fixture to load / unload schema.

### 11.27.1.11 test\_sql\_example\_2()

```
None test_sql_example_2 (
 RelationalConnector relational_db,
 Generator[None, None, None] load_examples_relational)
```

Run queries contained within test files.

Internal errors are handled by the class itself, and ruled out earlier. Here we just assert that the received results DataFrame matches what we expected.

#### Note

Uses a table-creation fixture to load / unload schema.

## 11.28 tests.test\_kg\_triples Namespace Reference

### Functions

- None [test\\_knowledge\\_graph\\_triples](#) ([GraphConnector](#) graph\_db)  
*Test KnowledgeGraph triple operations using add\_triple and get\_all\_triples.*
- [KnowledgeGraph nature\\_scene\\_graph](#) ([GraphConnector](#) graph\_db)  
*Create a scene graph with multiple location-based communities for testing.*
- None [test\\_get\\_subgraph\\_by\\_nodes](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Test filtering triples by specific node IDs.*
- None [test\\_get\\_neighborhood](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Test k-hop neighborhood expansion around a central node.*
- None [test\\_get\\_random\\_walk\\_sample](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Test random walk sampling starting from specified nodes.*
- None [test\\_get\\_neighborhood\\_comprehensive](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Comprehensive test for k-hop neighborhood expansion.*
- None [test\\_get\\_random\\_walk\\_sample\\_comprehensive](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Comprehensive test for random walk sampling.*
- None [test\\_detect\\_community\\_clusters\\_minimal](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Test basic community detection functionality.*
- None [test\\_detect\\_community\\_clusters\\_comprehensive](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Comprehensive test for community detection with various parameters.*

### 11.28.1 Function Documentation

#### 11.28.1.1 nature\_scene\_graph()

```
KnowledgeGraph nature_scene_graph (
 GraphConnector graph_db)
```

Create a scene graph with multiple location-based communities for testing.

Graph structure represents a park with distinct areas:

- Playground: swings, slide, kids
- Bench area: bench, parents
- Forest: trees, rock, path
- School building: doors, windows, classroom Each area forms a natural community for GraphRAG testing.

### 11.28.1.2 test\_detect\_community\_clusters\_comprehensive()

```
None test_detect_community_clusters_comprehensive (
 KnowledgeGraph nature_scene_graph)
```

Comprehensive test for community detection with various parameters.

Tests:

- Multi-level hierarchical detection
- community\_list structure for hierarchical summarization
- Invalid method handling
- Community stability and coverage

### 11.28.1.3 test\_detect\_community\_clusters\_minimal()

```
None test_detect_community_clusters_minimal (
 KnowledgeGraph nature_scene_graph)
```

Test basic community detection functionality.

Validates that detect\_community\_clusters assigns community\_id properties to nodes and that get\_community\_↔ subgraph retrieves triples within a community. Tests both Leiden and Louvain methods.

### 11.28.1.4 test\_get\_neighborhood()

```
None test_get_neighborhood (
 KnowledgeGraph nature_scene_graph)
```

Test k-hop neighborhood expansion around a central node.

Validates that get\_neighborhood correctly finds all triples within k hops of a starting node.

### 11.28.1.5 test\_get\_neighborhood\_comprehensive()

```
None test_get_neighborhood_comprehensive (
 KnowledgeGraph nature_scene_graph)
```

Comprehensive test for k-hop neighborhood expansion.

Tests edge cases and advanced features:

- depth=0 (no expansion)
- Disconnected nodes
- Maximum depth reaching entire connected component
- Cycle handling (no infinite loops)
- Consistent results across multiple calls



### 11.28.1.6 test\_get\_random\_walk\_sample()

```
None test_get_random_walk_sample (
 KnowledgeGraph nature_scene_graph)
```

Test random walk sampling starting from specified nodes.

Validates that get\_random\_walk\_sample generates a representative subgraph by following random paths through the graph.

### 11.28.1.7 test\_get\_random\_walk\_sample\_comprehensive()

```
None test_get_random_walk_sample_comprehensive (
 KnowledgeGraph nature_scene_graph)
```

Comprehensive test for random walk sampling.

Tests edge cases and advanced features:

- Empty start\_nodes list (should sample from any node)
- Dead-end nodes (leaf nodes with no outgoing edges)
- Walk length limits are respected
- Deterministic subset property
- Stochasticity verification

### 11.28.1.8 test\_get\_subgraph\_by\_nodes()

```
None test_get_subgraph_by_nodes (
 KnowledgeGraph nature_scene_graph)
```

Test filtering triples by specific node IDs.

Validates that get\_subgraph\_by\_nodes correctly filters triples where either subject or object matches the provided node list.

### 11.28.1.9 test\_knowledge\_graph\_triples()

```
None test_knowledge_graph_triples (
 GraphConnector graph_db)
```

Test KnowledgeGraph triple operations using add\_triple and get\_all\_triples.

Validates the KnowledgeGraph wrapper for semantic triple management:

- add\_triple() creates nodes and relationships
- get\_all\_triples() retrieves triples as element IDs
- get\_triple\_properties() constructs a DataFrame with element properties as columns
- triples\_to\_names() maps IDs to human-readable names




## Chapter 12

# Class Documentation


### 12.1 Log.BadAddressFailure Class Reference

Raised when a database connection string or address is invalid.

Inheritance diagram for Log.BadAddressFailure:



Collaboration diagram for Log.BadAddressFailure:



#### Public Member Functions

- `__init__` (self, str source\_prefix, str connection\_string)

#### Public Member Functions inherited from [Log.Failure](#)

- `__str__` (self)

#### Additional Inherited Members

#### Public Attributes inherited from [Log.Failure](#)

- `prefix`
- `msg`

### 12.1.1 Detailed Description

Raised when a database connection string or address is invalid.

- We support 4+ database engines and 2 endpoint frameworks (Blazor & Flask), each of which has a different error type when unable to connect.
- To avoid flooding the console with these, this error should not be chained.
- Usage: raise `BadAddressFailure(source_prefix, connection_string)` from `None`

## 12.1.2 Constructor & Destructor Documentation

### 12.1.2.1 \_\_init\_\_()

```
__init__ (
 self,
 str source_prefix,
 str connection_string)
```

Reimplemented from [Log.Failure](#).

The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/src/util.py](#)

## 12.2 Book Class Reference

### Public Member Functions

- None [\\_\\_init\\_\\_](#) (self, str title\_key="Title:", str author\_key="Author:", str language\_key="Language:", str date\_key="Release date:")
- [Iterator\[Tuple\[str, Dict\[str, Any\]\]\]](#) [stream\\_chapters](#) (self)

## 12.2.1 Constructor & Destructor Documentation

### 12.2.1.1 \_\_init\_\_()

```
None __init__ (
 self,
 str title_key = "Title:",
 str author_key = "Author:",
 str language_key = "Language:",
 str date_key = "Release date:")
```

## 12.2.2 Member Function Documentation

### 12.2.2.1 stream\_chapters()


```
Iterator[Tuple[str, Dict[str, Any]]] stream_chapters (
 self)
```

The documentation for this class was generated from the following file:


- [/home/runner/work/dsci-capstone/dsci-capstone/src/components/book\\_conversion.py](#)

## 12.3 BookFactory Class Reference

Inheritance diagram for BookFactory:



Collaboration diagram for BookFactory:



### Public Member Functions

- [Book create\\_book](#) (self)

### 12.3.1 Member Function Documentation

#### 12.3.1.1 create\_book()


```
Book create_book (
 self)
```

The documentation for this class was generated from the following file:


- [/home/runner/work/dsci-capstone/dsci-capstone/src/components/book\\_conversion.py](#)

## 12.4 BookStream Class Reference

Inheritance diagram for BookStream:

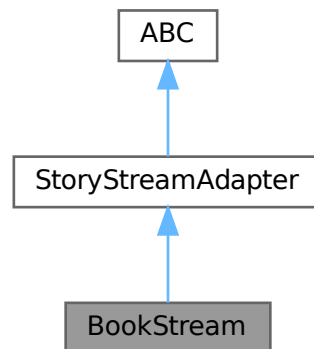

Collaboration diagram for BookStream:

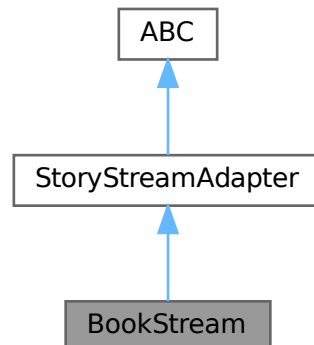

### Public Member Functions

- None `__init__` (self, [Book book](#))
- [Iterator\[Chunk\]](#) `stream_segments` (self)  
*Yields sanitized parts of a book.*

### Public Member Functions inherited from [StoryStreamAdapter](#)

- [Iterator\[Chunk\]](#) `stream_paragraphs` (self)  
*Concrete helper method to split segments into paragraphs.*
- [Iterator\[str\]](#) `stream_sentences` (self)  
*Concrete helper method to split paragraphs into sentences.*

## Public Attributes

- [book](#)

## 12.4.1 Constructor & Destructor Documentation

### 12.4.1.1 `__init__()`

```
None __init__ (
 self,
 Book book)
```

## 12.4.2 Member Function Documentation

### 12.4.2.1 `stream_segments()`

```
Iterator[Chunk] stream_segments (
 self)
```

Yields sanitized parts of a book.

- Story segments usually correspond to chapters.
- They serve as borders between chunking operations, ensuring chunks do not span multiple chapters. Implementation is handled by child classes `BookStream`, etc.
- Segments should be pre-cleaned and must contain 1 paragraph per line with all other newlines removed.

Reimplemented from [StoryStreamAdapter](#).

## 12.4.3 Member Data Documentation

### 12.4.3.1 `book`

`book`

The documentation for this class was generated from the following file:

- `/home/runner/work/dsci-capstone/dsci-capstone/src/components/book\_conversion.py`

## 12.5 Chunk Class Reference

Lightweight container for a span of story text.



## Public Member Functions

- None `__init__` (self, str `text`, int `book_id`, int `chapter_number`, int `line_start`, int `line_end`, int `story_id`, float `story_percent`, float `chapter_percent`, int `max_chunk_length=-1`)  
*Construct a Chunk.*
- int `char_count` (self, bool `prune_newlines=False`)  
*Computes the character count.*
- str `get_chunk_id` (self)  
*Use story ID, book ID, chapter, and chapter percentage to generate a chunk ID.*
- Dict[str, Any] `to_mongo_dict` (self)  
*Convert Chunk to Mongo document format.*
- str `__repr__` (self)

## Public Attributes

- `text`
- `book_id`
- `chapter_number`
- `line_start`
- `line_end`
- `story_id`
- `story_percent`
- `chapter_percent`

### 12.5.1 Detailed Description

Lightweight container for a span of story text.

- Carries positional metadata so downstream consumers can reconstruct context.
- Filter by `story_id` to fetch all chunks for a particular story.
- Use `story_percent` and `chapter_percent` to quickly sort chunks by intended order.
- Use `book_id`, `chapter_number`, `line_start`, and `line_end` to locate this chunk within source material.

### 12.5.2 Constructor & Destructor Documentation

#### 12.5.2.1 `__init__()`

```
None __init__ (
 self,
 str text,
 int book_id,
 int chapter_number,
 int line_start,
 int line_end,
 int story_id,
 float story_percent,
 float chapter_percent,
 int max_chunk_length = -1)
```

Construct a Chunk.

**Parameters**

<i>text</i>	The text content for this span.
<i>book_id</i>	Corresponds to a single book file in the dataset.
<i>chapter_number</i>	The chapter containing this chunk in the book file, 1-based.
<i>line_start</i>	The starting line within the TEI file, 1-based.
<i>line_end</i>	The inclusive ending line index within the TEI file ( $\geq$ line_start).
<i>story_id</i>	A stable id for the overall story. May be identical to book_id
<i>story_percent</i>	Approximate progress through the whole story [0.0, 100.0].
<i>chapter_percent</i>	Approximate progress through the current segment [0.0, 100.0].
<i>max_chunk_length</i>	Max allowed characters ( $\leq 0$ means "no limit").

**Exceptions**

<i>ValueError</i>	if text exceeds max_chunk_length when max_chunk_length > 0.
-------------------	-------------------------------------------------------------

**12.5.3 Member Function Documentation****12.5.3.1 \_\_repr\_\_()**

```
str __repr__ (
 self)
```

**12.5.3.2 char\_count()**

```
int char_count (
 self,
 bool prune_newlines = False)
```

Computes the character count.

**Parameters**

<i>prune_newlines</i>	Whether to remove newlines for the count.
-----------------------	-------------------------------------------

**Returns**

The number of characters in the chunk text.

**12.5.3.3 get\_chunk\_id()**

```
str get_chunk_id (
 self)
```

Use story ID, book ID, chapter, and chapter percentage to generate a chunk ID.

**Returns**

A string uniquely identifying a chunk.

**12.5.3.4 to\_mongo\_dict()**

```
Dict[str, Any] to_mongo_dict (
 self)
```

Convert Chunk to Mongo document format.

**Returns**

A dictionary which can be easily loaded into MongoDB.

**12.5.4 Member Data Documentation****12.5.4.1 book\_id**

```
book_id
```

**12.5.4.2 chapter\_number**

```
chapter_number
```

**12.5.4.3 chapter\_percent**

```
chapter_percent
```

**12.5.4.4 line\_end**

```
line_end
```

**12.5.4.5 line\_start**

```
line_start
```

**12.5.4.6 story\_id**

```
story_id
```

**12.5.4.7 story\_percent**

```
story_percent
```

#### 12.5.4.8 text

text


The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/src/components/book\\_conversion.py](#)


## 12.6 Connector Class Reference

Abstract base class for external connectors.

Inheritance diagram for Connector:

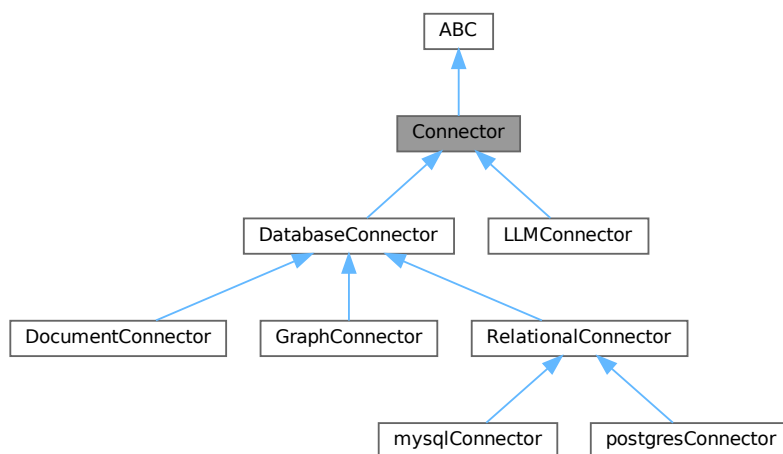

Collaboration diagram for Connector:



## Public Member Functions

- bool [test\\_operations](#) (self, bool raise\_error=True)  
*Establish a basic connection to the database, and test full functionality.*
- bool [check\\_connection](#) (self, str log\_source, bool raise\_error)  
*Minimal connection test to determine if our connection string is valid.*
- Optional[DataFrame] [execute\\_query](#) (self, str query)  
*Send a single command through the connection.*
- List[Optional[DataFrame]] [execute\\_file](#) (self, str filename)  
*Run several commands from a file.*

### 12.6.1 Detailed Description

Abstract base class for external connectors.

#### Note

Credentials are specified in the .env file.

Derived classes should implement:

- `init`
- `src.connectors.base.Connector.test_operations`
- `src.connectors.base.Connector.execute_query`
- `src.connectors.base.Connector.execute_file`

### 12.6.2 Member Function Documentation

#### 12.6.2.1 `check_connection()`

```
bool check_connection (
 self,
 str log_source,
 bool raise_error)
```

Minimal connection test to determine if our connection string is valid.

#### Parameters

<code>log_source</code>	The Log class prefix indicating which method is performing the check.
<code>raise_error</code>	Whether to raise an error on connection failure.

#### Returns

Whether the connection test was successful.

**Exceptions**

<i>Log.Failure</i>	If <code>raise_error</code> is <code>True</code> and the connection test fails to complete.
--------------------	---------------------------------------------------------------------------------------------

Reimplemented in [LLMConnector](#), [DocumentConnector](#), [GraphConnector](#), and [RelationalConnector](#).

**12.6.2.2 execute\_file()**

```
List[Optional[DataFrame]] execute_file (
 self,
 str filename)
```

Run several commands from a file.

**Parameters**

<i>filename</i>	The path to a specified query or prompt file (.sql, .txt).
-----------------	------------------------------------------------------------

**Returns**

Whether the query was performed successfully.

Reimplemented in [DatabaseConnector](#), and [LLMConnector](#).

**12.6.2.3 execute\_query()**

```
Optional[DataFrame] execute_query (
 self,
 str query)
```

Send a single command through the connection.

**Parameters**

<i>query</i>	A single query to perform on the database.
--------------	--------------------------------------------

**Returns**

The result of the query, or `None`

Reimplemented in [DatabaseConnector](#), [DocumentConnector](#), [LLMConnector](#), [RelationalConnector](#), and [GraphConnector](#).

**12.6.2.4 test\_operations()**

```
bool test_operations (
 self,
 bool raise_error = True)
```

Establish a basic connection to the database, and test full functionality.

Can be configured to fail silently, which enables retries or external handling.

#### Parameters

<i>raise_error</i>	Whether to raise an error on connection failure.
--------------------	--------------------------------------------------

#### Returns

Whether the connection test was successful.

#### Exceptions

<i>Log.Failure</i>	If <code>raise_error</code> is <code>True</code> and the connection test fails to complete.
--------------------	---------------------------------------------------------------------------------------------

Reimplemented in [DocumentConnector](#), [GraphConnector](#), [LLMConnector](#), and [RelationalConnector](#).


The documentation for this class was generated from the following file:

- `/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/base.py`


## 12.7 DatabaseConnector Class Reference

Abstract base class for database engine connectors.

Inheritance diagram for DatabaseConnector:

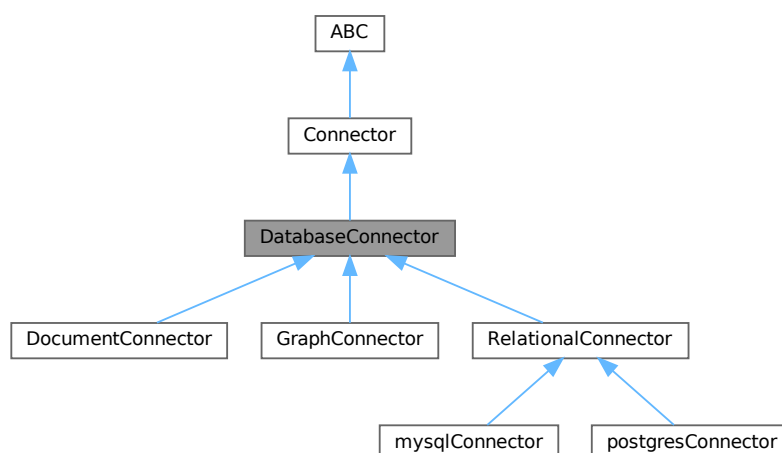

Collaboration diagram for DatabaseConnector:



## Public Member Functions

- None `__init__` (self, bool `verbose`=False)  
*Initialize the connector.*
- None `configure` (self, str DB, str database\_name)  
*Read connection settings from the .env file.*
- None `change_database` (self, str new\_database)  
*Update the connection URI to reference a different database in the same engine.*
- Generator[None, None, None] `temp_database` (self, str database\_name)  
*Temporarily switch to a pseudo-database, creating and dropping it if needed.*
- Optional[DataFrame] `execute_query` (self, str query)  
*Send a single command through the connection.*
- List[Optional[DataFrame]] `execute_combined` (self, str multi\_query)  
*Run several database commands in sequence.*
- List[Optional[DataFrame]] `execute_file` (self, str filename)  
*Run several database commands from a file.*
- DataFrame `get_dataframe` (self, str name, List[str] columns=[])  
*Automatically generate and run a query for the specified resource.*
- None `create_database` (self, str database\_name)  
*Use the current database connection to create a sibling database in this engine.*
- None `drop_database` (self, str database\_name)  
*Delete all data stored in a particular database.*
- bool `database_exists` (self, str database\_name)  
*Search for an existing database using the provided name.*

## Public Member Functions inherited from Connector

- bool `test_operations` (self, bool raise\_error=True)  
*Establish a basic connection to the database, and test full functionality.*
- bool `check_connection` (self, str log\_source, bool raise\_error)  
*Minimal connection test to determine if our connection string is valid.*



## Public Attributes

- [verbose](#)  
*Whether to print debug messages.*
- [db\\_type](#)
- [db\\_engine](#)
- [username](#)
- [password](#)
- [host](#)
- [port](#)
- [connection\\_string](#)

## Protected Member Functions

- [\\_is\\_single\\_query](#) (self, str query)  
*Checks if a string contains multiple queries.*
- [\\_split\\_combined](#) (self, str multi\_query)  
*Checks if a string contains multiple queries.*
- [\\_returns\\_data](#) (self, str query)  
*Checks if a query is structured in a way that returns real data, and not status messages.*
- [\\_parsable\\_to\\_df](#) (self, Any result)  
*Checks if the result of a query is valid (i.e.*

### 12.7.1 Detailed Description

Abstract base class for database engine connectors.

Derived classes should implement:

- [src.connectors.base.DatabaseConnector.\\_\\_init\\_\\_](#)
- [src.connectors.base.DatabaseConnector.test\\_operations](#)
- [src.connectors.base.DatabaseConnector.execute\\_query](#)
- [src.connectors.base.DatabaseConnector.\\_split\\_combined](#)
- [src.connectors.base.DatabaseConnector.get\\_dataframe](#)
- [src.connectors.base.DatabaseConnector.create\\_database](#)
- [src.connectors.base.DatabaseConnector.drop\\_database](#)
- [src.connectors.base.DatabaseConnector.change\\_database](#)
- [src.connectors.base.DatabaseConnector.database\\_exists](#)

### 12.7.2 Constructor & Destructor Documentation

#### 12.7.2.1 `__init__()`

```
None __init__ (
 self,
 bool verbose = False)
```

Initialize the connector.

## Parameters

<i>verbose</i>	Whether to print debug messages.
----------------	----------------------------------

## Note

Attributes will be set to None until [src.connectors.base.DatabaseConnector.configure\(\)](#) is called.

Reimplemented in [RelationalConnector](#), [DocumentConnector](#), [GraphConnector](#), [mysqlConnector](#), and [postgresConnector](#).

## 12.7.3 Member Function Documentation

### 12.7.3.1 `_is_single_query()`

```
bool _is_single_query (
 self,
 str query) [protected]
```

Checks if a string contains multiple queries.

## Parameters

<i>query</i>	A single or combined query string.
--------------	------------------------------------

## Returns

Whether the query is single (true) or combined (false).

### 12.7.3.2 `_parsable_to_df()`

```
bool _parsable_to_df (
 self,
 Any result) [protected]
```

Checks if the result of a query is valid (i.e.

can be converted to a Pandas DataFrame).

## Parameters

<i>result</i>	The result of a SQL, Cypher, or JSON query.
---------------	---------------------------------------------

## Returns

Whether the object is parsable to DataFrame.

Reimplemented in [DocumentConnector](#), [GraphConnector](#), and [RelationalConnector](#).

### 12.7.3.3 `_returns_data()`

```
bool _returns_data (
 self,
 str query) [protected]
```

Checks if a query is structured in a way that returns real data, and not status messages.

#### Parameters

<i>query</i>	A single query string.
--------------	------------------------

#### Returns

Whether the query is intended to fetch data (true) or might return a status message (false).

Reimplemented in [DocumentConnector](#), [GraphConnector](#), and [RelationalConnector](#).

### 12.7.3.4 `_split_combined()`

```
List[str] _split_combined (
 self,
 str multi_query) [protected]
```

Checks if a string contains multiple queries.

#### Parameters

<i>multi_query</i>	A string containing multiple queries.
--------------------	---------------------------------------

#### Returns

A list of single-query strings.

Reimplemented in [DocumentConnector](#), [GraphConnector](#), and [RelationalConnector](#).

### 12.7.3.5 `change_database()`

```
None change_database (
 self,
 str new_database)
```

Update the connection URI to reference a different database in the same engine.

#### Parameters

<i>new_database</i>	The name of the database to connect to.
---------------------	-----------------------------------------

Reimplemented in [DocumentConnector](#), [GraphConnector](#), and [RelationalConnector](#).

### 12.7.3.6 configure()

```
None configure (
 self,
 str DB,
 str database_name)
```

Read connection settings from the .env file.

#### Parameters

<i>DB</i>	The prefix of fetched database credentials.
<i>database_name</i>	The name of the database to connect to.

### 12.7.3.7 create\_database()

```
None create_database (
 self,
 str database_name)
```

Use the current database connection to create a sibling database in this engine.

#### Parameters

<i>database_name</i>	The name of the new database to create.
----------------------	-----------------------------------------

#### Exceptions

<i>Log.Failure</i>	If the database already exists.
--------------------	---------------------------------

Reimplemented in [DocumentConnector](#), [GraphConnector](#), and [RelationalConnector](#).

### 12.7.3.8 database\_exists()

```
bool database_exists (
 self,
 str database_name)
```

Search for an existing database using the provided name.

#### Parameters

<i>database_name</i>	The name of a database to search for.
----------------------	---------------------------------------

### Returns

Whether the database is visible to this connector.

Reimplemented in [DocumentConnector](#), [GraphConnector](#), and [RelationalConnector](#).

#### 12.7.3.9 drop\_database()

```
None drop_database (
 self,
 str database_name)
```

Delete all data stored in a particular database.

### Parameters

<i>database_name</i>	The name of an existing database.
----------------------	-----------------------------------

### Exceptions

<i>Log.Failure</i>	If the database does not exist.
--------------------	---------------------------------

Reimplemented in [DocumentConnector](#), [GraphConnector](#), and [RelationalConnector](#).

#### 12.7.3.10 execute\_combined()

```
List[Optional[DataFrame]] execute_combined (
 self,
 str multi_query)
```

Run several database commands in sequence.

### Parameters

<i>multi_query</i>	A string containing multiple queries.
--------------------	---------------------------------------

### Returns

A list of query results converted to DataFrames.

#### 12.7.3.11 execute\_file()

```
List[Optional[DataFrame]] execute_file (
 self,
 str filename)
```

Run several database commands from a file.

### Note

Loads the entire file into memory at once.

**Parameters**

<i>filename</i>	The path to a specified query file (.sql, .cql, .json).
-----------------	---------------------------------------------------------

**Returns**

Whether the query was performed successfully.

**Exceptions**

<i>Log.Failure</i>	If any query in the file fails to execute.
--------------------	--------------------------------------------

Reimplemented from [Connector](#).

**12.7.3.12 execute\_query()**

```
Optional[DataFrame] execute_query (
 self,
 str query)
```

Send a single command through the connection.

**Note**

If a result is returned, it will be converted to a DataFrame.

**Parameters**

<i>query</i>	A single query to perform on the database.
--------------	--------------------------------------------

**Returns**

DataFrame containing the result of the query, or None

**Exceptions**

<i>Log.Failure</i>	If the query fails to execute.
--------------------	--------------------------------

Reimplemented from [Connector](#).

Reimplemented in [DocumentConnector](#), [RelationalConnector](#), and [GraphConnector](#).

**12.7.3.13 get\_dataframe()**

```
DataFrame get_dataframe (
 self,
```

```
 str name,
 List[str] columns = [])
```

Automatically generate and run a query for the specified resource.

#### Parameters

<i>name</i>	The name of an existing table or collection in the database.
<i>columns</i>	A list of column names to keep.

#### Returns

DataFrame containing the requested data

Reimplemented in [DocumentConnector](#), [GraphConnector](#), and [RelationalConnector](#).

#### 12.7.3.14 temp\_database()

```
Generator[None, None, None] temp_database (
 self,
 str database_name)
```

Temporarily switch to a pseudo-database, creating and dropping it if needed.

- If the target database does not exist, it will be created before yielding and dropped automatically afterward.
- If it already exists, it will be left intact.

#### Parameters

<i>database_name</i>	The name of the pseudo-database to use temporarily.
----------------------	-----------------------------------------------------

### 12.7.4 Member Data Documentation

#### 12.7.4.1 connection\_string

connection\_string

#### 12.7.4.2 db\_engine

db\_engine

#### 12.7.4.3 db\_type

db\_type

#### 12.7.4.4 host

host

#### 12.7.4.5 password

password

#### 12.7.4.6 port

port

#### 12.7.4.7 username

username

#### 12.7.4.8 verbose

verbose

Whether to print debug messages.


The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/base.py](#)

## 12.8 DocumentConnector Class Reference


Connector for MongoDB (document database)

Inheritance diagram for DocumentConnector:

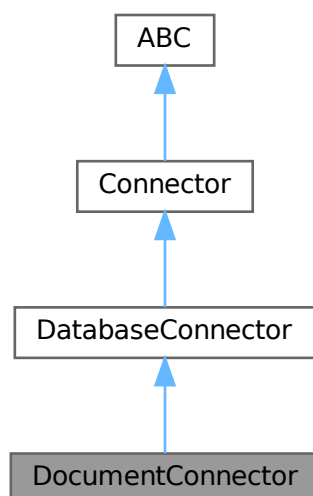



Collaboration diagram for DocumentConnector:

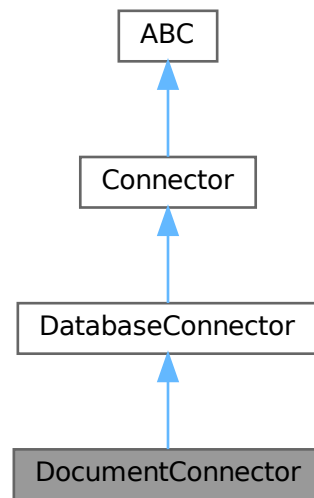

### Public Member Functions

- None `__init__` (self, bool `verbose`=False)  
*Creates a new MongoDB connector.*
- None `change_database` (self, str `new_database`)  
*Update the connection URI to reference a different database in the same engine.*
- bool `test_operations` (self, bool `raise_error`=True)  
*Establish a basic connection to the MongoDB database, and test full functionality.*
- bool `check_connection` (self, str `log_source`, bool `raise_error`=True)  
*Minimal connection test to determine if our connection string is valid.*
- `get_unmanaged_handle` (self)  
*Expose the low-level PyMongo handle for external use.*
- Optional[DataFrame] `execute_query` (self, str `query`)  
*Send a single MongoDB command using PyMongo.*
- DataFrame `get_dataframe` (self, str `name`, List[str] `columns`=[ ])  
*Automatically generate and run a query for the specified collection.*
- None `create_database` (self, str `database_name`)  
*Use the current database connection to create a sibling database in this engine.*
- None `drop_database` (self, str `database_name`)  
*Delete all data stored in a particular database.*
- bool `database_exists` (self, str `database_name`)  
*Search for an existing database using the provided name.*
- None `delete_dummy` (self)  
*Delete the initial dummy collection from the database.*

## Public Member Functions inherited from [DatabaseConnector](#)

- None [configure](#) (self, str DB, str database\_name)  
*Read connection settings from the .env file.*
- Generator[None, None, None] [temp\\_database](#) (self, str database\_name)  
*Temporarily switch to a pseudo-database, creating and dropping it if needed.*
- List[Optional[DataFrame]] [execute\\_combined](#) (self, str multi\_query)  
*Run several database commands in sequence.*
- List[Optional[DataFrame]] [execute\\_file](#) (self, str filename)  
*Run several database commands from a file.*

## Public Attributes

- [database\\_name](#)
- [verbose](#)
- [connection\\_string](#)

## Public Attributes inherited from [DatabaseConnector](#)

- [verbose](#)  
*Whether to print debug messages.*
- [db\\_type](#)
- [db\\_engine](#)
- [username](#)
- [password](#)
- [host](#)
- [port](#)
- [connection\\_string](#)

## Protected Member Functions

- list[str] [\\_split\\_combined](#) (self, str multi\_query)  
*Divides a string into non-divisible MongoDB commands by splitting on semicolons at depth 0.*
- bool [\\_returns\\_data](#) (self, str query)  
*Checks if a query is structured in a way that returns real data, and not status messages.*
- bool [\\_parsable\\_to\\_df](#) (self, Any result)  
*Checks if the result of a query is valid (i.e.*

## Protected Member Functions inherited from [DatabaseConnector](#)

- bool [\\_is\\_single\\_query](#) (self, str query)  
*Checks if a string contains multiple queries.*

## Protected Attributes

- [\\_auth\\_suffix](#)

## 12.8.1 Detailed Description

Connector for MongoDB (document database)

- Uses `mongoengine.connect(...)` on-demand for connections.
- Low-level operations use `pymongo` via `mongoengine.get_db()`.
- `create_database` uses an init collection insertion (MongoDB is lazy).

## 12.8.2 Constructor & Destructor Documentation

### 12.8.2.1 `__init__()`

```
None __init__ (
 self,
 bool verbose = False)
```

Creates a new MongoDB connector.

#### Parameters

<i>verbose</i>	Whether to print debug messages.
----------------	----------------------------------

Reimplemented from [DatabaseConnector](#).

## 12.8.3 Member Function Documentation

### 12.8.3.1 `_parsable_to_df()`

```
bool _parsable_to_df (
 self,
 Any result) [protected]
```

Checks if the result of a query is valid (i.e.

can be converted to a Pandas DataFrame).

- Handles cursor-style dicts (with 'cursor' or 'firstBatch'), list-of-dict results, and single-document results.
- Excludes pure status/meta responses like `{'ok': 1}`.

#### Parameters

<i>result</i>	The result of a JSON query.
---------------	-----------------------------

**Returns**

Whether the object is parsable to DataFrame.

Reimplemented from [DatabaseConnector](#).

**12.8.3.2 \_returns\_data()**

```
bool _returns_data (
 self,
 str query) [protected]
```

Checks if a query is structured in a way that returns real data, and not status messages.

Determines whether a MongoDB command should yield cursor data.

- Uses an exclusion list - commands that definitely return a status.
- Everything else falls through to execution for validation.

**Parameters**

<i>query</i>	A single pre-validated JSON query string.
--------------	-------------------------------------------

**Returns**

Whether the query is intended to fetch data (true) or might return a status message (false).

Reimplemented from [DatabaseConnector](#).

**12.8.3.3 \_split\_combined()**

```
list[str] _split_combined (
 self,
 str multi_query) [protected]
```

Divides a string into non-divisible MongoDB commands by splitting on semicolons at depth 0.

Handles nested brackets and semicolons inside JSON strings.

**Parameters**

<i>multi_query</i>	A string containing multiple queries with possible comments.
--------------------	--------------------------------------------------------------

**Returns**

A list of single-query strings (cleaned, ready for JSON parsing).

Reimplemented from [DatabaseConnector](#).

### 12.8.3.4 change\_database()

```
None change_database (
 self,
 str new_database)
```

Update the connection URI to reference a different database in the same engine.

#### Note

Additional settings are appended as a suffix to the MongoDB connection string.

#### Parameters

<i>new_database</i>	The name of the database to connect to.
---------------------	-----------------------------------------

Reimplemented from [DatabaseConnector](#).

### 12.8.3.5 check\_connection()

```
bool check_connection (
 self,
 str log_source,
 bool raise_error = True)
```

Minimal connection test to determine if our connection string is valid.

Connect to MongoDB using `MongoEngine.connect()`

#### Parameters

<i>log_source</i>	The Log class prefix indicating which method is performing the check.
<i>raise_error</i>	Whether to raise an error on connection failure.

#### Returns

Whether the connection test was successful.

#### Exceptions

<i>Log.Failure</i>	If <code>raise_error</code> is <code>True</code> and the connection test fails to complete.
--------------------	---------------------------------------------------------------------------------------------

Reimplemented from [Connector](#).

### 12.8.3.6 create\_database()

```
None create_database (
 self,
 str database_name)
```

Use the current database connection to create a sibling database in this engine.

#### Note

Forces MongoDB to actually create it by inserting a small init document.

#### Parameters

<i>database_name</i>	The name of the new database to create.
----------------------	-----------------------------------------

#### Exceptions

<i>Log.Failure</i>	If we fail to create the requested database for any reason.
--------------------	-------------------------------------------------------------

Reimplemented from [DatabaseConnector](#).

#### 12.8.3.7 database\_exists()

```
bool database_exists (
 self,
 str database_name)
```

Search for an existing database using the provided name.

#### Parameters

<i>database_name</i>	The name of a database to search for.
----------------------	---------------------------------------

#### Returns

Whether the database is visible to this connector.

Reimplemented from [DatabaseConnector](#).

#### 12.8.3.8 delete\_dummy()

```
None delete_dummy (
 self)
```

Delete the initial dummy collection from the database.

#### Note

Call this method whenever real data is being added to avoid pollution.

#### 12.8.3.9 drop\_database()

```
None drop_database (
 self,
 str database_name)
```

Delete all data stored in a particular database.

## Parameters

<i>database_name</i>	The name of an existing database.
----------------------	-----------------------------------

## Exceptions

<i>Log.Failure</i>	If we fail to drop the target database for any reason.
--------------------	--------------------------------------------------------

Reimplemented from [DatabaseConnector](#).

**12.8.3.10 execute\_query()**

```
Optional[DataFrame] execute_query (
 self,
 str query)
```

Send a single MongoDB command using PyMongo.

- The query must be a valid JSON command object (e.g. {"find": "users", "filter": {...}}).
- Mongo shell syntax such as `db.users.find({...})` or `.js` files will NOT work.
- If a result is returned, it will be converted to a DataFrame.

## Exceptions

<i>Log.Failure</i>	If the query fails to execute.
--------------------	--------------------------------

Reimplemented from [DatabaseConnector](#).

**12.8.3.11 get\_dataframe()**

```
DataFrame get_dataframe (
 self,
 str name,
 List[str] columns = [])
```

Automatically generate and run a query for the specified collection.

## Parameters

<i>name</i>	The name of an existing table or collection in the database.
<i>columns</i>	A list of column names to keep.

## Returns

Sorted DataFrame containing the requested data

### Exceptions

<i>Log.Failure</i>	If we fail to create the requested DataFrame for any reason.
--------------------	--------------------------------------------------------------

Reimplemented from [DatabaseConnector](#).

#### 12.8.3.12 `get_unmanaged_handle()`

```
get_unmanaged_handle (
 self)
```

Expose the low-level PyMongo handle for external use.

### Warning

Connection remains open - use for long-lived services only.

### Returns

PyMongo database instance.

#### 12.8.3.13 `test_operations()`

```
bool test_operations (
 self,
 bool raise_error = True)
```

Establish a basic connection to the MongoDB database, and test full functionality.

Can be configured to fail silently, which enables retries or external handling.

### Parameters

<i>raise_error</i>	Whether to raise an error on connection failure.
--------------------	--------------------------------------------------

### Returns

Whether the connection test was successful.

### Exceptions

<i>Log.Failure</i>	If <code>raise_error</code> is True and the connection test fails to complete.
--------------------	--------------------------------------------------------------------------------

Reimplemented from [Connector](#).



## 12.8.4 Member Data Documentation

### 12.8.4.1 `_auth_suffix`

`_auth_suffix` [protected]

### 12.8.4.2 `connection_string`

`connection_string`

### 12.8.4.3 `database_name`

`database_name`

### 12.8.4.4 `verbose`

`verbose`

The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/document.py](#)

## 12.9 EPUBToTEI Class Reference

Converts EPUB files to XML format (TEI specification).

### Public Member Functions

- None `__init__` (self, str [epub\\_path](#), bool save\_pandoc=False, bool save\_tei=True)  
*Initialize the converter.*
- None `convert_to_tei` (self)  
*Uses Pandoc to draft a TEI string from EPUB.*
- None `clean_tei` (self)  
*Wrap root if missing, sanitize ids, and save cleaned TEI.*

### Public Attributes

- [epub\\_path](#)
- [pandoc\\_xml\\_path](#)
- [raw\\_tei\\_content](#)
- [clean\\_tei\\_content](#)
- [tei\\_path](#)

### Static Public Attributes

- dict `xml_namespace` = {"tei": "http://www.tei-c.org/ns/1.0"}
- str `encoding` = "utf-8"

### Protected Member Functions

- str `_sanitize_ids` (self, str content)  
*Sanitize XML IDs in the TEI content to ensure they are valid and consistent.*
- str `_prune_bad_tags` (self, str content)  
*Replace all `lb` tags with newline characters in TEI.*

## 12.9.1 Detailed Description

Converts EPUB files to XML format (TEI specification).

Takes an EPUB book file and converts it to TEI in order to represent its chapter hierarchy.

## 12.9.2 Constructor & Destructor Documentation

### 12.9.2.1 `__init__()`

```
None __init__ (
 self,
 str epub_path,
 bool save_pandoc = False,
 bool save_tei = True)
```

Initialize the converter.

#### Parameters

<code>epub_path</code>	String containing the relative path to an EPUB file.
<code>save_pandoc</code>	Flag to save the intermediate Pandoc output to .tei.xml
<code>save_tei</code>	Flag to save the final TEI file as .tei

## 12.9.3 Member Function Documentation

### 12.9.3.1 `_prune_bad_tags()`

```
str _prune_bad_tags (
 self,
 str content) [protected]
```

Replace all `lb` tags with newline characters in TEI.

### 12.9.3.2 `_sanitize_ids()`

```
str _sanitize_ids (
 self,
 str content) [protected]
```

Sanitize XML IDs in the TEI content to ensure they are valid and consistent.

Pandoc sometimes generates invalid or non-unique `xml:id` attributes (e.g., containing spaces, punctuation, or mixed casing). Since we rely on these IDs as dictionary keys / anchors, we sanitize them using a regex to enforce alphanumeric/underscore/dash format.

#### Parameters

<i>content</i>	The raw TEI XML string possibly containing invalid <code>xml:id</code> attributes.
----------------	------------------------------------------------------------------------------------

#### Returns

A TEI XML string with valid NCNames, prefixed with 'id\_'.

### 12.9.3.3 `clean_tei()`

```
None clean_tei (
 self)
```

Wrap root if missing, sanitize ids, and save cleaned TEI.

### 12.9.3.4 `convert_to_tei()`

```
None convert_to_tei (
 self)
```

Uses Pandoc to draft a TEI string from EPUB.

## 12.9.4 Member Data Documentation

### 12.9.4.1 `clean_tei_content`

```
clean_tei_content
```

### 12.9.4.2 `encoding`

```
str encoding = "utf-8" [static]
```

### 12.9.4.3 `epub_path`

```
epub_path
```

#### 12.9.4.4 pandoc\_xml\_path

pandoc\_xml\_path

#### 12.9.4.5 raw\_tei\_content

raw\_tei\_content

#### 12.9.4.6 tei\_path

tei\_path

#### 12.9.4.7 xml\_namespace

```
dict xml_namespace = {"tei": "http://www.tei-c.org/ns/1.0"} [static]
```


The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/src/components/book\\_conversion.py](#)


## 12.10 Log.Failure Class Reference

User-facing base class for custom error handling.

Inheritance diagram for Log.Failure:



Collaboration diagram for Log.Failure:



### Public Member Functions

- `__init__` (self, str `prefix`="ERROR", str `msg`="")
- `__str__` (self)

### Public Attributes

- `prefix`
- `msg`

## 12.10.1 Detailed Description

User-facing base class for custom error handling.

- Builder Pattern - User can combine and chain standard message strings from the Log class.
- Prefixes (e.g., "GRAPH DB:", "FILE IO:") are redundant with tracebacks but improve readability by highlighting the semantic source of the error - not just a line number.
- Enforces a consistent color scheme across all raised errors for quick scanning.

## 12.10.2 Constructor & Destructor Documentation

### 12.10.2.1 `__init__()`

```
__init__ (
 self,
 str prefix = "ERROR",
 str msg = "")
```

Reimplemented in [Log.BadAddressFailure](#).

### 12.10.3 Member Function Documentation

#### 12.10.3.1 `__str__()`

```
__str__ (
 self)
```

### 12.10.4 Member Data Documentation

#### 12.10.4.1 `msg`

```
msg
```

#### 12.10.4.2 `prefix`

```
prefix
```


The documentation for this class was generated from the following file:

- </home/runner/work/dsci-capstone/dsci-capstone/src/util.py>


## 12.11 GraphConnector Class Reference

Connector for Neo4j (graph database).

Inheritance diagram for GraphConnector:

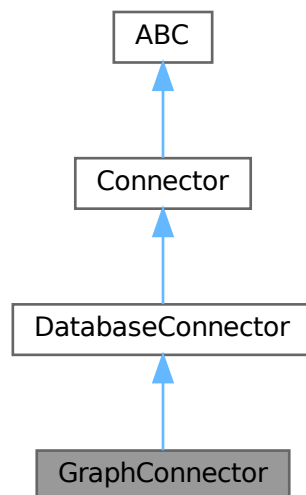

Collaboration diagram for GraphConnector:

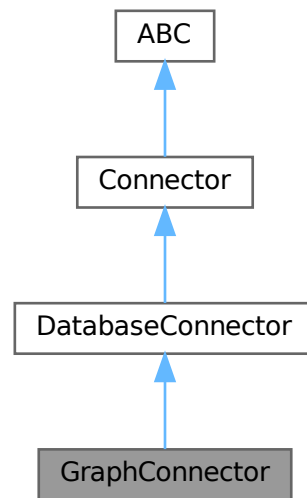

### Public Member Functions

- None `__init__` (self, bool `verbose`=False)  
*Creates a new Neo4j connector.*
- None `change_database` (self, str `new_database`)  
*Update the connection URI to reference a different database in the same engine.*
- Generator[None, None, None] `temp_graph` (self, str `graph_name`)  
*Temporarily inspect the specified graph, then swap back when finished.*
- bool `test_operations` (self, bool `raise_error`=True)  
*Establish a basic connection to the Neo4j database, and test full functionality.*
- bool `check_connection` (self, str `log_source`, bool `raise_error`=True)  
*Minimal connection test to determine if our connection string is valid.*
- Optional[DataFrame] `execute_query` (self, str `query`, bool `_filter_results`=True)  
*Send a single Cypher query to Neo4j.*
- DataFrame `get_dataframe` (self, str `name`, List[str] `columns`=[ ])  
*Automatically generate and run a query for the specified Knowledge Graph collection.*
- List[str] `get_unique` (self, str `key`)  
*Retrieve all unique values for a specified node property.*
- None `create_database` (self, str `database_name`)  
*Create a fresh pseudo-database if it does not already exist.*
- None `drop_database` (self, str `database_name`)  
*Delete all nodes stored under a particular database name.*
- None `drop_graph` (self, str `graph_name`)  
*Delete all nodes stored under a particular graph name.*
- bool `database_exists` (self, str `database_name`)  
*Search for an existing database using the provided name.*
- None `delete_dummy` (self)

- *Delete the initial dummy node from the database.*
- str `IS_DUMMY_` (self, str alias='n')  
*Generates Cypher code to select dummy nodes inside a WHERE clause.*
- str `NOT_DUMMY_` (self, str alias='n')  
*Generates Cypher code to select non-dummy nodes inside a WHERE clause.*
- str `SAME_DB_KG_` (self)  
*Generates a Cypher pattern dictionary to match nodes by current database and graph name.*

## Public Member Functions inherited from `DatabaseConnector`

- None `configure` (self, str DB, str database\_name)  
*Read connection settings from the .env file.*
- Generator[None, None, None] `temp_database` (self, str database\_name)  
*Temporarily switch to a pseudo-database, creating and dropping it if needed.*
- List[Optional[DataFrame]] `execute_combined` (self, str multi\_query)  
*Run several database commands in sequence.*
- List[Optional[DataFrame]] `execute_file` (self, str filename)  
*Run several database commands from a file.*

## Public Attributes

- `database_name`
- `verbose`
- `connection_string`

## Public Attributes inherited from `DatabaseConnector`

- `verbose`  
*Whether to print debug messages.*
- `db_type`
- `db_engine`
- `username`
- `password`
- `host`
- `port`
- `connection_string`

## Protected Member Functions

- List[str] `_split_combined` (self, str multi\_query)  
*Divides a string into non-divisible CQL queries, ignoring comments.*
- bool `_returns_data` (self, str query)  
*Checks if a query is structured in a way that returns real data, and not status messages.*
- bool `_parsable_to_df` (self, Tuple[Any, Any] result)  
*Checks if the result of a Neo4j query is valid (i.e.*
- None `_execute_retag_db` (self)  
*Sweeps the database for untagged nodes and relationships, and adds a 'db' attribute.*
- Tuple[Optional[List[Tuple[Any,...]]], Optional[List[str]]] `_fetch_latest` (self, List[Tuple[Any,...]] results)  
*Re-fetch nodes and edges after changing the remote copy in Neo4j.*



## Protected Member Functions inherited from [DatabaseConnector](#)

- `bool _is_single_query (self, str query)`  
*Checks if a string contains multiple queries.*

## Protected Attributes

- `_graph_name`

### 12.11.1 Detailed Description

Connector for Neo4j (graph database).

- Uses neomodel to abstract some operations, but raw CQL is required for many tasks.
- Neo4j does not support multiple logical databases in community edition, so we emulate them.
- This is achieved by using a 'db' property (database name) and 'kg' property (graph name) on nodes.

### 12.11.2 Constructor & Destructor Documentation

#### 12.11.2.1 `__init__()`

```
None __init__ (
 self,
 bool verbose = False)
```

Creates a new Neo4j connector.

#### Parameters

<code>verbose</code>	Whether to print success and failure messages.
----------------------	------------------------------------------------

Reimplemented from [DatabaseConnector](#).

### 12.11.3 Member Function Documentation

#### 12.11.3.1 `_execute_retag_db()`

```
None _execute_retag_db (
 self) [protected]
```

Sweeps the database for untagged nodes and relationships, and adds a 'db' attribute.

### 12.11.3.2 `_fetch_latest()`

```
Tuple[Optional[List[Tuple[Any, ...]]], Optional[List[str]]] _fetch_latest (
 self,
 List[Tuple[Any, ...]] results) [protected]
```

Re-fetch nodes and edges after changing the remote copy in Neo4j.

**Parameters**

<i>results</i>	Original list of untagged tuples from db.cypher_query().
----------------	----------------------------------------------------------

**Returns**

Latest version of results fetched from the database.

**12.11.3.3 \_parsable\_to\_df()**

```
bool _parsable_to_df (
 self,
 Tuple[Any, Any] result) [protected]
```

Checks if the result of a Neo4j query is valid (i.e. can be converted to a Pandas DataFrame).

- Validates shape: (records, meta)
- Validates content: rows are iterable, elements are dict-like or have `__properties__` (NeoModel Node/Rel)

**Parameters**

<i>result</i>	The result of a Cypher query.
---------------	-------------------------------

**Returns**

Whether the object is parsable to DataFrame.

Reimplemented from [DatabaseConnector](#).

**12.11.3.4 \_returns\_data()**

```
bool _returns_data (
 self,
 str query) [protected]
```

Checks if a query is structured in a way that returns real data, and not status messages.

Determines whether a Cypher query should yield records.

- RETURN must be present as a keyword (not in a string value) to return data.
- YIELD is used for stored procedures, and might return data.

**Parameters**

<i>query</i>	A single pre-validated CQL query string.
--------------	------------------------------------------

**Returns**

Whether the query is intended to fetch data (true) or might return a status message (false).

Reimplemented from [DatabaseConnector](#).

**12.11.3.5 \_split\_combined()**

```
List[str] _split_combined (
 self,
 str multi_query) [protected]
```

Divides a string into non-divisible CQL queries, ignoring comments.

**Parameters**

<i>multi_query</i>	A string containing multiple queries.
--------------------	---------------------------------------

**Returns**

A list of single-query strings.

Reimplemented from [DatabaseConnector](#).

**12.11.3.6 change\_database()**

```
None change_database (
 self,
 str new_database)
```

Update the connection URI to reference a different database in the same engine.

**Note**

Neo4j does not accept database names routed through the connection string.

**Parameters**

<i>new_database</i>	The name of the database to connect to.
---------------------	-----------------------------------------

Reimplemented from [DatabaseConnector](#).

**12.11.3.7 check\_connection()**

```
bool check_connection (
 self,
 str log_source,
 bool raise_error = True)
```

Minimal connection test to determine if our connection string is valid.

Connect to Neo4j executing a query: `db.cypher_query()`

#### Parameters

<i>log_source</i>	The Log class prefix indicating which method is performing the check.
<i>raise_error</i>	Whether to raise an error on connection failure.

#### Returns

Whether the connection test was successful.

#### Exceptions

<i>Log.Failure</i>	If <code>raise_error</code> is True and the connection test fails to complete.
--------------------	--------------------------------------------------------------------------------

Reimplemented from [Connector](#).

#### 12.11.3.8 create\_database()

```
None create_database (
 self,
 str database_name)
```

Create a fresh pseudo-database if it does not already exist.

#### Note

This change will apply to any new nodes created after [src.connectors.base.DatabaseConnector.change\\_database](#) is called.

#### Parameters

<i>database_name</i>	A database ID specifying the pseudo-database.
----------------------	-----------------------------------------------

#### Exceptions

<i>Log.Failure</i>	If we fail to create the requested database for any reason.
--------------------	-------------------------------------------------------------

Reimplemented from [DatabaseConnector](#).

#### 12.11.3.9 database\_exists()

```
bool database_exists (
 self,
 str database_name)
```

Search for an existing database using the provided name.

**Parameters**

<i>database_name</i>	The name of a database to search for.
----------------------	---------------------------------------

**Returns**

Whether the database is visible to this connector.

Reimplemented from [DatabaseConnector](#).

**12.11.3.10 delete\_dummy()**

```
None delete_dummy (
 self)
```

Delete the initial dummy node from the database.

**Note**

Never use this. Enables the existence of an "empty" database.

**12.11.3.11 drop\_database()**

```
None drop_database (
 self,
 str database_name)
```

Delete all nodes stored under a particular database name.

**Parameters**

<i>database_name</i>	A database ID specifying the pseudo-database.
----------------------	-----------------------------------------------

**Exceptions**

<i>Log.Failure</i>	If we fail to drop the target database for any reason.
--------------------	--------------------------------------------------------

Reimplemented from [DatabaseConnector](#).

**12.11.3.12 drop\_graph()**

```
None drop_graph (
 self,
 str graph_name)
```

Delete all nodes stored under a particular graph name.

## Parameters

<i>graph_name</i>	The name of a graph in the current database.
-------------------	----------------------------------------------

## Exceptions

<i>Log.Failure</i>	If we fail to drop the target graph for any reason.
--------------------	-----------------------------------------------------

**12.11.3.13 execute\_query()**

```
Optional[DataFrame] execute_query (
 self,
 str query,
 bool _filter_results = True)
```

Send a single Cypher query to Neo4j.

## Note

If a result is returned, it will be converted to a DataFrame.

## Parameters

<i>query</i>	A single query to perform on the database.
<i>_filter_results</i>	If True, limit results to the current database. Internal helper functions need unfiltered results.

## Returns

DataFrame containing the result of the query, or None

## Exceptions

<i>Log.Failure</i>	If the query fails to execute.
--------------------	--------------------------------

Reimplemented from [DatabaseConnector](#).

**12.11.3.14 get\_dataframe()**

```
DataFrame get_dataframe (
 self,
 str name,
 List[str] columns = [])
```

Automatically generate and run a query for the specified Knowledge Graph collection.

- Fetches all nodes and relationships belonging to the active database + graph name.

- Includes public attributes, `element_id`, `labels`, and `element_type`.
- Uses `execute_query()` for DataFrame conversion and filtering.
- Does not explode lists or nested values.

**Parameters**

<i>name</i>	The name of an existing graph or subgraph.
<i>columns</i>	A list of column names to keep.

**Returns**

Sorted DataFrame containing the requested data.

**Exceptions**

<i>Log.Failure</i>	If we fail to create the requested DataFrame for any reason.
--------------------	--------------------------------------------------------------

Reimplemented from [DatabaseConnector](#).

**12.11.3.15 get\_unique()**

```
List[str] get_unique (
 self,
 str key)
```

Retrieve all unique values for a specified node property.

Queries all nodes in the database and extracts distinct values for the given key.

**Parameters**

<i>key</i>	The node property name to extract unique values from (e.g. 'db' or 'kg').
------------	---------------------------------------------------------------------------

**Returns**

A list of unique values for the specified key, or an empty list if none exist.

**Exceptions**

<i>Log.Failure</i>	If the query fails to execute.
--------------------	--------------------------------

**12.11.3.16 IS\_DUMMY\_()**

```
str IS_DUMMY_ (
 self,
 str alias = 'n')
```



Generates Cypher code to select dummy nodes inside a WHERE clause.

Usage: MATCH (n) WHERE {self.IS\_DUMMY\_('n')};

#### Returns

A string containing Cypher code.

#### 12.11.3.17 NOT\_DUMMY\_()

```
str NOT_DUMMY_ (
 self,
 str alias = 'n')
```

Generates Cypher code to select non-dummy nodes inside a WHERE clause.

Usage: MATCH (n) WHERE {self.NOT\_DUMMY\_('n')};

#### Returns

A string containing Cypher code.

#### 12.11.3.18 SAME\_DB\_KG\_()

```
str SAME_DB_KG_ (
 self)
```

Generates a Cypher pattern dictionary to match nodes by current database and graph name.

Usage: MATCH (n {self.SAME\_DB\_KG\_()})

#### Returns

A string containing Cypher code.

#### 12.11.3.19 temp\_graph()

```
Generator[None, None, None] temp_graph (
 self,
 str graph_name)
```

Temporarily inspect the specified graph, then swap back when finished.

#### Parameters

<code>graph_name</code>	The name of a graph in the current database.
-------------------------	----------------------------------------------

### 12.11.3.20 test\_operations()

```
bool test_operations (
 self,
 bool raise_error = True)
```

Establish a basic connection to the Neo4j database, and test full functionality.

Can be configured to fail silently, which enables retries or external handling.

#### Parameters

<i>raise_error</i>	Whether to raise an error on connection failure.
--------------------	--------------------------------------------------

#### Returns

Whether the connection test was successful.

#### Exceptions

<i>Log.Failure</i>	If raise_error is True and the connection test fails to complete.
--------------------	-------------------------------------------------------------------

Reimplemented from [Connector](#).

## 12.11.4 Member Data Documentation

### 12.11.4.1 \_graph\_name

`_graph_name` [protected]

### 12.11.4.2 connection\_string

`connection_string`

### 12.11.4.3 database\_name

`database_name`

### 12.11.4.4 verbose

`verbose`

The documentation for this class was generated from the following file:

- </home/runner/work/dsci-capstone/dsci-capstone/src/connectors/graph.py>

## 12.12 KnowledgeGraph Class Reference

Manages a single graph within Neo4j.

### Public Member Functions

- None `__init__` (self, str name, [GraphConnector database](#), bool verbose=False)
- None `add_triple` (self, str subject, str relation, str object\_)  
*Add a semantic triple to the graph using raw Cypher.*
- DataFrame `get_all_triples` (self)  
*Return all triples in the specified graph as a pandas DataFrame.*
- Optional[DataFrame] `get_triple_properties` (self)  
*Pivot the graph elements DataFrame to expose node and relationship properties as columns.*
- DataFrame `triples_to_names` (self, DataFrame df\_ids, bool drop\_ids=False, Optional[DataFrame] df\_lookup=None)  
*Maps a DataFrame containing element ID columns to human-readable names.*
- DataFrame `find_element_names` (self, DataFrame df\_ids, List[str] name\_columns, List[str] id\_columns, str element\_type, str name\_property, bool drop\_ids=False, Optional[DataFrame] df\_lookup=None)  
*Helper function which maps element IDs to human-readable names.*
- DataFrame `get_subgraph_by_nodes` (self, List[str] node\_ids)  
*Return all triples where subject or object is in the specified node list.*
- DataFrame `get_neighborhood` (self, str node\_id, int depth=1)  
*Get k-hop neighborhood around a central node.*
- DataFrame `get_random_walk_sample` (self, List[str] start\_nodes, int walk\_length, int num\_walks=1)  
*Sample subgraph using directed random walk traversal starting from specified nodes.*
- DataFrame `get_community_subgraph` (self, int community\_id)  
*Return all triples belonging to a specific GraphRAG community.*
- None `detect_community_clusters` (self, str method="leiden", bool multi\_level=False, int max\_levels=10)  
*Run community detection on the graph as described by the GraphRAG paper.*
- str `to_triple_string` (self, Optional[DataFrame] triples\_df=None, str format="natural")  
*Convert triples to string representation in various formats.*
- str `to_contextualized_string` (self, Optional[List[str]] focus\_nodes=None, int top\_n=5)  
*Convert triples to contextualized string grouped by focus nodes.*
- str `to_narrative` (self, str strategy="path", Optional[str] start\_node=None, int max\_triples=50)  
*Convert graph to narrative text using specified strategy.*
- Dict[str, Any] `get_summary_stats` (self)  
*Return summary statistics about the graph structure.*
- DataFrame `get_edge_counts` (self, int top\_n=10)  
*Return node names and their edge counts, ordered by edge count descending.*
- str `get_node_context` (self, str node\_id, bool include\_neighbors=True)  
*Return natural language description of a node and its relationships.*
- DataFrame `get_relation_summary` (self)  
*Return summary of relationship types and their frequencies.*
- None `print_nodes` (self, int max\_rows=20, int max\_col\_width=50)  
*Print all nodes and edges in the current pseudo-database with row/column formatting.*
- None `print_triples` (self, int max\_rows=20, int max\_col\_width=50)  
*Print all nodes and edges in the current pseudo-database with row/column formatting.*

## Public Attributes

- [graph\\_name](#)  
*The name of this graph.*
- [database](#)  
*Reference to a pre-configured graph database wrapper.*
- [verbose](#)  
*Whether to print debug messages.*

### 12.12.1 Detailed Description

Manages a single graph within Neo4j.

- Handles safe conversion of LLM output to structured triples.
- Provides helper functions to add and retrieve triples.

### 12.12.2 Constructor & Destructor Documentation

#### 12.12.2.1 `__init__()`

```
None __init__ (
 self,
 str name,
 GraphConnector database,
 bool verbose = False)
```

### 12.12.3 Member Function Documentation

#### 12.12.3.1 `add_triple()`

```
None add_triple (
 self,
 str subject,
 str relation,
 str object_)
```

Add a semantic triple to the graph using raw Cypher.

#### Parameters

<i>subject</i>	A string representing the entity performing an action.
<i>relation</i>	A string describing the action.
<i>object_↔</i>	A string representing the entity being acted upon.
—	

**Note**

LLM output should be pre-normalized using `src.connectors.llm.LLMConnector.normalize_triples`.

**Exceptions**

<i>Log.Failure</i>	If the triple cannot be added to our graph database.
--------------------	------------------------------------------------------

**12.12.3.2 detect\_community\_clusters()**

```
None detect_community_clusters (
 self,
 str method = "leiden",
 bool multi_level = False,
 int max_levels = 10)
```

Run community detection on the graph as described by the GraphRAG paper.

- Assigns a `community_id` property to all nodes, and optionally `level_id`.
- Partitions the graph's nodes into topic-coherent communities.
- Afterwards, you can call `get_community_subgraph()` to extract each community's triples for summarization. Clustering Methods
- Leiden (recommended) - improvement of Louvain ensuring well-connected, stable communities; supports multi-level hierarchy.
- Louvain - quickly groups nodes but may yield fragmented subcommunities.

**Parameters**

<i>method</i>	The community detection algorithm to run. Options: "leiden" (default) or "louvain".
<i>multi_level</i>	Whether to record hierarchical levels ( <code>level_id</code> ) for multi-scale summarization.
<i>max_levels</i>	Maximum hierarchy depth to compute (default: 10).

**Exceptions**

<i>Log.Failure</i>	If GDS is unavailable or any query fails.
--------------------	-------------------------------------------

**12.12.3.3 find\_element\_names()**

```
DataFrame find_element_names (
 self,
 DataFrame df_ids,
 List[str] name_columns,
 List[str] id_columns,
 str element_type,
 str name_property,
```

```
bool drop_ids = False,
Optional[DataFrame] df_lookup = None)
```

Helper function which maps element IDs to human-readable names.

#### Note

- Requires the provided nodes or edges to still exist in the graph database; otherwise must specify `df_lookup`.

#### Parameters

<i>df_ids</i>	DataFrame with required columns: <i>id_columns</i> .
<i>name_columns</i>	Required list of column names to create.
<i>id_columns</i>	Required list of columns containing element IDs.
<i>element_type</i>	Whether to match nodes or relationships. Value must be "node" or "relationship".
<i>name_property</i>	Required element property from <i>df_lookup</i> to use as the display name.
<i>drop_ids</i>	Whether to remove <i>id_columns</i> from results.
<i>df_lookup</i>	Optional DataFrame fetched from <a href="#">src.connectors.graph.GraphConnector.get_dataframe</a> with required columns: <i>element_id</i> , <i>element_type</i> , and <i>name_property</i> .

#### Returns

DataFrame with added columns: *name\_columns*.

#### Exceptions

<i>Log.Failure</i>	If mapping fails or required IDs are missing.
--------------------	-----------------------------------------------

### 12.12.3.4 get\_all\_triples()

```
DataFrame get_all_triples (
 self)
```

Return all triples in the specified graph as a pandas DataFrame.

#### Returns

Returns (subject, relation, object) columns only.

#### Exceptions

<i>Log.Failure</i>	If the query fails to retrieve or process the DataFrame.
--------------------	----------------------------------------------------------

### 12.12.3.5 get\_community\_subgraph()

```
DataFrame get_community_subgraph (
```

```

 self,
 int community_id)

```

Return all triples belonging to a specific GraphRAG community.

- Communities are densely connected subgraphs detected via clustering algorithms.
- This enables GraphRAG-style hierarchical summarization where each community can be summarized independently. Requires nodes to have a 'community\_id' property assigned.
- Afterwards, you may run a summary step which generates community summaries for each cluster (as described in the paper).

#### Parameters

<i>community_id</i>	The identifier of the community to retrieve.
---------------------	----------------------------------------------

#### Returns

DataFrame with columns: subject\_id, relation\_id, object\_id

#### Exceptions

<i>Log.Failure</i>	If the query fails to retrieve the requested DataFrame or community detection has not been run.
--------------------	-------------------------------------------------------------------------------------------------

### 12.12.3.6 get\_edge\_counts()

```

DataFrame get_edge_counts (
 self,
 int top_n = 10)

```

Return node names and their edge counts, ordered by edge count descending.

#### Parameters

<i>top_n</i>	Number of top nodes to return (by edge count). Default is 10.
--------------	---------------------------------------------------------------

#### Returns

DataFrame with columns: node\_id, edge\_count

#### Exceptions

<i>Log.Failure</i>	If the query fails to retrieve the requested DataFrame.
--------------------	---------------------------------------------------------

### 12.12.3.7 `get_neighborhood()`

```
DataFrame get_neighborhood (
 self,
 str node_id,
 int depth = 1)
```

Get k-hop neighborhood around a central node.

Returns all triples within k hops of the specified node. A 1-hop neighborhood includes all direct neighbors, 2-hop includes neighbors-of-neighbors, etc.

#### Parameters

<i>node_id</i>	The element ID of the central node.
<i>depth</i>	Number of hops to traverse (default: 1).

#### Returns

DataFrame with columns: `subject_id`, `relation_id`, `object_id`

#### Exceptions

<i>Log.Failure</i>	If the query fails to retrieve the requested DataFrame.
--------------------	---------------------------------------------------------

### 12.12.3.8 `get_node_context()`

```
str get_node_context (
 self,
 str node_id,
 bool include_neighbors = True)
```

Return natural language description of a node and its relationships.

Generates a human-readable summary of a single node suitable for LLM context. Example: "Alice is connected to 5 entities. She knows Bob and Charlie, works at Company, lives in City, and follows Dave."

#### Parameters

<i>node_id</i>	The element ID of the node to describe.
<i>include_neighbors</i>	Whether to list neighbor node IDs (default: True).

#### Returns

Natural language description of the node.

#### Exceptions

<i>Log.Failure</i>	If the node does not exist in the graph.
--------------------	------------------------------------------



### 12.12.3.9 get\_random\_walk\_sample()

```
DataFrame get_random_walk_sample (
 self,
 List[str] start_nodes,
 int walk_length,
 int num_walks = 1)
```

Sample subgraph using directed random walk traversal starting from specified nodes.

- More diverse than degree-based filtering (nodes with many edges) and better preserves graph structure.
- Each walk starts from a random node in `start_nodes` and continues for `walk_length` steps.

#### Parameters

<i>start_nodes</i>	List of node IDs to use as starting points.
<i>walk_length</i>	Number of steps in each random walk.
<i>num_walks</i>	Number of random walks to perform (default: 1).

#### Returns

DataFrame with columns: `subject_id`, `relation_id`, `object_id`

#### Exceptions

<i>Log.Failure</i>	If the query fails to retrieve the requested DataFrame.
--------------------	---------------------------------------------------------

### 12.12.3.10 get\_relation\_summary()

```
DataFrame get_relation_summary (
 self)
```

Return summary of relationship types and their frequencies.

Provides an overview of what types of relationships exist in the graph and how common each type is. Useful for understanding graph schema.

#### Returns

DataFrame with columns: `relation_type`, `count`, `example_triple`

### 12.12.3.11 get\_subgraph\_by\_nodes()

```
DataFrame get_subgraph_by_nodes (
 self,
 List[str] node_ids)
```

Return all triples where subject or object is in the specified node list.

**Parameters**

<i>node_ids</i>	List of node element IDs to filter by.
-----------------	----------------------------------------

**Returns**

DataFrame with columns: subject\_id, relation\_id, object\_id

**Exceptions**

<i>Log.Failure</i>	If the query fails to retrieve the requested DataFrame.
--------------------	---------------------------------------------------------

**12.12.3.12 get\_summary\_stats()**

```
Dict[str, Any] get_summary_stats (
 self)
```

Return summary statistics about the graph structure.

Provides metadata useful for LLM context, including:

- *node\_count*: Total number of nodes
- *edge\_count*: Total number of relationships
- *relation\_types*: List of unique relationship types
- *avg\_degree*: Average node degree (edges per node)
- *top\_nodes*: List of most connected nodes (top 5 by degree)
- *density*: Graph density (actual edges / possible edges)

**Returns**

Dictionary containing graph statistics.

**12.12.3.13 get\_triple\_properties()**

```
Optional[DataFrame] get_triple_properties (
 self)
```

Pivot the graph elements DataFrame to expose node and relationship properties as columns.

- Builds a joined view of properties from both nodes (n1, n2) and the relationship (r).
- Removes redundant fields such as: db, kg, element\_type, start\_node\_id, and end\_node\_id.
- Usage: n1.element\_id, r.rel\_type, n2.name, etc.

**Returns**

DataFrame where each row represents one triple (n1, r, n2).

**Exceptions**

<i>Log.Failure</i>	If the elements DataFrame cannot be loaded or pivoting fails.
--------------------	---------------------------------------------------------------

**12.12.3.14 print\_nodes()**

```
None print_nodes (
 self,
 int max_rows = 20,
 int max_col_width = 50)
```

Print all nodes and edges in the current pseudo-database with row/column formatting.

**12.12.3.15 print\_triples()**

```
None print_triples (
 self,
 int max_rows = 20,
 int max_col_width = 50)
```

Print all nodes and edges in the current pseudo-database with row/column formatting.

**12.12.3.16 to\_contextualized\_string()**

```
str to_contextualized_string (
 self,
 Optional[List[str]] focus_nodes = None,
 int top_n = 5)
```

Convert triples to contextualized string grouped by focus nodes.

Groups triples by subject nodes and formats them with context headers. This provides better structure for LLM comprehension compared to flat triple lists. If *focus\_nodes* is *None*, uses the *top\_n* most connected nodes. Example output: Facts about Alice:

- knows Bob
- works\_at Company
- lives\_in City

**Parameters**

<i>focus_nodes</i>	List of node names to group by. If <i>None</i> , uses <i>top_n</i> by degree.
<i>top_n</i>	Number of top nodes to use if <i>focus_nodes</i> is <i>None</i> (default: 5).

**Returns**

Formatted string with contextualized triple groups.

**12.12.3.17 to\_narrative()**

```
str to_narrative (
 self,
 str strategy = "path",
 Optional[str] start_node = None,
 int max_triples = 50)
```

Convert graph to narrative text using specified strategy.

Transforms structured triples into natural language narrative:

- "path": Follow edges sequentially from start\_node, creating a story-like flow
- "cluster": Group related entities and describe them thematically
- "summary": High-level overview of graph contents and structure

**Parameters**

<i>strategy</i>	Narrative generation strategy: "path", "cluster", or "summary" (default: "path").
<i>start_node</i>	Starting node for "path" strategy. If None, uses highest-degree node.
<i>max_triples</i>	Maximum number of triples to include (default: 50).

**Returns**

Natural language narrative describing the graph.

**Exceptions**

<i>ValueError</i>	If strategy is not recognized.
-------------------	--------------------------------

**12.12.3.18 to\_triple\_string()**

```
str to_triple_string (
 self,
 Optional[DataFrame] triples_df = None,
 str format = "natural")
```

Convert triples to string representation in various formats.

Supports multiple output formats for LLM consumption:

- "natural": Human-readable sentences (e.g., "Alice knows Bob.")
- "triple": Raw triple format (e.g., "Alice KNOWS Bob")
- "json": JSON array of objects with s/r/o keys

## Parameters

<i>triples↔ _df</i>	DataFrame with subject/relation/object columns. If None, uses all triples from this graph.
<i>format</i>	Output format: "natural", "triple", or "json" (default: "natural").

## Returns

String representation of triples in the specified format.

## Exceptions

<i>ValueError</i>	If format is not recognized.
-------------------	------------------------------

**12.12.3.19 triples\_to\_names()**

```
DataFrame triples_to_names (
 self,
 DataFrame df_ids,
 bool drop_ids = False,
 Optional[DataFrame] df_lookup = None)
```

Maps a DataFrame containing element ID columns to human-readable names.

## Note

- Requires the provided nodes to still exist in the graph database; otherwise must specify df\_lookup.

## Parameters

<i>df_ids</i>	DataFrame with added columns: subject_id, relation_id, object_id.
<i>drop_ids</i>	Whether to remove columns from results: subject_id, relation_id, object_id.
<i>df_lookup</i>	Optional DataFrame fetched from <a href="#">src.connectors.graph.GraphConnector.get_dataframe</a> with required columns: element_id, element_type, name, and rel_type.

## Returns

DataFrame with added columns: subject, relation, object.

## Exceptions

<i>Log.Failure</i>	If mapping fails or required IDs are missing.
--------------------	-----------------------------------------------

**12.12.4 Member Data Documentation****12.12.4.1 database**

database

Reference to a pre-configured graph database wrapper.

#### 12.12.4.2 `graph_name`

`graph_name`

The name of this graph.

Matches `node.kg` for all nodes in the graph database.

#### 12.12.4.3 `verbose`

`verbose`

Whether to print debug messages.


The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/src/components/fact\\_storage.py](#)


## 12.13 LLMConnector Class Reference

Connector for prompting and returning LLM output (raw text/JSON) via LangChain.

Inheritance diagram for LLMConnector:

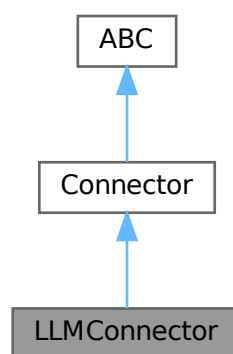

Collaboration diagram for LLMConnector:



### Public Member Functions

- None `__init__` (self, float temperature=0, str `system_prompt`="You are a helpful assistant.")  
*Initialize the connector.*
- None `configure` (self)  
*Initialize the LangChain LLM using environment credentials.*
- bool `test_operations` (self, bool raise\_error=True)  
*Establish a basic connection to the database, and test full functionality.*
- bool `check_connection` (self, str log\_source, bool raise\_error)  
*Send a trivial prompt to verify LLM connectivity.*
- str `execute_full_query` (self, str `system_prompt`, str human\_prompt)  
*Send a single prompt to the LLM with separate system and human instructions.*
- str `execute_query` (self, str query)  
*Send a single prompt through the connection and return raw LLM output.*
- str `execute_file` (self, str filename)  
*Run a single prompt from a file.*

### Static Public Member Functions

- List[Tuple[str, str, str]] `normalize_triples` (Any data)  
*Normalize flexible LLM output into a list of clean (subject, relation, object) triples.*

### Public Attributes

- `model_name`
- `llm`
- `system_prompt`

### 12.13.1 Detailed Description

Connector for prompting and returning LLM output (raw text/JSON) via LangChain.

#### Note

The method [src.connectors.llm.LLMConnector.execute\\_query](#) simplifies the prompt process.

### 12.13.2 Constructor & Destructor Documentation

#### 12.13.2.1 \_\_init\_\_()

```
None __init__ (
 self,
 float temperature = 0,
 str system_prompt = "You are a helpful assistant.")
```

Initialize the connector.

#### Note

Model name is specified in the .env file.

### 12.13.3 Member Function Documentation

#### 12.13.3.1 check\_connection()

```
bool check_connection (
 self,
 str log_source,
 bool raise_error)
```

Send a trivial prompt to verify LLM connectivity.

#### Parameters

<i>log_source</i>	The Log class prefix indicating which method is performing the check.
<i>raise_error</i>	Whether to raise an error on connection failure.

#### Returns

Whether the prompt executed successfully.

#### Exceptions

<i>Log.Failure</i>	If <i>raise_error</i> is True and the connection test fails to complete.
--------------------	--------------------------------------------------------------------------

Reimplemented from [Connector](#).



### 12.13.3.2 configure()

```
None configure (
 self)
```

Initialize the LangChain LLM using environment credentials.

Reads:

- OPENAI\_API\_KEY from .env for authentication
- LLM\_MODEL and LLM\_TEMPERATURE to override defaults

### 12.13.3.3 execute\_file()

```
str execute_file (
 self,
 str filename)
```

Run a single prompt from a file.

Reads the entire file as a single string and sends it to execute\_query.

#### Parameters

<i>filename</i>	Path to the prompt file (.txt)
-----------------	--------------------------------

#### Returns

Raw LLM response as a string.

Reimplemented from [Connector](#).

### 12.13.3.4 execute\_full\_query()

```
str execute_full_query (
 self,
 str system_prompt,
 str human_prompt)
```

Send a single prompt to the LLM with separate system and human instructions.

### 12.13.3.5 execute\_query()

```
str execute_query (
 self,
 str query)
```

Send a single prompt through the connection and return raw LLM output.

**Parameters**

<i>query</i>	A single string prompt to send to the LLM.
--------------	--------------------------------------------

**Returns**

Raw LLM response as a string.

Reimplemented from [Connector](#).

**12.13.3.6 normalize\_triples()**

```
List[Tuple[str, str, str]] normalize_triples (
 Any data) [static]
```

Normalize flexible LLM output into a list of clean (subject, relation, object) triples.

- Accepts dicts, lists of dicts, tuples, or dicts-of-lists.
- Joins list values, trims, and sanitizes for Cypher safety.
- Enforces uppercase underscore-safe relation labels.

**Parameters**

<i>data</i>	Raw LLM output to normalize.
-------------	------------------------------

**Returns**

List of sanitized (s, r, o) triples ready for insertion.

**Exceptions**

<i>ValueError</i>	If input format cannot be parsed.
-------------------	-----------------------------------

**12.13.3.7 test\_operations()**

```
bool test_operations (
 self,
 bool raise_error = True)
```

Establish a basic connection to the database, and test full functionality.

Can be configured to fail silently, which enables retries or external handling.

**Parameters**

<i>raise_error</i>	Whether to raise an error on connection failure.
--------------------	--------------------------------------------------

### Returns

Whether the prompt executed successfully.

### Exceptions

<i>Log.Failure</i>	If <code>raise_error</code> is <code>True</code> and the connection test fails to complete.
--------------------	---------------------------------------------------------------------------------------------

Reimplemented from [Connector](#).

## 12.13.4 Member Data Documentation

### 12.13.4.1 llm

llm

### 12.13.4.2 model\_name

model\_name

### 12.13.4.3 system\_prompt

system\_prompt

The documentation for this class was generated from the following file:

- </home/runner/work/dsci-capstone/dsci-capstone/src/connectors/llm.py>

## 12.14 Log Class Reference

The Log class standardizes console output.

Collaboration diagram for Log:



## Classes

- class [BadAddressFailure](#)  
*Raised when a database connection string or address is invalid.*
- class [Failure](#)  
*User-facing base class for custom error handling.*

## Static Public Member Functions

- None [success](#) (str prefix="PASS", str msg="", bool verbose=True)  
*A success message begins with a green prefix.*
- None [warn](#) (str prefix="PASS", str msg="", bool verbose=True)  
*A warning message begins with a yellow prefix.*
- None [fail](#) (str prefix="ERROR", str msg="", bool raise\_error=True, Optional[Exception] other\_error=None)  
*A failure message begins with a red prefix.*
- None [success\\_legacy](#) (str msg="")  
*A legacy success message begins with a Green Plus.*
- None [fail\\_legacy](#) (str msg="")  
*A legacy failure message begins with a Red X.*

## Static Public Attributes

- bool [USE\\_COLORS](#) = True  
*Enable ANSI colors in output.*
- str [GREEN](#) = "\033[32m"  
*ANSI code for green text.*
- str [RED](#) = "\033[31m"  
*ANSI code for red text.*
- str [YELLOW](#) = "\033[33m"  
*ANSI code for yellow text.*
- str [BRIGHT](#) = "\033[93m"  
*ANSI code for bright yellow / cream.*
- str [WHITE](#) = "\033[0m"  
*ANSI code to reset color.*
- str [SUCCESS\\_COLOR](#) = [GREEN](#)  
*ANSI color applied to the prefix of success messages.*
- str [WARNING\\_COLOR](#) = [YELLOW](#)  
*ANSI color applied to the prefix of ignored fail messages.*
- str [FAILURE\\_COLOR](#) = [RED](#)  
*ANSI color applied to the prefix of critical fail messages.*
- str [MSG\\_COLOR](#) = [BRIGHT](#)  
*ANSI color applied to the body of every Log message.*
- bool [FULL\\_DF](#) = False  
*When printing the results of a query.*
- str [conn\\_abc](#) = "BASE CONNECTOR: "
- str [db\\_conn\\_abc](#) = "CONNECTOR: "
- str [rel\\_db](#) = "REL DB: "
- str [gr\\_db](#) = "GRAPH DB: "
- str [doc\\_db](#) = "DOCS DB: "
- str [bad\\_addr](#) = "BAD ADDRESS: "

- `f msg_bad_addr = lambda connection_string"Failed to connect on {connection_string}"`
- `str bad_path = "FILE NOT FOUND: "`
- `f msg_bad_path = lambda file_path"Failed to open file '{file_path}'"`
- `f msg_good_path = lambda file_path"Reading contents of file '{file_path}'"`
- `f msg_good_exec_f = lambda file_path"Finished executing queries from '{file_path}'"`
- `f msg_bad_exec_f = lambda file_path"Error occurred while executing queries from '{file_path}'"`
- `f msg_db_connect = lambda database_name"Successfully connected to database: {database_name}"`
- `str good_val = "VALID RESULT: "`
- `str bad_val = "INCORRECT RESULT: "`
- `f msg_compare = lambda observed, expected"Expected {expected}, got {observed}"`
- `tuple msg_result`
- `tuple msg_good_table`
- `tuple msg_good_coll`
- `tuple msg_good_graph`
- `f msg_bad_table = lambda name"Table '{name}' not found"`
- `f msg_bad_coll = lambda name"Collection '{name}' not found"`
- `f msg_bad_graph = lambda name"Graph '{name}' not found"`
- `str test_ops = "OPERATE: "`
- `str test_basic = "CONNECT: "`
- `str test_info = "DB INFO: "`
- `str test_df = "GET DF: "`
- `str test_tmp_db = "CREATE DB: "`
- `str msg_unknown_error = "An unhandled error occurred."`
- `str get_df = "GET_DF: "`
- `str create_db = "CREATE_DB: "`
- `str drop_db = "DROP_DB: "`
- `str run_q = "QUERY: "`
- `str run_f = "FILE EXEC: "`
- `str drop_gr = "DROP_GRAPH: "`
- `f msg_success_managed_db = lambda managed, database_name"Successfully {managed} database '{database_name}'"`
- `tuple msg_fail_manage_db`
- `f msg_success_managed_gr = lambda managed, database_name"Successfully {managed} graph '{database_name}'"`
- `tuple msg_fail_manage_gr`
- `f msg_fail_parse = lambda alias, bad_value, expected_type"Could not convert {alias} with value {bad_value} to type {expected_type}"`
- `tuple msg_multiple_query`
- `f msg_good_exec_q = lambda query"Executed successfully:\n'{query}'"`
- `f msg_good_exec_qr = lambda query, results"Executed successfully:\n'{query}'\n{Log.msg_result(results)}"`
- `f msg_bad_exec_q = lambda query"Failed to execute query:\n'{query}'"`
- `Log msg_good_df_parse = lambda df.msg_result(df)`
- `f msg_bad_df_parse = lambda query"Failed to convert query result to DataFrame:\n'{query}'"`
- `str kg = "KG: "`
- `str pytest_db = "PYTEST (DB): "`
- `str db_exists = "DB_EXIST: "`
- `f msg_db_exists = lambda database_name"Database '{database_name}' already exists."`
- `f msg_db_not_found = lambda database_name, connection_string"Could not find database '{database_name}' using connection '{connection_string}'"`
- `f msg_db_current = lambda database_name"Cannot drop database '{database_name}' while connected to it!"`
- `str swap_db = "SWAP_DB: "`
- `str swap_kg = "SWAP_GRAPH: "`
- `f msg_swap_db = lambda old_db, new_db"Switched from database '{old_db}' to database '{new_db}'"`
- `f msg_swap_kg = lambda old_kg, new_kg"Switched from graph '{old_kg}' to graph '{new_kg}'"`

- `str get_unique = "UNIQUE: "`
- `f msg_none_df = lambda collection_type, collection_name "Unable to fetch DataFrame from {collection_type} '{collection_name}' - None"`
- `str sub_gr = "SUBGRAPH: "`
- `str gr_rag = "RAG: "`
- `f msg_bad_triples = lambda graph_name "No triples found for graph {graph_name}"`

### 12.14.1 Detailed Description

The Log class standardizes console output.

### 12.14.2 Member Function Documentation

#### 12.14.2.1 fail()

```
None fail (
 str prefix = "ERROR",
 str msg = "",
 bool raise_error = True,
 Optional[Exception] other_error = None) [static]
```

A failure message begins with a red prefix.

##### Parameters

<i>prefix</i>	The context of the message.
<i>msg</i>	The message to print.
<i>raise_error</i>	Whether to raise an error.
<i>other_error</i>	Another Exception resulting from this failure.

##### Exceptions

<i>Log.Failure</i>	If <code>raise_error</code> is True
--------------------	-------------------------------------

#### 12.14.2.2 fail\_legacy()

```
None fail_legacy (
 str msg = "") [static]
```

A legacy failure message begins with a Red X.

##### Parameters

<i>msg</i>	The message to print.
------------	-----------------------

### 12.14.2.3 success()

```
None success (
 str prefix = "PASS",
 str msg = "",
 bool verbose = True) [static]
```

A success message begins with a green prefix.

#### Parameters

<i>prefix</i>	The context of the message.
<i>msg</i>	The message to print.
<i>verbose</i>	Whether to actually print. Saves space and reduces nested if statements.

### 12.14.2.4 success\_legacy()

```
None success_legacy (
 str msg = "") [static]
```

A legacy success message begins with a Green Plus.

#### Parameters

<i>msg</i>	The message to print.
------------	-----------------------

### 12.14.2.5 warn()

```
None warn (
 str prefix = "PASS",
 str msg = "",
 bool verbose = True) [static]
```

A warning message begins with a yellow prefix.

#### Parameters

<i>prefix</i>	The context of the message.
<i>msg</i>	The message to print.
<i>verbose</i>	Whether to actually print. Saves space and reduces nested if statements.

## 12.14.3 Member Data Documentation

### 12.14.3.1 bad\_addr

```
str bad_addr = "BAD ADDRESS: " [static]
```

#### 12.14.3.2 bad\_path

```
str bad_path = "FILE NOT FOUND: " [static]
```

#### 12.14.3.3 bad\_val

```
str bad_val = "INCORRECT RESULT: " [static]
```

#### 12.14.3.4 BRIGHT

```
str BRIGHT = "\033[93m" [static]
```

ANSI code for bright yellow / cream.

#### 12.14.3.5 conn\_abc

```
str conn_abc = "BASE CONNECTOR: " [static]
```

#### 12.14.3.6 create\_db

```
str create_db = "CREATE_DB: " [static]
```

#### 12.14.3.7 db\_conn\_abc

```
str db_conn_abc = "CONNECTOR: " [static]
```

#### 12.14.3.8 db\_exists

```
str db_exists = "DB_EXIST: " [static]
```

#### 12.14.3.9 doc\_db

```
str doc_db = "DOCS DB: " [static]
```

#### 12.14.3.10 drop\_db

```
str drop_db = "DROP_DB: " [static]
```

#### 12.14.3.11 drop\_gr

```
str drop_gr = "DROP_GRAPH: " [static]
```



#### 12.14.3.12 FAILURE\_COLOR

```
str FAILURE_COLOR = RED [static]
```

ANSI color applied to the prefix of critical fail messages.

#### 12.14.3.13 FULL\_DF

```
bool FULL_DF = False [static]
```

When printing the results of a query.

#### 12.14.3.14 get\_df

```
str get_df = "GET_DF: " [static]
```

#### 12.14.3.15 get\_unique

```
str get_unique = "UNIQUE: " [static]
```

#### 12.14.3.16 good\_val

```
str good_val = "VALID RESULT: " [static]
```

#### 12.14.3.17 gr\_db

```
str gr_db = "GRAPH DB: " [static]
```

#### 12.14.3.18 gr\_rag

```
str gr_rag = "RAG: " [static]
```

#### 12.14.3.19 GREEN

```
str GREEN = "\033[32m" [static]
```

ANSI code for green text.

#### 12.14.3.20 kg

```
str kg = "KG: " [static]
```

#### 12.14.3.21 msg\_bad\_addr

```
f msg_bad_addr = lambda connection_string"Failed to connect on {connection_string}" [static]
```

#### 12.14.3.22 msg\_bad\_coll

```
f msg_bad_coll = lambda name"Collection '{name}' not found" [static]
```

#### 12.14.3.23 msg\_bad\_df\_parse

```
f msg_bad_df_parse = lambda query"Failed to convert query result to DataFrame:\n'{query}'" [static]
```

#### 12.14.3.24 msg\_bad\_exec\_f

```
f msg_bad_exec_f = lambda file_path"Error occurred while executing queries from '{file_path}'" [static]
```

#### 12.14.3.25 msg\_bad\_exec\_q

```
f msg_bad_exec_q = lambda query"Failed to execute query:\n'{query}'" [static]
```

#### 12.14.3.26 msg\_bad\_graph

```
f msg_bad_graph = lambda name"Graph '{name}' not found" [static]
```

#### 12.14.3.27 msg\_bad\_path

```
f msg_bad_path = lambda file_path"Failed to open file '{file_path}'" [static]
```

#### 12.14.3.28 msg\_bad\_table

```
f msg_bad_table = lambda name"Table '{name}' not found" [static]
```

#### 12.14.3.29 msg\_bad\_triples

```
f msg_bad_triples = lambda graph_name"No triples found for graph {graph_name}" [static]
```

#### 12.14.3.30 MSG\_COLOR

```
str MSG_COLOR = BRIGHT [static]
```

ANSI color applied to the body of every Log message.

### 12.14.3.31 msg\_compare

```
f msg_compare = lambda observed, expected"Expected {expected}, got {observed}" [static]
```

### 12.14.3.32 msg\_db\_connect

```
f msg_db_connect = lambda database_name"Successfully connected to database: {database_name}" [static]
```

### 12.14.3.33 msg\_db\_current

```
f msg_db_current = lambda database_name"Cannot drop database '{database_name}' while connected to it!" [static]
```

### 12.14.3.34 msg\_db\_exists

```
f msg_db_exists = lambda database_name"Database '{database_name}' already exists." [static]
```

### 12.14.3.35 msg\_db\_not\_found

```
f msg_db_not_found = lambda database_name, connection_string"Could not find database '{database_name}' using connection '{connection_string}'" [static]
```

### 12.14.3.36 msg\_fail\_manage\_db

```
tuple msg_fail_manage_db [static]
```

Initial value:

```
= (
 lambda manage, database_name, connection_string: f"Failed to {manage} database '{database_name}' on connection {connection_string}"
)
```

### 12.14.3.37 msg\_fail\_manage\_gr

```
tuple msg_fail_manage_gr [static]
```

Initial value:

```
= (
 lambda manage, database_name, connection_string: f"Failed to {manage} graph '{database_name}' on connection {connection_string}"
)
```

### 12.14.3.38 msg\_fail\_parse

```
f msg_fail_parse = lambda alias, bad_value, expected_type"Could not convert {alias} with value {bad_value} to type {expected_type}" [static]
```

#### 12.14.3.39 msg\_good\_coll

```
tuple msg_good_coll [static]
```

**Initial value:**

```
= (
 lambda name, df: f
```

#### 12.14.3.40 msg\_good\_df\_parse

```
Log msg_good_df_parse = lambda df.msg_result(df) [static]
```

#### 12.14.3.41 msg\_good\_exec\_f

```
f msg_good_exec_f = lambda file_path"Finished executing queries from '{file_path}'" [static]
```

#### 12.14.3.42 msg\_good\_exec\_q

```
f msg_good_exec_q = lambda query"Executed successfully:\n'{query}'" [static]
```

#### 12.14.3.43 msg\_good\_exec\_qr

```
f msg_good_exec_qr = lambda query, results"Executed successfully:\n'{query}'\n{Log.msg_result(results)}"
[static]
```

#### 12.14.3.44 msg\_good\_graph

```
tuple msg_good_graph [static]
```

**Initial value:**

```
= (
 lambda name, df: f
```

#### 12.14.3.45 msg\_good\_path

```
f msg_good_path = lambda file_path"Reading contents of file '{file_path}'" [static]
```

#### 12.14.3.46 msg\_good\_table

```
tuple msg_good_table [static]
```

**Initial value:**

```
= (
 lambda name, df: f
```

#### 12.14.3.47 msg\_multiple\_query

```
tuple msg_multiple_query [static]
```

##### Initial value:

```
= (
 lambda n_queries, query: f"A combined query ({n_queries} results) was executed as a single query.
 Extra results were discarded. Query:\n{query}"
)
```

#### 12.14.3.48 msg\_none\_df

```
f msg_none_df = lambda collection_type, collection_name"Unable to fetch DataFrame from {collection↵
_type} '{collection_name}' - None" [static]
```

#### 12.14.3.49 msg\_result

```
tuple msg_result [static]
```

##### Initial value:

```
= (
 lambda results: f
)
```

#### 12.14.3.50 msg\_success\_managed\_db

```
f msg_success_managed_db = lambda managed, database_name"Successfully {managed} database '{database↵
_name}'" [static]
```

#### 12.14.3.51 msg\_success\_managed\_gr

```
f msg_success_managed_gr = lambda managed, database_name"Successfully {managed} graph '{database↵
_name}'" [static]
```

#### 12.14.3.52 msg\_swap\_db

```
f msg_swap_db = lambda old_db, new_db"Switched from database '{old_db}' to database '{new_↵
db}'" [static]
```

#### 12.14.3.53 msg\_swap\_kg

```
f msg_swap_kg = lambda old_kg, new_kg"Switched from graph '{old_kg}' to graph '{new_kg}'"
[static]
```

#### 12.14.3.54 msg\_unknown\_error

```
str msg_unknown_error = "An unhandled error occurred." [static]
```

#### 12.14.3.55 pytest\_db

```
str pytest_db = "PYTEST (DB): " [static]
```

#### 12.14.3.56 RED

```
str RED = "\033[31m" [static]
```

ANSI code for red text.

#### 12.14.3.57 rel\_db

```
str rel_db = "REL DB: " [static]
```

#### 12.14.3.58 run\_f

```
str run_f = "FILE EXEC: " [static]
```

#### 12.14.3.59 run\_q

```
str run_q = "QUERY: " [static]
```

#### 12.14.3.60 sub\_gr

```
str sub_gr = "SUBGRAPH: " [static]
```

#### 12.14.3.61 SUCCESS\_COLOR

```
str SUCCESS_COLOR = GREEN [static]
```

ANSI color applied to the prefix of success messages.

#### 12.14.3.62 swap\_db

```
str swap_db = "SWAP_DB: " [static]
```

#### 12.14.3.63 swap\_kg

```
str swap_kg = "SWAP_GRAPH: " [static]
```

**12.14.3.64 test\_basic**

```
str test_basic = "CONNECT: " [static]
```

**12.14.3.65 test\_df**

```
str test_df = "GET DF: " [static]
```

**12.14.3.66 test\_info**

```
str test_info = "DB INFO: " [static]
```

**12.14.3.67 test\_ops**

```
str test_ops = "OPERATE: " [static]
```

**12.14.3.68 test\_tmp\_db**

```
str test_tmp_db = "CREATE DB: " [static]
```

**12.14.3.69 USE\_COLORS**

```
bool USE_COLORS = True [static]
```

Enable ANSI colors in output.

**12.14.3.70 WARNING\_COLOR**

```
str WARNING_COLOR = YELLOW [static]
```

ANSI color applied to the prefix of ignored fail messages.

**12.14.3.71 WHITE**

```
str WHITE = "\033[0m" [static]
```

ANSI code to reset color.

**12.14.3.72 YELLOW**

```
str YELLOW = "\033[33m" [static]
```

ANSI code for yellow text.

The documentation for this class was generated from the following file:

- </home/runner/work/dsci-capstone/dsci-capstone/src/util.py>

## 12.15 Metrics Class Reference

Utility class for computing and posting evaluation metrics.

### Public Member Functions

- None `__init__` (self)
- bool `post_payload` (self, Dict[str, Any] payload)  
*POST directly to Blazor (soon to be deprecated)*
- None `post_basic_metrics` (self, str book\_id, str book\_title, str summary, str gold\_summary="", str text="", \*\*Any kwargs)  
*POST basic evaluation scores to Blazor (ROUGE, BERTScore).*
- None `post_basic_output` (self, str book\_id, str book\_title, str summary)  
*POST dummy data to Blazor.*

### Static Public Member Functions

- Dict[str, Any] `compute_basic_metrics` (str summary, str gold\_summary, str chunk)  
*Compute ROUGE and BERTScore.*
- Dict[str, Any] `create_summary_payload` (str book\_id, str book\_title, str summary, str gold\_summary, Dict[str, Any] metrics=None)  
*Create the full Blazor payload for a single book.*
- Dict[str, Any] `generate_default_metrics` (float rouge1\_f1=0.0, float rouge2\_f1=0.0, float rougeL\_f1=0.0, float rougeLsum\_f1=0.0, float bert\_precision=0.0, float bert\_recall=0.0, float bert\_f1=0.0, float boook\_score=0.0, float questeval\_score=0.0, str qa\_question1="UNKNOWN", str qa\_gold1="UNKNOWN", str qa\_generated1="UNKNOWN", bool qa\_correct1=False, float qa\_accuracy1=0.0, str qa\_question2="UNKNOWN", str qa\_gold2="UNKNOWN", str qa\_generated2="UNKNOWN", bool qa\_correct2=False, float qa\_accuracy2=0.0)  
*Generate the metrics sub-payload with customizable default values.*
- Dict[str, Any] `generate_example_metrics` ()  
*Create a placeholder payload with dummy values.*

### Public Attributes

- `HOST`
- `PORT`
- `url`

### Static Public Attributes

- int `timeout_seconds` = 900

### 12.15.1 Detailed Description

Utility class for computing and posting evaluation metrics.



## 12.15.2 Constructor & Destructor Documentation

### 12.15.2.1 `__init__()`

```
None __init__ (
 self)
```

## 12.15.3 Member Function Documentation

### 12.15.3.1 `compute_basic_metrics()`

```
Dict[str, Any] compute_basic_metrics (
 str summary,
 str gold_summary,
 str chunk) [static]
```

Compute ROUGE and BERTScore.

#### Parameters

<i>summary</i>	A text string containing a book summary
<i>gold_summary</i>	A summary to compare against
<i>chunk</i>	The original text of the chunk.

#### Returns

Dict containing 'rouge' and 'bertscore' keys. Scores are nested with inconsistent schema.

### 12.15.3.2 `create_summary_payload()`

```
Dict[str, Any] create_summary_payload (
 str book_id,
 str book_title,
 str summary,
 str gold_summary,
 Dict[str, Any] metrics = None) [static]
```

Create the full Blazor payload for a single book.

#### Parameters

<i>book_id</i>	Unique identifier for one book.
<i>book_title</i>	String containing the title of a book.
<i>summary</i>	String containing a book summary.
<i>gold_summary</i>	Optional summary to compare against.
<i>metrics</i>	Dictionary containing various nested evaluation metrics.

**Returns**

A dictionary with C#-style key names.

**12.15.3.3 generate\_default\_metrics()**

```
Dict[str, Any] generate_default_metrics (
 float rouge1_f1 = 0.0,
 float rouge2_f1 = 0.0,
 float rougeL_f1 = 0.0,
 float rougeLsum_f1 = 0.0,
 float bert_precision = 0.0,
 float bert_recall = 0.0,
 float bert_f1 = 0.0,
 float boook_score = 0.0,
 float questeval_score = 0.0,
 str qa_question1 = "UNKNOWN",
 str qa_gold1 = "UNKNOWN",
 str qa_generated1 = "UNKNOWN",
 bool qa_correct1 = False,
 float qa_accuracy1 = 0.0,
 str qa_question2 = "UNKNOWN",
 str qa_gold2 = "UNKNOWN",
 str qa_generated2 = "UNKNOWN",
 bool qa_correct2 = False,
 float qa_accuracy2 = 0.0) [static]
```

Generate the metrics sub-payload with customizable default values.

**Parameters**

<i>rouge1_f1</i>	The ROUGE-1 evaluation metric.
<i>rouge2_f1</i>	The ROUGE-2 evaluation metric.
<i>rougeL_f1</i>	The ROUGE-L evaluation metric.
<i>rougeLsum_f1</i>	The ROUGE-Lsum evaluation metric.
<i>bert_precision</i>	The BERTScore precision score.
<i>bert_recall</i>	The BERTScore recall score.
<i>bert_f1</i>	The BERTScore F1 score.
<i>boook_score</i>	The BoookScore evaluation metric.
<i>questeval_score</i>	The QuestEval evaluation metric.
<i>qa_question1</i>	A question about the book.
<i>qa_gold1</i>	The correct answer to the question.
<i>qa_generated1</i>	A generated answer to judge.
<i>qa_correct1</i>	Whether our answer is correct.
<i>qa_accuracy1</i>	The accuracy score for this QA sample.
<i>qa_question2</i>	A question about the book.
<i>qa_gold2</i>	The correct answer to the question.
<i>qa_generated2</i>	A generated answer to judge.
<i>qa_correct2</i>	Whether our answer is correct.
<i>qa_accuracy2</i>	The accuracy score for this QA sample.

**Returns**

Dictionary containing various nested evaluation metrics.

**12.15.3.4 generate\_example\_metrics()**

```
Dict[str, Any] generate_example_metrics () [static]
```

Create a placeholder payload with dummy values.

**Returns**

Full payload with nested metrics.

**12.15.3.5 post\_basic\_metrics()**

```
None post_basic_metrics (
 self,
 str book_id,
 str book_title,
 str summary,
 str gold_summary = "",
 str text = "",
 **Any kwargs)
```

POST basic evaluation scores to Blazor (ROUGE, BERTScore).

**Parameters**

<i>book_id</i>	Unique identifier for one book.
<i>book_title</i>	String containing the title of a book.
<i>summary</i>	String containing a book summary.
<i>gold_summary</i>	Optional summary to compare against.
<i>text</i>	A string containing text from the book.
<i>kwargs</i>	Any additional named arguments will be added to the payload.

**12.15.3.6 post\_basic\_output()**

```
None post_basic_output (
 self,
 str book_id,
 str book_title,
 str summary)
```

POST dummy date to Blazor.

**Parameters**

<i>book_id</i>	Unique identifier for one book.
<i>book_title</i>	String containing the title of a book.
<i>summary</i>	String containing a book summary.

### 12.15.3.7 post\_payload()

```
bool post_payload (
 self,
 Dict[str, Any] payload)
```

POST directly to Blazor (soon to be deprecated)

Verify and POST a given payload using the requests API.

#### Parameters

<i>payload</i>	JSON dictionary containing data for a single book.
----------------	----------------------------------------------------

#### Returns

Whether the POST operation was successful.

## 12.15.4 Member Data Documentation

### 12.15.4.1 HOST

HOST

### 12.15.4.2 PORT

PORT

### 12.15.4.3 timeout\_seconds

```
int timeout_seconds = 900 [static]
```

### 12.15.4.4 url


url

The documentation for this class was generated from the following file:


- /home/runner/work/dsci-capstone/dsci-capstone/src/components/[metrics.py](#)

## 12.16 MetricsController Class Reference

Inheritance diagram for MetricsController:



Collaboration diagram for MetricsController:

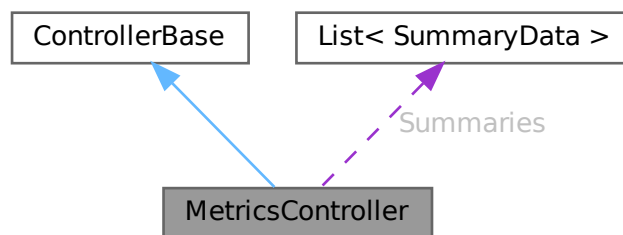

### Public Member Functions

- [MetricsController](#) (ILogger< [MetricsController](#) > logger, IHubContext< [MetricsHub](#) > hubContext)
- async Task< IActionResult > [Post](#) ([FromBody] [SummaryData](#) summary)
- IActionResult [GetIndex](#) (int id)
- IActionResult [GetAll](#) ()

### Private Attributes

- readonly ILogger< [MetricsController](#) > [\\_logger](#)
- readonly IHubContext< [MetricsHub](#) > [\\_hubContext](#)

### Static Private Attributes

- static readonly List< [SummaryData](#) > [Summaries](#) = new()

## 12.16.1 Constructor & Destructor Documentation

### 12.16.1.1 MetricsController()

```
MetricsController (
 ILogger< MetricsController > logger,
 IHubContext< MetricsHub > hubContext)
```

## 12.16.2 Member Function Documentation

### 12.16.2.1 GetAll()

```
IActionResult GetAll ()
```

### 12.16.2.2 GetIndex()

```
IActionResult GetIndex (
 int id)
```

### 12.16.2.3 Post()

```
async Task< IActionResult > Post (
 [FromBody] SummaryData summary)
```

## 12.16.3 Member Data Documentation

### 12.16.3.1 \_hubContext

```
readonly IHubContext<MetricsHub> _hubContext [private]
```

### 12.16.3.2 \_logger

```
readonly ILogger<MetricsController> _logger [private]
```

### 12.16.3.3 Summaries


```
readonly List<SummaryData> Summaries = new() [static], [private]
```

The documentation for this class was generated from the following file:


- /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Controllers/[MetricsController.cs](#)

## 12.17 MetricsHub Class Reference

Inheritance diagram for MetricsHub:



Collaboration diagram for MetricsHub:



### Public Member Functions

- [MetricsHub](#) (ILogger< [MetricsHub](#) >? logger=null)
- override async Task [OnConnectedAsync](#) ()
- override async Task [OnDisconnectedAsync](#) (Exception? exception)

### Private Attributes

- readonly? ILogger< [MetricsHub](#) > [\\_logger](#)

## 12.17.1 Constructor & Destructor Documentation

### 12.17.1.1 MetricsHub()

```
MetricsHub (
 ILogger< MetricsHub >? logger = null)
```

## 12.17.2 Member Function Documentation

### 12.17.2.1 OnConnectedAsync()

```
override async Task OnConnectedAsync ()
```

### 12.17.2.2 OnDisconnectedAsync()

```
override async Task OnDisconnectedAsync (
 Exception? exception)
```

## 12.17.3 Member Data Documentation

### 12.17.3.1 \_logger

```
readonly? ILogger<MetricsHub> _logger [private]
```


The documentation for this class was generated from the following file:

- /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Hubs/[MetricsHub.cs](#)

## 12.18 mysqlConnector Class Reference


A relational database connector configured for MySQL.

Inheritance diagram for mysqlConnector:

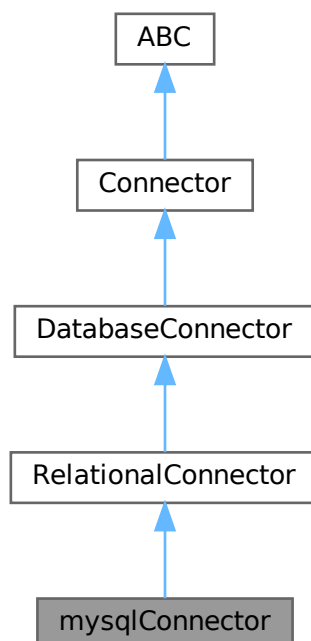



Collaboration diagram for mysqlConnector:

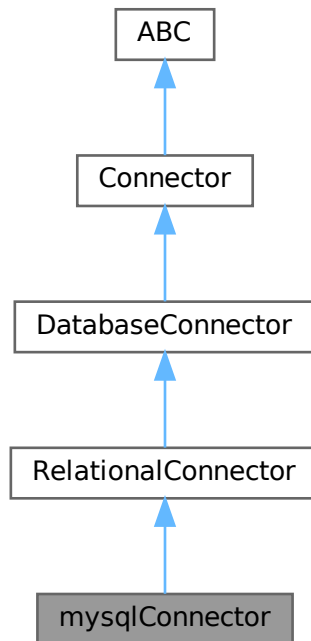

### Public Member Functions

- None `__init__` (self, bool `verbose`=False)  
*Configures the relational connector.*

### Public Member Functions inherited from `RelationalConnector`

- "RelationalConnector" `from_env` (cls, bool `verbose`=False)  
*Decides what type of relational connector to create using the .env file.*
- None `change_database` (self, str `new_database`)  
*Update the connection URI to reference a different database in the same engine.*
- bool `test_operations` (self, bool `raise_error`=True)  
*Establish a basic connection to the database, and test full functionality.*
- bool `check_connection` (self, str `log_source`, bool `raise_error`=True)  
*Minimal connection test to determine if our connection string is valid.*
- Optional[DataFrame] `execute_query` (self, str `query`)  
*Send a single command to the database connection.*
- DataFrame `get_dataframe` (self, str `name`, List[str] `columns`=[])  
*Automatically generate and run a query for the specified table using SQLAlchemy.*
- None `create_database` (self, str `database_name`)  
*Use the current database connection to create a sibling database in this engine.*
- None `drop_database` (self, str `database_name`="")  
*Delete all data stored in a particular database.*
- bool `database_exists` (self, str `database_name`)  
*Search for an existing database using the provided name.*

## Public Member Functions inherited from [DatabaseConnector](#)

- None [configure](#) (self, str DB, str database\_name)  
*Read connection settings from the .env file.*
- Generator[None, None, None] [temp\\_database](#) (self, str database\_name)  
*Temporarily switch to a pseudo-database, creating and dropping it if needed.*
- List[Optional[DataFrame]] [execute\\_combined](#) (self, str multi\_query)  
*Run several database commands in sequence.*
- List[Optional[DataFrame]] [execute\\_file](#) (self, str filename)  
*Run several database commands from a file.*

## Static Public Attributes

- dict [specific\\_queries](#)

## Additional Inherited Members

## Public Attributes inherited from [RelationalConnector](#)

- [database\\_name](#)
- [verbose](#)
- [connection\\_string](#)
- [db\\_type](#)

## Public Attributes inherited from [DatabaseConnector](#)

- [verbose](#)  
*Whether to print debug messages.*
- [db\\_type](#)
- [db\\_engine](#)
- [username](#)
- [password](#)
- [host](#)
- [port](#)
- [connection\\_string](#)

## Protected Member Functions inherited from [RelationalConnector](#)

- List[str] [\\_split\\_combined](#) (self, str multi\_query)  
*Divides a string into non-divisible SQL queries using `sqlparse`.*
- bool [\\_returns\\_data](#) (self, str query)  
*Checks if a query is structured in a way that returns real data, and not status messages.*
- bool [\\_parsable\\_to\\_df](#) (self, Tuple[Any, Any] result)  
*Checks if the result of a SQL query is valid (i.e.*

## Protected Member Functions inherited from [DatabaseConnector](#)

- bool [\\_is\\_single\\_query](#) (self, str query)  
*Checks if a string contains multiple queries.*

## 12.18.1 Detailed Description

A relational database connector configured for MySQL.

### Note

Should be hidden from the user using a factory method.

## 12.18.2 Constructor & Destructor Documentation

### 12.18.2.1 `__init__()`

```
None __init__ (
 self,
 bool verbose = False)
```

Configures the relational connector.

### Parameters

<i>verbose</i>	Whether to print success and failure messages.
----------------	------------------------------------------------

Reimplemented from [RelationalConnector](#).

## 12.18.3 Member Data Documentation

### 12.18.3.1 `specific_queries`

```
dict specific_queries [static]
```

### Initial value:

```
= {
 "MYSQL": [
 "SELECT DATABASE();", # Single value, name of the current database.
 "SHOW DATABASES;", # List of databases the secondary user can access.
] # List of all databases in the database engine.
}
```


The documentation for this class was generated from the following file:

- `/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/relational.py`


## 12.19 ParagraphStreamTEI Class Reference

Streams paragraphs from a TEI file as Chunk objects.

Inheritance diagram for ParagraphStreamTEI:

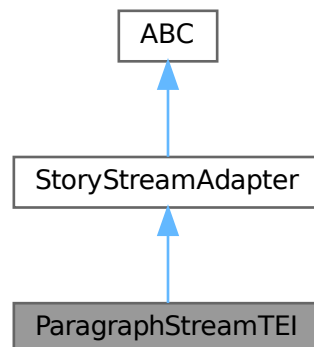

Collaboration diagram for ParagraphStreamTEI:



### Public Member Functions

- None `__init__` (self, str `tei_path`, int `book_id`, int `story_id`, list[str] `allowed_chapters`=None, str `start_inclusive`="", str `end_inclusive`="")  
*Create a ParagraphStreamTEI object.*
- Iterator[Chunk] `stream_segments` (self)  
*Yields sanitized parts of a book.*
- List[Chunk] `pre_compute_segments` (self)  
*Splits the target book into paragraphs.*

## Public Member Functions inherited from [StoryStreamAdapter](#)

- [Iterator](#)[[Chunk](#)] [stream\\_paragraphs](#) (self)  
*Concrete helper method to split segments into paragraphs.*
- [Iterator](#)[str] [stream\\_sentences](#) (self)  
*Concrete helper method to split paragraphs into sentences.*

## Public Attributes

- [tei\\_path](#)
- [book\\_id](#)
- [story\\_id](#)
- [allowed\\_chapters](#)
- [start\\_inclusive](#)
- [end\\_inclusive](#)
- [lines](#)
- [root](#)
- [chunks](#)
- [xml\\_namespace](#)

## Static Public Attributes

- dict [xml\\_namespace](#) = {"tei": "http://www.tei-c.org/ns/1.0"}
- str [encoding](#) = "utf-8"

### 12.19.1 Detailed Description

Streams paragraphs from a TEI file as Chunk objects.

### 12.19.2 Constructor & Destructor Documentation

#### 12.19.2.1 `__init__()`

```
None __init__ (
 self,
 str tei_path,
 int book_id,
 int story_id,
 list[str] allowed_chapters = None,
 str start_inclusive = "",
 str end_inclusive = "")
```

Create a ParagraphStreamTEI object.

#### Parameters

<i>tei_path</i>	Path to an existing TEI XML file.
<i>book_id</i>	ID for this book.
<i>story_id</i>	ID for this story (may be same as book_id).
<i>allowed_chapters</i>	A list of valid chapter titles. Must exactly match the contents of head.
<i>start_inclusive</i>	(Optional) Unique string representing the start of the book.
<i>end_inclusive</i>	(Optional) Unique string representing the end of the book.

## 12.19.3 Member Function Documentation

### 12.19.3.1 `pre_compute_segments()`

```
List[Chunk] pre_compute_segments (
 self)
```

Splits the target book into paragraphs.

Yields Chunk objects for each paragraph (

) in the TEI file. Uses etree Element.sourceline to approximate start/end line in TEI. Supports optional start\_inclusive / end\_inclusive boundaries to slice text and stop iteration. Computes progress percentages using character counts:

- story\_percent: progress through the entire story
- chapter\_percent: progress through the current chapter Populates self.chunks so they can be streamed as requested by interface

### 12.19.3.2 `stream_segments()`

```
Iterator[Chunk] stream_segments (
 self)
```

Yields sanitized parts of a book.

- Story segments usually correspond to chapters.
- They serve as borders between chunking operations, ensuring chunks do not span multiple chapters. Implementation is handled by child classes BookStream, etc.
- Segments should be pre-cleaned and must contain 1 paragraph per line with all other newlines removed.

Reimplemented from [StoryStreamAdapter](#).

## 12.19.4 Member Data Documentation

### 12.19.4.1 `allowed_chapters`

`allowed_chapters`

### 12.19.4.2 `book_id`

`book_id`

### 12.19.4.3 `chunks`

`chunks`

#### 12.19.4.4 encoding

```
str encoding = "utf-8" [static]
```

#### 12.19.4.5 end\_inclusive

```
end_inclusive
```

#### 12.19.4.6 lines

```
lines
```

#### 12.19.4.7 root

```
root
```

#### 12.19.4.8 start\_inclusive

```
start_inclusive
```

#### 12.19.4.9 story\_id

```
story_id
```

#### 12.19.4.10 tei\_path

```
tei_path
```

#### 12.19.4.11 xml\_namespace [1/2]

```
dict xml_namespace = {"tei": "http://www.tei-c.org/ns/1.0"} [static]
```

#### 12.19.4.12 xml\_namespace [2/2]

```
xml_namespace
```


The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/src/components/book\\_conversion.py](#)

## 12.20 postgresConnector Class Reference


A relational database connector configured for PostgreSQL.

Inheritance diagram for postgresConnector:

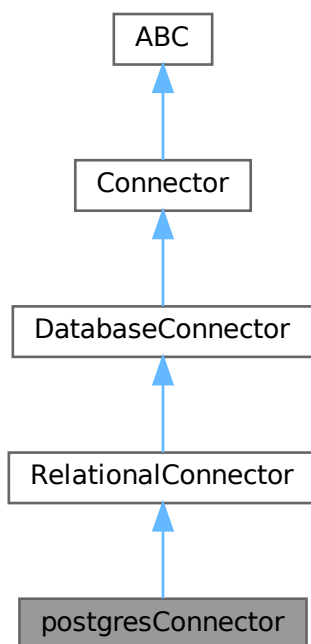



Collaboration diagram for postgresConnector:

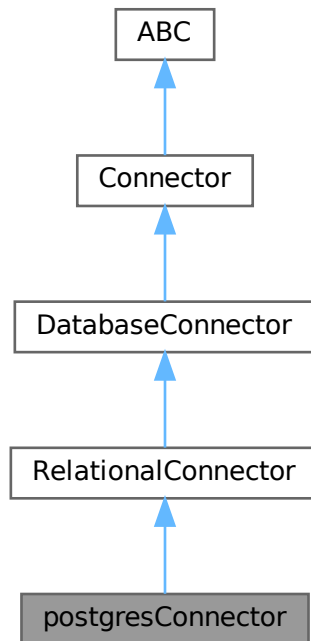

### Public Member Functions

- None `__init__` (self, bool `verbose=False`)  
*Configures the relational connector.*

### Public Member Functions inherited from `RelationalConnector`

- "RelationalConnector" `from_env` (cls, bool `verbose=False`)  
*Decides what type of relational connector to create using the .env file.*
- None `change_database` (self, str `new_database`)  
*Update the connection URI to reference a different database in the same engine.*
- bool `test_operations` (self, bool `raise_error=True`)  
*Establish a basic connection to the database, and test full functionality.*
- bool `check_connection` (self, str `log_source`, bool `raise_error=True`)  
*Minimal connection test to determine if our connection string is valid.*
- Optional[DataFrame] `execute_query` (self, str `query`)  
*Send a single command to the database connection.*
- DataFrame `get_dataframe` (self, str `name`, List[str] `columns=[]`)  
*Automatically generate and run a query for the specified table using SQLAlchemy.*
- None `create_database` (self, str `database_name`)  
*Use the current database connection to create a sibling database in this engine.*
- None `drop_database` (self, str `database_name=""`)  
*Delete all data stored in a particular database.*
- bool `database_exists` (self, str `database_name`)  
*Search for an existing database using the provided name.*

## Public Member Functions inherited from [DatabaseConnector](#)

- None [configure](#) (self, str DB, str database\_name)  
*Read connection settings from the .env file.*
- Generator[None, None, None] [temp\\_database](#) (self, str database\_name)  
*Temporarily switch to a pseudo-database, creating and dropping it if needed.*
- List[Optional[DataFrame]] [execute\\_combined](#) (self, str multi\_query)  
*Run several database commands in sequence.*
- List[Optional[DataFrame]] [execute\\_file](#) (self, str filename)  
*Run several database commands from a file.*

## Static Public Attributes

- dict [specific\\_queries](#)

## Additional Inherited Members

## Public Attributes inherited from [RelationalConnector](#)

- [database\\_name](#)
- [verbose](#)
- [connection\\_string](#)
- [db\\_type](#)

## Public Attributes inherited from [DatabaseConnector](#)

- [verbose](#)  
*Whether to print debug messages.*
- [db\\_type](#)
- [db\\_engine](#)
- [username](#)
- [password](#)
- [host](#)
- [port](#)
- [connection\\_string](#)

## Protected Member Functions inherited from [RelationalConnector](#)

- List[str] [\\_split\\_combined](#) (self, str multi\_query)  
*Divides a string into non-divisible SQL queries using `sqlparse`.*
- bool [\\_returns\\_data](#) (self, str query)  
*Checks if a query is structured in a way that returns real data, and not status messages.*
- bool [\\_parsable\\_to\\_df](#) (self, Tuple[Any, Any] result)  
*Checks if the result of a SQL query is valid (i.e.*

## Protected Member Functions inherited from [DatabaseConnector](#)

- bool [\\_is\\_single\\_query](#) (self, str query)  
*Checks if a string contains multiple queries.*

## 12.20.1 Detailed Description

A relational database connector configured for PostgreSQL.

### Note

Should be hidden from the user using a factory method.

## 12.20.2 Constructor & Destructor Documentation

### 12.20.2.1 `__init__()`

```
None __init__ (
 self,
 bool verbose = False)
```

Configures the relational connector.

### Parameters

<i>verbose</i>	Whether to print success and failure messages.
----------------	------------------------------------------------

Reimplemented from [RelationalConnector](#).

## 12.20.3 Member Data Documentation

### 12.20.3.1 `specific_queries`

```
dict specific_queries [static]
```

### Initial value:

```
= {
 "POSTGRES": [
 "SELECT current_database();", # Single value, name of the current database.
 "SELECT datname FROM pg_database;", # List of ALL databases, even ones we cannot access.
] # List of all databases in the database engine.
}
```

The documentation for this class was generated from the following file:

- `/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/relational.py`

## 12.21 PRF1Metric Class Reference

### Properties

- string [Name](#) [get, set]
- double [Precision](#) [get, set]
- double [Recall](#) [get, set]
- double [F1Score](#) [get, set]

## 12.21.1 Property Documentation

### 12.21.1.1 F1Score

```
double F1Score [get], [set]
```

### 12.21.1.2 Name

```
string Name [get], [set]
```

### 12.21.1.3 Precision

```
double Precision [get], [set]
```

### 12.21.1.4 Recall

```
double Recall [get], [set]
```

The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/PRF1Metric.cs](#)

## 12.22 QALtem Class Reference

### Properties

- string [Question](#) [get, set]
- string [GoldAnswer](#) [get, set]
- string [GeneratedAnswer](#) [get, set]
- bool? [IsCorrect](#) [get, set]
- double? [Accuracy](#) [get, set]

## 12.22.1 Property Documentation

### 12.22.1.1 Accuracy

```
double? Accuracy [get], [set]
```

### 12.22.1.2 GeneratedAnswer

```
string GeneratedAnswer [get], [set]
```

### 12.22.1.3 GoldAnswer

```
string GoldAnswer [get], [set]
```

### 12.22.1.4 IsCorrect

```
bool? IsCorrect [get], [set]
```

### 12.22.1.5 Question

```
string Question [get], [set]
```

The documentation for this class was generated from the following file:

- /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/[QAItem.cs](#)

## 12.23 QAMetric Class Reference

### Properties

- List< [QAItem](#) > [QAItems](#) = new() [get, set]
- double [AverageAccuracy](#) [get]

### 12.23.1 Property Documentation

#### 12.23.1.1 AverageAccuracy

```
double AverageAccuracy [get]
```

#### 12.23.1.2 QAItems

```
List<QAItem> QAItems = new() [get], [set]
```


The documentation for this class was generated from the following file:

- /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/[QAMetric.cs](#)


## 12.24 RelationalConnector Class Reference

Connector for relational databases (MySQL, PostgreSQL).

Inheritance diagram for RelationalConnector:

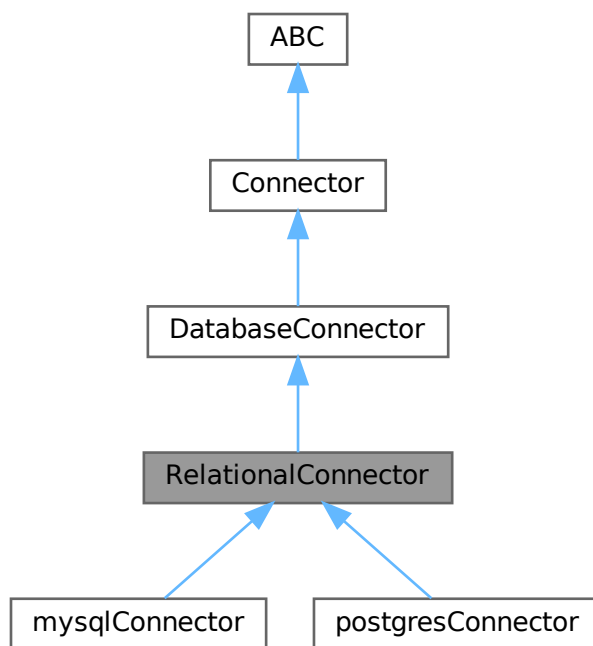

Collaboration diagram for RelationalConnector:

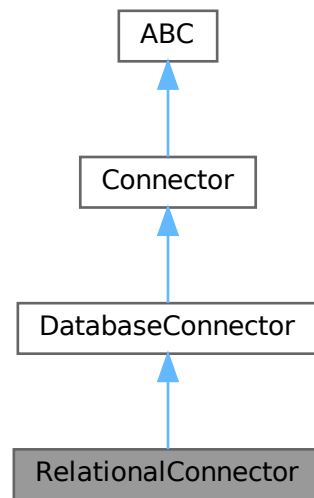

### Public Member Functions

- None `__init__` (self, bool `verbose`, List[str] `specific_queries`)  
*Creates a new database connector.*
- "RelationalConnector" `from_env` (cls, bool `verbose`=False)  
*Decides what type of relational connector to create using the .env file.*
- None `change_database` (self, str `new_database`)  
*Update the connection URI to reference a different database in the same engine.*
- bool `test_operations` (self, bool `raise_error`=True)  
*Establish a basic connection to the database, and test full functionality.*
- bool `check_connection` (self, str `log_source`, bool `raise_error`=True)  
*Minimal connection test to determine if our connection string is valid.*
- Optional[DataFrame] `execute_query` (self, str `query`)  
*Send a single command to the database connection.*
- DataFrame `get_dataframe` (self, str `name`, List[str] `columns`=[])  
*Automatically generate and run a query for the specified table using SQLAlchemy.*
- None `create_database` (self, str `database_name`)  
*Use the current database connection to create a sibling database in this engine.*
- None `drop_database` (self, str `database_name`="")  
*Delete all data stored in a particular database.*
- bool `database_exists` (self, str `database_name`)  
*Search for an existing database using the provided name.*

## Public Member Functions inherited from [DatabaseConnector](#)

- None [configure](#) (self, str DB, str database\_name)  
*Read connection settings from the .env file.*
- Generator[None, None, None] [temp\\_database](#) (self, str database\_name)  
*Temporarily switch to a pseudo-database, creating and dropping it if needed.*
- List[Optional[DataFrame]] [execute\\_combined](#) (self, str multi\_query)  
*Run several database commands in sequence.*
- List[Optional[DataFrame]] [execute\\_file](#) (self, str filename)  
*Run several database commands from a file.*

## Public Attributes

- [database\\_name](#)
- [verbose](#)
- [connection\\_string](#)
- [db\\_type](#)

## Public Attributes inherited from [DatabaseConnector](#)

- [verbose](#)  
*Whether to print debug messages.*
- [db\\_type](#)
- [db\\_engine](#)
- [username](#)
- [password](#)
- [host](#)
- [port](#)
- [connection\\_string](#)

## Protected Member Functions

- List[str] [\\_split\\_combined](#) (self, str multi\_query)  
*Divides a string into non-divisible SQL queries using `sqlparse`.*
- bool [\\_returns\\_data](#) (self, str query)  
*Checks if a query is structured in a way that returns real data, and not status messages.*
- bool [\\_parsable\\_to\\_df](#) (self, Tuple[Any, Any] result)  
*Checks if the result of a SQL query is valid (i.e.*

## Protected Member Functions inherited from [DatabaseConnector](#)

- bool [\\_is\\_single\\_query](#) (self, str query)  
*Checks if a string contains multiple queries.*

### 12.24.1 Detailed Description

Connector for relational databases (MySQL, PostgreSQL).

Uses SQLAlchemy to abstract complex database operations. Hard-coded queries are used for testing purposes, and depend on the specific engine.



## 12.24.2 Constructor & Destructor Documentation

### 12.24.2.1 \_\_init\_\_()

```
None __init__ (
 self,
 bool verbose,
 List[str] specific_queries)
```

Creates a new database connector.

Use [src.connectors.relational.RelationalConnector.from\\_env](#) instead (this is called by derived classes).

#### Parameters

<i>verbose</i>	Whether to print success and failure messages.
<i>specific_queries</i>	A list of helpful SQL queries.

Reimplemented from [DatabaseConnector](#).

Reimplemented in [mysqlConnector](#), and [postgresConnector](#).

## 12.24.3 Member Function Documentation

### 12.24.3.1 \_parsable\_to\_df()

```
bool _parsable_to_df (
 self,
 Tuple[Any, Any] result) [protected]
```

Checks if the result of a SQL query is valid (i.e.

can be converted to a Pandas DataFrame).

- SQLAlchemy CursorResult exposes `.returns_rows` and `.keys()`.
- These must be fetched earlier, before the cursor is closed.

#### Parameters

<i>result</i>	The tuple result (rows, columns) of a SQL, Cypher, or JSON query.
---------------	-------------------------------------------------------------------

#### Returns

Whether the object is parsable to DataFrame.

Reimplemented from [DatabaseConnector](#).

### 12.24.3.2 \_returns\_data()

```
bool _returns_data (
```

```

 self,
 str query) [protected]

```

Checks if a query is structured in a way that returns real data, and not status messages.

Determines whether a SQL query should yield tabular data.

- Uses an exclusion list - commands that definitely return only status / row count.
- Everything else falls through to execution for validation.

#### Parameters

<i>query</i>	A single pre-validated SQL query string.
--------------	------------------------------------------

#### Returns

Whether the query is intended to fetch data (true) or might return a status message (false).

Reimplemented from [DatabaseConnector](#).

### 12.24.3.3 `_split_combined()`

```

List[str] _split_combined (
 self,
 str multi_query) [protected]

```

Divides a string into non-divisible SQL queries using `sqlparse`.

#### Parameters

<i>multi_query</i>	A string containing multiple queries.
--------------------	---------------------------------------

#### Returns

A list of single-query strings.

Reimplemented from [DatabaseConnector](#).

### 12.24.3.4 `change_database()`

```

None change_database (
 self,
 str new_database)

```

Update the connection URI to reference a different database in the same engine.

#### Parameters

<i>new_database</i>	The name of the database to connect to.
---------------------	-----------------------------------------

Reimplemented from [DatabaseConnector](#).

### 12.24.3.5 check\_connection()

```
bool check_connection (
 self,
 str log_source,
 bool raise_error = True)
```

Minimal connection test to determine if our connection string is valid.

Connect to our relational database using SQLAlchemy's engine.begin()

#### Parameters

<i>log_source</i>	The Log class prefix indicating which method is performing the check.
<i>raise_error</i>	Whether to raise an error on connection failure.

#### Returns

Whether the connection test was successful.

#### Exceptions

<i>Log.Failure</i>	If <i>raise_error</i> is True and the connection test fails to complete.
--------------------	--------------------------------------------------------------------------

Reimplemented from [Connector](#).

### 12.24.3.6 create\_database()

```
None create_database (
 self,
 str database_name)
```

Use the current database connection to create a sibling database in this engine.

#### Parameters

<i>database_name</i>	The name of the new database to create.
----------------------	-----------------------------------------

#### Exceptions

<i>Log.Failure</i>	If we fail to create the requested database for any reason.
--------------------	-------------------------------------------------------------

Reimplemented from [DatabaseConnector](#).

### 12.24.3.7 database\_exists()

```
bool database_exists (
 self,
 str database_name)
```

Search for an existing database using the provided name.

#### Parameters

<i>database_name</i>	The name of a database to search for.
----------------------	---------------------------------------

#### Returns

Whether the database is visible to this connector.

Reimplemented from [DatabaseConnector](#).

### 12.24.3.8 drop\_database()

```
None drop_database (
 self,
 str database_name = "")
```

Delete all data stored in a particular database.

#### Parameters

<i>database_name</i>	The name of an existing database.
----------------------	-----------------------------------

#### Exceptions

<i>Log.Failure</i>	If we fail to drop the target database for any reason.
--------------------	--------------------------------------------------------

Reimplemented from [DatabaseConnector](#).

### 12.24.3.9 execute\_query()

```
Optional[DataFrame] execute_query (
 self,
 str query)
```

Send a single command to the database connection.

#### Note

If a result is returned, it will be converted to a DataFrame.

## Parameters

<i>query</i>	A single query to perform on the database.
--------------	--------------------------------------------

## Returns

DataFrame containing the result of the query, or None

## Exceptions

<i>Log.Failure</i>	If the query fails to execute.
--------------------	--------------------------------

Reimplemented from [DatabaseConnector](#).

**12.24.3.10 from\_env()**

```
"RelationalConnector" from_env (
 cls,
 bool verbose = False)
```

Decides what type of relational connector to create using the .env file.

## Parameters

<i>verbose</i>	Whether to print success and failure messages.
----------------	------------------------------------------------

## Exceptions

<i>Log.Failure</i>	If the .env file contains an invalid DB_ENGINE value.
--------------------	-------------------------------------------------------

**12.24.3.11 get\_dataframe()**

```
DataFrame get_dataframe (
 self,
 str name,
 List[str] columns = [])
```

Automatically generate and run a query for the specified table using SQLAlchemy.

## Parameters

<i>name</i>	The name of an existing table or collection in the database.
<i>columns</i>	A list of column names to keep.

**Returns**

Sorted DataFrame containing the requested data

**Exceptions**

<i>Log.Failure</i>	If we fail to create the requested DataFrame for any reason.
--------------------	--------------------------------------------------------------

Reimplemented from [DatabaseConnector](#).

**12.24.3.12 test\_operations()**

```
bool test_operations (
 self,
 bool raise_error = True)
```

Establish a basic connection to the database, and test full functionality.

Can be configured to fail silently, which enables retries or external handling.

**Parameters**

<i>raise_error</i>	Whether to raise an error on connection failure.
--------------------	--------------------------------------------------

**Returns**

Whether the connection test was successful.

**Exceptions**

<i>Log.Failure</i>	If <code>raise_error</code> is <code>True</code> and the connection test fails to complete.
--------------------	---------------------------------------------------------------------------------------------

Reimplemented from [Connector](#).

**12.24.4 Member Data Documentation****12.24.4.1 connection\_string**

`connection_string`

**12.24.4.2 database\_name**

`database_name`

**12.24.4.3 db\_type**

`db_type`

#### 12.24.4.4 verbose

verbose

The documentation for this class was generated from the following file:

- </home/runner/work/dsci-capstone/dsci-capstone/src/connectors/relational.py>

## 12.25 RelationExtractor Class Reference

### Public Member Functions

- `__init__` (self, model\_name="Babelscape/rebel-large", max\_tokens=1024)
- `List[Tuple[str, str, str]|str] extract` (self, str text, bool parse\_tuples=False)

### Public Attributes

- `nlp`
- `sentencizer`
- `tokenizer`
- `model`
- `max_tokens`
- `tuple_delim`

### 12.25.1 Constructor & Destructor Documentation

#### 12.25.1.1 \_\_init\_\_()

```
__init__ (
 self,
 model_name = "Babelscape/rebel-large",
 max_tokens = 1024)
```

### 12.25.2 Member Function Documentation

#### 12.25.2.1 extract()

```
List[Tuple[str, str, str] | str] extract (
 self,
 str text,
 bool parse_tuples = False)
```

### 12.25.3 Member Data Documentation

#### 12.25.3.1 max\_tokens

max\_tokens

### 12.25.3.2 model

model

### 12.25.3.3 nlp

nlp

### 12.25.3.4 sentencizer

sentencizer

### 12.25.3.5 tokenizer

tokenizer

### 12.25.3.6 tuple\_delim

tuple\_delim

The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/src/components/relation\\_extraction.py](#)

## 12.26 ScalarMetric Class Reference

### Properties

- string [Name](#) [get, set]
- double [Value](#) [get, set]

### 12.26.1 Property Documentation

#### 12.26.1.1 Name

string Name [get], [set]

#### 12.26.1.2 Value

double Value [get], [set]

The documentation for this class was generated from the following file:


- [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/ScalarMetric.cs](#)



## 12.27 Session Class Reference

Stores active database connections and configuration settings.

Collaboration diagram for Session:



### Public Member Functions

- Self `__new__` (cls, \*Any args, \*\*Any kwargs)  
*Creates a new session at first access, otherwise returns the existing session.*
- None `__init__` (self, bool `verbose`=False)  
*Initializes the session using the .env file.*

### Public Attributes

- `verbose`  
*Enables or disables the components from printing debug info.*
- `relational_db`  
*Stores RDF-compliant semantic triples.*
- `docs_db`  
*Stores input text, pre-processed chunks, JSON intermediates, and final output.*
- `graph_db`  
*Stores entities (nodes) and relations (edges).*
- `main_graph`  
*Main storage for initial pipeline.*

### Static Protected Attributes

- `_instance` = None
- bool `_created` = False
- `Session _session` = None

## 12.27.1 Detailed Description

Stores active database connections and configuration settings.

- This class implements Singleton design so only one session can be created.

## 12.27.2 Constructor & Destructor Documentation

### 12.27.2.1 `__init__()`

```
None __init__ (
 self,
 bool verbose = False)
```

Initializes the session using the .env file.

- The relational database connector is created using a Factory Method, choosing mysql or postgres based on the .env file.
- The document database connector is created normally since mongo is the only supported option.
- The graph database connector is created normally since neo4j is the only supported option.

## 12.27.3 Member Function Documentation

### 12.27.3.1 `__new__()`

```
Self __new__ (
 cls,
 *Any args,
 **Any kwargs)
```

Creates a new session at first access, otherwise returns the existing session.

#### Parameters

<code>*args</code>	Positional arguments forwarded to <code>init()</code> .
<code>**kwargs</code>	Keyword arguments forwarded to <code>init()</code> .

#### Returns

The new global Session singleton.

## 12.27.4 Member Data Documentation

### 12.27.4.1 `_created`

```
bool _created = False [static], [protected]
```

#### 12.27.4.2 `_instance`

```
_instance = None [static], [protected]
```

#### 12.27.4.3 `_session`

```
Session _session = None [static], [protected]
```

#### 12.27.4.4 `docs_db`

```
docs_db
```

Stores input text, pre-processed chunks, JSON intermediates, and final output.

#### 12.27.4.5 `graph_db`

```
graph_db
```

Stores entities (nodes) and relations (edges).

#### 12.27.4.6 `main_graph`

```
main_graph
```

Main storage for initial pipeline.

#### 12.27.4.7 `relational_db`

```
relational_db
```

Stores RDF-compliant semantic triples.

#### 12.27.4.8 `verbose`

```
verbose
```

Enables or disables the components from printing debug info.

The documentation for this class was generated from the following file:

- `/home/runner/work/dsci-capstone/dsci-capstone/src/core/context.py`

## 12.28 Story Class Reference

### Public Member Functions

- None `__init__` (self, `StoryStreamAdapter` reader)
- Iterator[`Chunk`] `stream_chunks` (self)
- None `pre_split_chunks` (self, int max\_chunk\_length)

*Splits paragraphs into chunks.*

### Public Attributes

- `reader`

### Protected Member Functions

- None `_merge_chunks` (self, List[`Chunk`] segs, int max\_len)
- `Chunk` `_make_single` (self, `Chunk` seg, str text, int max\_len, Optional[`Chunk`] start=None)

## 12.28.1 Constructor & Destructor Documentation

### 12.28.1.1 `__init__()`

```
None __init__ (
 self,
 StoryStreamAdapter reader)
```

## 12.28.2 Member Function Documentation

### 12.28.2.1 `_make_single()`

```
Chunk _make_single (
 self,
 Chunk seg,
 str text,
 int max_len,
 Optional[Chunk] start = None) [protected]
```

### 12.28.2.2 `_merge_chunks()`

```
None _merge_chunks (
 self,
 List[Chunk] segs,
 int max_len) [protected]
```

### 12.28.2.3 pre\_split\_chunks()

```
None pre_split_chunks (
 self,
 int max_chunk_length)
```

Splits paragraphs into chunks.

- Populates self.chunks with Chunk objects that obey max\_chunk\_length.
- Combines adjacent paragraphs when possible.
- Falls back to splitting by sentences if one paragraph is too long.

### 12.28.2.4 stream\_chunks()

```
Iterator[Chunk] stream_chunks (
 self)
```

## 12.28.3 Member Data Documentation

### 12.28.3.1 reader


```
reader
```

The documentation for this class was generated from the following file:


- /home/runner/work/dsci-capstone/dsci-capstone/src/components/[book\\_conversion.py](#)

## 12.29 StoryStreamAdapter Class Reference

Inheritance diagram for StoryStreamAdapter:

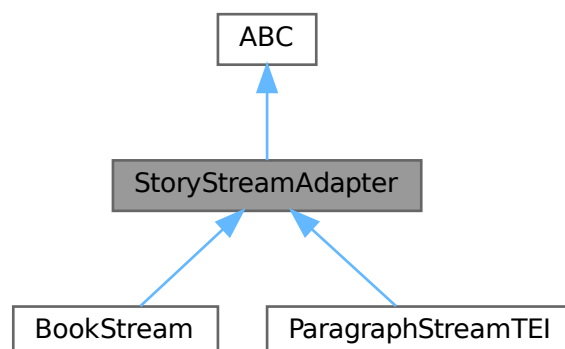

Collaboration diagram for StoryStreamAdapter:



## Public Member Functions

- Iterator[[Chunk](#)] [stream\\_segments](#) (self)  
*Yields sanitized parts of a book.*
- Iterator[[Chunk](#)] [stream\\_paragraphs](#) (self)  
*Concrete helper method to split segments into paragraphs.*
- Iterator[str] [stream\\_sentences](#) (self)  
*Concrete helper method to split paragraphs into sentences.*

## 12.29.1 Member Function Documentation

### 12.29.1.1 [stream\\_paragraphs\(\)](#)

```
Iterator[Chunk] stream_paragraphs (
 self)
```

Concrete helper method to split segments into paragraphs.

The [Chunk](#) class is repurposed here so we pass location info. Depending on the `Story.pre_split_chunks` implementation, this might be unnecessary.

### 12.29.1.2 [stream\\_segments\(\)](#)

```
Iterator[Chunk] stream_segments (
 self)
```

Yields sanitized parts of a book.

- Story segments usually correspond to chapters.
- They serve as borders between chunking operations, ensuring chunks do not span multiple chapters. Implementation is handled by child classes [BookStream](#), etc.
- Segments should be pre-cleaned and must contain 1 paragraph per line with all other newlines removed.

Reimplemented in [ParagraphStreamTEI](#), and [BookStream](#).

### 12.29.1.3 stream\_sentences()

```
Iterator[str] stream_sentences (
 self)
```

Concrete helper method to split paragraphs into sentences.

Mostly for debugging.

The documentation for this class was generated from the following file:

- [/home/runner/work/dsci-capstone/dsci-capstone/src/components/book\\_conversion.py](#)

## 12.30 SummaryData Class Reference

### Properties

- string [BookID](#) [get, set]
- string [BookTitle](#) [get, set]
- string [SummaryText](#) [get, set]
- string [GoldSummaryText](#) [get, set]
- [SummaryMetrics Metrics](#) = new() [get, set]
- List< [QAMetric](#) > [QAResults](#) = new() [get, set]

### 12.30.1 Property Documentation

#### 12.30.1.1 BookID

```
string BookID [get], [set]
```

#### 12.30.1.2 BookTitle

```
string BookTitle [get], [set]
```

#### 12.30.1.3 GoldSummaryText

```
string GoldSummaryText [get], [set]
```

#### 12.30.1.4 Metrics

```
SummaryMetrics Metrics = new() [get], [set]
```

#### 12.30.1.5 QAResults

```
List<QAMetric> QAResults = new() [get], [set]
```

### 12.30.1.6 SummaryText

```
string SummaryText [get], [set]
```

The documentation for this class was generated from the following file:

- /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/[SummaryData.cs](#)

## 12.31 SummaryMetrics Class Reference

### Static Public Member Functions

- static [SummaryMetrics](#) [GetDefault](#) ()

### Properties

- List< [PRF1Metric](#) > [PRF1Metrics](#) = new() [get, set]
- [QAMetric](#) [QA](#) = new() [get, set]
- List< [ScalarMetric](#) > [ScalarMetrics](#) = new() [get, set]

### 12.31.1 Member Function Documentation

#### 12.31.1.1 GetDefault()

```
static SummaryMetrics GetDefault () [static]
```

### 12.31.2 Property Documentation

#### 12.31.2.1 PRF1Metrics

```
List<PRF1Metric> PRF1Metrics = new() [get], [set]
```

#### 12.31.2.2 QA

```
QAMetric QA = new() [get], [set]
```

#### 12.31.2.3 ScalarMetrics

```
List<ScalarMetric> ScalarMetrics = new() [get], [set]
```

The documentation for this class was generated from the following file:

- /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/[SummaryMetrics.cs](#)



# Chapter 13

## File Documentation

### 13.1 /home/runner/work/dsci-capstone/dsci-capstone/src/\_\_init\_\_.py File Reference

#### Namespaces

- namespace [src](#)

### 13.2 /home/runner/work/dsci-capstone/dsci-capstone/src/components/↵ \_\_init\_\_.py File Reference

#### Namespaces

- namespace [src](#)
- namespace [src.components](#)

### 13.3 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/↵ \_\_init\_\_.py File Reference

#### Namespaces

- namespace [src](#)
- namespace [src.connectors](#)

### 13.4 /home/runner/work/dsci-capstone/dsci-capstone/src/core/↵ \_\_init\_\_.py File Reference

#### Namespaces

- namespace [src](#)
- namespace [src.core](#)

## 13.5 /home/runner/work/dsci-capstone/dsci-capstone/tests/\_\_init\_\_.py File Reference

### Namespaces

- namespace [tests](#)

## 13.6 /home/runner/work/dsci-capstone/dsci-capstone/src/components/book\_conversion.py File Reference

### Classes

- class [Chunk](#)  
*Lightweight container for a span of story text.*
- class [StoryStreamAdapter](#)
- class [Story](#)
- class [ParagraphStreamTEI](#)  
*Streams paragraphs from a TEI file as Chunk objects.*
- class [Book](#)
- class [BookStream](#)
- class [BookFactory](#)
- class [EPUBToTEI](#)  
*Converts EPUB files to XML format (TEI specification).*

### Namespaces

- namespace [src](#)
- namespace [src.components](#)
- namespace [src.components.book\\_conversion](#)

### Variables

- [nlp](#) = `spacy.blank("en")`
- [sentencizer](#) = `nlp.add_pipe("sentencizer")`

## 13.7 /home/runner/work/dsci-capstone/dsci-capstone/src/components/corpus.py File Reference

### Namespaces

- namespace [src](#)
- namespace [src.components](#)
- namespace [src.components.corpus](#)

## Functions

- [load\\_booksum](#) ()
- [to\\_df\\_booksum](#) (ds)
- [load\\_narrativeqa](#) ()
- [to\\_df\\_nqa](#) (ds)
- [normalize\\_title](#) (t)
- [merge\\_dataframes](#) (df1, df2, suffix1, suffix2, key\_columns)
- [fuzzy\\_merge\\_titles](#) (df1, df2, suffix1, suffix2, key="title", threshold=90, scorer=fuzz.token\_sort\_ratio)  
*Perform a two-way fuzzy merge between two DataFrames on a text column (e.g., book titles).*

## Variables

- [df\\_booksum](#) = [load\\_booksum](#)()
- [df\\_nqa](#) = [load\\_narrativeqa](#)()
- [df](#) = [fuzzy\\_merge\\_titles](#)([df\\_booksum](#), [df\\_nqa](#), "\_booksum", "\_nqa", key="title", threshold=70)
- [index](#)
- [m](#) = [Metrics](#)()

## 13.8 /home/runner/work/dsci-capstone/dsci-capstone/src/components/fact\_storage.py File Reference

### Classes

- class [KnowledgeGraph](#)  
*Manages a single graph within Neo4j.*

### Namespaces

- namespace [src](#)
- namespace [src.components](#)
- namespace [src.components.fact\\_storage](#)

## 13.9 /home/runner/work/dsci-capstone/dsci-capstone/src/components/metrics.py File Reference

### Classes

- class [Metrics](#)  
*Utility class for computing and posting evaluation metrics.*

### Namespaces

- namespace [src](#)
- namespace [src.components](#)
- namespace [src.components.metrics](#)

## Functions

- Dict[str, Any] [run\\_questeval](#) (Dict[str, Any] chunk, \*str qeval\_task="summarization", bool use\_cuda=False, bool use\_question\_weighter=True)  
*Run QuestEval metric calculation.*
- Dict[str, Any] [run\\_bookscore](#) (Dict[str, Any] chunk, \*str model="gpt-3.5-turbo", int batch\_size=10, bool use\_↵\_v2=True)  
*Run BoookScore metric for long-form summarization.*
- str [chunk\\_bookscore](#) (str book\_text, str book\_title='book', int chunk\_size=2048)  
*Chunk a book into BoookScore segments.*

### 13.10 [/home/runner/work/dsci-capstone/dsci-capstone/src/components/README.md](#) File Reference

### 13.11 [/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/↵README.md](#) File Reference

### 13.12 [/home/runner/work/dsci-capstone/dsci-capstone/src/core/↵README.md](#) File Reference

### 13.13 [/home/runner/work/dsci-capstone/dsci-capstone/src/README.md](#) File Reference

### 13.14 [/home/runner/work/dsci-capstone/dsci-capstone/tests/examples-db/README.md](#) File Reference

### 13.15 [/home/runner/work/dsci-capstone/dsci-capstone/tests/↵README.md](#) File Reference

### 13.16 [/home/runner/work/dsci-capstone/dsci-capstone/src/components/relation\\_extraction.py](#) File Reference

## Classes

- class [RelationExtractor](#)

## Namespaces

- namespace [src](#)
- namespace [src.components](#)
- namespace [src.components.relation\\_extraction](#)

## 13.17 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/base.py File Reference

### Classes

- class [Connector](#)  
*Abstract base class for external connectors.*
- class [DatabaseConnector](#)  
*Abstract base class for database engine connectors.*

### Namespaces

- namespace [src](#)
- namespace [src.connectors](#)
- namespace [src.connectors.base](#)

## 13.18 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/document.py File Reference

### Classes

- class [DocumentConnector](#)  
*Connector for MongoDB (document database)*

### Namespaces

- namespace [src](#)
- namespace [src.connectors](#)
- namespace [src.connectors.document](#)

### Functions

- [MongoHandle mongo\\_handle](#) (str host, str alias)  
*Establish a temporary connection to MongoDB.*
- [DataFrame \\_flatten\\_recursive](#) (DataFrame df)  
*Explode all list columns and flatten dict columns until only scalars remain.*
- [str \\_sanitize\\_json](#) (str text)  
*Remove comments and other non-JSON content from a MongoDB query string.*
- [Dict\[str, Any\] \\_sanitize\\_document](#) (Dict[str, Any] doc, Dict[str, Set[Type[Any]]] type\_registry)  
*Normalize document fields to consistent types for DataFrame construction.*
- [DataFrame \\_docs\\_to\\_df](#) (List[Dict[str, Any]] docs, bool merge\_unspecified=True)  
*Convert raw MongoDB documents to a Pandas DataFrame.*
- [str \\_find\\_compatible\\_nested\\_key](#) (Type[Any] value\_type, Dict[str, Set[Type[Any]]] nested\_schema, bool merge\_unspecified)  
*Find a nested column compatible with the given primitive type.*

## Variables

- `MongoHandle` = Generator["Database[Any]", None, None]

## 13.19 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/graph.py File Reference

### Classes

- class `GraphConnector`  
*Connector for Neo4j (graph database).*

### Namespaces

- namespace `src`
- namespace `src.connectors`
- namespace `src.connectors.graph`

### Functions

- DataFrame `_filter_to_db` (DataFrame df, str database\_name)  
*Filter a DataFrame by database context.*
- DataFrame `_tuples_to_df` (List[Tuple[Any,...]] tuples, List[str] meta)  
*Convert Neo4j query results (nodes and relationships) into a Pandas DataFrame.*
- DataFrame `_normalize_elements` (DataFrame df)  
*Convert Neo4j query results (nodes and relationships) into a Pandas DataFrame.*

## 13.20 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/llm.py File Reference

### Classes

- class `LLMConnector`  
*Connector for prompting and returning LLM output (raw text/JSON) via LangChain.*

### Namespaces

- namespace `src`
- namespace `src.connectors`
- namespace `src.connectors.llm`

## 13.21 /home/runner/work/dsci-capstone/dsci-capstone/src/connectors/relational.py File Reference

### Classes

- class [RelationalConnector](#)  
*Connector for relational databases (MySQL, PostgreSQL).*
- class [mysqlConnector](#)  
*A relational database connector configured for MySQL.*
- class [postgresConnector](#)  
*A relational database connector configured for PostgreSQL.*

### Namespaces

- namespace [src](#)
- namespace [src.connectors](#)
- namespace [src.connectors.relational](#)

## 13.22 /home/runner/work/dsci-capstone/dsci-capstone/src/core/boss.py File Reference

### Namespaces

- namespace [src](#)
- namespace [src.core](#)
- namespace [src.core.boss](#)  
*Boss microservice for orchestrating distributed task processing.*

### Functions

- None [pipeline\\_5b](#) (str summary, str book\_title, str book\_id, str chunk, str gold\_summary="", float bookscore=None, float questeval=None)  
*Send metrics to Blazor.*
- Dict[str, str] [load\\_worker\\_config](#) (List[str] task\_types)  
*Load worker service URLs from environment variables.*
- None [clear\\_task\\_data](#) ([MongoHandle](#) mongo\_db, str collection\_name, str chunk\_id, str task\_name)  
*Clear any existing task data before assigning new task to worker.*
- bool [assign\\_task\\_to\\_worker](#) (str worker\_url, str database\_name, str collection\_name, str chunk\_id)  
*Assign a task to a worker microservice.*
- Flask [create\\_app](#) ([DocumentConnector](#) docs\_db, str database\_name, str collection\_name, Dict[str, str] worker\_urls)  
*Create and configure Flask application for boss service.*
- None [create\\_boss\\_thread](#) (str DB\_NAME, int BOSS\_PORT, str COLLECTION)
- requests.models.Response [post\\_story\\_status](#) (int boss\_port, int story\_id, str task, str status)  
*Helpers to interact with the Flask boss thread.*
- requests.models.Response [post\\_chunk\\_status](#) (int boss\_port, str chunk\_id, int story\_id, str task, str status)  
*Send a chunk-level update to the boss Flask app.*
- requests.models.Response [post\\_process\\_full\\_story](#) (int boss\_port, int story\_id, str task\_type)  
*Process all chunks in MongoDB matching the provided story ID.*

## Variables

- `MongoHandle` = Generator["Database[Any]", None, None]

## 13.23 /home/runner/work/dsci-capstone/dsci-capstone/src/core/context.py File Reference

### Classes

- class `Session`  
*Stores active database connections and configuration settings.*

### Namespaces

- namespace `src`
- namespace `src.core`
- namespace `src.core.context`

### Functions

- `Session get_session` (\*Any args, \*\*Any kwargs)  
*Lazily creates a session on first call, otherwise returns the existing session.*
- Any `__getattr__` (str name)  
*Lazy attribute resolution for module-level imports.*

### Variables

- `Session session`  
*The global instance of the singleton Session class.*

## 13.24 /home/runner/work/dsci-capstone/dsci-capstone/src/core/worker.py File Reference

### Namespaces

- namespace `src`
- namespace `src.core`
- namespace `src.core.worker`  
*Generic Flask worker microservice for distributed task processing.*



## Functions

- None [process\\_task](#) ([MongoHandle](#) mongo\_db, str collection\_name, str chunk\_id, str task\_name, Dict[str, Any] chunk\_doc, str [boss\\_url](#), Callable[[Dict[str, Any]], Dict[str, Any]] task\_handler, Any task\_kwargs=None)  
*Perform the assigned task in a background thread.*
- str [load\\_mongo\\_config](#) (str database)  
*Load MongoDB configuration from environment variables.*
- str [load\\_boss\\_config](#) ()  
*Load boss service callback URL from environment variables.*
- Tuple[Callable[[Dict[str, Any]], Dict[str, Any]], Dict[str, Any]] [get\\_task\\_info](#) (str task\_name)  
*Dynamically import and return the appropriate task handler function.*
- [load\\_imports](#) (func)  
*Pre-warm the task by importing requirements.*
- None [mark\\_task\\_in\\_progress](#) ([MongoHandle](#) mongo\_db, str collection\_name, str chunk\_id, str task\_name)  
*Mark a task as in-progress in MongoDB before processing begins.*
- None [save\\_task\\_result](#) ([MongoHandle](#) mongo\_db, str collection\_name, str chunk\_id, str task\_name, Dict[str, Any] result)  
*Save completed task results to MongoDB.*
- None [notify\\_boss](#) (str [boss\\_url](#), str chunk\_id, str task\_name, str status)  
*Send completion notification to boss service.*
- Flask [create\\_app](#) (str task\_name, str [boss\\_url](#))  
*Create and configure Flask application for task processing.*

## Variables

- [MongoHandle](#) = Generator["Database[Any]", None, None]
- [parser](#) = argparse.ArgumentParser(description="Flask worker microservice")
- [required](#)
- [True](#)
- [help](#)
- [args](#) = parser.parse\_args()
- str [task\\_queue](#) = Queue()
- [target](#)
- [task\\_worker](#) ()  
*Background threading system for non-blocking task handling.*
- [daemon](#)
- str [boss\\_url](#) = [load\\_boss\\_config](#)()
- [PORT](#) = int(os.environ["{args.task.upper()}\_PORT"])
- Flask [app](#) = [create\\_app](#)(args.task, [boss\\_url](#))
- [host](#)
- [port](#)
- [use\\_reloader](#)

## 13.25 /home/runner/work/dsci-capstone/dsci-capstone/src/main.py File Reference

### Namespaces

- namespace [src](#)
- namespace [src.main](#)

## Functions

- `convert_single ()`  
*Converts one EPUB file to TEI format.*
- `convert_from_csv ()`  
*Converts several EPUB files to TEI format.*
- `chunk_single ()`  
*Creates a Story and many Chunks from a TEI file.*
- `test_relation_extraction ()`  
*Runs REBEL on a basic example; used for debugging.*
- `process_single ()`  
*Uses NLP and LLM to process an existing TEI file.*
- `graph_triple_files ()`  
*Loads JSON into Neo4j to test the Blazor graph page.*
- `output_single ()`  
*Generates a summary from triples stored in JSON, and posts data to Blazor.*
- `full_pipeline (collection_name, epub_path, book_chapters, start_str, end_str, book_id, story_id, book_title)`
- `old_main (collection_name)`
- `pipeline_1 (epub_path, book_chapters, start_str, end_str, book_id, story_id)`  
*Connects all components to convert an EPUB file to a book summary.*
- `pipeline_2 (collection_name, chunks, book_title)`  
*Extracts triples from a random chunk.*
- `pipeline_3 (triples)`  
*Generates a LLM summary using Neo4j triples.*
- `pipeline_4 (collection_name, triples_string, chunk_id)`  
*Generate chunk summary.*
- `pipeline_5a (summary, book_title, book_id)`  
*Send book info to Blazor.*

## Variables

- `str tei = "./datasets/examples/trilogy-wishes-1.tei"`  
*Will revisit later - Book classes need refactoring ###.*
- `str chapters`
- `str start = ""`
- `str end = "But I must say no more."`
- `list triple_files`
- `list response_files = ["/datasets/triples/chunk-160_story-1.txt"]`
- `DB_NAME = os.environ["DB_NAME"]`
- `BOSS_PORT = int(os.environ["PYTHON_PORT"])`
- `COLLECTION = os.environ["COLLECTION_NAME"]`
- `int story_id = 1`
- `int book_id = 2`
- `str book_title = "The Phoenix and the Carpet"`
- `chunks`
- `triples`
- `chunk`
- `chunk_id = chunk.get_chunk_id()`
- `triples_string = pipeline_3(triples)`
- `summary = pipeline_4(COLLECTION, triples_string, chunk.get_chunk_id())`
- `response = post_process_full_story(BOSS_PORT, story_id, task_type)`

## 13.26 /home/runner/work/dsci-capstone/dsci-capstone/src/util.py File Reference

### Classes

- class [Log](#)  
*The Log class standardizes console output.*
- class [Log.Failure](#)  
*User-facing base class for custom error handling.*
- class [Log.BadAddressFailure](#)  
*Raised when a database connection string or address is invalid.*

### Namespaces

- namespace [src](#)
- namespace [src.util](#)

### Functions

- DataFrame [df\\_natural\\_sorted](#) (DataFrame df, List[str] ignored\_columns=[], List[str] sort\_columns=[])  
*Sort a DataFrame in natural order using only certain columns.*
- bool [check\\_values](#) (List[Any] results, List[Any] expected, bool verbose, str log\_source, bool raise\_error)  
*Safely compare two lists of values.*

## 13.27 /home/runner/work/dsci-capstone/dsci-capstone/tests/conftest.py File Reference

### Namespaces

- namespace [tests](#)
- namespace [tests.conftest](#)

### Functions

- [pytest\\_addoption](#) (parser)
- [session](#) (request)  
*Fixture to create session.*
- [RelationalConnector relational\\_db](#) (Session session)  
*Fixture to get relational database connection.*
- [DocumentConnector docs\\_db](#) (Session session)  
*Fixture to get document database connection.*
- [GraphConnector graph\\_db](#) (Session session)  
*Fixture to get document database connection.*

## 13.28 `/home/runner/work/dsci-capstone/dsci-capstone/tests/test_db_basic.py` File Reference

### Namespaces

- namespace `tests`
- namespace `tests.test_db_basic`

### Functions

- None `test_db_relational_minimal` (`RelationalConnector` relational\_db)  
*Tests if the RelationalConnector has a valid connection string.*
- None `test_db_docs_minimal` (`DocumentConnector` docs\_db)  
*Tests if the DocumentConnector has a valid connection string.*
- None `test_db_graph_minimal` (`GraphConnector` graph\_db)  
*Tests if the GraphConnector has a valid connection string.*
- None `test_db_relational_comprehensive` (`RelationalConnector` relational\_db)  
*Tests if the GraphConnector is working as intended.*
- None `test_db_docs_comprehensive` (`DocumentConnector` docs\_db)  
*Tests if the GraphConnector is working as intended.*
- None `test_db_graph_comprehensive` (`GraphConnector` graph\_db)  
*Tests if the GraphConnector is working as intended.*

## 13.29 `/home/runner/work/dsci-capstone/dsci-capstone/tests/test_db_files.py` File Reference

### Namespaces

- namespace `tests`
- namespace `tests.test_db_files`

### Functions

- Generator[None, None, None] `load_examples_relational` (`RelationalConnector` relational\_db)  
*Fixture to create relational tables using engine-specific syntax.*
- None `test_sql_example_1` (`RelationalConnector` relational\_db, Generator[None, None, None] `load_examples_relational`)  
*Run queries contained within test files.*
- None `test_sql_example_2` (`RelationalConnector` relational\_db, Generator[None, None, None] `load_examples_relational`)  
*Run queries contained within test files.*
- None `test_mongo_example_1` (`DocumentConnector` docs\_db)  
*Run queries contained within test files.*
- None `test_mongo_example_2` (`DocumentConnector` docs\_db)  
*Run queries contained within test files.*
- None `test_mongo_example_3` (`DocumentConnector` docs\_db)  
*Run queries contained within test files.*
- None `test_cypher_example_1` (`GraphConnector` graph\_db)  
*Run queries contained within test files.*

- None [test\\_cypher\\_example\\_2](#) ([GraphConnector](#) graph\_db)  
*Test social network graph with relationships and mixed query patterns.*
- None [test\\_cypher\\_example\\_3](#) ([GraphConnector](#) graph\_db)  
*Test scene and dialogue graphs with proper isolation.*
- None [test\\_cypher\\_example\\_4](#) ([GraphConnector](#) graph\_db)  
*Test event graph with property mutations and multi-hop traversal.*
- None [\\_exec\\_query\\_file](#) ([DatabaseConnector](#) db\_fixture, str filename, List[str] valid\_files)  
*Run queries from a local file through the database.*

## 13.30 /home/runner/work/dsci-capstone/dsci-capstone/tests/test\_kg\_triples.py File Reference

### Namespaces

- namespace [tests](#)
- namespace [tests.test\\_kg\\_triples](#)

### Functions

- None [test\\_knowledge\\_graph\\_triples](#) ([GraphConnector](#) graph\_db)  
*Test KnowledgeGraph triple operations using add\_triple and get\_all\_triples.*
- [KnowledgeGraph nature\\_scene\\_graph](#) ([GraphConnector](#) graph\_db)  
*Create a scene graph with multiple location-based communities for testing.*
- None [test\\_get\\_subgraph\\_by\\_nodes](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Test filtering triples by specific node IDs.*
- None [test\\_get\\_neighborhood](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Test k-hop neighborhood expansion around a central node.*
- None [test\\_get\\_random\\_walk\\_sample](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Test random walk sampling starting from specified nodes.*
- None [test\\_get\\_neighborhood\\_comprehensive](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Comprehensive test for k-hop neighborhood expansion.*
- None [test\\_get\\_random\\_walk\\_sample\\_comprehensive](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Comprehensive test for random walk sampling.*
- None [test\\_detect\\_community\\_clusters\\_minimal](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Test basic community detection functionality.*
- None [test\\_detect\\_community\\_clusters\\_comprehensive](#) ([KnowledgeGraph](#) nature\_scene\_graph)  
*Comprehensive test for community detection with various parameters.*

- 13.31** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/\\_Imports.razor](#) File Reference ↩
- 13.32** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/App.razor](#) File Reference ↩
- 13.33** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Layout/MainLayout.razor](#) File Reference ↩
- 13.34** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Layout/NavMenu.razor](#) File Reference ↩
- 13.35** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/Error.razor](#) File Reference ↩
- 13.36** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/Graph.razor](#) File Reference ↩
- 13.37** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/Home.razor](#) File Reference ↩
- 13.38** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Pages/Metrics.razor](#) File Reference ↩
- 13.39** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Components/Routes.razor](#) File Reference ↩
- 13.40** [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Controllers/MetricsController.cs](#) File Reference ↩

#### Classes

- class [MetricsController](#)

#### Namespaces

- namespace [BlazorApp](#)
- namespace [BlazorApp.Controllers](#)

## 13.41 /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Hubs/MetricsHub.cs File Reference↔

### Classes

- class [MetricsHub](#)

### Namespaces

- namespace [BlazorApp](#)
- namespace [BlazorApp.Hubs](#)

## 13.42 /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/PRF1Metric.cs File Reference↔

### Classes

- class [PRF1Metric](#)

### Namespaces

- namespace [BlazorApp](#)
- namespace [BlazorApp.Models](#)

## 13.43 /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/QAItem.cs File Reference↔

### Classes

- class [QAItem](#)

### Namespaces

- namespace [BlazorApp](#)
- namespace [BlazorApp.Models](#)

## 13.44 /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/QAMetric.cs File Reference↔

### Classes

- class [QAMetric](#)

### Namespaces

- namespace [BlazorApp](#)
- namespace [BlazorApp.Models](#)

## 13.45 [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/ScalarMetric.cs](#) File Reference

### Classes

- class [ScalarMetric](#)

### Namespaces

- namespace [BlazorApp](#)
- namespace [BlazorApp.Models](#)

## 13.46 [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/SummaryData.cs](#) File Reference

### Classes

- class [SummaryData](#)

### Namespaces

- namespace [BlazorApp](#)
- namespace [BlazorApp.Models](#)

## 13.47 [/home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/SummaryMetrics.cs](#) File Reference

### Classes

- class [SummaryMetrics](#)

### Namespaces

- namespace [BlazorApp](#)
- namespace [BlazorApp.Models](#)



# Index

/home/runner/work/dsci-capstone/dsci-capstone/src/README.md, 182  
184 /home/runner/work/dsci-capstone/dsci-capstone/tests/conftest.py,  
/home/runner/work/dsci-capstone/dsci-capstone/src/\_\_init\_\_.py, 191  
181 /home/runner/work/dsci-capstone/dsci-capstone/tests/examples-  
/home/runner/work/dsci-capstone/dsci-capstone/src/components/README.md, 184  
184 /home/runner/work/dsci-capstone/dsci-capstone/tests/test\_db\_basic.py,  
/home/runner/work/dsci-capstone/dsci-capstone/src/components/\_\_init\_\_.py, 182  
181 /home/runner/work/dsci-capstone/dsci-capstone/tests/test\_db\_files.py,  
/home/runner/work/dsci-capstone/dsci-capstone/src/components/book\_conversion.py, 192  
182 /home/runner/work/dsci-capstone/dsci-capstone/tests/test\_kg\_triples.py,  
/home/runner/work/dsci-capstone/dsci-capstone/src/components/core.py, 193  
182 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/components/facets/BlazorApp/Components/App.razor, 194  
183 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/components/metrics/BlazorApp/Components/Layout/MainLayout.razor,  
183 194  
/home/runner/work/dsci-capstone/dsci-capstone/src/components/navigation/BlazorApp/Components/Layout/NavMenu.razor,  
184  
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/README.md, 184  
184 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/\_\_init\_\_.py, 194  
181 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/homebase.py, 185  
185 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/document.py, 185  
185 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/graph.py, 194  
186 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/homehub.py, 186  
186 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/connectors/relationships.py, 187  
187 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/core/README.md, 184  
184 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/core/\_\_init\_\_.py, 181  
181 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/core/boss.py, 194  
187 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/core/context.py, 194  
188 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/core/home.py, 188  
188 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/main.py, 189  
189 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/src/util.py, 191  
191 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/tests/README.md, 184  
184 /home/runner/work/dsci-capstone/dsci-capstone/web-  
/home/runner/work/dsci-capstone/dsci-capstone/tests/\_\_init\_\_.py, 184

- app/BlazorApp/Models/ScalarMetric.cs, 196
- /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/SummaryData.cs, 196
- /home/runner/work/dsci-capstone/dsci-capstone/web-app/BlazorApp/Models/SummaryMetrics.cs, 196
- \_\_getattr\_\_
  - src.core.context, 38
- \_\_init\_\_
  - Book, 65
  - BookStream, 68
  - Chunk, 69
  - DatabaseConnector, 77
  - DocumentConnector, 87
  - EPUBToTEI, 94
  - GraphConnector, 101
  - KnowledgeGraph, 112
  - LLMConnector, 124
  - Log.BadAddressFailure, 65
  - Log.Failure, 97
  - Metrics, 141
  - mysqlConnector, 151
  - ParagraphStreamTEI, 153
  - postgresConnector, 159
  - RelationalConnector, 165
  - RelationExtractor, 171
  - Session, 174
  - Story, 176
- \_\_new\_\_
  - Session, 174
- \_\_repr\_\_
  - Chunk, 70
- \_\_str\_\_
  - Log.Failure, 98
- \_auth\_suffix
  - DocumentConnector, 93
- \_created
  - Session, 174
- \_docs\_to\_df
  - src.connectors.document, 29
- \_exec\_query\_file
  - tests.test\_db\_files, 56
- \_execute\_retag\_db
  - GraphConnector, 101
- \_fetch\_latest
  - GraphConnector, 101
- \_filter\_to\_db
  - src.connectors.graph, 32
- \_find\_compatible\_nested\_key
  - src.connectors.document, 29
- \_flatten\_recursive
  - src.connectors.document, 29
- \_graph\_name
  - GraphConnector, 110
- \_hubContext
  - MetricsController, 146
- \_instance
  - Session, 174
- \_is\_single\_query
  - DatabaseConnector, 78
- \_logger
  - MetricsController, 146
  - MetricsHub, 148
- \_make\_single
  - Story, 176
- \_merge\_chunks
  - Story, 176
- \_normalize\_elements
  - src.connectors.graph, 32
- \_parsable\_to\_df
  - DatabaseConnector, 78
  - DocumentConnector, 87
  - GraphConnector, 103
  - RelationalConnector, 165
- \_prune\_bad\_tags
  - EPUBToTEI, 94
- \_returns\_data
  - DatabaseConnector, 78
  - DocumentConnector, 88
  - GraphConnector, 103
  - RelationalConnector, 165
- \_sanitize\_document
  - src.connectors.document, 30
- \_sanitize\_ids
  - EPUBToTEI, 94
- \_sanitize\_json
  - src.connectors.document, 30
- \_session
  - Session, 175
- \_split\_combined
  - DatabaseConnector, 79
  - DocumentConnector, 88
  - GraphConnector, 104
  - RelationalConnector, 166
- \_tuples\_to\_df
  - src.connectors.graph, 33
- Accuracy
  - QAItem, 160
- add\_triple
  - KnowledgeGraph, 112
- allowed\_chapters
  - ParagraphStreamTEI, 154
- app
  - src.core.worker, 44
- args
  - src.core.worker, 44
- assign\_task\_to\_worker
  - src.core.boss, 35
- AverageAccuracy
  - QAMetric, 161
- bad\_addr
  - Log, 131
- bad\_path
  - Log, 131
- bad\_val

- Log, 132
- BlazorApp, 21
- BlazorApp.Controllers, 21
- BlazorApp.Hubs, 21
- BlazorApp.Models, 21
- Book, 65
  - \_\_init\_\_, 65
  - stream\_chapters, 65
- book
  - BookStream, 68
- book\_id
  - Chunk, 71
  - ParagraphStreamTEI, 154
  - src.main, 50
- book\_title
  - src.main, 50
- BookFactory, 66
  - create\_book, 66
- BookID
  - SummaryData, 179
- BookStream, 67
  - \_\_init\_\_, 68
  - book, 68
  - stream\_segments, 68
- BookTitle
  - SummaryData, 179
- BOSS\_PORT
  - src.main, 50
- boss\_url
  - src.core.worker, 44
- BRIGHT
  - Log, 132
- change\_database
  - DatabaseConnector, 79
  - DocumentConnector, 88
  - GraphConnector, 104
  - RelationalConnector, 166
- chapter\_number
  - Chunk, 71
- chapter\_percent
  - Chunk, 71
- chapters
  - src.main, 50
- char\_count
  - Chunk, 70
- check\_connection
  - Connector, 73
  - DocumentConnector, 89
  - GraphConnector, 104
  - LLMConnector, 124
  - RelationalConnector, 167
- check\_values
  - src.util, 52
- Chunk, 68
  - \_\_init\_\_, 69
  - \_\_repr\_\_, 70
  - book\_id, 71
  - chapter\_number, 71
  - chapter\_percent, 71
  - char\_count, 70
  - get\_chunk\_id, 70
  - line\_end, 71
  - line\_start, 71
  - story\_id, 71
  - story\_percent, 71
  - text, 71
  - to\_mongo\_dict, 71
- chunk
  - src.main, 50
- chunk\_bookscore
  - src.components.metrics, 25
- chunk\_id
  - src.main, 50
- chunk\_single
  - src.main, 47
- chunks
  - ParagraphStreamTEI, 154
  - src.main, 50
- clean\_tei
  - EPUBToTEI, 95
- clean\_tei\_content
  - EPUBToTEI, 95
- clear\_task\_data
  - src.core.boss, 35
- COLLECTION
  - src.main, 51
- Components Module Overview, 1
- compute\_basic\_metrics
  - Metrics, 141
- configure
  - DatabaseConnector, 80
  - LLMConnector, 124
- conn\_abc
  - Log, 132
- connection\_string
  - DatabaseConnector, 83
  - DocumentConnector, 93
  - GraphConnector, 110
  - RelationalConnector, 170
- Connector, 72
  - check\_connection, 73
  - execute\_file, 74
  - execute\_query, 74
  - test\_operations, 74
- Connectors Module Overview, 3
- convert\_from\_csv
  - src.main, 47
- convert\_single
  - src.main, 47
- convert\_to\_tei
  - EPUBToTEI, 95
- Core Module Overview, 5
- create\_app
  - src.core.boss, 35
  - src.core.worker, 41
- create\_book

- BookFactory, 66
- create\_boss\_thread
  - src.core.boss, 36
- create\_database
  - DatabaseConnector, 80
  - DocumentConnector, 89
  - GraphConnector, 105
  - RelationalConnector, 167
- create\_db
  - Log, 132
- create\_summary\_payload
  - Metrics, 141
- daemon
  - src.core.worker, 44
- database
  - KnowledgeGraph, 121
- Database Example Datasets, 9
- database\_exists
  - DatabaseConnector, 80
  - DocumentConnector, 90
  - GraphConnector, 105
  - RelationalConnector, 167
- database\_name
  - DocumentConnector, 93
  - GraphConnector, 110
  - RelationalConnector, 170
- DatabaseConnector, 75
  - \_\_init\_\_, 77
  - \_is\_single\_query, 78
  - \_parsable\_to\_df, 78
  - \_returns\_data, 78
  - \_split\_combined, 79
  - change\_database, 79
  - configure, 80
  - connection\_string, 83
  - create\_database, 80
  - database\_exists, 80
  - db\_engine, 83
  - db\_type, 83
  - drop\_database, 81
  - execute\_combined, 81
  - execute\_file, 81
  - execute\_query, 82
  - get\_dataframe, 82
  - host, 83
  - password, 84
  - port, 84
  - temp\_database, 83
  - username, 84
  - verbose, 84
- db\_conn\_abc
  - Log, 132
- db\_engine
  - DatabaseConnector, 83
- db\_exists
  - Log, 132
- DB\_NAME
  - src.main, 51
- db\_type
  - DatabaseConnector, 83
  - RelationalConnector, 170
- delete\_dummy
  - DocumentConnector, 90
  - GraphConnector, 106
- detect\_community\_clusters
  - KnowledgeGraph, 113
- df
  - src.components.corpus, 24
- df\_booksum
  - src.components.corpus, 24
- df\_natural\_sorted
  - src.util, 53
- df\_nqa
  - src.components.corpus, 25
- doc\_db
  - Log, 132
- docs\_db
  - Session, 175
  - tests.conftest, 54
- DocumentConnector, 84
  - \_\_init\_\_, 87
  - \_auth\_suffix, 93
  - \_parsable\_to\_df, 87
  - \_returns\_data, 88
  - \_split\_combined, 88
  - change\_database, 88
  - check\_connection, 89
  - connection\_string, 93
  - create\_database, 89
  - database\_exists, 90
  - database\_name, 93
  - delete\_dummy, 90
  - drop\_database, 90
  - execute\_query, 91
  - get\_dataframe, 91
  - get\_unmanaged\_handle, 92
  - test\_operations, 92
  - verbose, 93
- drop\_database
  - DatabaseConnector, 81
  - DocumentConnector, 90
  - GraphConnector, 106
  - RelationalConnector, 168
- drop\_db
  - Log, 132
- drop\_gr
  - Log, 132
- drop\_graph
  - GraphConnector, 106
- encoding
  - EPUBToTEI, 95
  - ParagraphStreamTEI, 154
- end
  - src.main, 51
- end\_inclusive
  - ParagraphStreamTEI, 155

- epub\_path
  - EPUBToTEI, 95
- EPUBToTEI, 93
  - \_\_init\_\_, 94
  - \_prune\_bad\_tags, 94
  - \_sanitize\_ids, 94
  - clean\_tei, 95
  - clean\_tei\_content, 95
  - convert\_to\_tei, 95
  - encoding, 95
  - epub\_path, 95
  - pandoc\_xml\_path, 95
  - raw\_tei\_content, 96
  - tei\_path, 96
  - xml\_namespace, 96
- execute\_combined
  - DatabaseConnector, 81
- execute\_file
  - Connector, 74
  - DatabaseConnector, 81
  - LLMConnector, 125
- execute\_full\_query
  - LLMConnector, 125
- execute\_query
  - Connector, 74
  - DatabaseConnector, 82
  - DocumentConnector, 91
  - GraphConnector, 107
  - LLMConnector, 125
  - RelationalConnector, 168
- extract
  - RelationExtractor, 171
- F1Score
  - PRF1Metric, 160
- fail
  - Log, 130
- fail\_legacy
  - Log, 130
- FAILURE\_COLOR
  - Log, 132
- find\_element\_names
  - KnowledgeGraph, 113
- from\_env
  - RelationalConnector, 169
- FULL\_DF
  - Log, 133
- full\_pipeline
  - src.main, 48
- fuzzy\_merge\_titles
  - src.components.corpus, 23
- generate\_default\_metrics
  - Metrics, 142
- generate\_example\_metrics
  - Metrics, 143
- GeneratedAnswer
  - QALtem, 160
- get\_all\_triples
  - KnowledgeGraph, 114
- get\_chunk\_id
  - Chunk, 70
- get\_community\_subgraph
  - KnowledgeGraph, 114
- get\_dataframe
  - DatabaseConnector, 82
  - DocumentConnector, 91
  - GraphConnector, 107
  - RelationalConnector, 169
- get\_df
  - Log, 133
- get\_edge\_counts
  - KnowledgeGraph, 115
- get\_neighborhood
  - KnowledgeGraph, 115
- get\_node\_context
  - KnowledgeGraph, 116
- get\_random\_walk\_sample
  - KnowledgeGraph, 117
- get\_relation\_summary
  - KnowledgeGraph, 117
- get\_session
  - src.core.context, 39
- get\_subgraph\_by\_nodes
  - KnowledgeGraph, 117
- get\_summary\_stats
  - KnowledgeGraph, 118
- get\_task\_info
  - src.core.worker, 41
- get\_triple\_properties
  - KnowledgeGraph, 118
- get\_unique
  - GraphConnector, 108
  - Log, 133
- get\_unmanaged\_handle
  - DocumentConnector, 92
- GetAll
  - MetricsController, 146
- GetDefault
  - SummaryMetrics, 180
- GetIndex
  - MetricsController, 146
- GoldAnswer
  - QALtem, 160
- GoldSummaryText
  - SummaryData, 179
- good\_val
  - Log, 133
- gr\_db
  - Log, 133
- gr\_rag
  - Log, 133
- graph\_db
  - Session, 175
  - tests.confest, 54
- graph\_name
  - KnowledgeGraph, 122

- graph\_triple\_files
  - src.main, 48
- GraphConnector, 98
  - \_\_init\_\_, 101
  - \_execute\_retag\_db, 101
  - \_fetch\_latest, 101
  - \_graph\_name, 110
  - \_parsable\_to\_df, 103
  - \_returns\_data, 103
  - \_split\_combined, 104
  - change\_database, 104
  - check\_connection, 104
  - connection\_string, 110
  - create\_database, 105
  - database\_exists, 105
  - database\_name, 110
  - delete\_dummy, 106
  - drop\_database, 106
  - drop\_graph, 106
  - execute\_query, 107
  - get\_dataframe, 107
  - get\_unique, 108
  - IS\_DUMMY\_, 108
  - NOT\_DUMMY\_, 109
  - SAME\_DB\_KG\_, 109
  - temp\_graph, 109
  - test\_operations, 109
  - verbose, 110
- GREEN
  - Log, 133
- help
  - src.core.worker, 45
- HOST
  - Metrics, 144
- host
  - DatabaseConnector, 83
  - src.core.worker, 45
- index
  - src.components.corpus, 25
- IS\_DUMMY\_
  - GraphConnector, 108
- IsCorrect
  - QAItem, 161
- kg
  - Log, 133
- KnowledgeGraph, 111
  - \_\_init\_\_, 112
  - add\_triple, 112
  - database, 121
  - detect\_community\_clusters, 113
  - find\_element\_names, 113
  - get\_all\_triples, 114
  - get\_community\_subgraph, 114
  - get\_edge\_counts, 115
  - get\_neighborhood, 115
  - get\_node\_context, 116
  - get\_random\_walk\_sample, 117
  - get\_relation\_summary, 117
  - get\_subgraph\_by\_nodes, 117
  - get\_summary\_stats, 118
  - get\_triple\_properties, 118
  - graph\_name, 122
  - print\_nodes, 119
  - print\_triples, 119
  - to\_contextualized\_string, 119
  - to\_narrative, 120
  - to\_triple\_string, 120
  - triples\_to\_names, 121
  - verbose, 122
- line\_end
  - Chunk, 71
- line\_start
  - Chunk, 71
- lines
  - ParagraphStreamTEI, 155
- llm
  - LLMConnector, 127
- LLMConnector, 122
  - \_\_init\_\_, 124
  - check\_connection, 124
  - configure, 124
  - execute\_file, 125
  - execute\_full\_query, 125
  - execute\_query, 125
  - llm, 127
  - model\_name, 127
  - normalize\_triples, 126
  - system\_prompt, 127
  - test\_operations, 126
- load\_booksum
  - src.components.corpus, 24
- load\_boss\_config
  - src.core.worker, 41
- load\_examples\_relational
  - tests.test\_db\_files, 57
- load\_imports
  - src.core.worker, 42
- load\_mongo\_config
  - src.core.worker, 42
- load\_narrativeqa
  - src.components.corpus, 24
- load\_worker\_config
  - src.core.boss, 36
- Log, 127
  - bad\_addr, 131
  - bad\_path, 131
  - bad\_val, 132
  - BRIGHT, 132
  - conn\_abc, 132
  - create\_db, 132
  - db\_conn\_abc, 132
  - db\_exists, 132
  - doc\_db, 132
  - drop\_db, 132

- drop\_gr, 132
- fail, 130
- fail\_legacy, 130
- FAILURE\_COLOR, 132
- FULL\_DF, 133
- get\_df, 133
- get\_unique, 133
- good\_val, 133
- gr\_db, 133
- gr\_rag, 133
- GREEN, 133
- kg, 133
- msg\_bad\_addr, 133
- msg\_bad\_coll, 134
- msg\_bad\_df\_parse, 134
- msg\_bad\_exec\_f, 134
- msg\_bad\_exec\_q, 134
- msg\_bad\_graph, 134
- msg\_bad\_path, 134
- msg\_bad\_table, 134
- msg\_bad\_triples, 134
- MSG\_COLOR, 134
- msg\_compare, 134
- msg\_db\_connect, 135
- msg\_db\_current, 135
- msg\_db\_exists, 135
- msg\_db\_not\_found, 135
- msg\_fail\_manage\_db, 135
- msg\_fail\_manage\_gr, 135
- msg\_fail\_parse, 135
- msg\_good\_coll, 135
- msg\_good\_df\_parse, 136
- msg\_good\_exec\_f, 136
- msg\_good\_exec\_q, 136
- msg\_good\_exec\_qr, 136
- msg\_good\_graph, 136
- msg\_good\_path, 136
- msg\_good\_table, 136
- msg\_multiple\_query, 136
- msg\_none\_df, 137
- msg\_result, 137
- msg\_success\_managed\_db, 137
- msg\_success\_managed\_gr, 137
- msg\_swap\_db, 137
- msg\_swap\_kg, 137
- msg\_unknown\_error, 137
- pytest\_db, 137
- RED, 138
- rel\_db, 138
- run\_f, 138
- run\_q, 138
- sub\_gr, 138
- success, 130
- SUCCESS\_COLOR, 138
- success\_legacy, 131
- swap\_db, 138
- swap\_kg, 138
- test\_basic, 138
- test\_df, 139
- test\_info, 139
- test\_ops, 139
- test\_tmp\_db, 139
- USE\_COLORS, 139
- warn, 131
- WARNING\_COLOR, 139
- WHITE, 139
- YELLOW, 139
- Log.BadAddressFailure, 63
  - \_\_init\_\_, 65
- Log.Failure, 96
  - \_\_init\_\_, 97
  - \_\_str\_\_, 98
  - msg, 98
  - prefix, 98
- m
  - src.components.corpus, 25
- main\_graph
  - Session, 175
- mark\_task\_in\_progress
  - src.core.worker, 42
- max\_tokens
  - RelationExtractor, 171
- merge\_dataframes
  - src.components.corpus, 24
- Metrics, 140
  - \_\_init\_\_, 141
  - compute\_basic\_metrics, 141
  - create\_summary\_payload, 141
  - generate\_default\_metrics, 142
  - generate\_example\_metrics, 143
  - HOST, 144
  - PORT, 144
  - post\_basic\_metrics, 143
  - post\_basic\_output, 143
  - post\_payload, 144
  - SummaryData, 179
  - timeout\_seconds, 144
  - url, 144
- MetricsController, 145
  - \_hubContext, 146
  - \_logger, 146
  - GetAll, 146
  - GetIndex, 146
  - MetricsController, 146
  - Post, 146
  - Summaries, 146
- MetricsHub, 147
  - \_logger, 148
  - MetricsHub, 147
  - OnConnectedAsync, 148
  - OnDisconnectedAsync, 148
- model
  - RelationExtractor, 171
- model\_name
  - LLMConnector, 127
- mongo\_handle

- src.connectors.document, 31
- MongoHandle
  - src.connectors.document, 31
  - src.core.boss, 38
  - src.core.worker, 45
- msg
  - Log.Failure, 98
- msg\_bad\_addr
  - Log, 133
- msg\_bad\_coll
  - Log, 134
- msg\_bad\_df\_parse
  - Log, 134
- msg\_bad\_exec\_f
  - Log, 134
- msg\_bad\_exec\_q
  - Log, 134
- msg\_bad\_graph
  - Log, 134
- msg\_bad\_path
  - Log, 134
- msg\_bad\_table
  - Log, 134
- msg\_bad\_triples
  - Log, 134
- MSG\_COLOR
  - Log, 134
- msg\_compare
  - Log, 134
- msg\_db\_connect
  - Log, 135
- msg\_db\_current
  - Log, 135
- msg\_db\_exists
  - Log, 135
- msg\_db\_not\_found
  - Log, 135
- msg\_fail\_manage\_db
  - Log, 135
- msg\_fail\_manage\_gr
  - Log, 135
- msg\_fail\_parse
  - Log, 135
- msg\_good\_coll
  - Log, 135
- msg\_good\_df\_parse
  - Log, 136
- msg\_good\_exec\_f
  - Log, 136
- msg\_good\_exec\_q
  - Log, 136
- msg\_good\_exec\_qr
  - Log, 136
- msg\_good\_graph
  - Log, 136
- msg\_good\_path
  - Log, 136
- msg\_good\_table
  - Log, 136
- msg\_multiple\_query
  - Log, 136
- msg\_none\_df
  - Log, 137
- msg\_result
  - Log, 137
- msg\_success\_managed\_db
  - Log, 137
- msg\_success\_managed\_gr
  - Log, 137
- msg\_swap\_db
  - Log, 137
- msg\_swap\_kg
  - Log, 137
- msg\_unknown\_error
  - Log, 137
- mysqlConnector, 148
  - \_\_init\_\_, 151
  - specific\_queries, 151
- Name
  - PRF1Metric, 160
  - ScalarMetric, 172
- nature\_scene\_graph
  - tests.test\_kg\_triples, 59
- nlp
  - RelationExtractor, 172
  - src.components.book\_conversion, 22
- normalize\_title
  - src.components.corpus, 24
- normalize\_triples
  - LLMConnector, 126
- NOT\_DUMMY\_
  - GraphConnector, 109
- notify\_boss
  - src.core.worker, 43
- old\_main
  - src.main, 48
- OnConnectedAsync
  - MetricsHub, 148
- OnDisconnectedAsync
  - MetricsHub, 148
- output\_single
  - src.main, 48
- pandoc\_xml\_path
  - EPUBToTEI, 95
- ParagraphStreamTEI, 151
  - \_\_init\_\_, 153
  - allowed\_chapters, 154
  - book\_id, 154
  - chunks, 154
  - encoding, 154
  - end\_inclusive, 155
  - lines, 155
  - pre\_compute\_segments, 154
  - root, 155



- start\_inclusive, 155
- story\_id, 155
- stream\_segments, 154
- tei\_path, 155
- xml\_namespace, 155
- parser
  - src.core.worker, 45
- password
  - DatabaseConnector, 84
- pipeline\_1
  - src.main, 48
- pipeline\_2
  - src.main, 48
- pipeline\_3
  - src.main, 49
- pipeline\_4
  - src.main, 49
- pipeline\_5a
  - src.main, 49
- pipeline\_5b
  - src.core.boss, 36
- PORT
  - Metrics, 144
  - src.core.worker, 45
- port
  - DatabaseConnector, 84
  - src.core.worker, 45
- Post
  - MetricsController, 146
- post\_basic\_metrics
  - Metrics, 143
- post\_basic\_output
  - Metrics, 143
- post\_chunk\_status
  - src.core.boss, 36
- post\_payload
  - Metrics, 144
- post\_process\_full\_story
  - src.core.boss, 37
- post\_story\_status
  - src.core.boss, 37
- postgresConnector, 156
  - \_\_init\_\_, 159
  - specific\_queries, 159
- pre\_compute\_segments
  - ParagraphStreamTEI, 154
- pre\_split\_chunks
  - Story, 176
- Precision
  - PRF1Metric, 160
- prefix
  - Log.Failure, 98
- PRF1Metric, 159
  - F1Score, 160
  - Name, 160
  - Precision, 160
  - Recall, 160
- PRF1Metrics
  - SummaryMetrics, 180
- print\_nodes
  - KnowledgeGraph, 119
- print\_triples
  - KnowledgeGraph, 119
- process\_single
  - src.main, 49
- process\_task
  - src.core.worker, 43
- pytest\_addoption
  - tests.conftest, 54
- pytest\_db
  - Log, 137
- QA
  - SummaryMetrics, 180
- QALtem, 160
  - Accuracy, 160
  - GeneratedAnswer, 160
  - GoldAnswer, 160
  - IsCorrect, 161
  - Question, 161
- QALtems
  - QAMetric, 161
- QAMetric, 161
  - AverageAccuracy, 161
  - QALtems, 161
- QAResults
  - SummaryData, 179
- Question
  - QALtem, 161
- raw\_tei\_content
  - EPUBToTEI, 96
- reader
  - Story, 177
- Recall
  - PRF1Metric, 160
- RED
  - Log, 138
- rel\_db
  - Log, 138
- relational\_db
  - Session, 175
  - tests.conftest, 54
- RelationalConnector, 162
  - \_\_init\_\_, 165
  - \_parsable\_to\_df, 165
  - \_returns\_data, 165
  - \_split\_combined, 166
  - change\_database, 166
  - check\_connection, 167
  - connection\_string, 170
  - create\_database, 167
  - database\_exists, 167
  - database\_name, 170
  - db\_type, 170
  - drop\_database, 168
  - execute\_query, 168

- from\_env, 169
  - get\_dataframe, 169
  - test\_operations, 170
  - verbose, 170
- RelationExtractor, 171
  - \_\_init\_\_, 171
  - extract, 171
  - max\_tokens, 171
  - model, 171
  - nlp, 172
  - sentencizer, 172
  - tokenizer, 172
  - tuple\_delim, 172
- required
  - src.core.worker, 45
- response
  - src.main, 51
- response\_files
  - src.main, 51
- root
  - ParagraphStreamTEI, 155
- run\_bookscore
  - src.components.metrics, 26
- run\_f
  - Log, 138
- run\_q
  - Log, 138
- run\_questeval
  - src.components.metrics, 27
- SAME\_DB\_KG\_
  - GraphConnector, 109
- save\_task\_result
  - src.core.worker, 44
- ScalarMetric, 172
  - Name, 172
  - Value, 172
- ScalarMetrics
  - SummaryMetrics, 180
- sentencizer
  - RelationExtractor, 172
  - src.components.book\_conversion, 22
- Session, 173
  - \_\_init\_\_, 174
  - \_\_new\_\_, 174
  - \_created, 174
  - \_instance, 174
  - \_session, 175
  - docs\_db, 175
  - graph\_db, 175
  - main\_graph, 175
  - relational\_db, 175
  - verbose, 175
- session
  - src.core.context, 39
  - tests.conftest, 54
- Source Directory Overview, 7
- specific\_queries
  - mysqlConnector, 151
  - postgresConnector, 159
- src, 22
- src.components, 22
- src.components.book\_conversion, 22
  - nlp, 22
  - sentencizer, 22
- src.components.corpus, 23
  - df, 24
  - df\_booksum, 24
  - df\_nqa, 25
  - fuzzy\_merge\_titles, 23
  - index, 25
  - load\_booksum, 24
  - load\_narrativeqa, 24
  - m, 25
  - merge\_dataframes, 24
  - normalize\_title, 24
  - to\_df\_booksum, 24
  - to\_df\_nqa, 24
- src.components.fact\_storage, 25
- src.components.metrics, 25
  - chunk\_bookscore, 25
  - run\_bookscore, 26
  - run\_questeval, 27
- src.components.relation\_extraction, 27
- src.connectors, 27
- src.connectors.base, 28
- src.connectors.document, 28
  - \_docs\_to\_df, 29
  - \_find\_compatible\_nested\_key, 29
  - \_flatten\_recursive, 29
  - \_sanitize\_document, 30
  - \_sanitize\_json, 30
  - mongo\_handle, 31
  - MongoHandle, 31
- src.connectors.graph, 31
  - \_filter\_to\_db, 32
  - \_normalize\_elements, 32
  - \_tuples\_to\_df, 33
- src.connectors.llm, 33
- src.connectors.relational, 33
- src.core, 34
- src.core.boss, 34
  - assign\_task\_to\_worker, 35
  - clear\_task\_data, 35
  - create\_app, 35
  - create\_boss\_thread, 36
  - load\_worker\_config, 36
  - MongoHandle, 38
  - pipeline\_5b, 36
  - post\_chunk\_status, 36
  - post\_process\_full\_story, 37
  - post\_story\_status, 37
- src.core.context, 38
  - \_\_getattr\_\_, 38
  - get\_session, 39
  - session, 39
- src.core.worker, 39

- app, [44](#)
- args, [44](#)
- boss\_url, [44](#)
- create\_app, [41](#)
- daemon, [44](#)
- get\_task\_info, [41](#)
- help, [45](#)
- host, [45](#)
- load\_boss\_config, [41](#)
- load\_imports, [42](#)
- load\_mongo\_config, [42](#)
- mark\_task\_in\_progress, [42](#)
- MongoHandle, [45](#)
- notify\_boss, [43](#)
- parser, [45](#)
- PORT, [45](#)
- port, [45](#)
- process\_task, [43](#)
- required, [45](#)
- save\_task\_result, [44](#)
- target, [45](#)
- task\_queue, [45](#)
- task\_worker, [45](#)
- True, [46](#)
- use\_reloader, [46](#)
- src.main, [46](#)
  - book\_id, [50](#)
  - book\_title, [50](#)
  - BOSS\_PORT, [50](#)
  - chapters, [50](#)
  - chunk, [50](#)
  - chunk\_id, [50](#)
  - chunk\_single, [47](#)
  - chunks, [50](#)
  - COLLECTION, [51](#)
  - convert\_from\_csv, [47](#)
  - convert\_single, [47](#)
  - DB\_NAME, [51](#)
  - end, [51](#)
  - full\_pipeline, [48](#)
  - graph\_triple\_files, [48](#)
  - old\_main, [48](#)
  - output\_single, [48](#)
  - pipeline\_1, [48](#)
  - pipeline\_2, [48](#)
  - pipeline\_3, [49](#)
  - pipeline\_4, [49](#)
  - pipeline\_5a, [49](#)
  - process\_single, [49](#)
  - response, [51](#)
  - response\_files, [51](#)
  - start, [51](#)
  - story\_id, [51](#)
  - summary, [51](#)
  - tei, [51](#)
  - test\_relation\_extraction, [49](#)
  - triple\_files, [52](#)
  - triples, [52](#)
  - triples\_string, [52](#)
- src.util, [52](#)
  - check\_values, [52](#)
  - df\_natural\_sorted, [53](#)
- start
  - src.main, [51](#)
- start\_inclusive
  - ParagraphStreamTEI, [155](#)
- Story, [176](#)
  - \_\_init\_\_, [176](#)
  - \_make\_single, [176](#)
  - \_merge\_chunks, [176](#)
  - pre\_split\_chunks, [176](#)
  - reader, [177](#)
  - stream\_chunks, [177](#)
- story\_id
  - Chunk, [71](#)
  - ParagraphStreamTEI, [155](#)
  - src.main, [51](#)
- story\_percent
  - Chunk, [71](#)
- StoryStreamAdapter, [177](#)
  - stream\_paragraphs, [178](#)
  - stream\_segments, [178](#)
  - stream\_sentences, [178](#)
- stream\_chapters
  - Book, [65](#)
- stream\_chunks
  - Story, [177](#)
- stream\_paragraphs
  - StoryStreamAdapter, [178](#)
- stream\_segments
  - BookStream, [68](#)
  - ParagraphStreamTEI, [154](#)
  - StoryStreamAdapter, [178](#)
- stream\_sentences
  - StoryStreamAdapter, [178](#)
- sub\_gr
  - Log, [138](#)
- success
  - Log, [130](#)
- SUCCESS\_COLOR
  - Log, [138](#)
- success\_legacy
  - Log, [131](#)
- Summaries
  - MetricsController, [146](#)
- summary
  - src.main, [51](#)
- SummaryData, [179](#)
  - BookID, [179](#)
  - BookTitle, [179](#)
  - GoldSummaryText, [179](#)
  - Metrics, [179](#)
  - QAResults, [179](#)
  - SummaryText, [179](#)
- SummaryMetrics, [180](#)
  - GetDefault, [180](#)

- PRF1Metrics, 180
- QA, 180
- ScalarMetrics, 180
- SummaryText
  - SummaryData, 179
- swap\_db
  - Log, 138
- swap\_kg
  - Log, 138
- system\_prompt
  - LLMConnector, 127
- target
  - src.core.worker, 45
- task\_queue
  - src.core.worker, 45
- task\_worker
  - src.core.worker, 45
- tei
  - src.main, 51
- tei\_path
  - EPUBToTEI, 96
  - ParagraphStreamTEI, 155
- temp\_database
  - DatabaseConnector, 83
- temp\_graph
  - GraphConnector, 109
- Test Suite Overview, 11
- test\_basic
  - Log, 138
- test\_cypher\_example\_1
  - tests.test\_db\_files, 57
- test\_cypher\_example\_2
  - tests.test\_db\_files, 57
- test\_cypher\_example\_3
  - tests.test\_db\_files, 57
- test\_cypher\_example\_4
  - tests.test\_db\_files, 57
- test\_db\_docs\_comprehensive
  - tests.test\_db\_basic, 55
- test\_db\_docs\_minimal
  - tests.test\_db\_basic, 55
- test\_db\_graph\_comprehensive
  - tests.test\_db\_basic, 55
- test\_db\_graph\_minimal
  - tests.test\_db\_basic, 55
- test\_db\_relational\_comprehensive
  - tests.test\_db\_basic, 55
- test\_db\_relational\_minimal
  - tests.test\_db\_basic, 56
- test\_detect\_community\_clusters\_comprehensive
  - tests.test\_kg\_triples, 59
- test\_detect\_community\_clusters\_minimal
  - tests.test\_kg\_triples, 60
- test\_df
  - Log, 139
- test\_get\_neighborhood
  - tests.test\_kg\_triples, 60
- test\_get\_neighborhood\_comprehensive
  - tests.test\_kg\_triples, 60
- test\_get\_random\_walk\_sample
  - tests.test\_kg\_triples, 60
- test\_get\_random\_walk\_sample\_comprehensive
  - tests.test\_kg\_triples, 61
- test\_get\_subgraph\_by\_nodes
  - tests.test\_kg\_triples, 61
- test\_info
  - Log, 139
- test\_knowledge\_graph\_triples
  - tests.test\_kg\_triples, 61
- test\_mongo\_example\_1
  - tests.test\_db\_files, 58
- test\_mongo\_example\_2
  - tests.test\_db\_files, 58
- test\_mongo\_example\_3
  - tests.test\_db\_files, 58
- test\_operations
  - Connector, 74
  - DocumentConnector, 92
  - GraphConnector, 109
  - LLMConnector, 126
  - RelationalConnector, 170
- test\_ops
  - Log, 139
- test\_relation\_extraction
  - src.main, 49
- test\_sql\_example\_1
  - tests.test\_db\_files, 58
- test\_sql\_example\_2
  - tests.test\_db\_files, 58
- test\_tmp\_db
  - Log, 139
- tests, 53
- tests.conftest, 53
  - docs\_db, 54
  - graph\_db, 54
  - pytest\_adoption, 54
  - relational\_db, 54
  - session, 54
- tests.test\_db\_basic, 55
  - test\_db\_docs\_comprehensive, 55
  - test\_db\_docs\_minimal, 55
  - test\_db\_graph\_comprehensive, 55
  - test\_db\_graph\_minimal, 55
  - test\_db\_relational\_comprehensive, 55
  - test\_db\_relational\_minimal, 56
- tests.test\_db\_files, 56
  - \_exec\_query\_file, 56
  - load\_examples\_relational, 57
  - test\_cypher\_example\_1, 57
  - test\_cypher\_example\_2, 57
  - test\_cypher\_example\_3, 57
  - test\_cypher\_example\_4, 57
  - test\_mongo\_example\_1, 58
  - test\_mongo\_example\_2, 58
  - test\_mongo\_example\_3, 58
  - test\_sql\_example\_1, 58

- test\_sql\_example\_2, 58
- tests.test\_kg\_triples, 59
  - nature\_scene\_graph, 59
  - test\_detect\_community\_clusters\_comprehensive, 59
  - test\_detect\_community\_clusters\_minimal, 60
  - test\_get\_neighborhood, 60
  - test\_get\_neighborhood\_comprehensive, 60
  - test\_get\_random\_walk\_sample, 60
  - test\_get\_random\_walk\_sample\_comprehensive, 61
  - test\_get\_subgraph\_by\_nodes, 61
  - test\_knowledge\_graph\_triples, 61
- text
  - Chunk, 71
- timeout\_seconds
  - Metrics, 144
- to\_contextualized\_string
  - KnowledgeGraph, 119
- to\_df\_booksum
  - src.components.corpus, 24
- to\_df\_nqa
  - src.components.corpus, 24
- to\_mongo\_dict
  - Chunk, 71
- to\_narrative
  - KnowledgeGraph, 120
- to\_triple\_string
  - KnowledgeGraph, 120
- tokenizer
  - RelationExtractor, 172
- triple\_files
  - src.main, 52
- triples
  - src.main, 52
- triples\_string
  - src.main, 52
- triples\_to\_names
  - KnowledgeGraph, 121
- True
  - src.core.worker, 46
- tuple\_delim
  - RelationExtractor, 172
- url
  - Metrics, 144
- USE\_COLORS
  - Log, 139
- use\_reloader
  - src.core.worker, 46
- username
  - DatabaseConnector, 84
- Value
  - ScalarMetric, 172
- verbose
  - DatabaseConnector, 84
  - DocumentConnector, 93
  - GraphConnector, 110
  - KnowledgeGraph, 122
  - RelationalConnector, 170
  - Session, 175
- warn
  - Log, 131
- WARNING\_COLOR
  - Log, 139
- WHITE
  - Log, 139
- xml\_namespace
  - EPUBToTEI, 96
  - ParagraphStreamTEI, 155
- YELLOW
  - Log, 139