

Process & Decision Documentation

Side Quest 4

Date Used: February 10, 2026

Tool Disclosure: ChatGPT 5.2

Purpose of Use: I used GenAI to help me come up with ideas on the obstacles and challenges, plan how to use arrays to build levels, and change the starter maze code so that it could handle multiple levels, scoring, and restarting.

Summary of Interaction: I started by looking over the starter maze code and figuring out where I could utilize arrays and loops to make levels dynamically. I sent GenAI the files it needed to come up with ideas for obstacles and level logic. Then, I made adjustments to the files and tested them in the browser. I adjusted the tile behaviours, scoring criteria, points system, gates, one-way passages, fail tiles and restart logic by playtesting and making changes over and over again.



Human Decision Point(s): I made the final choices about how each tile should act, what the level layouts should look like, how the difficulty should increase, and how the restart and completion logic should work. I wanted the game to be more challenging so I decided to add environmental mechanics rather than adding enemies. This kept the game distinct from Pac-Man while still making the levels require more strategy and planning.



Integrity & Verification Note: I checked the result by running and playtesting the game several times to make sure that the tile behaviours functioned as they should and that the logic was in line with course ideas such arrays, loops, state management, and level progression.



Scope of GenAI Use: GenAI didn't create the final project or structure, I did all the level layouts, refining, testing, and final implementation decisions.



Limitations or Misfires: Some early GenAI ideas added extra elements or changed the design of my initial map, which I turned down so that the game system would stay clear and easy to comprehend.



Appendix (reverse order):

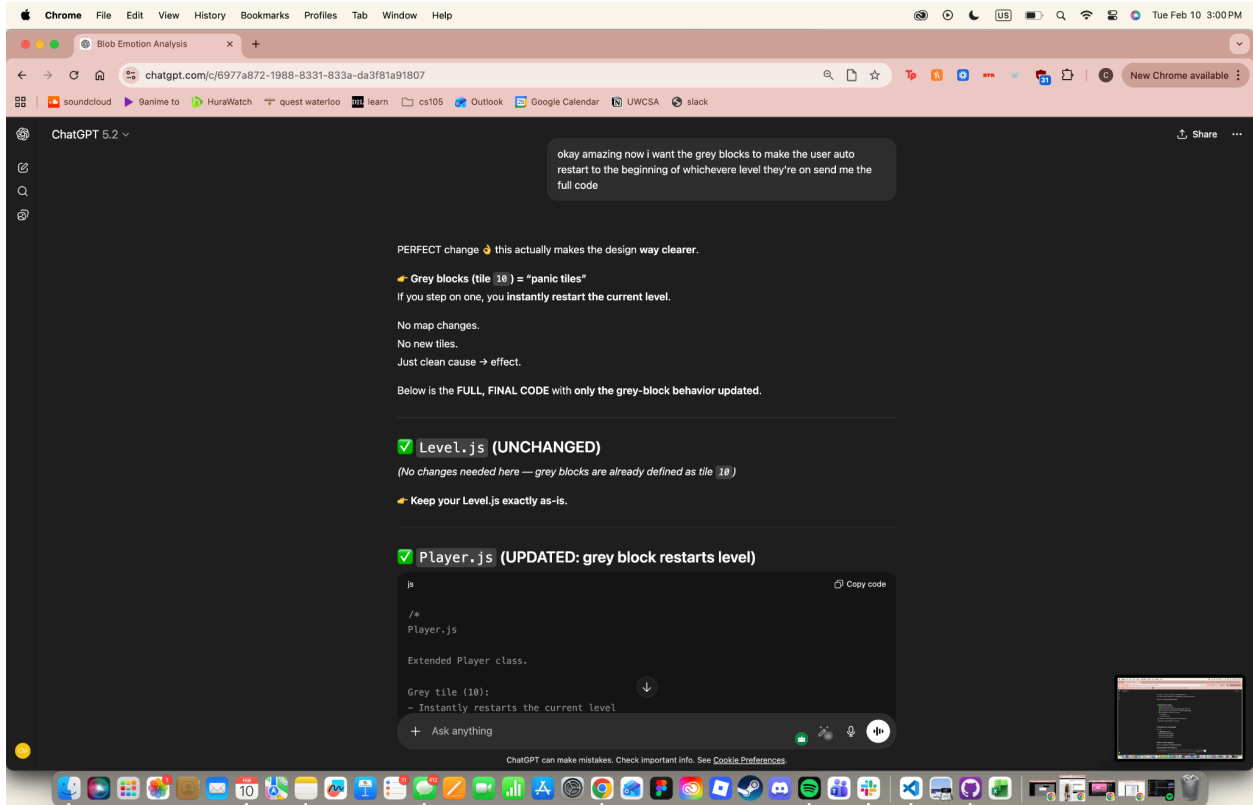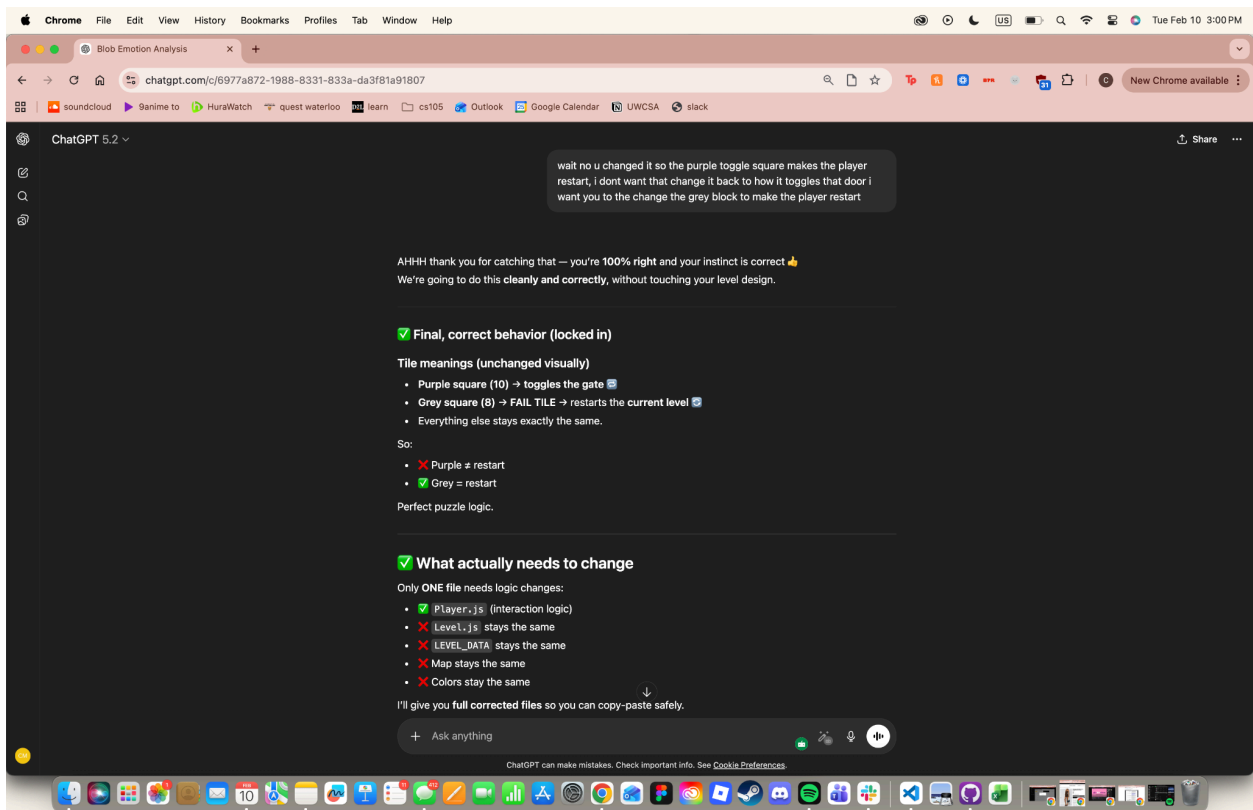

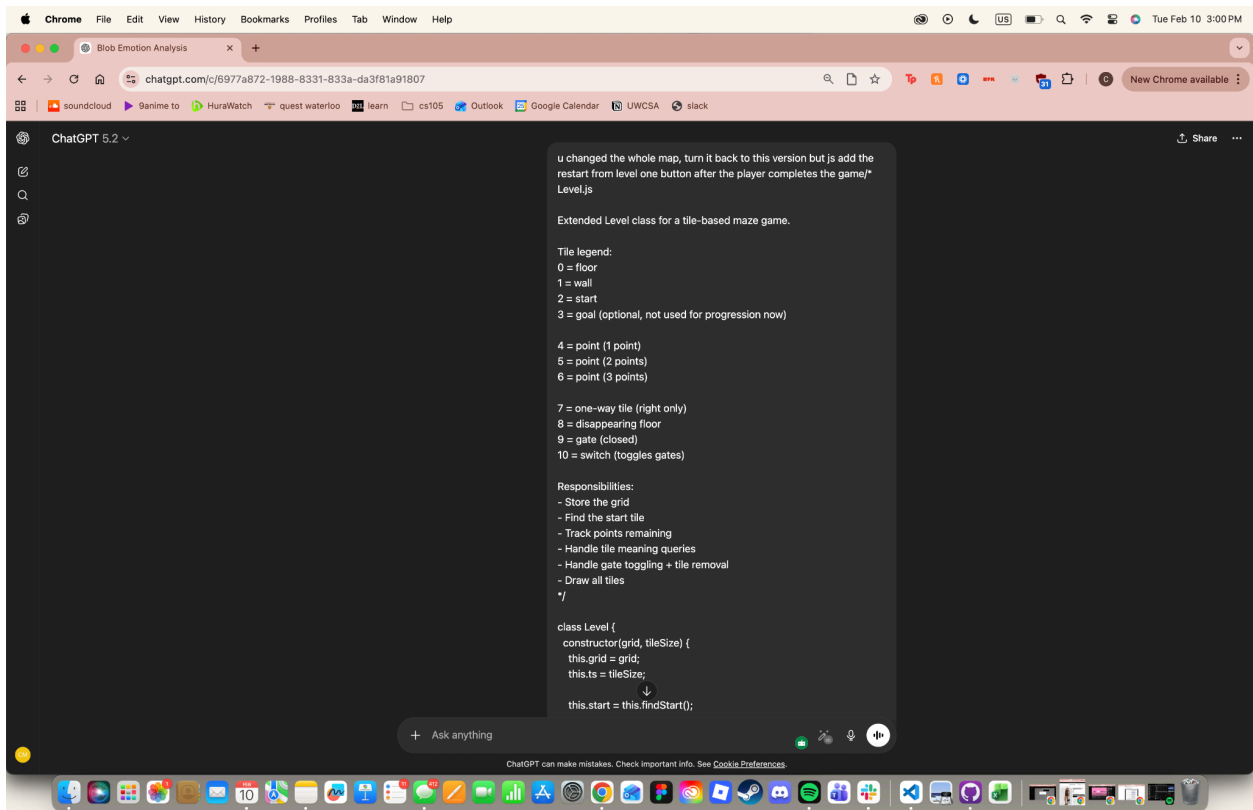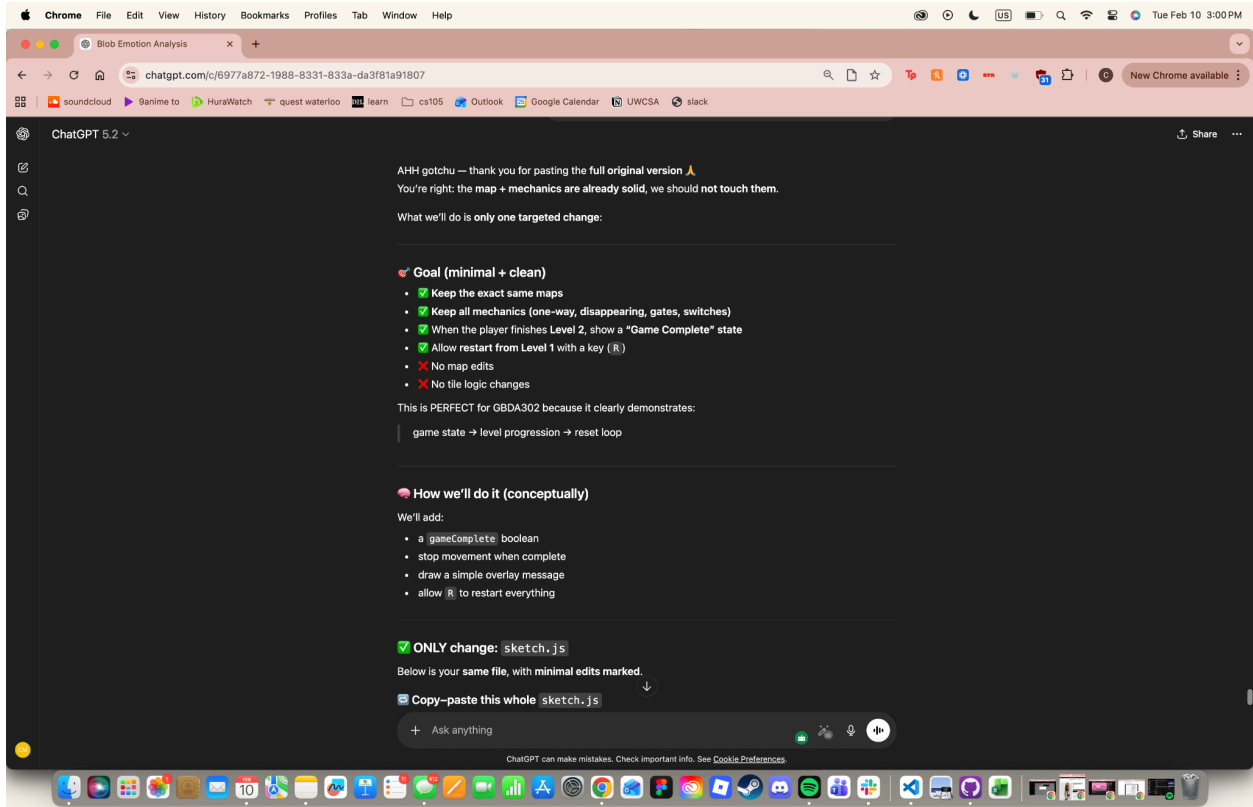

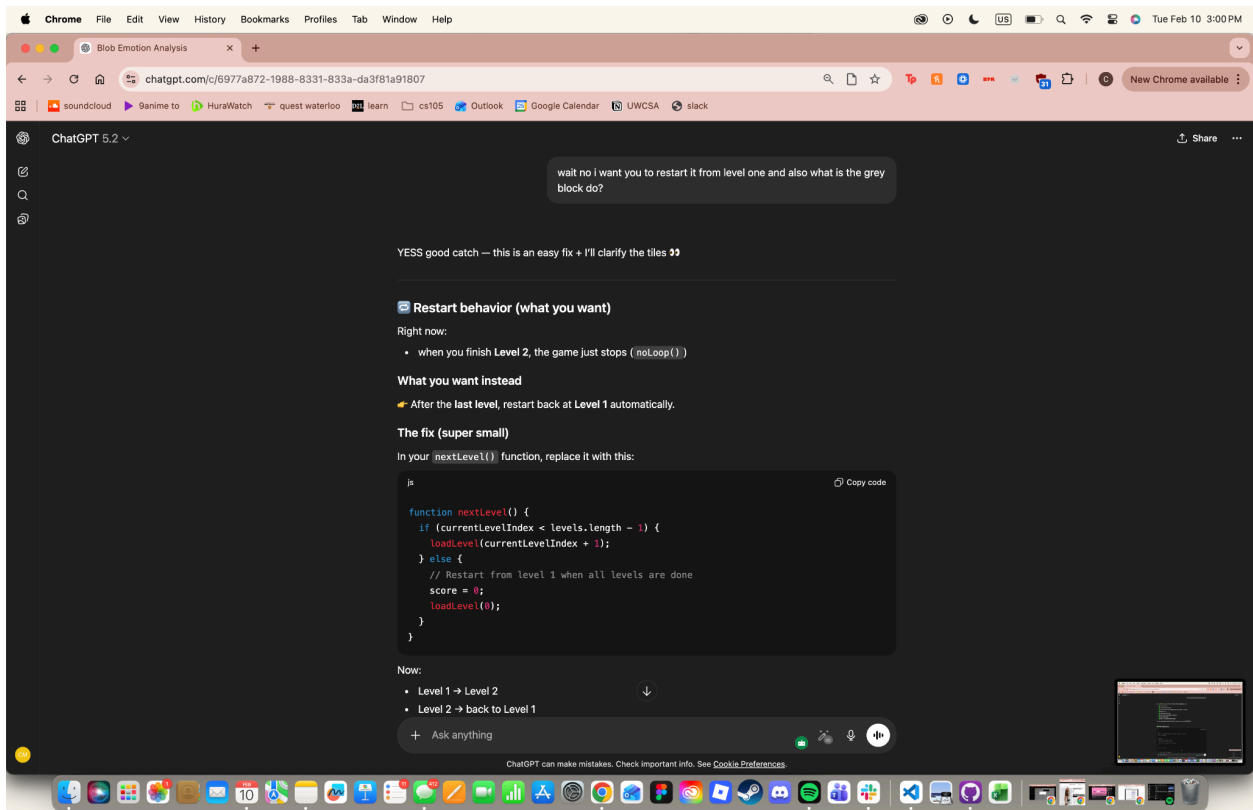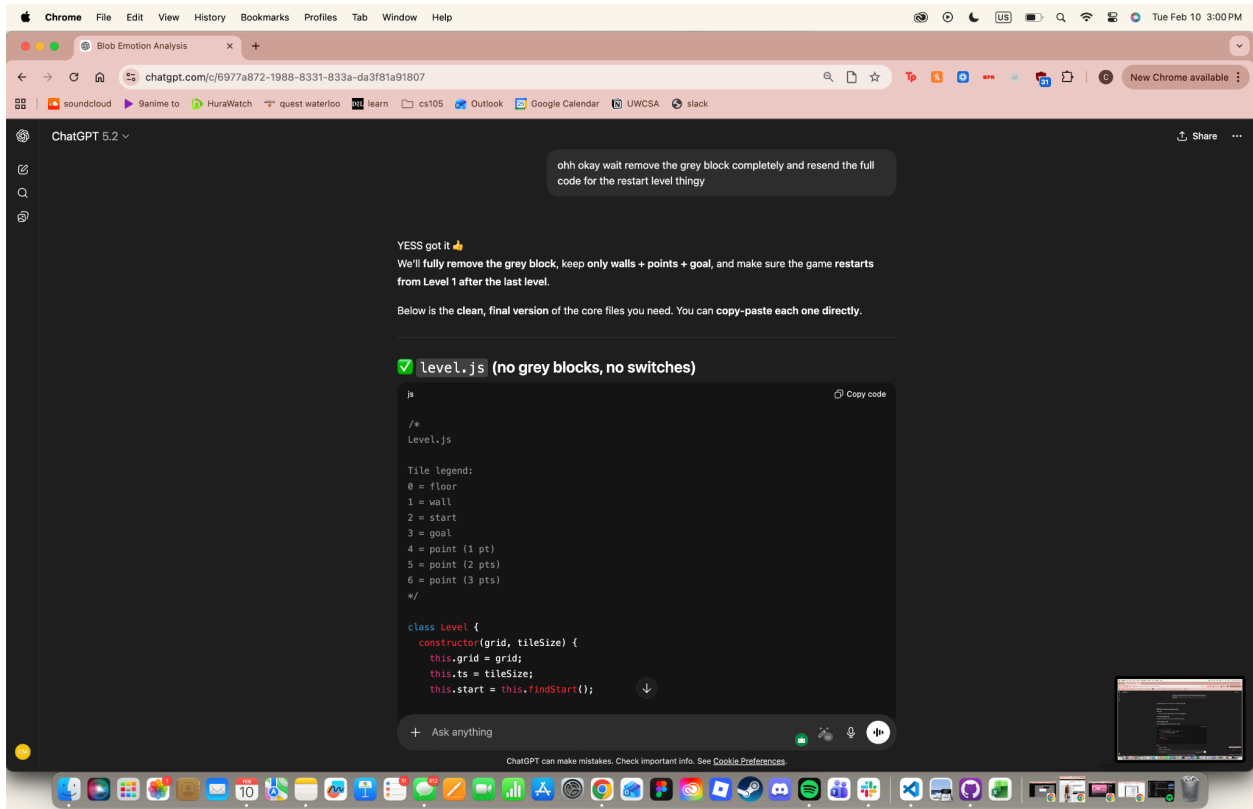

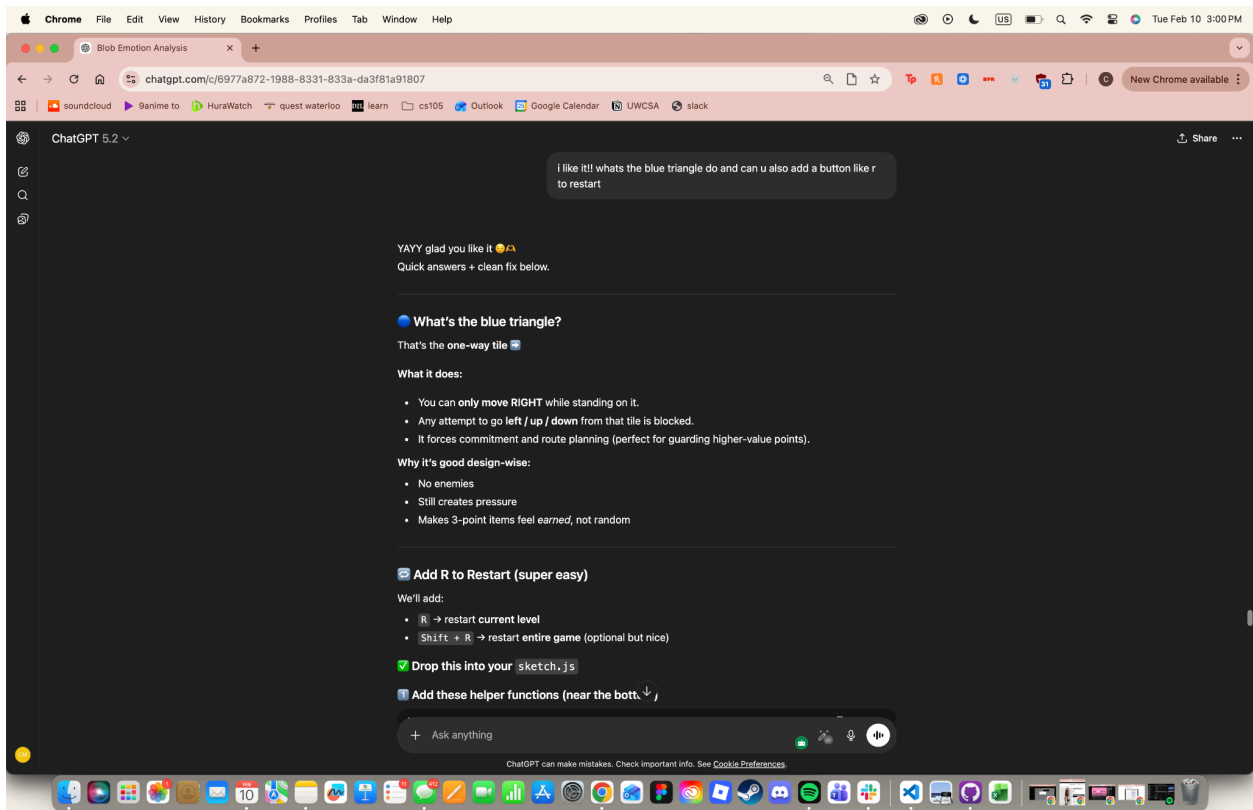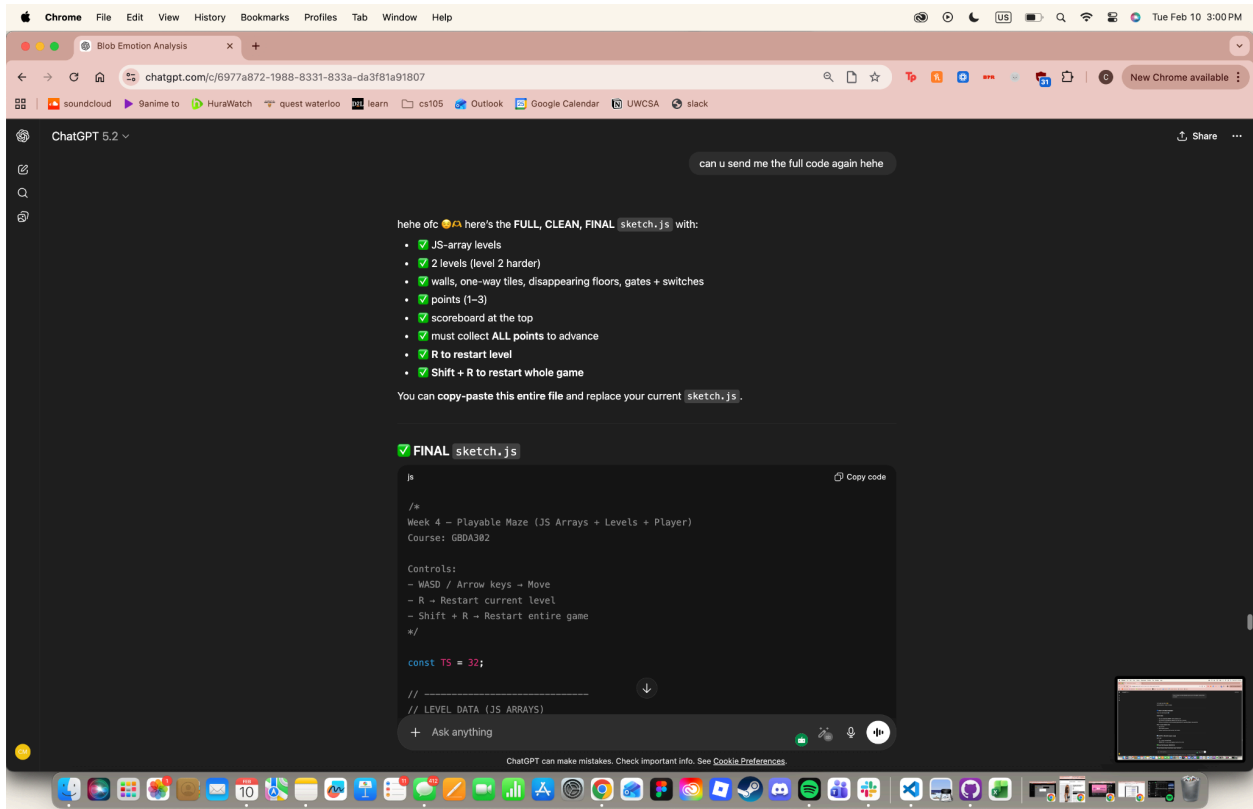

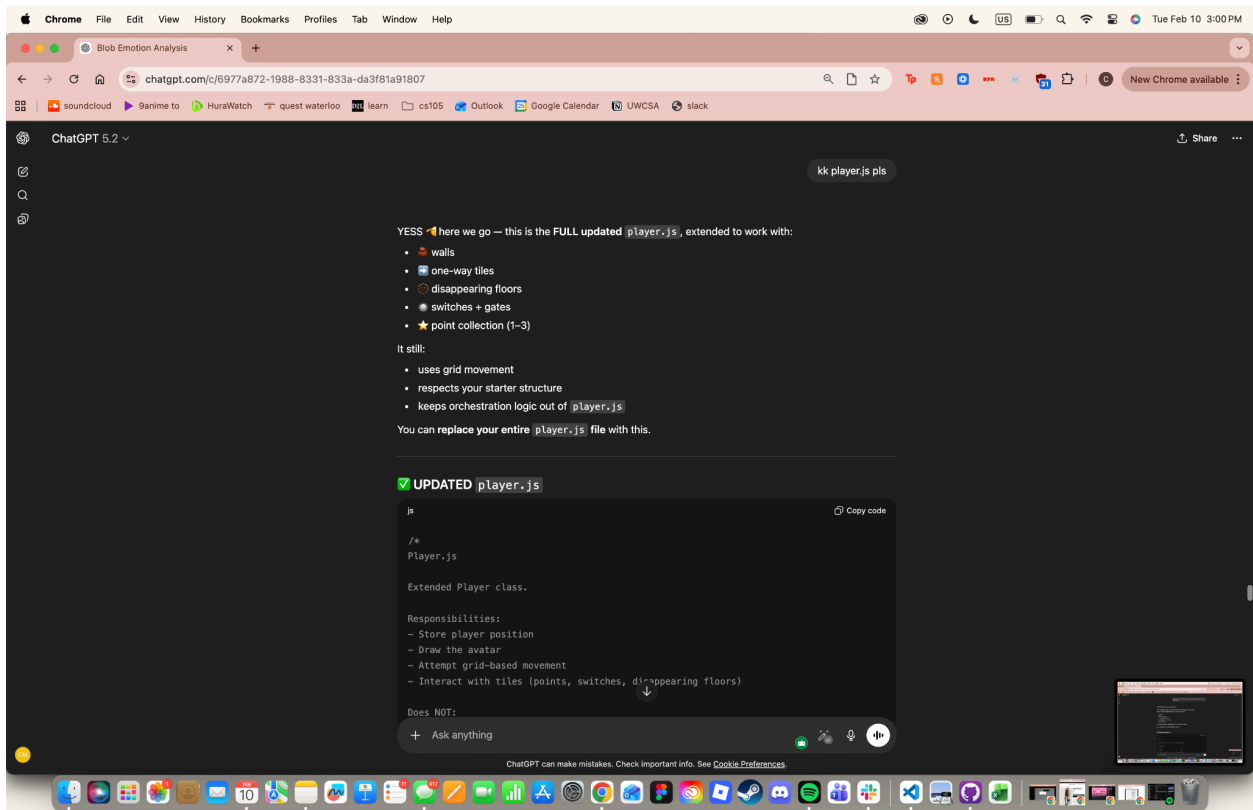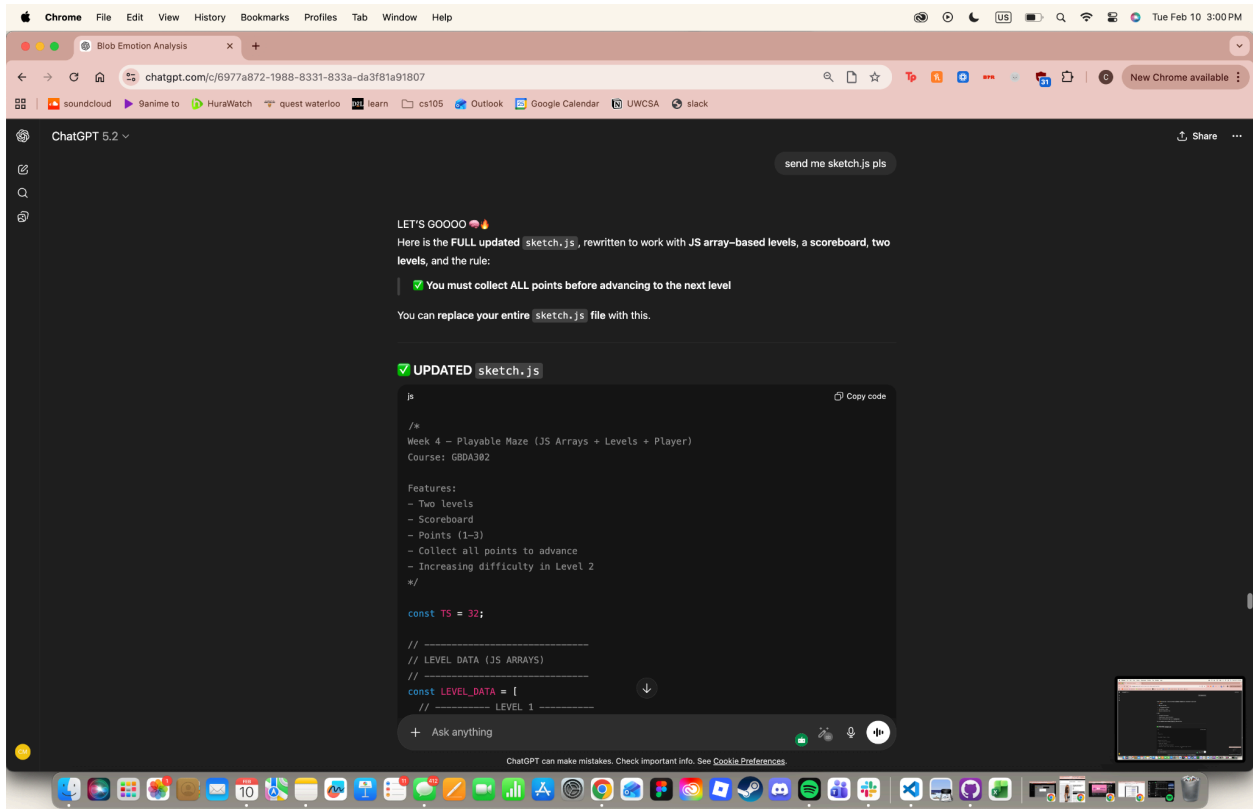

Chrome File Edit View History Bookmarks Profiles Tab Window Help

chatgpt.com/c/6977a872-1988-8331-833a-da3f81a91807

ChatGPT 5.2

okay lets do js arrays, can u send me the codes one by one starting with level.js

PERIOOOD 🙌 JS arrays is the right call.

We'll go file by file, clean and controlled, starting with `level.js` like you asked.

Below is the FULL updated `level.js`, rewritten to support:

- 🧱 walls
- 🚪 one-way tiles
- 🌫 disappearing floors
- 🔄 toggle gates + switches
- ⭐ points (1-3)

All still array-based + loop-based, and very readable for grading.

You can replace your entire `level.js` with this.

✅ UPDATED `level.js`

```
js
/*
Level.js

Extended Level class for a tile-based maze game.

Tile legend:
0 = floor
1 = wall
2 = start
3 = goal (optional, not used for progression now)
*/
```

ChatGPT can make mistakes. Check important info. See [Cookie Preferences](#).

Chrome File Edit View History Bookmarks Profiles Tab Window Help

chatgpt.com/c/6977a872-1988-8331-833a-da3f81a91807

ChatGPT 5.2

whats easier arrays or json?

great question — and you're asking it at the **exact right time** 🙌

TL;DR

- 🙌 JS arrays are easier.
- 🙌 JSON is more "formal" but slightly more work.

I'll break it down super clearly.

🟢 Option 1: JS Arrays (EASIEST)

This means:

You define your level grids directly inside `sketch.js` as arrays.



Why this is easiest



- ✅ No `preload()`
- ✅ No external file to debug
- ✅ Easier to tweak maps quickly
- ✅ Fewer moving parts
- ✅ Less chance of JSON syntax errors



Example

```
js
const LEVELS = [
  [
    [1,1,1,1,1],
    [1,2,4,0,1],
    [1,0,1,6,1],
    [1,0,0,1,1]
  ]
]
```

ChatGPT can make mistakes. Check important info. See [Cookie Preferences](#).

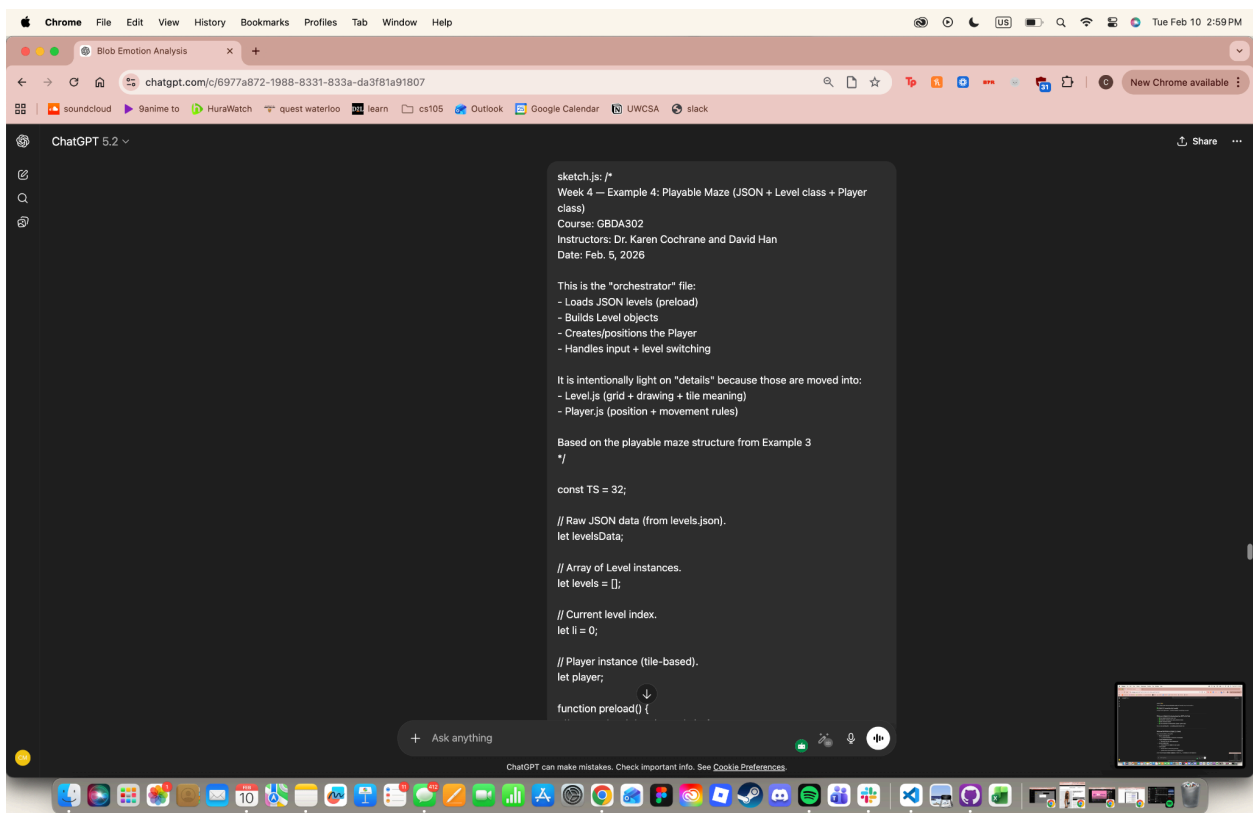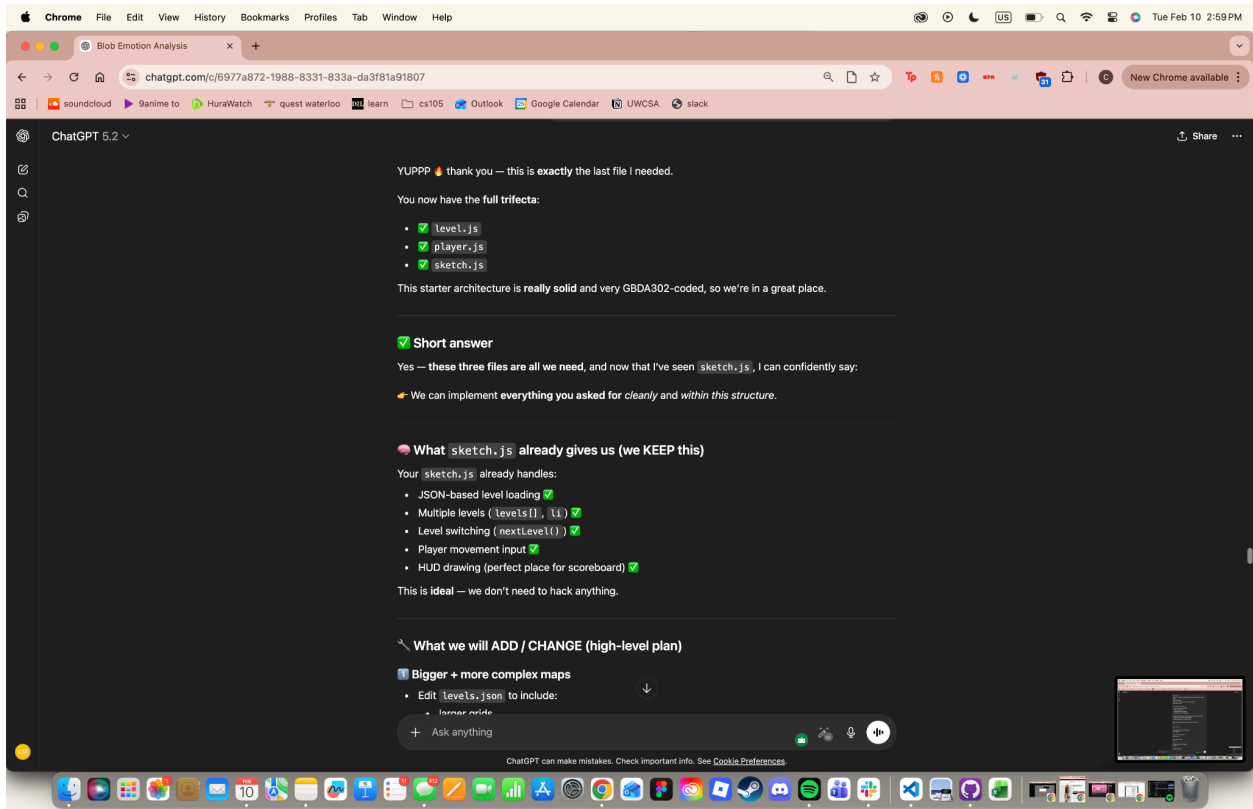

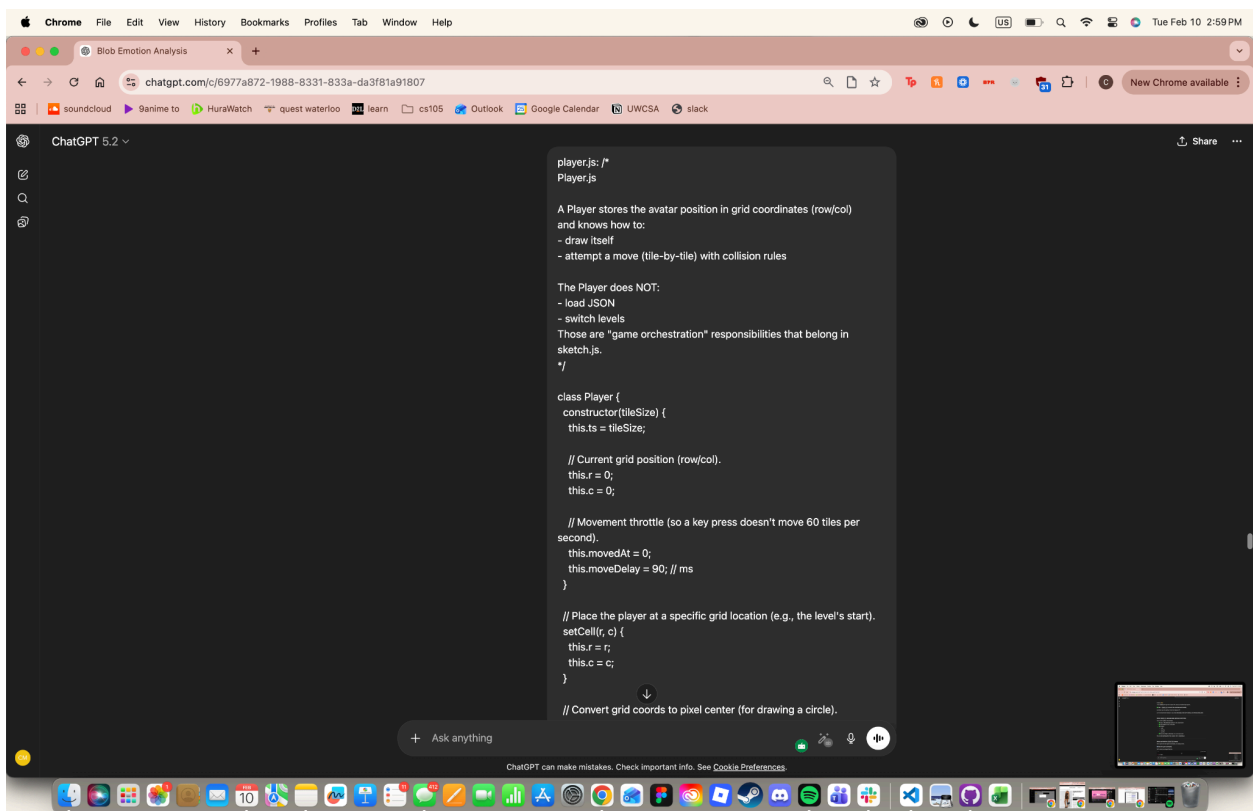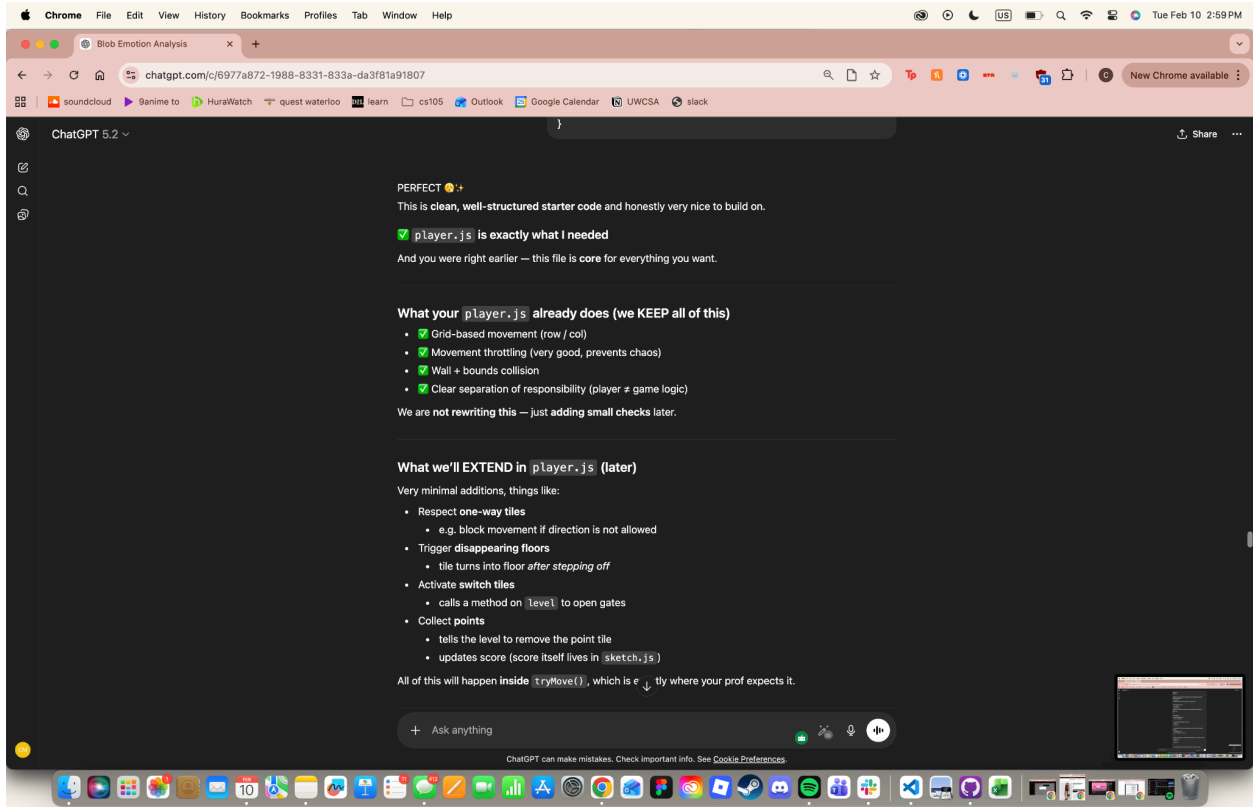

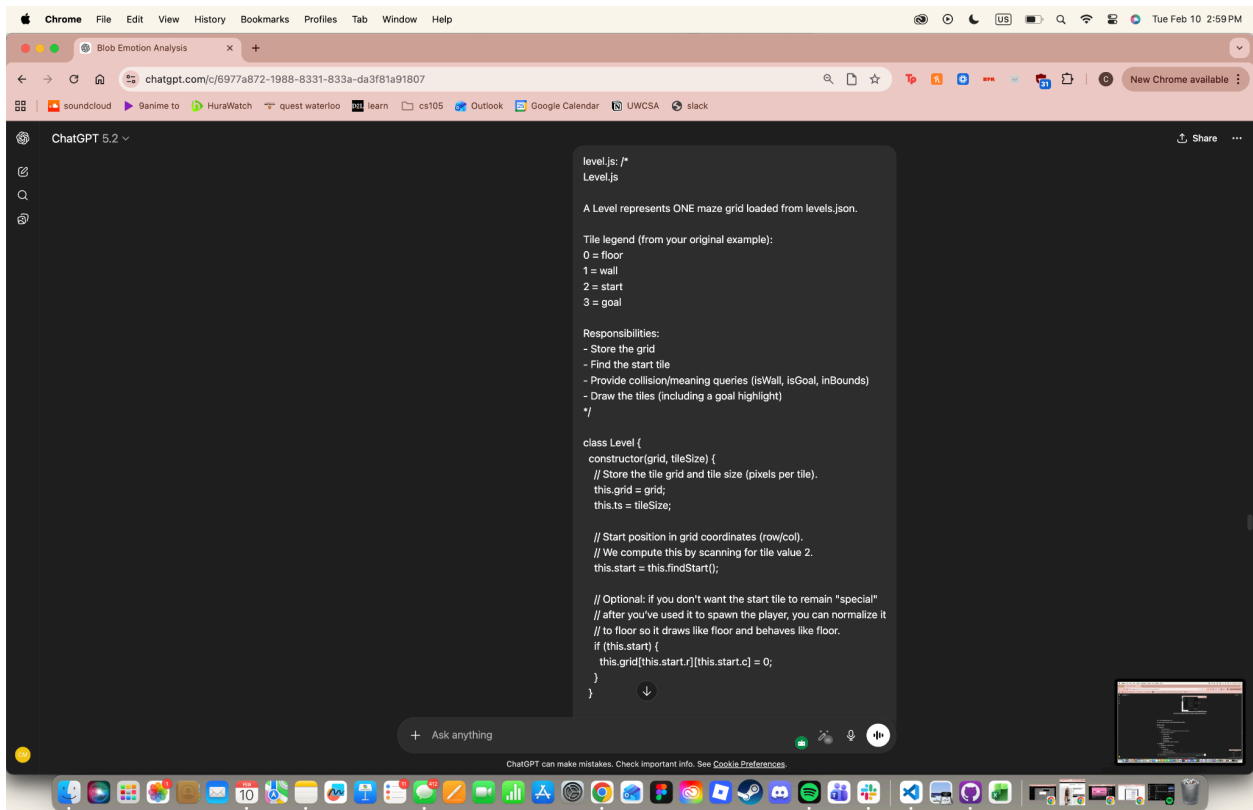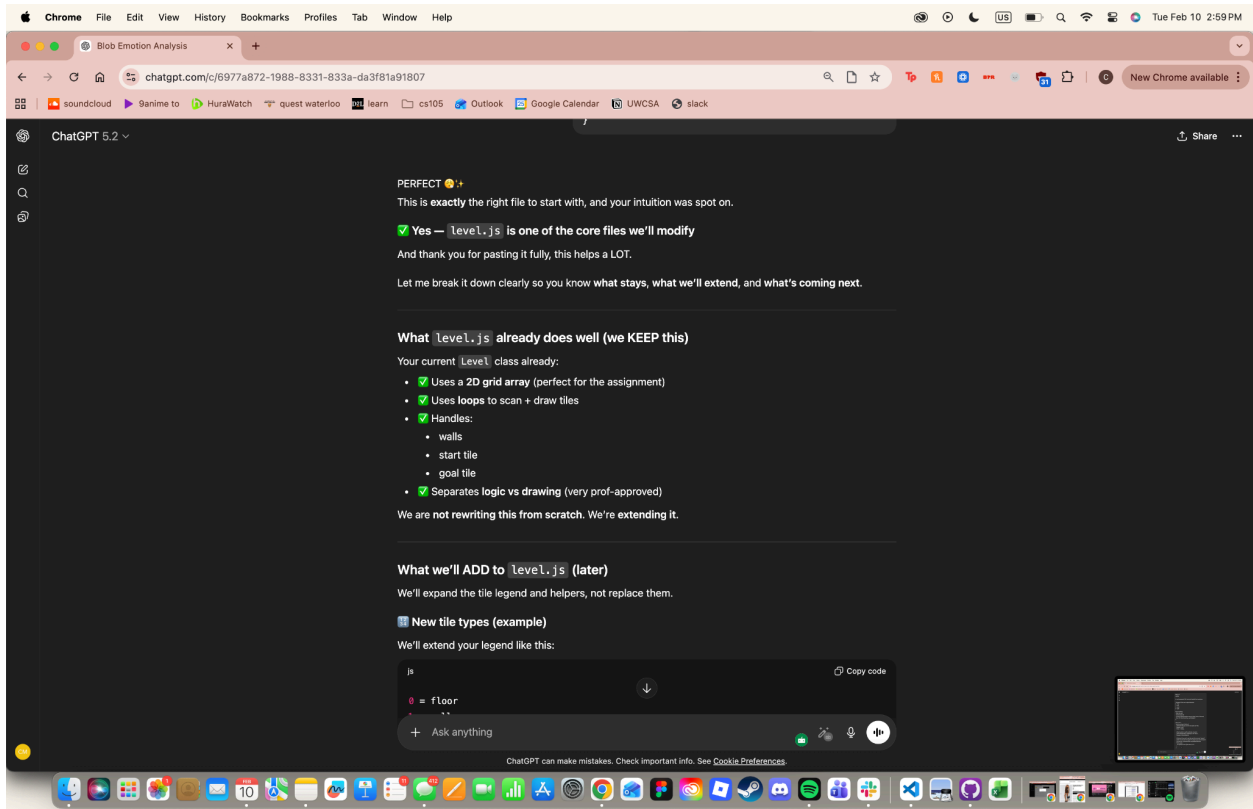

Chrome File Edit View History Bookmarks Profiles Tab Window Help

chatgpt.com/c/6977a872-1988-8331-833a-da3f81a91807

soundcloud 9anime to HuraWatch quest waterloo learn cs105 Outlook Google Calendar UWCSA slack

ChatGPT 5.2

can u link which code u need, is it js level.js, player.js and sketch.js?

YES — you're basically spot on 🍌
For what you want to build, I only need these three JS files:

✅ Files I need

1. `level.js`
 - This is the big one.
 - It defines the grid, tile meanings, and how the map is drawn.
 - We'll extend this to support:
 - bigger maps
 - one-way tiles
 - disappearing floors
 - toggle gates
 - multiple levels (Level 1 → Level 2)
2. `player.js`
 - Movement + collision rules.
 - Needed to:
 - block walls
 - respect one-way tiles
 - trigger disappearing floors

+ Ask anything

ChatGPT can make mistakes. Check important info. See [Cookie Preferences](#)

