



Lehrstuhl für Data Science

Optimizations of the Skip-Gram Model with negative Sampling

Bachelorarbeit von

Cédric Milinaire

PRÜFER

Prof. Dr. Michael Granitzer

March 20, 2019

Contents

1	Introduction	1
2	Background	2
2.1	The Skip-Gram Model	2
2.2	Negative Sampling	3
2.3	Optimization of the Skip Gram Model	5
2.3.1	Parallelization	5
2.3.2	Context sensitive word embedding	7
2.4	Optimizers in Machine learning	8
2.4.1	SGD	8
2.4.2	Momentum	8
2.4.3	Nesterov	8
2.4.4	Adagrad	9
2.4.5	Adadelata	9
2.4.6	Adam	10
3	Methods	11
4	Results	12
5	Discussion	13
6	Conclusion	14
	Bibliography	15

Abstract

Acknowledgments

List of Figures

2.1	Comparasion of the execution time in relation with the number of used cores [VEV16]	6
2.2	"Nearest neighbor words by our model and Skip- Gram. The first line in each block is the results of Skip-Gram; and the rest lines are the results of our model" [LQH15]	8

List of Tables

1 Introduction

Insert a short introduction to word2vec. and quickly talk about machine learning blablablah.

2 Background

2.1 The Skip-Gram Model

The Skip Gram Model is a model used to embed words into vectors, by analyzing the context in which the words happens. It's achieving this by maximizing the following equation:

$$\prod_{t=1}^T \prod_{-m < j < m} p(w_{t+j}|w_t) \quad (2.1)$$

Where T is the number of words in the corpus data, w_t the t -th word in the corpus data and m is the context window. This means that the m nearest words to w are considered as context words. This equation can be transformed quite easily into sums by using log probabilities:

$$\sum_{t=1}^T \sum_{-m < j < m} \log(p(w_{t+j}|w_t)) \quad (2.2)$$

where the parameters are the same as in 2.1. The basic Skip-Gram Model uses a classical Softmax to calculate the conditional probability $p(w_{t+j}|w_t)$:

$$p(w_{t+j}|w_t) = \frac{\exp(\tilde{v}_{w_{t+j}}^T v_{w_t})}{\sum_{w=1}^v \exp(\tilde{v}_w^T v_{w_t})} \quad (2.3)$$

Here \tilde{v}_{w_t} and v_{w_t} are the vector representations. There lies a problem in this approach. As a matter of fact it is unsuitable to compute the softmax. For the computation of $\sum_{w=1}^v \exp(v_w^T w_t)$ one has to go over the whole corpus data. As very big data sets are needed to train the model, this is not a solution. But different solutions were proposed by Mikolov et al. [Tom+13]. The first one is to use a Hierarchical soft max introduced by Morin and Bengio [MB05]. In this model the probability distribution of the output nodes is saved in a binary tree which gives one a logarithmic computation time for each of these

probabilities, and this makes it feasible to compute the softmax. Another possibility is the use of negative sampling which is used in the original word2vec implementation [Tom+13], which I shall discuss in the next section.

2.2 Negative Sampling

An alternative to the Hierarchical Softmax is Noise Contrastive Estimation (NCE) which was introduced by Gutmann and Hyvärinen [GH10], and first applied to NLP by Mnih and Teh [MT12]. The idea behind NCE is to distinguish targets words from noise. It does so by reducing the problem to a logistic regression task, and does it by maximizing the log probability. The skip-gram Model is only interested in good word representation, hence the probability of the word is not meaningful as long as the quality of the word representations remains high. Mikolov et al. [Tom+13] simplified NCE and called it Negative Sampling. Let's dive into it.

The idea behind negative sampling is to only update the output nodes of certain words. This will obviously save an enormous amount of computation time. The idea is that given a pair $(c, w) \in D$, where c is a word in the context window of w we will set $p(c|w) = 1$, here p is the score for our logistic regression. Then select K random words k_i from the corpus data and set $p(k_i|w) = 0$, more one the random distribution later. We will denote the score that the (c, w) wasn't drawn at random the following way: $p(y = 1|c, w)$, and if (k, w) is chosen at random this way: $p(y = 0|k, w)$. Now we will use logistic regression to update the weights of the k selected context words and c . By doing so we will only have to update $k + 1$ output nodes.

Let's look at how we construct our objective function for a given word w and one of its context words c :

2 Background

$$\begin{aligned}
p(c|w) &= p(y = 1|c, w) + \prod_{k \in K} p(y = 0|k, c) \\
&= p(y = 1|c, w) + \prod_{k \in K} 1 - p(y = 1|k, c) \\
&= \log(p(y = 1|c, w)) + \sum_{k \in K} \log(1 - p(y = 1|k, c)) \\
&= \log\left(\frac{1}{1 + e^{-v_c v_w}}\right) + \sum_{k \in K} \log\left(1 - \frac{1}{1 + e^{-v_c v_k}}\right) \\
&= \log\left(\frac{1}{1 + e^{-v_c v_w}}\right) + \sum_{k \in K} \log\left(\frac{1}{1 + e^{v_c v_k}}\right) \\
&= \log(\sigma(v_c v_w)) + \sum_{k \in K} \sigma(\log(-v_c v_k)) \quad \text{where, } \sigma = \frac{1}{1 + e^{-x}}
\end{aligned}$$

We see that to compute our objective function we will only have to compute the sum over K . Which in practice is very small (2-20). To put things in perspective let's imagine our data set consists of 100000 words, we set $K = 2$ and let's say that each output neuron has weight vector v with $|v| = 300$. When updating our weights we would only update $0.2 * 10^{-2}$ of the 300 million weights in the output layer.

One question remains: how do we choose our random words? Mikolov et al. [Tom+13] used the following unigram distribution:

$$P(w) = \frac{f(w)^{\frac{3}{4}}}{\sum_{w_k \in W} f(w_k)^{\frac{3}{4}}} \quad (2.4)$$

where $f(w)$ is the frequency of w in the Vocabulary W . The value of $\frac{3}{4}$ is set empirically.

It's quite easily observable that this approach will outperform the classical softmax in computation time. Now the question arises if the accuracy is good enough but according to Mikolov et al. [Tom+13] the negative sampling method "is an extremely simple training method that learns accurate representations". As a matter of fact Mikolov et al. [Tom+13] reported a 6% accuracy improvement in comparison to a Hierarchical Softmax model. We now have enough background knowledge about word2vec and the skip gram model to look at how it can be optimized. In the next section we are going to cover what has already been done.

2.3 Optimization of the Skip Gram Model

Due to the popularity of the skip gram model, a lot of research went into optimizing it. This research can actually be divided into two categories, parallelization, and the optimization of the accuracy of the algorithm by allowing words to have multiple meanings.

2.3.1 Parallelization

In the original model the optimization is done with Stochastic Gradient Descent (SGD), which is a sequential algorithm. This process does not favor a parallelization. To deal with this specific problem Mikolov et al.[Tom+13] used a Hogwild tree proposed by Recht et al.[Rec+11]. The approach is to allow multiple threads to access a shared memory, in this case the single model. Therefore overwriting errors are bound to happen. But according to Recht et al.[Rec+11] the overwriting errors won't lead to a significant accuracy loss if the data access isn't too frequent. But in the case of NLP the problem seems to be a bit more significant, and especially for word embedding, as many words share the same context words. There were several attempts at solving this issue, and we are going to cover a few of them in the following subsections.

Parallization in shared and Distributed Memory

The first parallization solution which was proposed by Ji et al. [Ji+16], is to try to reduce the cost of our vector multiplication. The main idea in this paper is to convert the level 1-BLAS vector to vector operations to a level-3 BLAS matrix multiplication operation. This is achieved, buy using the same negative samples for each context word of a given word w . Instead of using for each context word a vector to vector multiplication we can transform this, under the assumption that we will not loose accuracy by sharing the same negative samples, into a matrix multiplication. The matrix multiplication can be represented the following way.

$$\begin{bmatrix} w \\ w_{n_1} \\ \vdots \\ w_{n_k} \end{bmatrix} * \begin{bmatrix} w_{c_1} \\ \vdots \\ w_{c_{2m}} \end{bmatrix}$$

2 Background

where w is our given word, $w_{n_1}...w_{n_k}$ are the shared negative samples, with $k \in [5, 20]$, and $w_{c_1}...w_{c_{2m}}$ are the words inside of the context window m of w , with $m \in [10, 20]$, also called a batch of input context words. After each batch the model updates the weights of the used vectors. This model achieves a 3.6 fold increase in throughput, by only losing 1% of accuracy.

Parallelization by the use of caching

This idea was proposed by Vuurens et al. [VEV16]. The architecture used here is the basic skip gram model with an hierarchical soft max. The general idea is to cache the most frequent used nodes of the binary tree used to memorize the probability distribution, and update them on the shared single model after a certain amounts of seen words (the paper used the number 10). The paper produced interesting results as they managed to increase execution time by increasing the number of cores used for the calculation. This is very powerful because in the original implementation the execution time regressed after 8 cores, this seems to indicate that too much overwriting was happening, as the number of concurrent threads surpasses a certain threshold. This can be seen in 2.1, where c31 is the model proposed by Vuurens et al.[VEV16]. The model did not suffer any accuracy loss in comparison to the original Word2vec model.

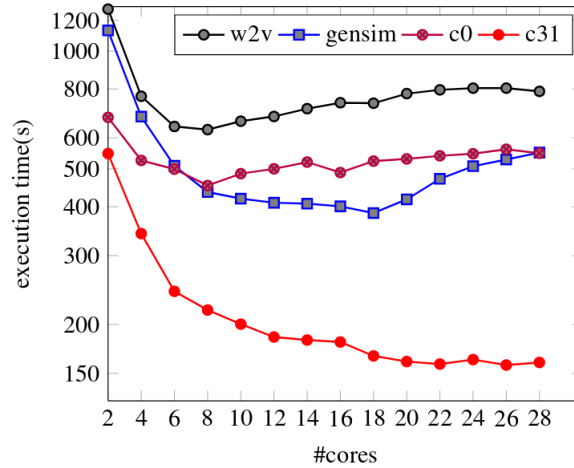


Figure 2.1: Comparison of the execution time in relation with the number of used cores [VEV16]

2.3.2 Context sensitive word embedding

A word does not always have the same meaning according to its context. This is a problem that is not addressed by word2vec and the general skipGram model. Some new models, that have taken this issue into consideration, were proposed. A lot of work has been done in this direction, Liu et al.[Liu+15], Bartunov et al.[Ser+15] for example, but the one reporting the best results is Liu et al. [LQH15]. The main idea is to change the way we compute the variables we use in our conditional probability. The idea is to look if a word given a certain context word matches to a topic. Bank would match too finance given the context word money. Bank would also match too nature if river was the given context word. But bank would not match too nature with the context word money. Now one could ask himself how to achieve such a context sensitive word embedding, first we have to introduce new variables, therefore let's look at the objective function used: First let's take a look at the objective function:

$$J(\Omega) = \sum_{(w,t,c) \in D} \sum_{(w,\tilde{t},\tilde{c}) \in \tilde{D}} \max(0, 1 - g(w, t, c) + g(w, \tilde{t}, \tilde{c})) \lambda \|\Omega\|_2^2 \quad (2.5)$$

This approach uses the same negative sample technique as described in the previous sections, D is the corpus data and \tilde{D} is the set of negative samples and λ is the hyperparameter used for the standard L_2 standardization. What is interesting here is the function $g(w, c, t)$, where w is a word, c the context word, and t the context in which the word appears, g is defined as follows:

$$g(w, c, t) = u^T \sigma(w^T M^{[1:k]} t + V_c^T (w \oplus t) + b_c) \quad (2.6)$$

where, u, V_c, b_c are standard parameters for a neural network, \oplus is the vector concatenation, while the most important parameter is $M^{[1:k]}$, which is a tensor layer, the tensor layer is used because of its ability to model multiple interactions in the data, as this will be useful for multiple contexts. They used SGD for the optimization of this objective function. They achieved really interesting results as shown in 2.2.

Words	Similar Words
bank	depositor, fdicinsured, river, idbi
bank:1	river, flood, road, hilltop
bank:2	finance, investment, stock, share

Figure 2.2: "Nearest neighbor words by our model and Skip- Gram. The first line in each block is the results of Skip-Gram; and the rest lines are the results of our model" [LQH15]

2.4 Optimizers in Machine learning

This section will give a quick overview about a few optimizers existing in machine learning. Those optimizers were used to optimize the Skip-Gram Model.

2.4.1 SGD

2.4.2 Momentum

The main Idea behind momentum is to use the previous gradient to compute the current update vector. We do this, because SGD can have trouble, when the loss function is very steep in only one direction. SGD would then osciliate and only taking small steps into the steep direction. While using the previous gradient, momentum will accelerate the learning in the correct direction. At the update t we will compute our update vector v_t the following way:

$$v_t = \gamma v_{t-1} + \alpha \nabla J(\theta) \quad (2.7)$$

And then we update our weights as usual: $\theta = \theta - v_t$

2.4.3 Nesterov

Momentum can be a powerful tool, and sometimes be it's own enemy. With momentum the learning algorithm often overshoots, and blows by the local optima. Hence it will never converge. This problem was addressed by Nesterov. The idea behind his algorithm is to incorporate the momentum in the computation of our gradients. We will substract the momentum vector from our weights before computing the gradients. Therefore we will kind of compute the gradients from the position where we would be with momentum.

2 Background

which will allow us to make a step in a better direction. The computation of the update vector will look the following way:

$$v_t = \gamma v_{t-1} + \alpha \nabla J(\theta - \gamma v_{t-1}) \quad (2.8)$$

. this have shown to work very well, especially for RNN's.

2.4.4 Adagrad

Adagrad first introduced by..., is an optimizer that tries to apply different learning rates to different parameters according to their frequency. the idea is to give very frequent features a small learning rate, and very sparse features a high learning rate. For this let's define: $g_{t,i} = \nabla J(\theta_{t,i})$ which is the partial derivate of the loss function with respect to the parameter θ_i at time step t The classic update would look like this $\theta_{t+1,i} = \theta_{t,i} - \alpha g_{t,i}$ Now we want to change the learning rate decreasing it for very frequent words. For this we will look at the following diagonal matrix $G_{t,i,i}$ of the sum of the squares of the graditents. This means that the matrix for very frequent features will be very big. We know divide the learning rate through the square root of our matrix and multiply (vector matrix multiplication) it with our gradient vector. The equation will look the following way:

$$\theta_{t+1,i} = \theta_{t,i} - \frac{\alpha}{\sqrt{G_{t,i,i} + \epsilon}} g_{t,i}, \quad (2.9)$$

where ϵ is a smoothing factor usually set to $1e - 8$. There lies one weakniss in this approach: the sum of the squares of the previous gradients grows constantly. This means after a certain number of epochs the learning rate will be insufficient. This issue was addressed by ... in his implementation of Addadelta.

2.4.5 Adadelta

Addadelta addresses two issues of Addagrad, first the problem of the consistent growing of the gradients. And then the unit problem.

2.4.6 Adam

3 Methods

Describe the method/software/tool/algorithm you have developed here

4 Results

Describe the experimental setup, the used datasets/parameters and the experimental results achieved

5 Discussion

Discuss the results. What is the outcome of your experiments?

6 Conclusion

Summarize the thesis and provide a outlook on future work.

Bibliography

- [02] “Placing Search in Context: The Concept Revisited”. In: *ACM Trans. Inf. Syst.* 20.1 (Jan. 2002), pp. 116–131. ISSN: 1046-8188. DOI: 10.1145/503104.503110. URL: <http://doi.acm.org/10.1145/503104.503110>.
- [GH10] Michael Gutmann and Aapo Hyvärinen. “Noise-contrastive estimation: A new estimation principle for unnormalized statistical models”. In: *Proceedings of the Thirteenth International Conference on Artificial Intelligence and Statistics*. 2010, pp. 297–304 (cit. on p. 3).
- [Ji+16] Shihao Ji, Nadathur Satish, Sheng Li, and Pradeep Dubey. “Parallelizing Word2Vec in Shared and Distributed Memory”. In: *CoRR* abs/1604.04661 (2016). arXiv: 1604.04661. URL: <http://arxiv.org/abs/1604.04661> (cit. on p. 5).
- [LQH15] Pengfei Liu, Xipeng Qiu, and Xuanjing Huang. “Learning Context-Sensitive Word Embeddings with Neural Tensor Skip-Gram Model.” In: *IJCAI*. 2015, pp. 1284–1290 (cit. on pp. 7, 8).
- [Liu+15] Yang Liu, Zhiyuan Liu, Tat-Seng Chua, and Maosong Sun. “Topical Word Embeddings.” In: *AAAI*. 2015, pp. 2418–2424 (cit. on p. 7).
- [MT12] Andriy Mnih and Yee Whye Teh. “A fast and simple algorithm for training neural probabilistic language models”. In: *arXiv preprint arXiv:1206.6426* (2012) (cit. on p. 3).
- [MB05] Frederic Morin and Yoshua Bengio. “Hierarchical probabilistic neural network language model.” In: *Aistats*. Vol. 5. Citeseer. 2005, pp. 246–252 (cit. on p. 2).
- [Rec+11] Benjamin Recht, Christopher Re, Stephen Wright, and Feng Niu. “Hogwild: A lock-free approach to parallelizing stochastic gradient descent”. In: *Advances in neural information processing systems*. 2011, pp. 693–701 (cit. on p. 5).

- [ŘS10] Radim Řehůřek and Petr Sojka. “Software Framework for Topic Modelling with Large Corpora”. English. In: *Proceedings of the LREC 2010 Workshop on New Challenges for NLP Frameworks*. <http://is.muni.cz/publication/884893/en>. Valletta, Malta: ELRA, May 2010, pp. 45–50.
- [Ser+15] Bartunov Sergey, Kondrashkin Dmitry, Osokin Anton, and P. Vetrov Dmitry. “Breaking Sticks and Ambiguities with Adaptive Skip-gram”. In: *CoRR* abs/1502.07257 (2015). arXiv: 1502.07257. URL: <http://arxiv.org/abs/1502.07257> (cit. on p. 7).
- [Tom+13] Mikolov Tomas, Ilya Sutskever Qiu, Chen Kai, Corado Greg, and Dean Jeffrey. “Distributed Representations of Words and Phrases and their Compositionality”. In: *CoRR* abs/1310.4546 (2013). arXiv: 1310.4546. URL: <http://arxiv.org/abs/1310.4546> (cit. on pp. 2–5).
- [VEV16] Jeroen BP Vuurens, Carsten Eickhoff, and Arjen P de Vries. “Efficient Parallel Learning of Word2Vec”. In: *arXiv preprint arXiv:1606.07822* (2016) (cit. on p. 6).