



Object-Oriented Programming using JAVA Language


Lecture 04: Single-Dimension Arrays

Lecturer: Assoc. Prof. Farouk Al-Fahaidy

Introducing Arrays

Array is a data structure that represents a collection of the same types of data.

```
double[] myList = new double[10];
```

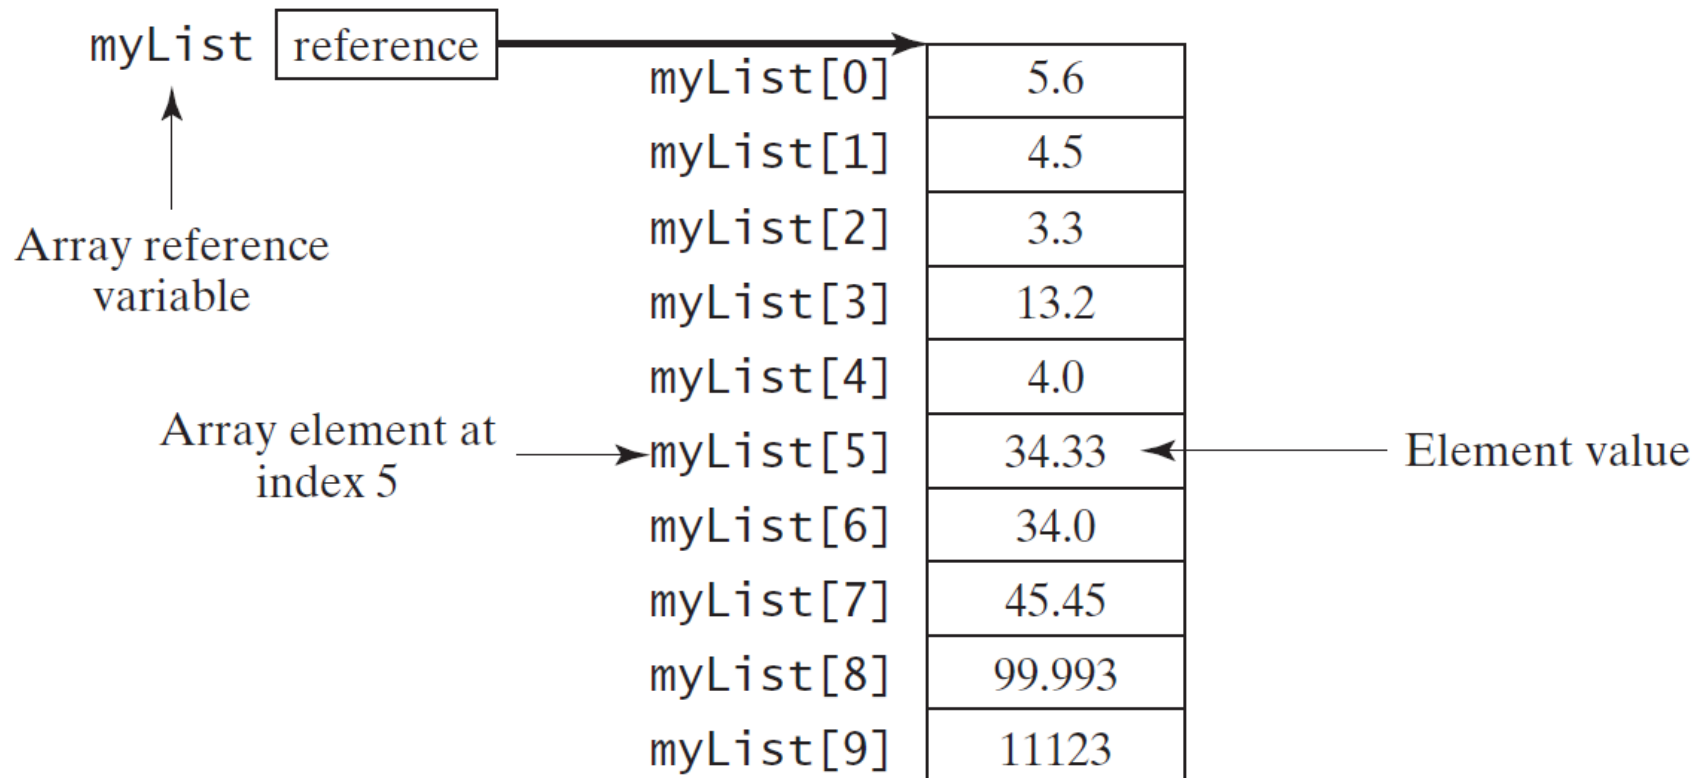

Declaring Array Variables

► `datatype[] arrayRefVar;`

Example:

```
double[] myList;
```

► `datatype arrayRefVar[];` // This style is allowed, but not preferred

Example:

```
double myList[];
```

Creating Arrays

```
arrayRefVar = new datatype[arraySize];
```

Example:

```
myList = new double[10];
```

`myList[0]` references the first element in the array.

`myList[9]` references the last element in the array.

Declaring and Creating in One Step

► `datatype[] arrayRefVar = new
 datatype[arraySize];`

```
double[] myList = new double[10];
```

► `datatype arrayRefVar[] = new
 datatype[arraySize];`

```
double myList[] = new double[10];
```

The Length of an Array

Once an array is created, its size is fixed. It cannot be changed. You can find its size using

`arrayRefVar.length`

For example,

`myList.length` returns 10

Default Values

- ❖ When an array is created, its elements are assigned the default value of
 - 0 for the numeric primitive data types,
 - '\u0000' for char types, and
 - false for boolean types.

Indexed Variables

- ❖ The array elements are accessed through the index.
- ❖ The array indices are *0-based*, i.e., it starts from 0 to `arrayRefVar.length-1`.
 - Example, if `myList` holds ten double values and the indices are from 0 to 9.
- ❖ Each element in the array is represented using the following *syntax*, known as an *indexed variable*:
`arrayRefVar[index];`

Using Indexed Variables

- ❖ After an array is created, an indexed variable can be used in the same way as a regular variable.
 - For example, the following code adds the value in `myList[0]` and `myList[1]` to `myList[2]`.

```
myList[2] = myList[0] + myList[1];
```

Array Initializers

- Declaring, creating, initializing in one step:

```
double[] myList = {1.9, 2.9, 3.4, 3.5};
```

This shorthand syntax must be in one statement.

Declaring, creating, initializing Using the Shorthand Notation

```
double[] myList = {1.9, 2.9, 3.4, 3.5};
```

This shorthand notation is equivalent to the following statements:

```
double[] myList = new double[4];
```

```
myList[0] = 1.9;
```

```
myList[1] = 2.9;
```

```
myList[2] = 3.4;
```

```
myList[3] = 3.5;
```

Trace Program with Arrays

Declare array variable values, create an array, and assign its reference to values

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the array is created



0	0
1	0
2	0
3	0
4	0

Trace Program with Arrays

i becomes 1

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the array is created

0	0
1	0
2	0
3	0
4	0

Trace Program with Arrays

i (=1) is less than 5

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the array is created

0	0
1	0
2	0
3	0
4	0

Trace Program with Arrays

After this line is executed, value[1] is 1

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the first iteration

0	0
1	1
2	0
3	0
4	0

Trace Program with Arrays

```
public class Test {  
    public static void main(String[]  
        args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After i++, i becomes 2

After the first iteration

0	0
1	1
2	0
3	0
4	0

Trace Program with Arrays

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

i (= 2) is less than 5

After the first iteration

0	0
1	1
2	0
3	0
4	0

Trace Program with Arrays

After this line is executed,
values[2] is 3 (2 + 1)

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the second iteration

0	0
1	1
2	3
3	0
4	0

Trace Program with Arrays

After this, i becomes 3.

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the second iteration

0	0
1	1
2	3
3	0
4	0

Trace Program with Arrays

i (=3) is still less than 5.

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the second iteration

0	0
1	1
2	3
3	0
4	0

Trace Program with Arrays

After this line, values[3] becomes 6 (3 + 3)

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the third iteration

0	0
1	1
2	3
3	6
4	0

Trace Program with Arrays

After this, i becomes 4

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the third iteration

0	0
1	1
2	3
3	6
4	0

Trace Program with Arrays

i (=4) is still less than 5

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the third iteration

0	0
1	1
2	3
3	6
4	0

Trace Program with Arrays

After this, values[4] becomes 10 (4 + 6)

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the fourth iteration

0	0
1	1
2	3
3	6
4	10

Trace Program with Arrays

After i++, i becomes 5

```
public class Test {  
    public static void main(String[]  
        args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

After the fourth iteration

0	0
1	1
2	3
3	6
4	10

Trace Program with Arrays

$i (=5) < 5$ is false. Exit the loop

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < 5; i++) {  
            values[i] = i + values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```


After the fourth iteration

0	0
1	1
2	3
3	6
4	10

Trace Program with Arrays

After this line, values[0] is 11 (1 + 10)

```
public class Test {  
    public static void main(String[] args) {  
        int[] values = new int[5];  
        for (int i = 1; i < values.length; i++) {  
            values[i] = i * values[i-1];  
        }  
        values[0] = values[1] + values[4];  
    }  
}
```

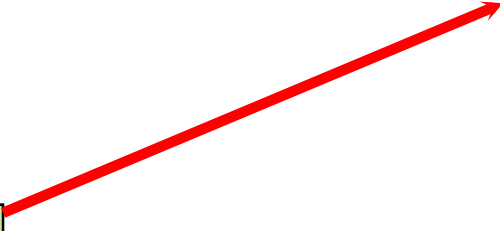

0	11
1	1
2	3
3	6
4	10

Processing Arrays

See the examples in the next.

1. (Initializing arrays with input values)
2. (Initializing arrays with random values)
3. (Printing arrays)
4. (Summing all elements)
5. (Finding the largest element)
6. (Finding the smallest index of the largest element)
7. (*Random shuffling*)
8. (*Shifting elements*)

Initializing arrays with input values

```
java.util.Scanner input = new  
    java.util.Scanner(System.in);  
System.out.print("Enter " + myList.length + "  
    values: ");  
for (int i = 0; i < myList.length; i++)  
    myList[i] = input.nextDouble();
```

Initializing arrays with random values

```
for (int i = 0; i < myList.length; i++) {  
    myList[i] = Math.random() * 100;  
}
```

Printing arrays

```
for (int i = 0; i < myList.length; i++) {  
    System.out.print(myList[i] + " ");  
}
```

Summing all elements


```
double total = 0;  
for (int i = 0; i < myList.length; i++) {  
    total += myList[i];  
}
```


Finding the largest element

```
double max = myList[0];  
for (int i = 1; i < myList.length; i++) {  
    if (myList[i] > max) max = myList[i];  
}
```

Random shuffling

```
for (int i = myList.length - 1; i > 0; i--) {  
    // Generate an index j randomly with 0 <= j <= i  
    int j = (int)(Math.random()  
        * (i + 1));  
  
    // Swap myList[i] with myList[j]  
    double temp = myList[i];  
    myList[i] = myList[j];  
    myList[j] = temp;  
}
```

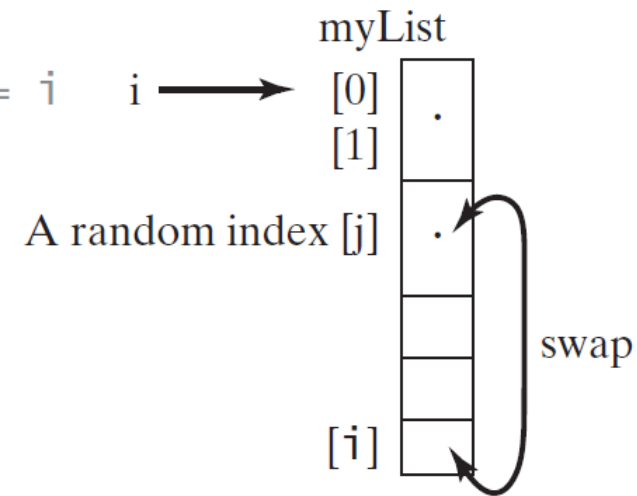


Shifting Elements

```
double temp = myList[0]; // Retain the first element
```

```
// Shift elements left  
for (int i = 1; i < myList.length; i++) {  
    myList[i - 1] = myList[i];  
}
```

```
// Move the first element to fill in the last position  
myList[myList.length - 1] = temp;
```

myList



Enhanced for Loop (for-each loop)

JDK 1.5 introduced a new for loop that enables you to traverse the complete array sequentially without using an index variable. For example, the following code displays all elements in the array myList:

```
for (double value: myList)
    System.out.println(value);
```

In general, the syntax is



```
for (elementType value: arrayRefVar) {
    // Process the value
}
```

You still have to use an index variable if you wish to traverse the array in a different order or change the elements in the array.

Copying Arrays

Often, in a program, you need to duplicate an array or a part of an array. In such cases you could attempt to use the assignment statement (=), as follows:

`list2 = list1;`

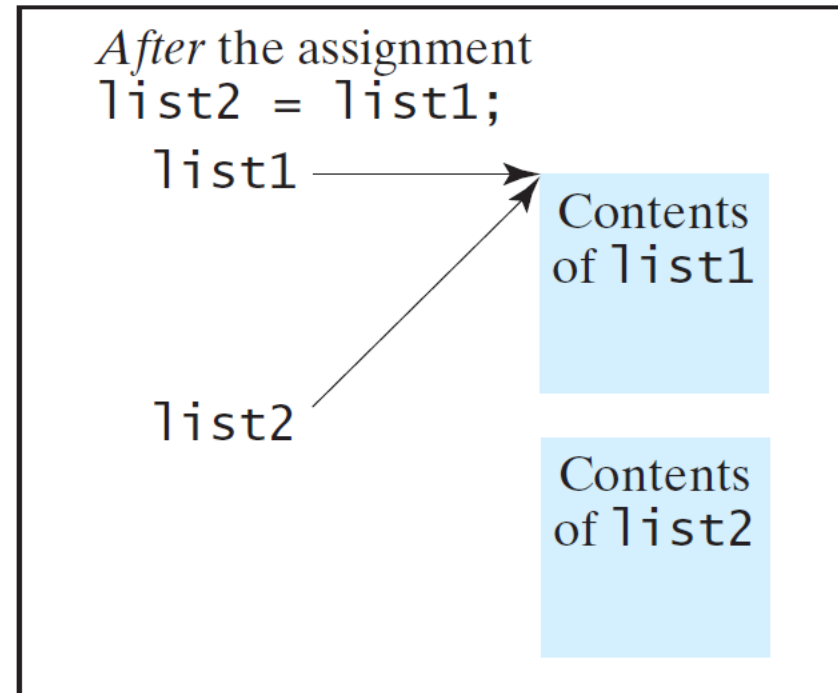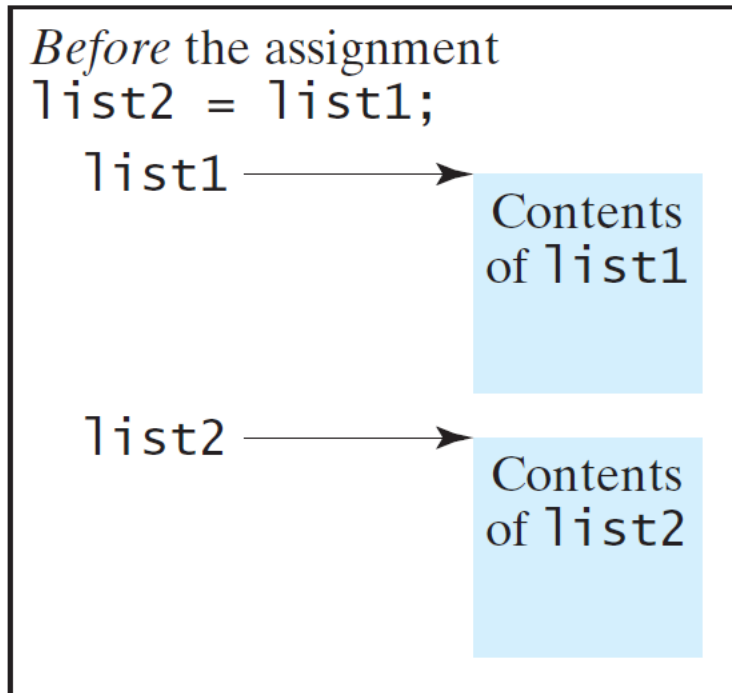

Copying Arrays

Using a loop:

```
int[] sourceArray = {2, 3, 1, 5, 10};  
int[] targetArray = new int[sourceArray.length];  
  
for (int i = 0; i < sourceArray.length; i++)  
    targetArray[i] = sourceArray[i];
```

The `arraycopy` Utility

```
arraycopy (sourceArray, src_pos,  
           targetArray, tar_pos, length);
```

Example:

```
System.arraycopy (sourceArray, 0,  
                  targetArray, 0, sourceArray.length);
```

Passing Arrays to Methods

```
public static void printArray(int[] array) {  
    for (int i = 0; i < array.length; i++) {  
        System.out.print(array[i] + " ");  
    }  
}
```

Invoke the method

```
int[] list = {3, 1, 2, 6, 4, 2};  
printArray(list);
```

Invoke the method

```
printArray(new int[]{3, 1, 2, 6, 4, 2});
```

Anonymous array

Pass By Value


Java uses *pass by value* to pass arguments to a method. There are important differences between passing a value of variables of primitive data types and passing arrays.

- ▶ For a parameter of a primitive type value, the actual value is passed. Changing the value of the local parameter inside the method does not affect the value of the variable outside the method.
- ▶ For a parameter of an array type, the value of the parameter contains a reference to an array; this reference is passed to the method. Any changes to the array that occur inside the method body will affect the original array that was passed as the argument.

Simple Example

```
public class Test {  
    public static void main(String[] args) {  
        int x = 1; // x represents an int value  
        int[] y = new int[10]; // y represents an array of int values  
  
        m(x, y); // Invoke m with arguments x and y  
  
        System.out.println("x is " + x);  
        System.out.println("y[0] is " + y[0]);  
    }  
  
    public static void m(int number, int[] numbers) {  
        number = 1001; // Assign a new value to number  
        numbers[0] = 5555; // Assign a new value to numbers[0]  
    }  
}
```

Heap

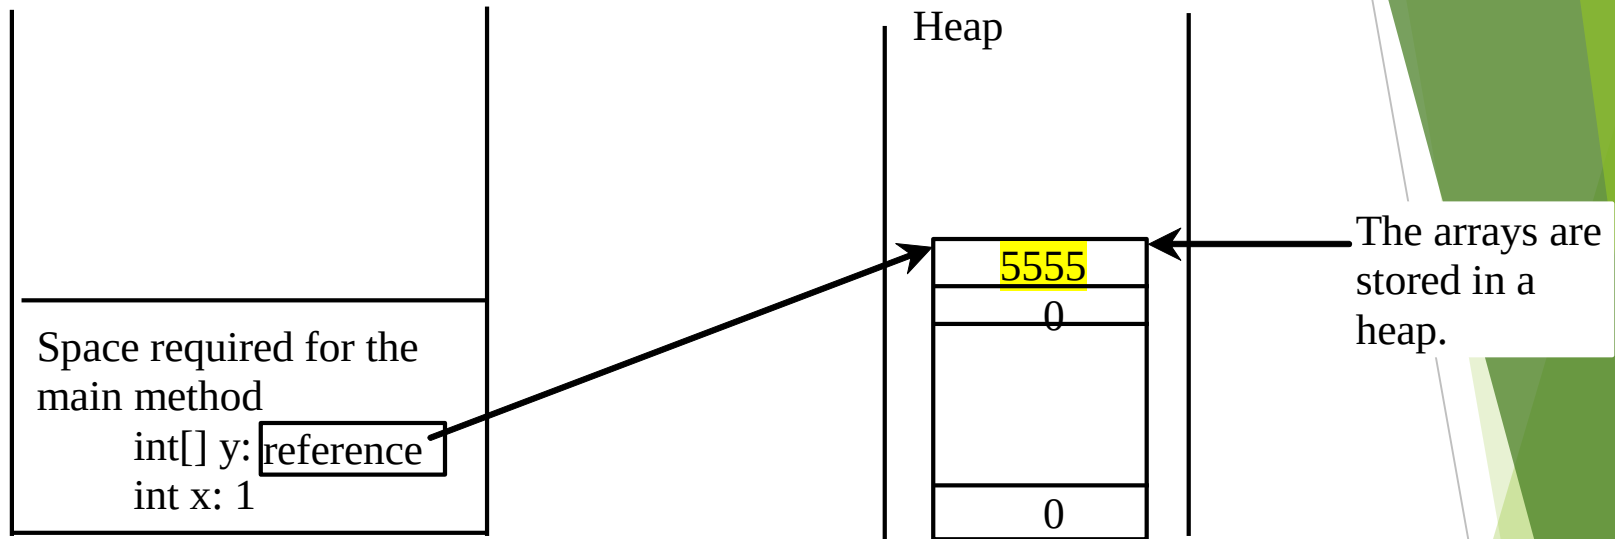

The **JVM** stores the array in an area of memory, called **heap**, which is used for **dynamic** memory allocation where blocks of memory are allocated and freed in an arbitrary order.

Passing Arrays as Arguments


- **Objective:** Demonstrate differences of passing primitive data type variables and array variables.



TestPassArray

Run

Example, cont.

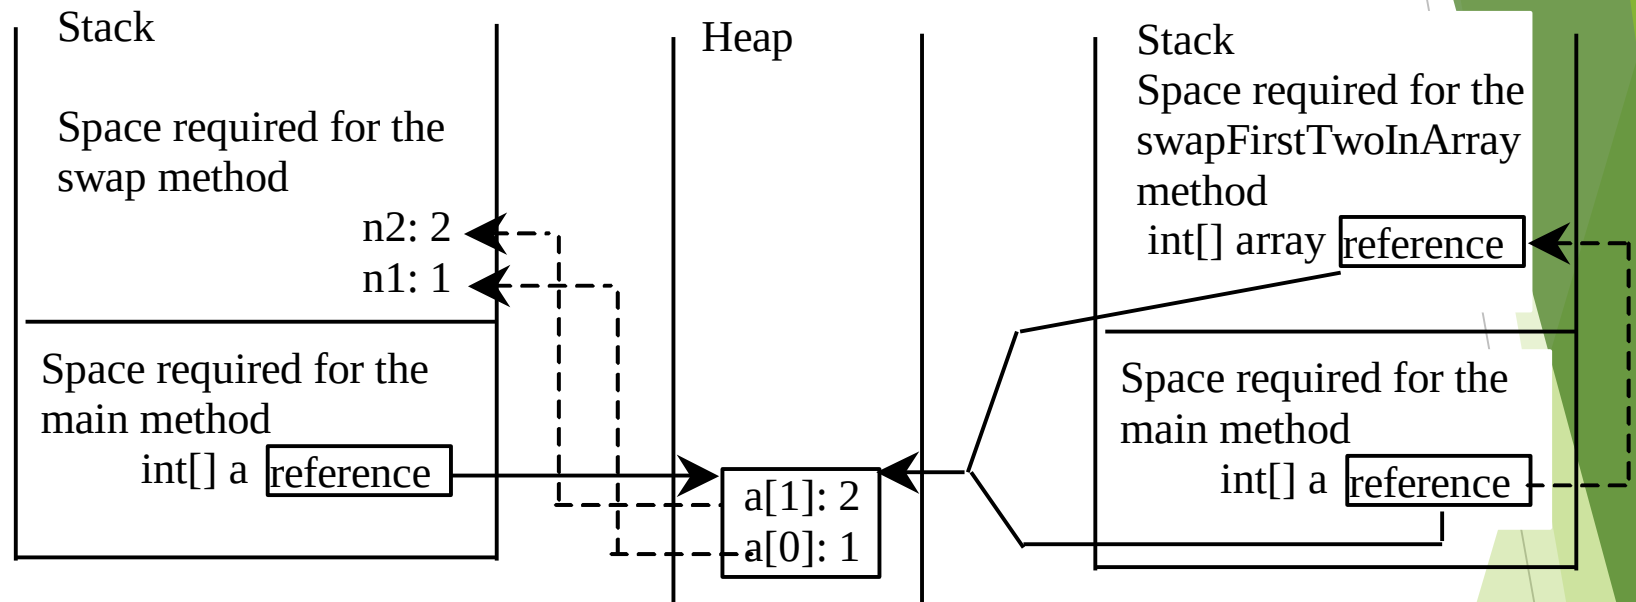

Invoke `swap(int n1, int n2)`.
The primitive type values in `a[0]` and `a[1]` are passed to the `swap` method.

The arrays are stored in a heap.

Invoke `swapFirstTwoInArray(int[] array)`.
The reference value in `a` is passed to the `swapFirstTwoInArray` method.


Returning an Array from a Method

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

list

result

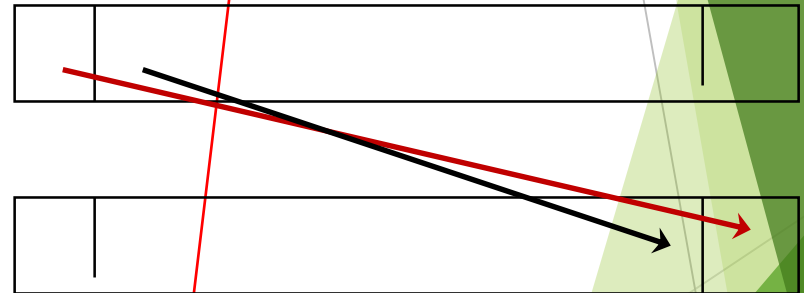

Trace the reverse Method

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {
```

```
    int[] result = new int[list.length];
```

```
    for (int i = 0, j = result.length - 1;
```

```
        i < list.length; i++, j--) {
```

```
        result[j] = list[i];
```

```
    }
```

```
    return result;
```

```
}
```

Declare result and create array

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	0	0
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
    return result;  
}
```

i = 0 and j = 5

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	0	0
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};  
int[] list2 = reverse(list1);
```

i (= 0) is less than 6

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	0	0
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];
```

```
    for (int i = 0, j = result.length - 1;
```

```
        i < list.length; i++, j--) {
```

```
        result[j] = list[i];
```

```
    }
```

```
    return result;
```

```
}
```

i = 0 and j = 5
Assign list[0] to result[5]

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	0	1
---	---	---	---	---	---

50

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 1 and j becomes 4

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	0	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (=1) is less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	0	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];
```

```
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {
```

```
        result[j] = list[i];
```

```
    }
```

```
    return result;
```

```
}
```

i = 1 and j = 4
Assign list[1] to result[4]

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 2 and
j becomes 3

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (=2) is still less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	0	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];
```

```
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {
```

```
        result[j] = list[i];
```

```
    }
```

```
    return result;
```

```
}
```

i = 2 and j = 3
Assign list[i] to result[j]

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 3 and
j becomes 2

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (=3) is still less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	0	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];
```

```
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {
```

```
        result[j] = list[i];
```

```
    }
```

```
    return result;
```

```
}
```

i = 3 and j = 2
Assign list[i] to result[j]

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	4	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 4 and
j becomes 1

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	4	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (=4) is still less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	0	4	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];
```

```
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {
```

```
        result[j] = list[i];
```

```
    }
```

```
    return result;
```

```
}
```

i = 4 and j = 1
Assign list[i] to result[j]

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	5	4	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 5 and
j becomes 0

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	5	4	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

i (=5) is still less than 6

list

1	2	3	4	5	6
---	---	---	---	---	---

result

0	5	4	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];
```

```
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {
```

```
        result[j] = list[i];
```

```
    }
```

```
    return result;
```

```
}
```

i = 5 and j = 0
Assign list[i] to result[j]

list

1	2	3	4	5	6
---	---	---	---	---	---

result

6	5	4	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
         i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

After this, i becomes 6 and
j becomes -1

list

1	2	3	4	5	6
---	---	---	---	---	---

result

6	5	4	3	2	1
---	---	---	---	---	---

Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```

$i (=6) < 6$ is false. So exit the loop.

list

1	2	3	4	5	6
---	---	---	---	---	---

result

6	5	4	3	2	1
---	---	---	---	---	---


Trace the reverse Method, cont.

```
int[] list1 = {1, 2, 3, 4, 5, 6};
```

```
int[] list2 = reverse(list1);
```

```
public static int[] reverse(int[] list) {  
    int[] result = new int[list.length];  
  
    for (int i = 0, j = result.length - 1;  
        i < list.length; i++, j--) {  
        result[j] = list[i];  
    }  
  
    return result;  
}
```


Return result

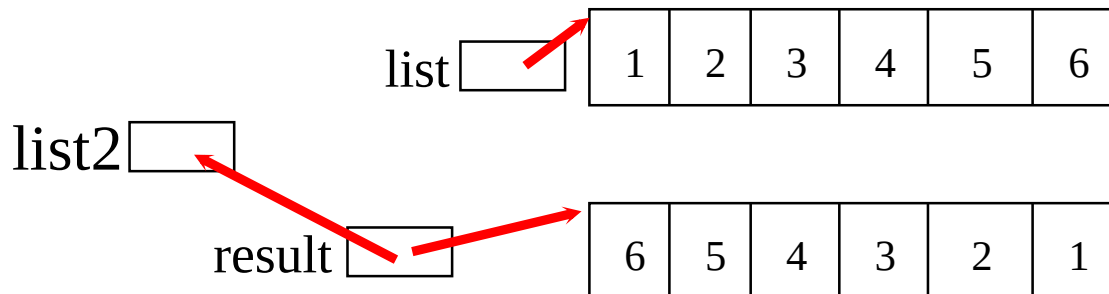

Searching Arrays

Searching is the process of looking for a specific element in an array; for example, discovering whether a certain score is included in a list of scores. Searching is a common task in computer programming. There are many algorithms and data structures devoted to searching. In this section, two commonly used approaches are discussed, *linear search* and *binary search*.

```
public class LinearSearch {  
    /** The method for finding a key in the list */  
    public static int linearSearch(int[] list, int key) {  
        for (int i = 0; i < list.length; i++)  
            if (key == list[i])  
                return i;  
        return -1;  
    }  
}
```

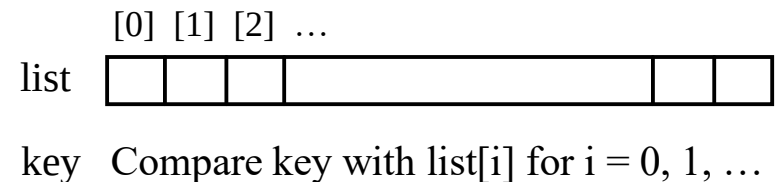

Linear Search

The linear search approach compares the key element, key, *sequentially* with each element in the array list. The method continues to do so until the key matches an element in the list or the list is exhausted without a match being found. If a match is made, the linear search returns the index of the element in the array that matches the key. If no match is found, the search returns -1.

Linear Search Animation

Key

List

3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8
3	6	4	1	9	7	3	2	8

From Idea to Solution

```
/** The method for finding a key in the list */  
public static int linearSearch(int[] list, int key) {  
    for (int i = 0; i < list.length; i++)  
        if (key == list[i])  
            return i;  
    return -1;  
}
```

Trace the method

```
int[] list = {1, 4, 4, 2, 5, -3, 6, 2};  
int i = linearSearch(list, 4); // returns 1  
int j = linearSearch(list, -4); // returns -1  
int k = linearSearch(list, -3); // returns 5
```


The Arrays.binarySearch Method

Since binary search is frequently used in programming, Java provides several overloaded binarySearch methods for searching a key in an array of int, double, char, short, long, and float in the java.util.Arrays class. For example, the following code searches the keys in an array of numbers and an array of characters.

```
int[] list = {2, 4, 7, 10, 11, 45, 50, 59, 60, 66, 69, 70, 79};
```

```
System.out.println("Index is " +  
    java.util.Arrays.binarySearch(list, 11));
```

Return is 4

```
char[] chars = {'a', 'c', 'g', 'x', 'y', 'z'};
```

```
System.out.println("Index is " +  
    java.util.Arrays.binarySearch(chars, 't'));
```

Return is -4 (insertion point
is 3, so return is -3-1)

For the binarySearch method to work, the array must be pre-sorted in increasing order.

Command-Line Parameters

```
class TestMain {  
    public static void main(String[] args) {  
        ...  
    }  
}
```


```
java TestMain arg0 arg1 arg2 ... argn
```

Processing Command-Line Parameters

In the main method, get the arguments from `args[0]`, `args[1]`, ..., `args[n]`, which corresponds to `arg0`, `arg1`, ..., `argn` in the command line.

Problem: Calculator

- **Objective:** Write a program that will perform binary operations on integers. The program receives three parameters: an operator and two integers.

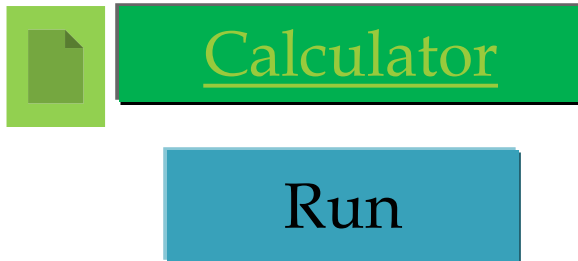

```
java Calculator 2 + 3
```

```
java Calculator 2 - 3
```

```
java Calculator 2 / 3
```

```
java Calculator 2 . 3
```