[/landing page]

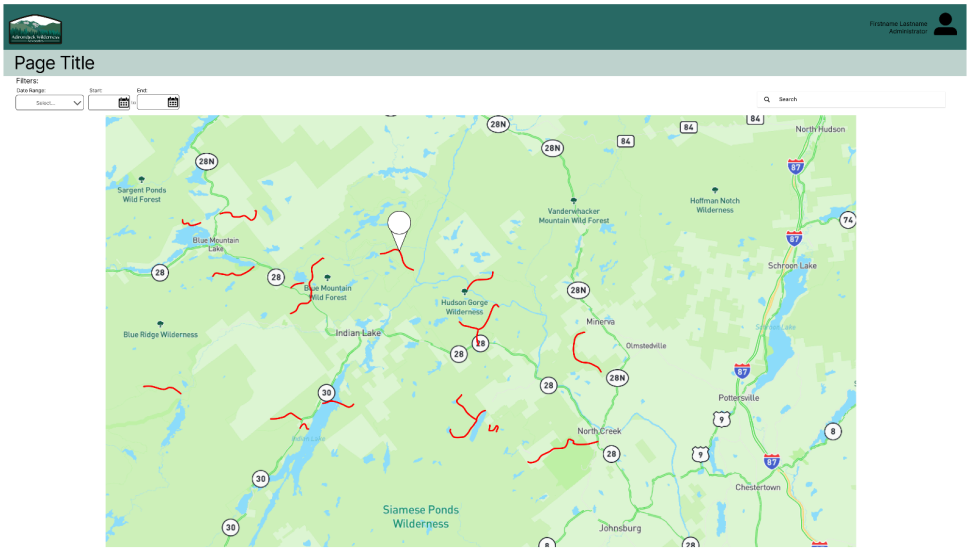

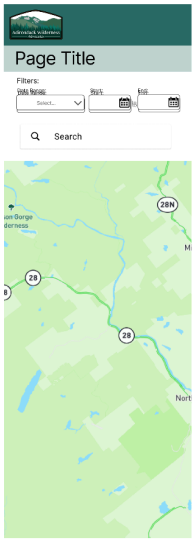

Not shown on this wire frame are the different colored pins at the trail heads.

Use Cases

1. Log in / Register (see /login)
    a. As users don't need to log in to see basic trail usage data, the landing page is the first thing they see.
2. Click on pin (see /dashboard)
    a. When a pin/trailhead is clicked on, it will route the user to the **dashboard view**, with a single trail selected in the trail filters. This will show the user the charted usage data over some default amount of time for the trail they selected.
3. Change timeframe of data
    a. The default is "live" data from that day.
        i. Might be a risk
        ii. Reliability of the device is suspect - there are devices that are not connected to the cloud
    b. ADD: New default is all data over the time period for which there is data
    c. This should be a start/end date picker.
        i. Presets for that day, last two weeks, last month
            1. ADD: "All time"

[/dashboard]

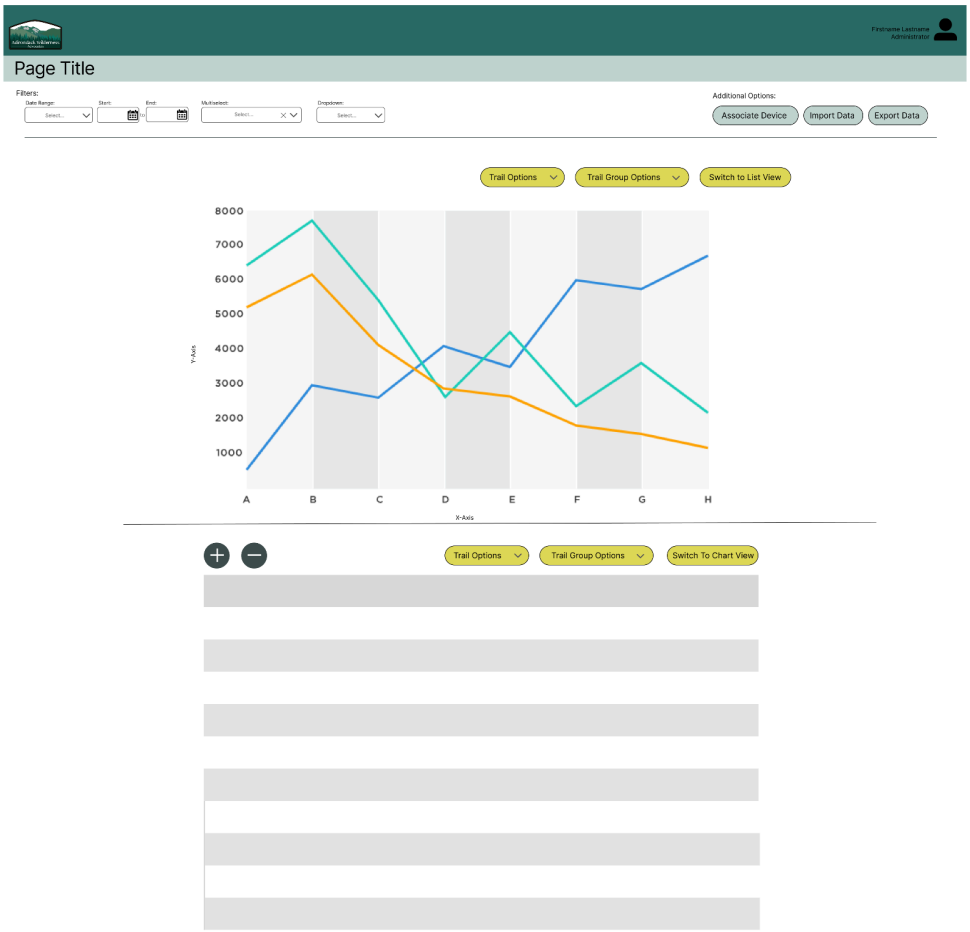

Not shown here are the dropdown menus for trail and trail group CRUD, as well as the popups that would appear when clicked.

Use Cases:

1. Routed from landing page:
    a. Should show a filtered **chart view** for the trail the user selected on the landing page
    b. The **“default” filter** would be the trail the user selected on the landing page.
2. If a Trail Manager, Admin, or Root Admin:
    a. Should see all buttons
3. If a registered user:
    a. Should see a button for exporting trail data.
4. If an unregistered user (guest):

    a. Should only see the chart and filters, no buttons except a greyed out/unusable export button.
    b. If a guest wants to export data, they need to register (see /login).
        i. It should be clear through a greyed out button that exporting is possible, but if clicked a popup appears to tell the guest the above information.
5. Importing:
    a. Will display a file chooser requesting for the CSV file (path) from the user.
    b. Validates the structure and accepts or rejects the file depending on the results of validation.
    c. After validating the data, it should be uploaded to the persistence layer.
6. Exporting:
    a. Given the current filters applied for date range and trails, retrieves trail usage data from persistence layer.
    b. Will export the trail usage data to CSV format into users downloads folder.
7. Trail CRUD
    a. Must be able to create Trail
        i. Trail Name
        ii. Trail Location (trail head, should be lat/lon coordinates for map view)
    b. Must be able to update Trail
        i. Trail Name
        ii. Trail Location
    c. Must be able to delete Trail
8. Trail Group CRUD
    a. Must be able to create trail group
        i. Group name
        ii. Trails in group
            1. Should use a search tool rather than scroll view to add trails to the group
    b. Must be able to update trail group
        i. Group Name
        ii. Trails in group
            1. Same as above
    c. Must be able to delete trail group
9. Device CRUD
    a. Must be able to connect/”create” a device
        i. Manual "add device" function for adding offline devices to the persistence layer
        ii. Recorded in the persistence layer whether the device was added by API call (autonomously) or by a user (manually).
    b. Must be able to update a device
        i. If a device is moved from one trail to another, the device must be associated with a new trail
    c. Must be able to delete a device

i. If a device is no longer being used, there must be a way to delete the device from the persistence layer.

[/login]

/login

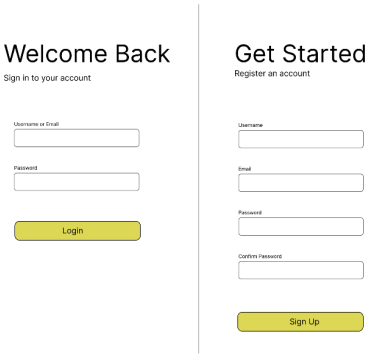

Use Cases:

1. Register
    a. If you enter an unregistered email address AND username, you are able to register as a new user.
        i. If the email address or username has already been registered, it will be like you attempted to log in.
    b. If successful, the user will be redirected to the landing page.
2. Log In
    a. If you enter the correct username/email address and password, you will be logged into the system.
    b. If successful, the user will be redirected to the landing page.

[/privilege]

[privilege

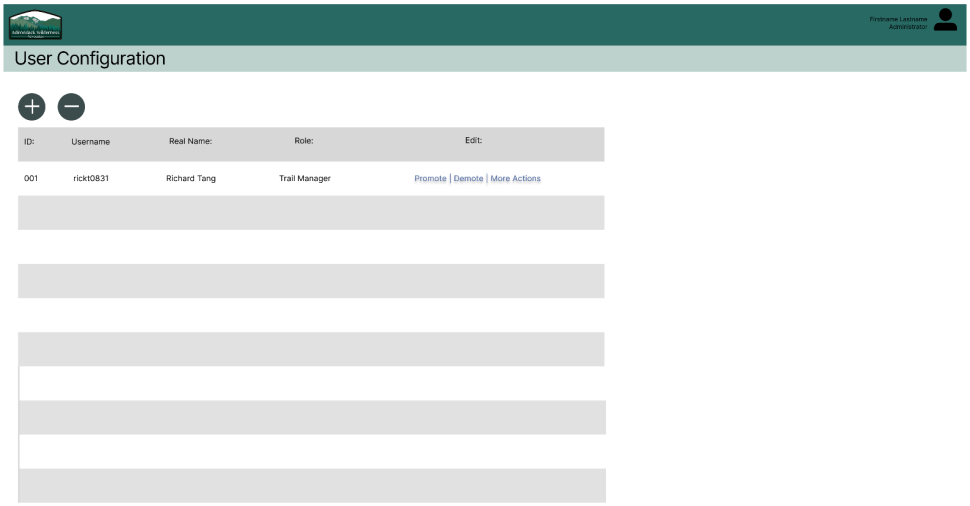

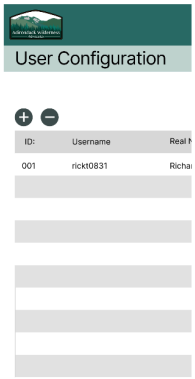

Use Cases:

1. Administrators and the Root Administrator can:
    a. Grant and remove trail manager permissions to registered users.
    b. Block/ban a certain user or trail manager.
2. The Root Administrator can:
    a. Grant and remove administrator permissions to registered users or trail managers.
    b. Block/ban a certain user, trail manager, or administrator.