

SFCC FRAUD DETECTION (O-PLUX) SERVICE CARTRIDGE INSTALLATION MANUAL

Table of Contents

1. Introduction	4
2. Components Overview	4
2.1 Functionalities Overview	4
2.2 Limits and Restrictions	4
3. Integration Guide	5
3.1 Setup	5
3.1.1 Cartridge for a Storefront	5
3.1.2 Cartridge for a Business Manager	5
3.1.3 Metadata for Integration	5
3.2 Components	6
3.2.1 Assigning a Cartridge to the Site	6
3.2.2 Admin Screen Configuration	8
3.2.2.1 Setup Cartridges	8
3.2.2.2 Admin Screen Configuration	9
3.2.3 Site Import	13
3.2.4 Metadata & Site Data Checking	16
3.2.5 Custom Site Preference for Fraud Detection	19
3.2.5.1 OpluxConfigs items	21
3.2.6 Services	22
3.2.7 Payment Methods	26

3.3 Code Setup Guide	28
3.4 Linking Settlement Status	31
3.5 How to Use Fraud Detection (O-PLUX)	34
3.5.1 Order List	34
3.5.2 Search	35
You can search for fraudulent orders by setting conditions such as order date and processing result. By default, the conditions for automatic examination items are " HOLD " or " REVIEW "	35
3.5.3 Update	36
3.5.3.1 Re-examination	36
3.5.3.2 Manual examination	38
3.5.3.3 Manual examination Memo	39
3.5.3.4 Blacklist Registration	40
3.5.3.5 Blacklist Release	41
3.5.3.6 Other	42
3.6 Jobs	43
3.6.1 Manual examination result acquisition - Oplux_GetEventInfo	43
3.6.2 Settlement Status Sending - Oplux_UpdateSettleStatus	45
3.7 Customize parameters	50
3.7.1 O-PLUX parameters not supported by SFCC	50
3.7.2 Add Custom Attributes	56
3.7.3 Code Modification	62
3.8 Customize Content Assets	66
3.8.1 opluxEventNG	66
3.8.1.1 Check Content Assets	68
3.8.1.2 Sample Error Page	71

3.8.2 opluxCancelledEmail	72
3.8.2.1 Add Content Assets	72
3.8.2.2 Code Modification	75
Please refer to the sample code below for customization.	75
3.9 Log Settings	76
3.9.1 Output	76
3.9.2 Check log files	78
4. Troubleshooting	81

1. Introduction

This document describes how to install and configure the fraud detection services cartridge in a Salesforce Commerce Cloud environment (referred below as SFCC). The cartridge was tested against 6.0.0 of SFRA and compatibility mode 21.7.

2. Components Overview

2.1 Functionalities Overview

This cartridge provides a fraud detection service operated by Cacco Inc.

2.2 Limits and Restrictions

- Target

This cartridge can be used with either Storefront Reference Architecture (SFRA) .

- Language/Country restrictions

The cartridge is developed for Japanese. It might not be working properly if you chose other language (Locale).

3. Integration Guide

3.1 Setup

3.1.1 Cartridge for a Storefront

- int_oplux
- int_oplux_sfra_changes

3.1.2 Cartridge for a Business Manager

- bm_oplux

3.1.3 Metadata for Integration

- system-objecttype-extensions.xml
- services.xml
- jobs.xml
- library.xml

The file for site import has the following structure. Compress the top folder into a zip file for use. In doing so, replace the folder name of [RefArchSharedLibrary] with the ID of the content library.


Top folder (site-template)

```
|—libraries
    |—RefArchSharedLibrary
        |—library.xml
|—services.xml
|—jobs.xml
|—meta
    |—system-objecttype-extensions.xml
```


3.2 Components

3.2.1 Assigning a Cartridge to the Site

In Business Manager, go to **Administration > Sites > Manage Sites**.

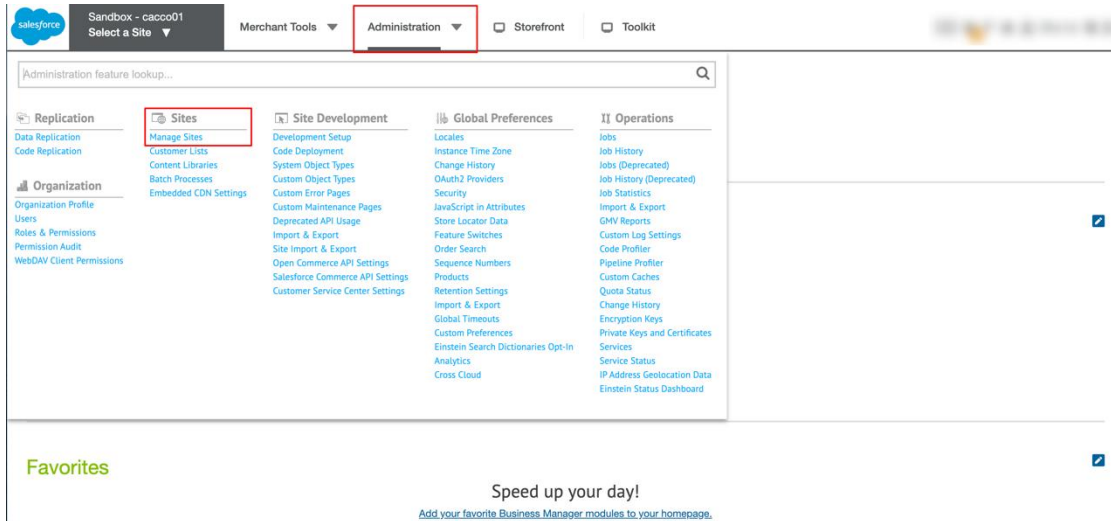

Click on the site to manage.

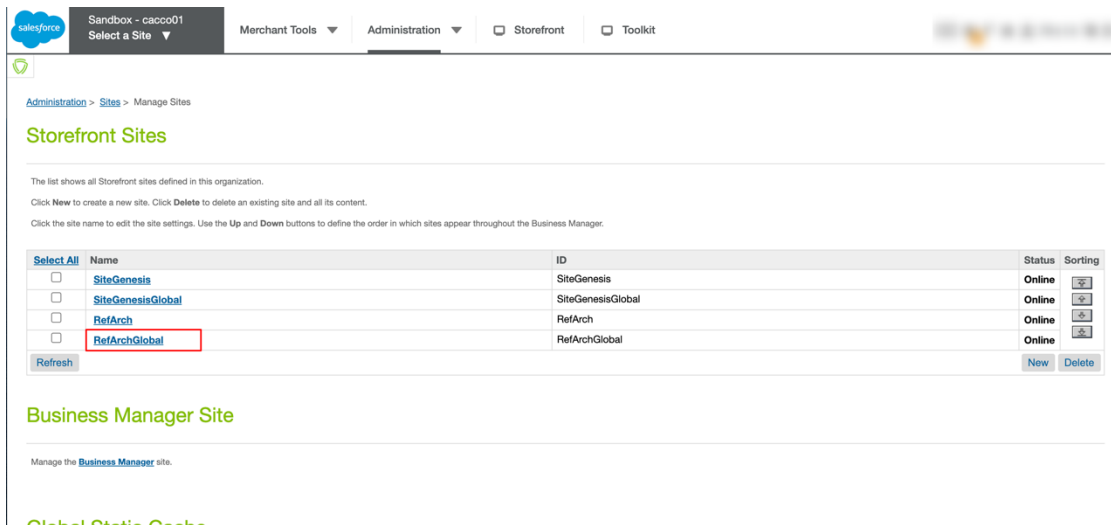

Open the “**Setting**” tab for Cartridge setting.

The screenshot shows the Salesforce Commerce Cloud Administration console. The top navigation bar includes 'Sandbox - cacco01', 'Merchant Tools', 'Administration', 'Storefront', and 'Toolkit'. The breadcrumb trail is 'Administration > Sites > Manage Sites > RefArchGlobal - General'. The 'General' tab is selected, and the 'Settings' sub-tab is highlighted. The page title is 'RefArchGlobal - General'. A note states: 'Fields with a red asterisk (*) are mandatory. Click Apply to save the details. Click Reset to revert to the last saved state. Click Delete to delete the site.' The form contains the following fields: ID (RefArchGlobal), Name* (RefArchGlobal), Time Zone* (Etc/UTC), Default Currency* (British Pound Sterling), Taxation* (Gross), Customer List* (RefArch), Brand, Billing Entity, and Description. At the bottom right are 'Apply', 'Reset', and 'Delete' buttons.

Set the cartridge path settings on the “**Settings**” tab as below.


int_oplux_sfra_chages:int_oplux:bm_oplux:app_storefront_base

The screenshot shows the Salesforce Commerce Cloud Administration console with the 'Settings' tab selected for 'RefArchGlobal'. The page title is 'RefArchGlobal - Settings'. A note states: 'Click Apply to save the details. Click Reset to revert to the last saved state.' The 'Instance Type' is set to 'Sandbox/Development'. A deprecated message is shown: 'Deprecated. The preferred way of configuring HTTP and HTTPS hostnames is by using new features of the site aliases configuration ("SEO > Aliases Configuration"). The HTTP/HTTPS hostname values set in this section will be used if no hostnames are defined by aliases configuration and are intended only to support an older configuration style.' The 'HTTP Hostname' and 'HTTPS Hostname' fields are empty. The 'Instance Type: All' section shows the 'Cartridges' field with the value 'int_oplux_sfra_chages:int_oplux:bm_oplux:app_storefront_base' highlighted in red. The 'Effective Cartridge Path' field lists the following paths: int_oplux_sfra, int_oplux, app_storefront_base, plugin_apple_pay, plugin_facebook, plugin_payments, plugin_pinterest_commerce, and plugin_web_payments.

3.2.2 Admin Screen Configuration

3.2.2.1 Setup Cartridges

Click the **“Back to List”** button, then go to **“Business Manager Site”** > **“Manage the Business Manager site”** link.

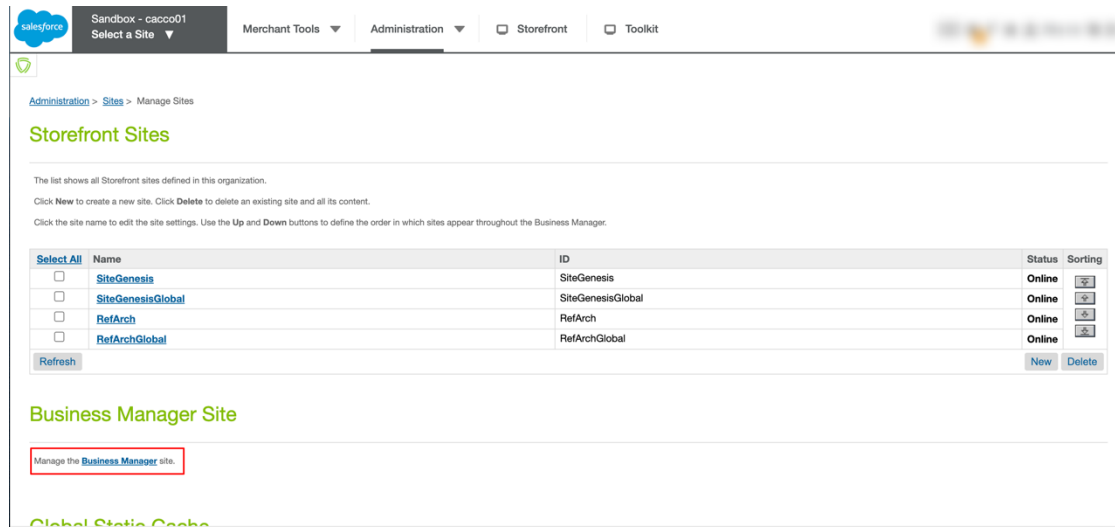


The screenshot shows the Salesforce Admin console interface. The top navigation bar includes the Salesforce logo, a user profile dropdown, and tabs for Merchant Tools, Administration, Storefront, and Toolkit. The main content area is titled 'Storefront Sites' and contains a table of sites. The table has columns for Name, ID, Status, and Sorting. The sites listed are SiteGenesis, SiteGenesisGlobal, RefArch, and RefArchGlobal, all with an 'Online' status. Below the table is a 'Business Manager Site' section with a link to 'Manage the Business Manager site.' The 'RefArch' and 'RefArchGlobal' links are highlighted with a red box.

Select All	Name	ID	Status	Sorting
☐	SiteGenesis	SiteGenesis	Online	
☐	SiteGenesisGlobal	SiteGenesisGlobal	Online	
☐	RefArch	RefArch	Online	
☐	RefArchGlobal	RefArchGlobal	Online	

Set the cartridge path settings on the **“Settings”** tab as below.

bm_oplux:bm_app_storefront_base:bm_custom_plugin:int_oplux

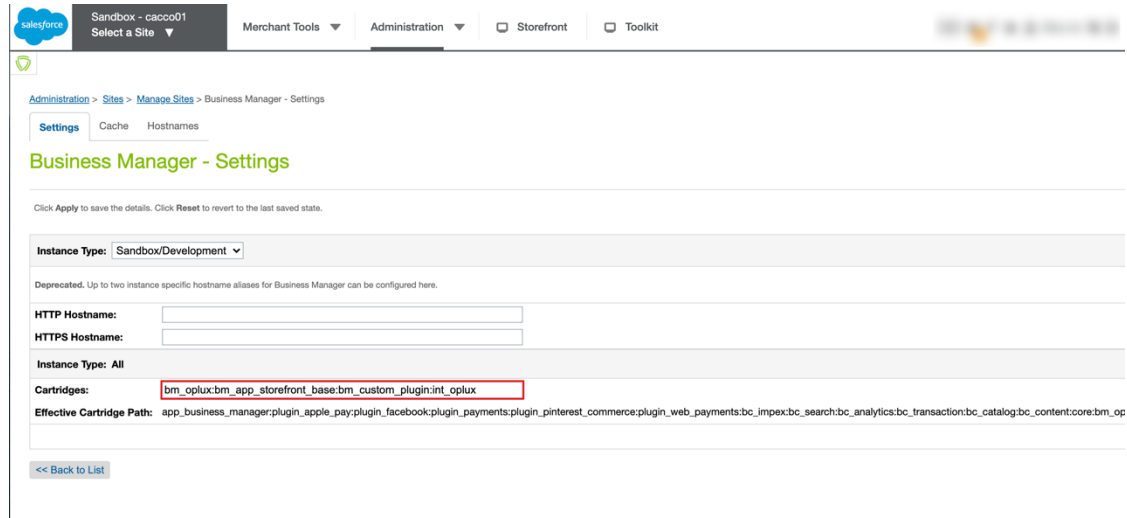

The screenshot shows the Salesforce Admin console interface for the 'Business Manager - Settings' page. The page displays the 'Instance Type' as 'Sandbox/Development' and the 'Cartridges' section with the path 'bm_oplux:bm_app_storefront_base:bm_custom_plugin:int_oplux' highlighted with a red box. The 'Effective Cartridge Path' is also visible.

Instance Type: **Sandbox/Development**

Deprecated. Up to two instance specific hostname aliases for Business Manager can be configured here.

HTTP Hostname:

HTTPS Hostname:


Instance Type: All

Cartridges: **bm_oplux:bm_app_storefront_base:bm_custom_plugin:int_oplux**


Effective Cartridge Path: app_business_manager:plugin_apple_pay:plugin_facebook:plugin_payments:plugin_pinterest_commerce:plugin_web_payments:bc_impex:bc_search:bc_analytics:bc_transaction:bc_catalog:bc_content:core:bm_op

3.2.2.2 Admin Screen Configuration

In order to use the Fraud Detection settings screen on the Business Manager, go to **Administration > Organization > Role & Permissions**.

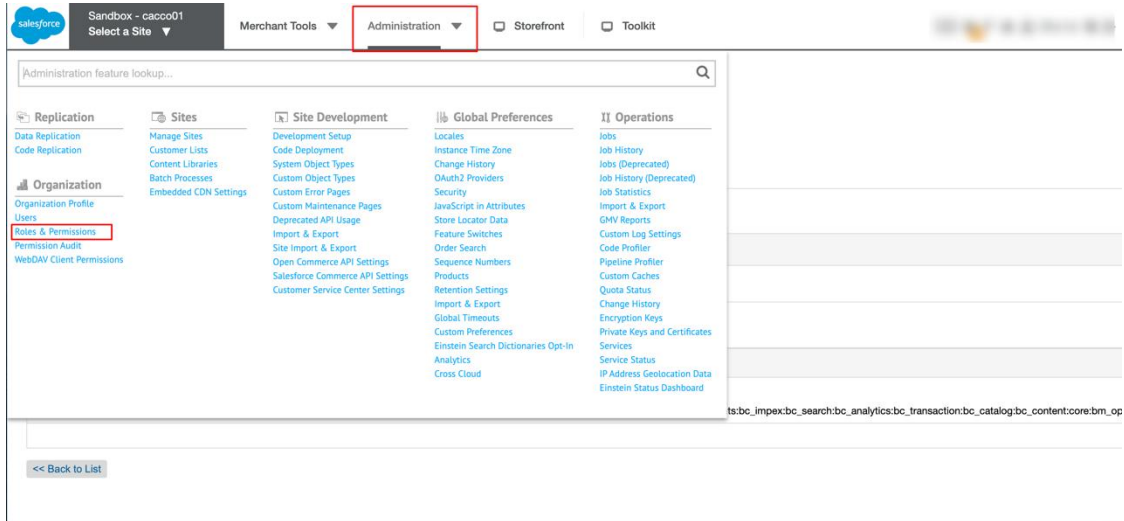

Select the ID to set (in this case , Administrator) .

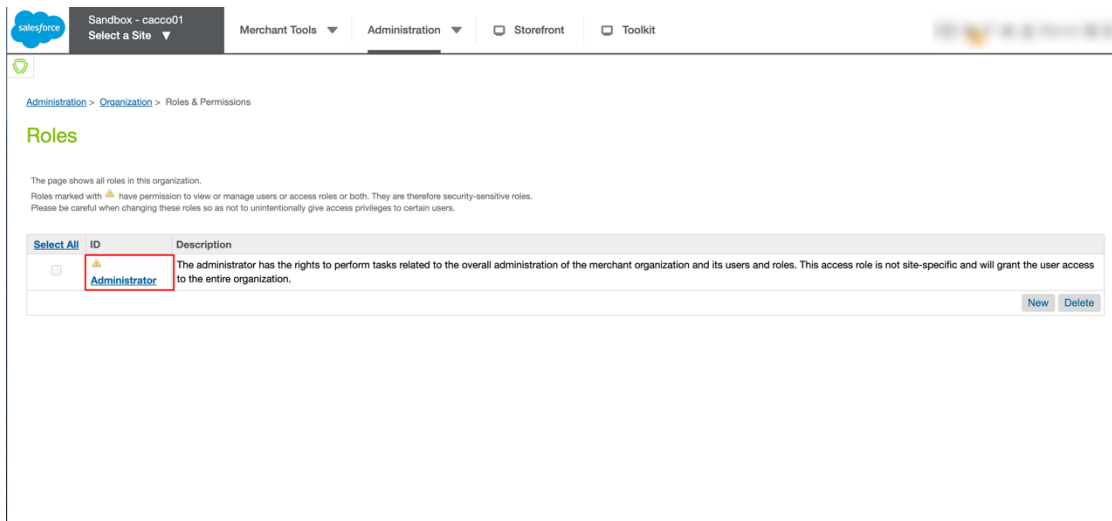

Select “Business Manager Modules” tab.

The screenshot shows the Salesforce Administrator interface. The top navigation bar includes the Salesforce logo, a dropdown menu for 'Sandbox - cacco01', and tabs for 'Merchant Tools', 'Administration', 'Storefront', and 'Toolkit'. The 'Administration' tab is selected. Below the navigation bar, the breadcrumb trail reads 'Administration > Organization > Roles > Administrator - General'. The 'General' tab is selected, and the 'Business Manager Modules' sub-tab is highlighted with a red box. The main content area displays the details for the 'Administrator' role. The 'ID' field is 'Administrator'. The 'Description' field contains the text: 'The administrator has the rights to perform tasks related to the overall administration of the merchant organization and its users and roles. This access role is not site-specific and will grant the user access to the entire organization.' At the bottom right of the description field are 'Apply' and 'Delete' buttons. A '<< Back to List' button is located at the bottom left of the page.

Select the target site.

The screenshot shows the Salesforce Administrator interface with the 'Business Manager Modules' tab selected. A 'Select Context' dialog box is open in the center. The dialog box has a title bar with a close button. The main text inside the dialog box says 'Select a context to view and edit permissions. Organization and Sites can't be selected at the same time.' Below this text are two sections: 'Organization' and 'Sites'. The 'Organization' section has a checkbox for 'Organization' which is unchecked. The 'Sites' section has a checkbox for 'Sites' which is checked. Below the 'Sites' checkbox are three checkboxes: 'SiteGenesis' (unchecked), 'SiteGenesisGlobal' (checked), and 'RefArch' (unchecked). The 'RefArchGlobal' checkbox is also checked. A red box highlights the 'SiteGenesisGlobal' and 'RefArchGlobal' checkboxes, with a red circle containing the number '1' next to it. At the bottom right of the dialog box are 'Cancel' and 'Apply' buttons. The 'Apply' button is highlighted with a red box and a red circle containing the number '2'. The background of the page is dimmed, showing the 'Business Manager Modules' tab and a table with columns 'Business Manager Module' and 'Module Description'. The 'Selected Context: None' is displayed at the top left of the table. A '<< Back to List' button is located at the bottom left of the page.

After selection, the following will be displayed

Sandbox - cacco01
Select a Site

Merchant Tools

Administration

Storefront

Toolkit

Administration > Organization > Roles > Administrator - Business Manager Modules

GeneralUsersBusiness Manager ModulesFunctional PermissionsWebDAV PermissionsLocale PermissionsPrice Adjustment LimitsCustomer Service Center Permissions

Administrator - Business Manager Modules

This list shows all Business Manager modules available in the system for which permissions can be granted. Click **Select Context** to select the context for which you would like to modify permissions. Available context options are the organization, one site, or multiple sites.

Select the checkboxes and use the **Update** button at the bottom of the page to grant permissions to certain Business Manager modules. Deselect the checkboxes and use the **Update** button to revoke permissions to specific Business Manager modules.

Read access may be granted to an increasing number of Business Manager modules. Write access includes read access. When removing read access, make sure you haven't also granted write access for the respective features.

When multiple contexts are selected with different permissions for a feature or module, detailed information can be viewed by clicking in the "Details" column.

Selected Context: SiteGenesisGlobal, RefArchGlobal
[Select Context](#)

Business Manager Module	Module Description	Read	Write
Products and Catalogs		☒	☒
Products	Manage the products of the organization. Note: Due to the relation between products and product sets, it is not possible to combine read and write access between these two modules. Please note that for read-only access across the entire "Products" module the functional permissions 'Manage_Site_Catalog', 'Manage_Site_PriceBooks', and 'Manage_Site_Inventory' are required in the site context. For full write access, the additional organization-level functional permission 'Manage_All_Catalogs' is required.	☒	☒
Product Sets	Manage the product sets of the organization. Note: Due to the relation between products and product sets, it is not possible to combine read and write access between these two modules. Please note that for read-only access across the entire "Product Sets" module the functional permissions 'Manage_Site_Catalog', 'Manage_Site_PriceBooks', and 'Manage_Site_Inventory' are required in the site context. For full write access, the additional organization-level functional permission 'Manage_All_Catalogs' is required.	☒	☒

Check "Fraud Detection (O-PLUX)" settings options then "Update".

Sandbox - cacco01
Select a Site

Merchant Tools

Administration

Storefront


Toolkit

Search Preferences	Manage the search preferences for this site.	☒	☒
Sequence Numbers	Manage sequence numbers assigned to your orders.	☒	☒
Order	Manage essential order settings for this site.	☒	☒
Coupons	Manage the coupon preferences for this site.	☒	☒
Promotions	Manage the promotion preferences for this site.	☒	☒
Deprecated Storefront Toolkit	Manage the deprecated Storefront Toolkit preferences for this site.	☒	☒
Storefront URLs	Configure the Storefront URL preferences.	☒	☒
Custom Preferences	Configure custom site preferences.	☒	☒
Pinterest Commerce	Manage the Pinterest Commerce configuration.		☒
Privacy	Manage the privacy preferences for this site.	☒	☒
Customer Service Center Preferences	Manage the Customer Service Center preferences for this site.	☒	☒
Apple Pay	Manage the Apple Pay configuration.	☒	☒
Fraud Detection (O-PLUX)			☒
Orders	Orders		☒

ResetUpdate

<< Back to List


Now, **“Fraud Detection (O-PLUX)”** settings item will be shown under Merchant Tools menu.

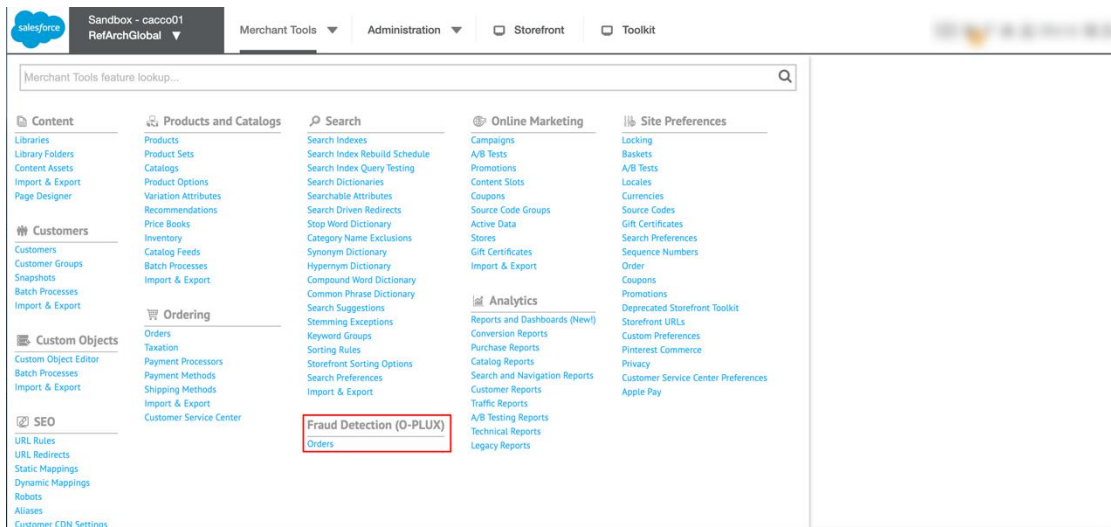

3.2.3 Site Import


In Business Manager, go to

Administration > Site Development > Site Import & Export.

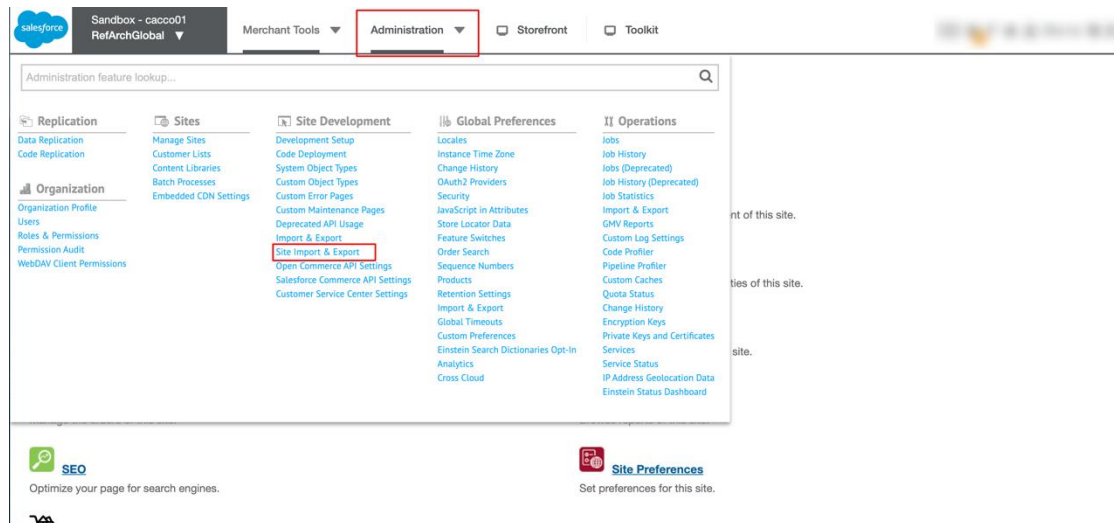

On the opened screen, select the file to upload for import. Select the zip file produced in step 3.1 of the guide and click the “Upload” button.

Setting target file: **{name of compressed file}.zip** and upload. In this case the target file is called “metadata.zip”.

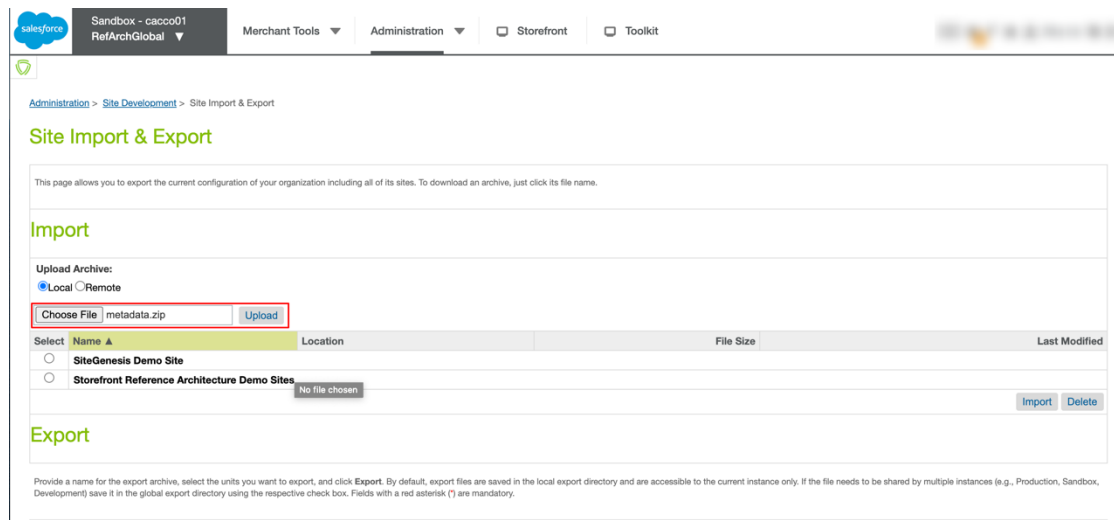

After the file is uploaded, the zip file will appear like this.

This page allows you to export the current configuration of your organization including all of its sites. To download an archive, just click its file name.

Import

Upload Archive:
☒ Local ☐ Remote

No file chosen

Select	Name ▲	Location	File Size	Last Modified
☐	metadata.zip	local	7.48 KB	8/18/20 1:29:13 am
☐	SiteGenesis Demo Site			
☐	Storefront Reference Architecture Demo Sites			

Export

Provide a name for the export archive, select the units you want to export, and click **Export**. By default, export files are saved in the local export directory and are accessible to the current instance only. If the file needs to be shared by multiple instances (e.g., Production, Sandbox, Development) save it in the global export directory using the respective check box. Fields with a red asterisk (*) are mandatory.

Select the uploaded file then click the “Import” button.

This page allows you to export the current configuration of your organization including all of its sites. To download an archive, just click its file name.

Import

Upload Archive:
☒ Local ☐ Remote

No file chosen

Select	Name ▲	Location	File Size	Last Modified
☒	metadata.zip	local	7.48 KB	8/18/20 1:29:13 am
☐	SiteGenesis Demo Site			
☐	Storefront Reference Architecture Demo Sites			

Export

Provide a name for the export archive, select the units you want to export, and click **Export**. By default, export files are saved in the local export directory and are accessible to the current instance only. If the file needs to be shared by multiple instances (e.g., Production, Sandbox, Development) save it in the global export directory using the respective check box. Fields with a red asterisk (*) are mandatory.

When the confirmation message appears, click the “OK” button. Wait a little bit for the file to be imported.

Sandbox - cacco01

RefArchGlobal

Merchant Tools

Administration

Storefront

Toolkit

Administration > Site Development > Site Import & Export

Site Import & Export

This page allows you to export the current configuration of your organization including all of its sites. To download an archive, just click its file name.

Import

Are you sure that you want to import the selected archive?

OKCancel

Upload Archive:

LocalRemote

Choose FileNo file chosenUpload

Select

Name

Location

File Size

Last Modified

metadata.zip

local

7.48 KB

8/18/20 1:29:13 am

SiteGenesis Demo Site

Storefront Reference Architecture Demo Sites

ImportDelete

Export

Provide a name for the export archive, select the units you want to export, and click **Export**. By default, export files are saved in the local export directory and are accessible to the current instance only. If the file needs to be shared by multiple instances (e.g., Production, Sandbox,

3.2.4 Metadata & Site Data Checking

After site import is completed, we should double check whether necessary items have been imported successfully.

- Administration > Site Development > System Object Types >

SitePreference > Attribute Definitions

oplux_shop_id

oplux_application_id

oplux_secret_access_id

oplux_get_device_info_url

oplux_run_background_job

oplux_order_status_for_review_hold

oplux_order_status_for_api_error_limit

- Administration > Site Development > System Object Types > Order >

Attribute Definitions

oplux_event_id

oplux_settle_status

oplux_rule_code

oplux_rule_group

oplux_rule_description

oplux_event_aa_result

oplux_response_result

oplux_event_ma_result

oplux_event_ma_result_memo

oplux_blacked_flag

oplux_black_customer_type

oplux_black_other_category

oplux_black_settle_category
oplux_customer_notification_mail_sent_flag
oplux_error
oplux_device_info
oplux_skip_update_settle_status
oplux_event_api_response_json

● Administration > Site Development > System Object Types > Basket >

Attribute Definitions

oplux_event_id
oplux_settle_status
oplux_rule_code
oplux_rule_group
oplux_rule_description
oplux_event_aa_result
oplux_response_result
oplux_event_ma_result
oplux_event_ma_result_memo
oplux_blacked_flag
oplux_black_customer_type
oplux_black_other_category
oplux_black_settle_category
oplux_customer_notification_mail_sent_flag
oplux_error
oplux_device_info
oplux_skip_update_settle_status
oplux_event_api_response_json

- Administration > Site Development > System Object Types >

PaymentMethod > Attribute Definitions


oplux_model_id

oplux_payment_method


3.2.5 Custom Site Preference for Fraud Detection

Select the site in Business Manager, to use the fraud detection.

Go to **Merchant Tools > Site Preference > Custom Preference**.

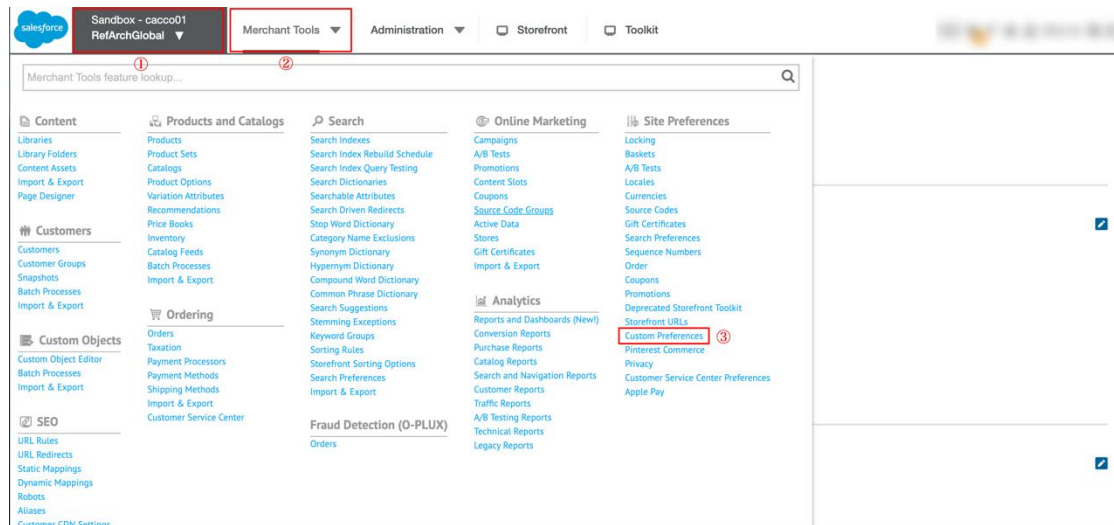

Select the **“OpluxConfigs”**.

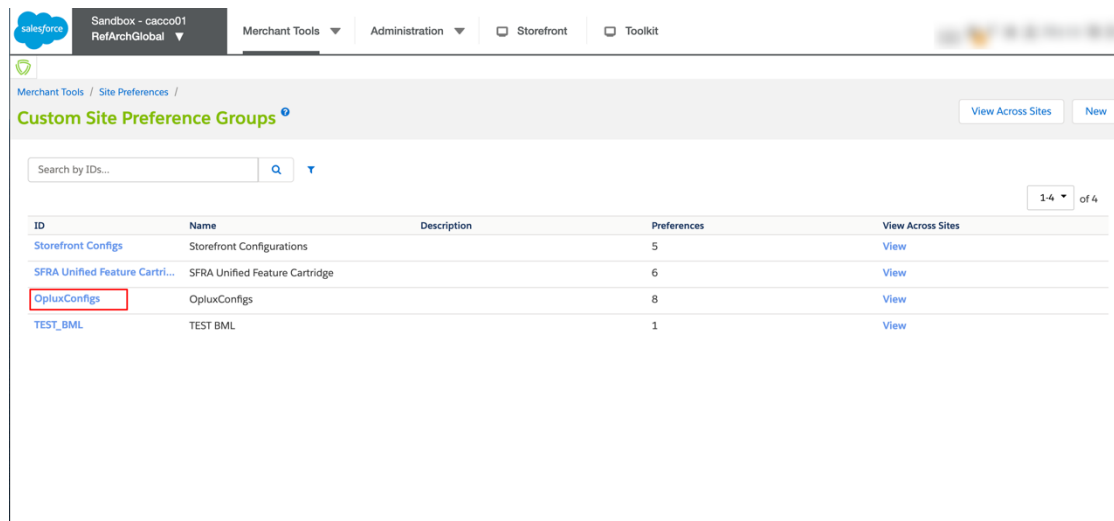

Set the following items.

Name	Value	Default Value
デバイス情報取得先 URL (oplux_get_device_info_url) (String) opluxから配布された値を設定	//fraud-buster.appspot.com/js/fraudbuster.js	//fraud-buster.appspot.com/js/fraudbust... Edit Across Sites
ショップID (oplux_shop_id) (String) O-PLUXで利用する加盟店様のID。運用開始前にご連絡いたします。	oplux_shop_id	Edit Across Sites
審査登録リクエストがエラーの場合の注文ステータス (oplux_order_status_for_api_error_li... 審査のイベント登録リクエストがエラーしてリトライ回数も上限に達した場合の注文ステータス	None	注文成功 Edit Across Sites
審査結果がREVIEW/HOLDの場合の注文ステータス (oplux_order_status_for_review_hold) 審査結果がREVIEW/HOLDの場合に設定する注文のステータスの指定。	注文保留 (HOLD)	注文保留 Edit Across Sites
接続元ID	oplux_application_id	

ショップID : **oplux_shop_id**

接続元ID : **oplux_application_id**

シークレットキー: **oplux_secret_access_id**

デバイス情報取得URL: **oplux_get_device_info_url**

Note: Each item is used for API authentication of the fraud detection.


Please make sure to set the information provided by the service provider correctly.

3.2.5.1 OpluxConfigs items


項目	説明
デバイス情報取得URL	URL for getting end user's device info. Please set the value provided.
ショップID	ID used in O-PLUX system. Please set the value provided.
審査登録リクエストがエラーの場合の 注文ステータス	Handling order status when event registr ation API error occurs.
自動審査結果がREVIEW/HOLDの場合の 注文ステータス	Handling order status when event registr ation API result is REVIEW or HOLD.
接続元ID	ID used for connection. Please set the value provided.
シークレットキー	Required for API authentication. Please set the value provided.
目視審査サービスを使用	Setting for active or deactive "Oplux_Get EventInfo" job. Check it if you want to active.

3.2.6 Services

In Business Manager, go to **Administration > Operations > Services**.

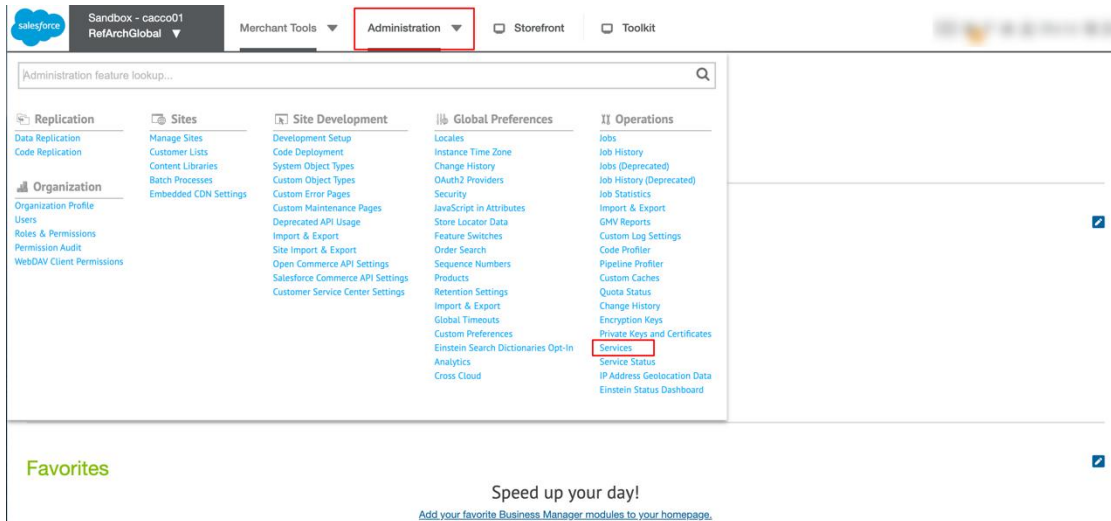

Check that the following items are displayed.

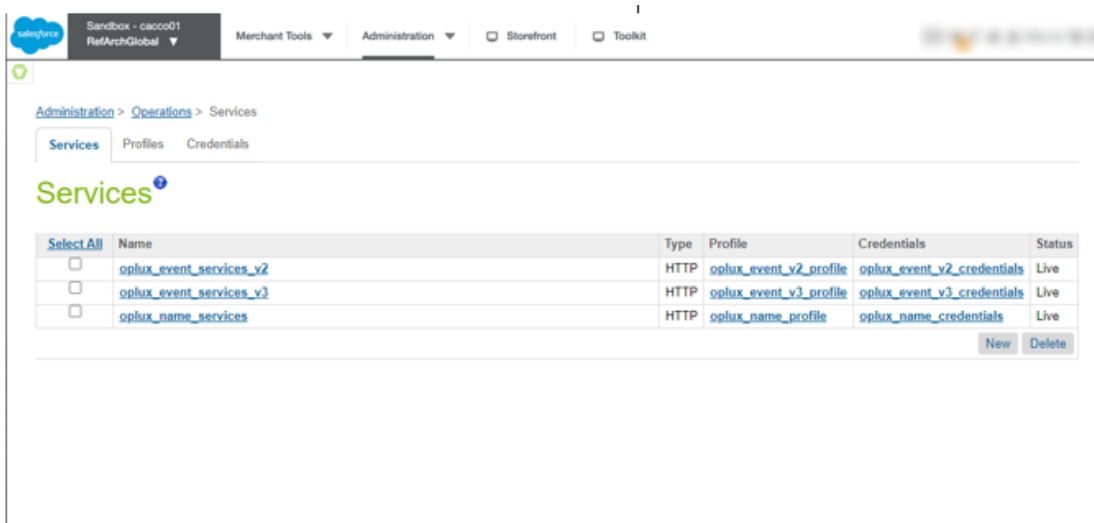

- name normalization API:
 - name: **oplux_name_services**
 - profile: **oplux_name_profile**
 - Credentials: **oplux_name_credentials**

Click the link of “**oplux_name_services**”, make sure the name, profile, and credentials fields are set.

Salesforce Sandbox - cacco01 RefArchGlobal Merchant Tools Administration Storefront Toolkit

Administration > Operations > Services > oplux_name_services - Details

oplux_name_services

Fields with a red asterisk (*) are mandatory. Click Apply to save the details. Click Reset to revert to the last saved state.

Name: oplux_name_services

Type: HTTP

Enabled: ☒

Service Mode: Live

Log Name Prefix: oplux

Communication Log Enabled: ☐

Force PRD Behavior in Non-PRD Environments: ☒

Profile: oplux_name_profile

Credentials: oplux_name_credentials

Apply Reset

<< Back to List

Click the “**Back to List**” button, then click the link of “**oplux_name_credentials**”. Make sure that value for name is set. For the URL item, set the information according to the environment. User and password are not required.

verification environment : <https://staging-name-normalizer.o-plux.com/>

production environment : <https://name-normalizer.o-plux.com/>

Salesforce Sandbox - cacco01 RefArchGlobal Merchant Tools Administration Storefront Toolkit

Administration > Operations > Services > oplux_name_credentials - Details

oplux_name_credentials

Fields with a red asterisk (*) are mandatory. Click Apply to save the details. Click Reset to revert to the last saved state.

These credentials are used by 1 service.

Name: oplux_name_credentials

URL: https://staging-name-normalizer.o-plux.com/

User:

Password:

Apply Reset

<< Back to List

- Event acquisition / update (version2) :

name: **oplux_event_services_v2**

profile: **oplux_event_v2_profile**

credentials: **oplux_event_v2_credentials**

Click the link of “**oplux_event_services_v2**”, make sure the name, profile, and credentials fields are set.

The screenshot shows the Salesforce Admin console interface. The breadcrumb trail is 'Administration > Operations > Services > oplux_event_services_v2 - Details'. The page title is 'oplux_event_services_v2'. Below the title, a message states: 'Fields with a red asterisk (*) are mandatory. Click Apply to save the details. Click Reset to revert to the last saved state.' The configuration form includes the following fields: 'Name*' (text input with value 'oplux_event_services_v2'), 'Type' (dropdown menu with value 'HTTP'), 'Enabled' (checkbox checked), 'Service Mode' (dropdown menu with value 'Live'), 'Log Name Prefix' (text input with value 'oplux'), 'Communication Log Enabled' (checkbox checked), and 'Force PRD Behavior in Non-PRD Environments' (checkbox unchecked). The 'Profile' dropdown menu is set to 'oplux_event_v2_profile' and the 'Credentials' dropdown menu is set to 'oplux_event_v2_credentials'. Both the 'Profile' and 'Credentials' dropdowns are highlighted with red boxes. At the bottom right of the form are 'Apply' and 'Reset' buttons. At the bottom left is a '<< Back to List' button.

Click the “**Back to List**” button, then click the link of “**oplux_event_v2_credentials**”.

Make sure that value for name is set. For the URL item, set the information according to the environment.

User and password are not required.

verification environment : <https://api.tst.o-plux.com/v2/event>

production environment : <https://api.o-plux.com/v2/event>

The screenshot shows the Salesforce Admin console interface for the 'oplux_event_v2_credentials' configuration. The breadcrumb trail is 'Administration > Operations > Services > oplux_event_v2_credentials - Details'. The page title is 'oplux_event_v2_credentials'. Below the title, a message states: 'Fields with a red asterisk (*) are mandatory. Click Apply to save the details. Click Reset to revert to the last saved state. These credentials are used by 1 service.' The configuration form includes the following fields: 'Name*' (text input with value 'oplux_event_v2_credentials'), 'URL' (text input with value 'https://api.tst.o-plux.com/v2/event'), 'User' (text input), and 'Password' (password input with masked characters). The 'Name' and 'URL' fields are highlighted with red boxes. At the bottom right of the form are 'Apply' and 'Reset' buttons. At the bottom left is a '<< Back to List' button.

- Event registration (version3) :

name: **oplux_event_services_v3**

profile: **oplux_event_v3_profile**

credentials: **oplux_event_v3_credentials**

Click the link of “**oplux_event_services_v3**”, make sure the name, profile, and credentials fields are set.

[Administration](#) > [Operations](#) > [Services](#) > oplux_event_services_v3 - Details

oplux_event_services_v3[?]

Fields with a red asterisk (*) are mandatory. Click Apply to save the details. Click Reset to revert to the last saved state.

Name*	oplux_event_services_v3
Type	HTTP
Enabled	☒
Service Mode	Live
Log Name Prefix	oplux
Communication Log Enabled	☒
Force PRD Behavior in Non-PRD Environments	☐
Profile	oplux_event_v3_profile
Credentials	oplux_event_v3_credentials

[Apply](#) [Reset](#)

[<< Back to List](#)

Click the “**Back to List**” button, then click the link of “**oplux_event_v3_credentials**”.

Make sure that value for name is set. For the URL item, set the information according to the environment.

User and password are not required.

verification environment : <https://api.tst.o-plux.com/v3/event>

production environment : <https://api.o-plux.com/v3/event>

[Administration](#) > [Operations](#) > [Services](#) > oplux_event_v3_credentials - Details

oplux_event_v3_credentials

Fields with a red asterisk (*) are mandatory. Click Apply to save the details. Click Reset to revert to the last saved state.

These credentials are used by 1 service.


Name*	oplux_event_v3_credentials
URL	https://api.tst.o-plux.com/v3/event
User	
Password	*****

[Apply](#) [Reset](#)


[<< Back to List](#)

3.2.7 Payment Methods

In Business Manager, go to **Merchant Tools > Ordering > Payment Methods**

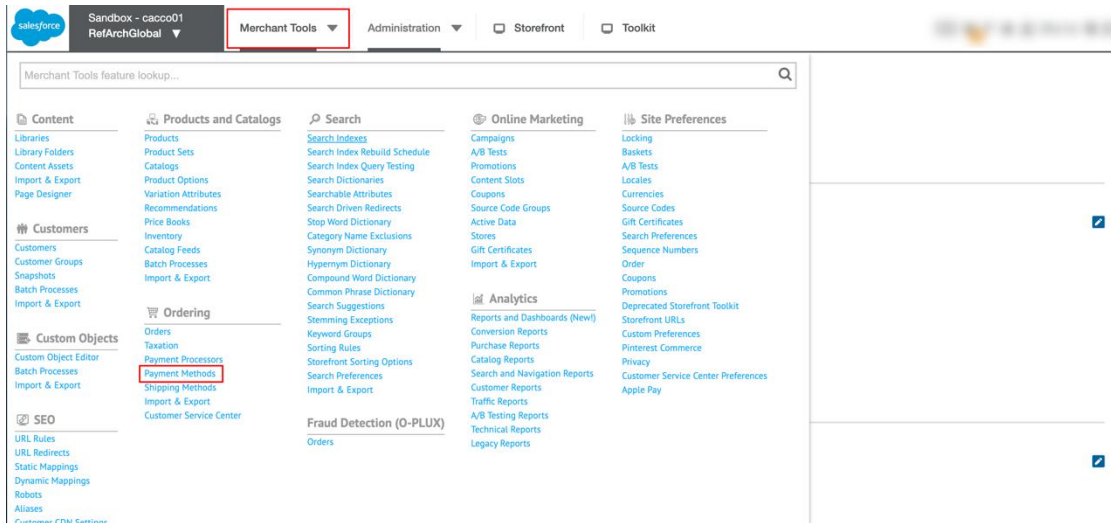

Check the “**OPLUX**” item for each payment methods must be set.

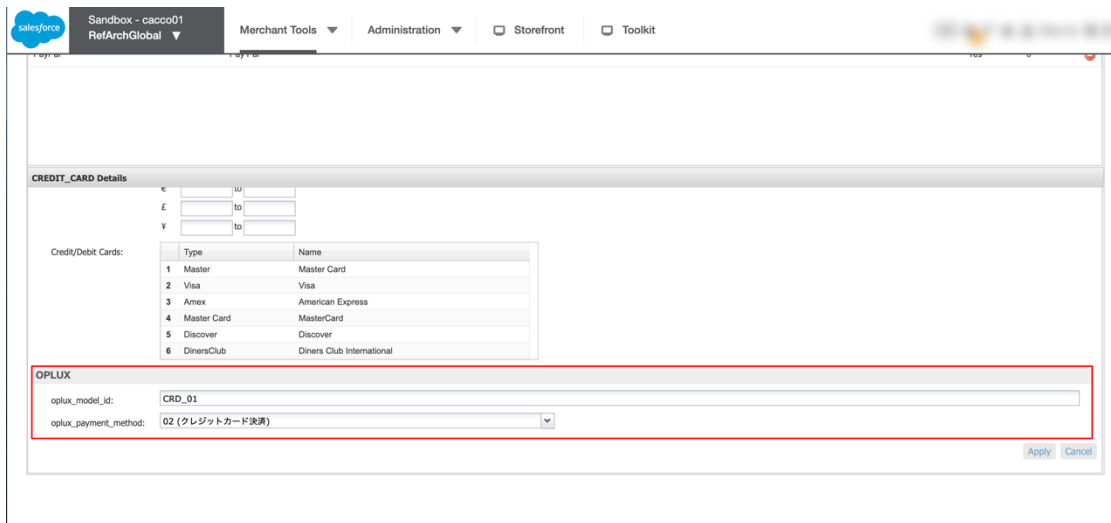

- **oplux_model_id**

For example: "CRD_01", "ATB_01", etc. It depends on the value provided.

- **oplux_payment_method**

Number	Payment method
01	Deferred payment
02	Credit payment
03	Cash on delivery
04	Prepayment
05	Electronic money
06	Point payment
07	Account transfer
08	Installments
09	Payeasy
10	PayPal
11	QR code payments
12	AmazonPay
99	Other

3.3 Code Setup Guide

The below information shows the code that needs to be modified from SiteGenesis .

If you cannot introduce the "int_oplux_sfra_changes" cartridge as is, please modify the code by referring to the following guide. The existing code has a gray font color.

- Customize **cartridge/controllers/CheckoutServices.js**

This is the variable declaration section.

```
' use strict ';  
var server = require('server' );  
var eventHelpers = require('*/cartridge/scripts/utils/eventHelpers');  
var constants = require('*/cartridge/scripts/utils/constants');  
server.extend (module.superModule);  
var Transaction = require('dw/system/Transaction');  
var BasketMgr = require('dw/order/BasketMgr');  
var currentBasket = BasketMgr.getCurrentBasket();
```

Save the device information and the first number of the credit card for O-PLUX event registration API and execute the event registration API.

If the examination result is OK, the examination result is cached for each examination model. If the examination result is NG, the cache is cleared and an error screen is displayed.

```
'SubmitPayment'  
function (req, res, next) {  
    // Do not review if validation error occurs  
    if (res.viewData.error) {  
        return next();  
    }  
}
```

```

    }
    var deviceInfo = request.httpParameterMap.get('fraudbuster');
    var paymentForm = server.forms.getForm('billing');
    var cardNumber = paymentForm.creditCardFields.cardNumber.value;
    var opluxCallHelpers = require('*/cartridge/scripts/utils/opluxCallHelpers'
;
    var URLUtils = require('dw/web/URLUtils')
(deviceInfo){      deviceInfo.getValue().length <= constants.MAX_SESSION_STRIN
G_LENGTH ? req.session.privacyCache.set(
, deviceInfo.getValue()) : req.session.privacyCache.set(opluxDeviceInfo, '');
    req.session.privacyCache.set('cardNumber', cardNumber);
    }
    ...
    return next();
  }
);

```

Before creating an Order, update the results of the event Registration API for the current judging model in Basket. This will preserve the results of the event registration API in the Order.

```

server.prepend(
  'PlaceOrder',
  function (req, res, next) {
    var BasketMgr = require(' dw/order/BasketMgr');
    var currentBasket = BasketMgr.getCurrentBasket();
    eventHelpers.updateBasketOpluxExaminationResult(currentBasket);
    return next();
  }
)

```

After creating the Order, verify that the event registration API results are correctly updated to the Order.

```

server.append (
  'PlaceOrder',
  server.middleware.post,
  server.middleware.https,
  function (req, res, next) {
    ...
    var OpluxCallHelpers = require('/int_oplux/cartridge/scripts/utils/opluxCallHelpers
');
    ...
    ...
    if(orderID){
      var order =OrderMgr.getOrder(orderID);
      if (order && viewData.error) {
        var isValid = OpluxCallHelpers.opluxResultValidation(order);
        if (!isValid) {
          res.json({
            error: true,
            cartError: true,
            redirectUrl: URLUtils.url('Page-Show', 'cid', "opluxEventNG").toString()
          });
        }
      }
      // OPLUX: process order status by Oplux
      OpluxCallHelpers.postProcess(order);
      // clear orderNo from cache
      session.privacy.orderNo = null;
      session.privacy.model_id = null;
    }
    return next();
  }
);

```

- Customize **cartridge/template/default/checkout/billing/billing.isml**

Set the URL to get the device information.

```
...
<!------->
<!-- oplux get device info -->
<!------->
<fieldset>
  <input type="hidden" id="fraudbuster" name="fraudbuster"/>
  <script type="text/javascript" src=" ${dw.system.Site.current.preferences.custom.oplux_get_
device_info_url}"></script>
</fieldset>
...
```

3.4 Linking Settlement Status

If you want to add “deferred-payment” etc. to the payment method and link the settlement status, please add or modify the code in the following resource file.

If you want to use the “overdue” setting in O-PLUX, you need to set the payment deadline.

Please refer to the sample code below for customization.

- Customize **cartridge/scripts/jobs/opluxUpdateSettleStatus.js**

Get order information to update the status of O-PLUX.

```
function searchPastDueForPaymentOrders() {
    var OrderMgr = require('dw/order/OrderMgr');
    var Constants = require('*/cartridge/scripts/utils/constants');

    var orders = OrderMgr.searchOrders(
        "custom.oplux_event_id != NULL AND custom.oplux_skip_update_settle_status != TRUE
AND " +
        "custom.oplux_settle_status = {0}",
        'creationDate asc',
        Constants.EVENT_REQUEST_SETTLE_DEFAULT_STATUS.PAYMENT_OVERDUE
    );
    return orders;
}
```

- Customize **cartridge/scripts/jobs/opluxSettleStatusFinder.js**

Returns the settlement status linked to the O-PLUX.

Define a function for each audit model ID in the CustomStatusMap property. The sample code for the case of "oplux_model_id: 01" is implemented in the cartridge.

For example, if you want to add "oplux_model_id: 02" as a payment method, please refer to the commented out part below and add processing according to the payment method.

```
customStatusMap: {
    '01': function (order) {
        var Order = require('dw/order/Order');
        Logger.debug("====Custom SettleStatusFinder Started.====");
        var now = new Date();
        if(order.custom.payLimitDate < now &&
            order.paymentStatus == Order.PAYMENT_STATUS_NOTPAID &&
```




```
(order.status == Order.ORDER_STATUS_NEW ||
order.status == Order.ORDER_STATUS_OPEN)
){
    return '30';
}
return null;
},
// If 02 is added, add the following code
'02': function (order) {
    // Describe the process according to the payment method
}
// If 02 is added, add the above code
},
```

3.5 How to Use Fraud Detection (O-PLUX)

3.5.1 Order List

Select the site in Business Manager, to use the fraud detection.

Go to **Merchant Tools > Fraud Detection (O-PLUX) > Orders** to see the list of fraud detected orders.

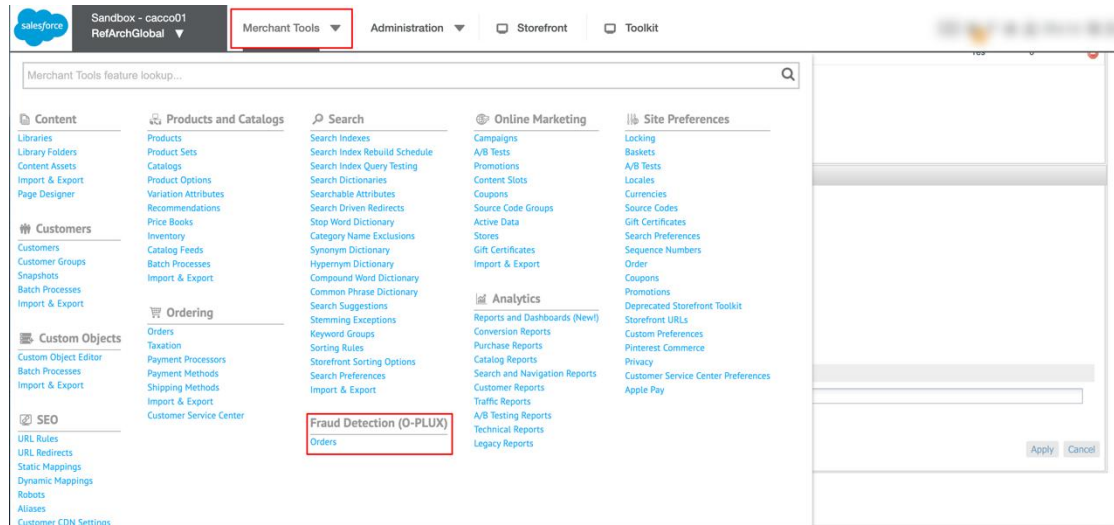

3.5.2 Search

You can search for fraudulent orders by setting conditions such as order date and processing result. By default, the conditions for automatic examination items are **"HOLD"** or **"REVIEW"**

不正検知設定 > 注文一覧

注文一覧

注文日: From: yyyy/mm/dd --:-- To: yyyy/mm/dd --:-- ルールコード:

処理結果: ルールグループ:

自動審査: ☐ OK ☐ NG ☒ HOLD ☒ REVIEW ルール説明文:

目視審査: ☐ OK ☐ NG ☐ HOLD 目視審査メモ:

ブラック登録: エラー詳細:

ステータス: 注文番号:

注文検索

Order numbers are displayed starting with the most recent order.

注文検索

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー
00016701	2020/07/31 11:45:05 am		FAILED	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REVIEW...	優先度2_REVI...	審査結果「RE...	
00016201	2020/07/30 10:32:35 am		OPEN	完了		REVIEW	OK NG HOLD	5分ジョブテス...	登録 登録 無	TEST_REVIEW...	優先度2_REVI...	審査結果「RE...	[20/07/31
00015904	2020/07/30 05:52:58 am		OPEN	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REVIEW...	優先度2_REVI...	審査結果「RE...	[20/07/31
00015903	2020/07/30 05:49:53 am		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REVIEW...	優先度2_REVI...	審査結果「RE...	[20/07/31
00014901	2020/07/27 03:41:50 am		FAILED	完了		REVIEW	OK NG HOLD	5分ジョブテス...	登録 有 解除	TEST_REVIEW...	優先度2_REVI...	審査結果「RE...	[2020/07/
00014301	2020/07/22 09:02:38 am		FAILED	完了		REVIEW	OK NG HOLD		登録 有 解除	TEST_REVIEW...	優先度2_REVI...	審査結果「RE...	[2020/07/
00014203	2020/07/22 08:55:51 am		OPEN	完了		HOLD	OK NG HOLD		登録 登録 無	TEST_HOLDTEL	優先度4_HOL...	テスト用の強...	
00014202	2020/07/22 08:48:46 am		OPEN	完了		REVIEW	OK NG HOLD	1 3 3 3 5 5 5	登録 有 解除	TEST_REVIEW...	優先度2_REVI...	審査結果「RE...	
00014201	2020/07/22 08:42:43 am		OPEN	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REVIEW...	優先度2_REVI...	審査結果「RE...	
00013301	2020/07/20 01:36:47 am		OPEN	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REVIEW...	優先度2_REVI...	審査結果「RE...	

Showing 1 - 10 of 85 item(s)

Show 50 100 items

[1] 2 3 4 5 >

3.5.3 Update

3.5.3.1 Re-examination

If the processing result is “Error”, you can re-examine. Orders with order status “CANCELLED”, “FAILED” or “COMPLETED” cannot be re-examined.

You can also re-examine if the export status is “EXPORTED”.

Set the processing result item to “Error” and click the “Order Search” button.

不正検知設定 > 注文一覧

注文一覧

注文日: From: yyyy/mm/dd -- -- To: yyyy/mm/dd -- --

処理結果: エラー

自動審査: ☐ OK ☐ NG ☐ HOLD ☐ REVIEW

目視審査: ☐ OK ☐ NG ☐ HOLD

ブラック登録: すべて

ステータス: すべて

ルールコード:

ルールグループ:

ルール説明文:

目視審査メモ:

エラー詳細:

注文番号:

注文検索

Check box is displayed for orders that can be re-examined.

注文番号	注文日	審査	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014004	2024/05/16 05:44:09 pm		NEW	エラー	☐								
00013804	2024/04/10 05:29:41 pm		OPEN	エラー	☐								
00013602	2024/04/10 05:19:26 pm		OPEN	エラー	☐								
00013602	2024/04/10 05:08:32 pm		OPEN	エラー	☐								
00013503	2024/03/18 10:10:53 am		NEW	エラー	☐								
00013419	2024/03/15 05:46:01 pm		NEW	エラー	☐								
00013418	2024/03/15 05:32:06 pm		OPEN	エラー	☐								
00013417	2024/03/15 05:04:34 pm		OPEN	エラー	☐								
00013416	2024/03/15 04:38:35 pm		OPEN	エラー	☐								
00013415	2024/03/15 04:37:32 pm		NEW	エラー	☐								

You can re-examine by selecting the check box and click the “Re-examination” button.

注文番号	注文日	顧客	ステータス	処理結果	再審査 ☐	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014204 コピー	2024/05/16 05:44:09 pm		NEW	エラー	☒								
00013804 コピー	2024/04/10 05:29:41 pm		OPEN	エラー	☒								
00013803 コピー	2024/04/10 05:19:26 pm		OPEN	エラー	☒								
00013802 コピー	2024/04/10 05:08:32 pm		OPEN	エラー	☒								
00013503 コピー	2024/03/18 10:10:53 am		NEW	エラー	☒								
00013419 コピー	2024/03/15 05:46:01 pm		NEW	エラー	☐								
00013418 コピー	2024/03/15 05:32:06 pm		OPEN	エラー	☐								
00013417 コピー	2024/03/15 05:04:34 pm		OPEN	エラー	☐								
00013416 コピー	2024/03/15 04:38:35 pm		OPEN	エラー	☐								
00013415 コピー	2024/03/15 04:37:32 pm		NEW	エラー	☐								
再審査													

3.5.3.2 Manual examination

You can set the result of Manual examination by selecting the “OK”, “NG”, “HOLD” butt on.

Conditions:

- Order status “NEW” “OPEN” “REPLACED”
- Export status other than “EXPORTED”

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014003	2024/05/16 05:14:15 pm		CANCELLED	完了		REVIEW	OK NG HOLD						
00013902	2024/05/15 11:55:28 am		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013805	2024/04/10 05:31:48 pm		OPEN	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013709	2024/04/08 06:25:52 pm		NEW	完了		REVIEW	OK NG HOLD			SEL_FURIG...	優先度2_R...	配送先番字...	
00013708	2024/04/08 06:23:18 pm		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013707	2024/04/08 05:57:54 pm		NEW	完了		REVIEW	OK NG HOLD			SEL_FURIG...	優先度2_R...	配送先番字...	
00013706	2024/04/08 05:52:10 pm		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013705	2024/04/08 05:49:41 pm		NEW	完了		REVIEW	OK NG HOLD			SEL_FURIG...	優先度2_R...	購入者番字...	
00013704	2024/04/08 05:19:29 pm		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013703	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013703	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD			SEL_FURIG...	優先度2_R...	購入者番字...	

Select one of the buttons, then confirmation popup will appear. It can be set by clicking the “Update” button.

検索条件: すべて

自動審査: ☐ OK ☐ NG ☐ HOLD ☒ REVIEW

目視審査: ☐ OK ☐ NG ☐ HOLD

ブラック登録: すべて

ステータス: すべて

ルールグループ:

ルール説明文:

目視審査メモ:

エラー詳細:

注文番号:

注文検索

目視審査更新

注文番号 [00013902] の目視審査を [OK] に設定してもよろしいですか?

Cancel Update

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014003	2024/05/16 05:14:15 pm		CANCELLED	完了		REVIEW	OK NG HOLD						
00013902	2024/05/15 11:55:28 am		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013805	2024/04/10 05:31:48 pm		OPEN	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013709	2024/04/08 06:25:52 pm		NEW	完了		REVIEW	OK NG HOLD			SEL_FURIG...	優先度2_R...	配送先番字...	
00013708	2024/04/08 06:23:18 pm		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013707	2024/04/08 05:57:54 pm		NEW	完了		REVIEW	OK NG HOLD			SEL_FURIG...	優先度2_R...	配送先番字...	
00013706	2024/04/08 05:52:10 pm		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013705	2024/04/08 05:49:41 pm		NEW	完了		REVIEW	OK NG HOLD			SEL_FURIG...	優先度2_R...	購入者番字...	
00013704	2024/04/08 05:19:29 pm		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013703	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD			TEST_REVI...	優先度2_R...	テスト用の...	
00013703	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD			SEL_FURIG...	優先度2_R...	購入者番字...	

3.5.3.3 Manual examination Memo

You can register a Manual examination memo by clicking the “Register” button.

Conditions:

- Order status “NEW” “OPEN” “REPLACED”
- Export status other than “EXPORTED”

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014903	2024/05/16 05:14:15 pm		CANCELLED	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013802	2024/05/15 11:55:28 am		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013805	2024/04/10 05:31:48 pm		OPEN	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	配送先番字...	
00013709	2024/04/08 06:25:52 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013708	2024/04/08 06:23:18 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	配送先番字...	
00013707	2024/04/08 05:57:54 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013706	2024/04/08 05:52:10 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	購入者番字...	
00013705	2024/04/08 05:49:41 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013704	2024/04/08 05:19:29 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013703	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	購入者番字...	

Click the “Register” button, the input field for the Manual examination memo will be displayed. After input the contents, it can be set by clicking the “Update” button.

和訳結果: すべて

自動審査: ☐ OK ☐ NG ☒ HOLD ☐ REVIEW

目視審査: ☐ OK ☐ NG ☐ HOLD

ブラック登録: すべて

ステータス: すべて

ルールグループ:

目視審査メモ:

Cancel Update

注文詳細

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014903	2024/05/16 05:14:15 pm		CANCELLED	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013802	2024/05/15 11:55:28 am		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013805	2024/04/10 05:31:48 pm		OPEN	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	配送先番字...	
00013709	2024/04/08 06:25:52 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013708	2024/04/08 06:23:18 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	配送先番字...	
00013707	2024/04/08 05:57:54 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013706	2024/04/08 05:52:10 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	購入者番字...	
00013705	2024/04/08 05:49:41 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013704	2024/04/08 05:19:29 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REV...	優先度2_R...	テスト用の...	
00013703	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	購入者番字...	

3.5.3.4 Blacklist Registration

You can set the blacklist by clicking the “Register” button in the blacklist registration item.

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目録審査	目録審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー
00014003	2024/05/16 05:14:15 pm		CANCELLED	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013902	2024/05/15 11:55:28 am		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013805	2024/04/10 05:31:48 pm		OPEN	完了		REVIEW	OK NG HOLD		登録	SEL_FURIG...	優先度2_R...	配送先苗字...	
00013709	2024/04/08 06:25:52 pm		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013708	2024/04/08 06:23:18 pm		NEW	完了		REVIEW	OK NG HOLD		登録	SEL_FURIG...	優先度2_R...	配送先苗字...	
00013707	2024/04/08 05:57:54 pm		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013706	2024/04/08 05:52:10 pm		NEW	完了		REVIEW	OK NG HOLD		登録	SEL_FURIG...	優先度2_R...	購入者苗字...	
00013705	2024/04/08 05:49:41 pm		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013704	2024/04/08 05:19:29 pm		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013703	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD		登録	SEL_FURIG...	優先度2_R...	購入者苗字...	

By clicking the “Register” button, a popup to set reasons for blacklist registration will be displayed. Click the “Update” button to register.

ブラック登録: すべて

ステータス: すべて

自動審査: ☐ OK ☐ NG ☒ HOLD ☒ REVIEW

目録審査: ☐ OK ☐ NG ☐ HOLD

ブラック登録: すべて

エラー詳細

ルールグループ

ルール番号

目録審査メモ

注文番号

ブラック登録理由

ブラック登録対象: 申込者

ブラックの決済カテゴリ: 後払い決済での不払い

その他ブラックカテゴリ: 選択 *任意

Cancel Update

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目録審査	目録審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014003	2024/05/16 05:14:15 pm		CANCELLED	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013902	2024/05/15 11:55:28 am		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013805	2024/04/10 05:31:48 pm		OPEN	完了		REVIEW	OK NG HOLD		登録	SEL_FURIG...	優先度2_R...	配送先苗字...	
00013709	2024/04/08 06:25:52 pm		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013708	2024/04/08 06:23:18 pm		NEW	完了		REVIEW	OK NG HOLD		登録	SEL_FURIG...	優先度2_R...	配送先苗字...	
00013707	2024/04/08 05:57:54 pm		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013706	2024/04/08 05:52:10 pm		NEW	完了		REVIEW	OK NG HOLD		登録	SEL_FURIG...	優先度2_R...	購入者苗字...	
00013705	2024/04/08 05:49:41 pm		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013704	2024/04/08 05:19:29 pm		NEW	完了		REVIEW	OK NG HOLD		登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013703	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD		登録	SEL_FURIG...	優先度2_R...	購入者苗字...	

3.5.3.5 Blacklist Release

When one item is registered in blacklist, the “Release” button will be displayed.
You can release the registered item by clicking this button.

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文
00014003 コピー	2024/05/16 05:14:15 pm		CANCELLED	完了		REVIEW	OK NG HOLD	登録	登録 解除	TEST_REVI...	優先度2_R...	テスト用の...
00013902 コピー	2024/05/15 11:55:28 am		NEW	完了		REVIEW	OK NG HOLD	登録	有 解除	TEST_REVI...	優先度2_R...	テスト用の...
00013805 コピー	2024/04/10 05:31:48 pm		OPEN	完了		REVIEW	OK NG HOLD	登録	登録 解除	SEI_FURIG...	優先度2_R...	配送先番字...
00013709 コピー	2024/04/08 06:25:52 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録 解除	TEST_REVI...	優先度2_R...	テスト用の...
00013708 コピー	2024/04/08 06:23:18 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録 解除	SEI_FURIG...	優先度2_R...	配送先番字...
00013707 コピー	2024/04/08 05:57:54 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録 解除	TEST_REVI...	優先度2_R...	テスト用の...
00013706 コピー	2024/04/08 05:52:10 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録 解除	SEI_FURIG...	優先度2_R...	購入者番字...
00013705 コピー	2024/04/08 05:49:41 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録 解除	TEST_REVI...	優先度2_R...	テスト用の...
00013704 コピー	2024/04/08 05:19:29 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録 解除	TEST_REVI...	優先度2_R...	テスト用の...
00013703 コピー	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD	登録	登録 解除	SEI_FURIG...	優先度2_R...	購入者番字...

Click the “Release” button to display confirmation popup.

This item will be released by clicking the “Update” button.

処理結果: [すべて](#)

ルールグループ:

自動審査: ☐ OK ☐ NG ☒ HOLD ☒ REVIEW

目視審査: ☐ OK ☐ NG ☐ HOLD

ブラック登録: [すべて](#)

ステータス: [すべて](#)

ルール説明文:

目視審査メモ:

エラー詳細:

注文番号:

注文番号

注文日

顧客

ステータス

処理結果

再審査

自動審査

目視審査

目視審査メモ

ブラック登録

ルールコード

ルールグループ

ルール説明文

00014003 [コピー](#)

2024/05/16 05:14:15 pm

CANCELLED

完了

REVIEW

[OK](#) [NG](#) [HOLD](#)

[登録](#)

TEST_REVI...

優先度2_R...

テスト用の...

00013902 [コピー](#)

2024/05/15 11:55:28 am

NEW

完了

REVIEW

[OK](#) [NG](#) [HOLD](#)

[登録](#)

[有](#) [解除](#)

TEST_REVI...

優先度2_R...

テスト用の...

00013805 [コピー](#)

2024/04/10 05:31:48 pm

OPEN

完了

REVIEW

[OK](#) [NG](#) [HOLD](#)

[登録](#)

[登録](#) [解除](#)

SEI_FURIG...

優先度2_R...

配送先番字...

00013709 [コピー](#)

2024/04/08 06:25:52 pm

NEW

完了

REVIEW

[OK](#) [NG](#) [HOLD](#)

[登録](#)

[登録](#) [解除](#)

TEST_REVI...

優先度2_R...

テスト用の...

00013708 [コピー](#)

2024/04/08 06:23:18 pm

NEW

完了

REVIEW

[OK](#) [NG](#) [HOLD](#)

[登録](#)

[登録](#) [解除](#)

SEI_FURIG...

優先度2_R...

配送先番字...

00013707 [コピー](#)

2024/04/08 05:57:54 pm

NEW

完了

REVIEW

[OK](#) [NG](#) [HOLD](#)

[登録](#)

[登録](#) [解除](#)

TEST_REVI...

優先度2_R...

テスト用の...

00013706 [コピー](#)

2024/04/08 05:52:10 pm

NEW

完了

REVIEW

[OK](#) [NG](#) [HOLD](#)

[登録](#)

[登録](#) [解除](#)

SEI_FURIG...

優先度2_R...

購入者番字...

00013705 [コピー](#)

2024/04/08 05:49:41 pm

NEW

完了

REVIEW

[OK](#) [NG](#) [HOLD](#)

[登録](#)

[登録](#) [解除](#)

TEST_REVI...

優先度2_R...

テスト用の...

00013704 [コピー](#)

2024/04/08 05:19:29 pm

NEW

完了

REVIEW

[OK](#) [NG](#) [HOLD](#)

[登録](#)

[登録](#) [解除](#)

TEST_REVI...

優先度2_R...

テスト用の...

3.5.3.6 Other

Click the items of “rule code”, “rule group”, “rule description”, and “error details”, then contents of each item are displayed.

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014003	2024/05/16 09:14:15 pm		CANCELLED	完了		REVIEW	OK NG HOLD		登録 削除 無	TEST_REV...	優先度2_R...	テスト用の...	
00013902	2024/05/15 11:55:28 am		NEW	完了		REVIEW	OK NG HOLD		登録 有 解除	TEST_REV...	優先度2_R...	テスト用の...	
00013805	2024/04/10 05:31:48 pm		OPEN	完了		REVIEW	OK NG HOLD		登録 登録 無	SEL_FURIG...	優先度2_R...	配送先番字...	
00013709	2024/04/08 06:25:52 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REV...	優先度2_R...	テスト用の...	
00013708	2024/04/08 06:23:18 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	SEL_FURIG...	優先度2_R...	配送先番字...	
00013707	2024/04/08 05:57:54 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REV...	優先度2_R...	テスト用の...	
00013706	2024/04/08 05:52:10 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	SEL_FURIG...	優先度2_R...	購入者番字...	
00013705	2024/04/08 05:49:41 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REV...	優先度2_R...	テスト用の...	
00013704	2024/04/08 05:19:29 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REV...	優先度2_R...	テスト用の...	
00013703	2024/04/08 03:58:10 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	SEL_FURIG...	優先度2_R...	購入者番字...	

If you click a “rule group” item, it will be displayed as follows:

検索条件: すべて

自動審査: ☐ OK ☐ NG ☒ HOLD ☐ REVIEW

目視審査: ☐ OK ☐ NG ☐ HOLD

ブラック登録: すべて

ステータス: すべて

ルールグループ

ルール説明

目視審査メモ

エラー詳細

注文番号

ルールグループ

優先度2_REVIEW_ルール単発

閉じる

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014003	2024/05/16 09:14:15 pm		CANCELLED	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REV...	優先度2_R...	テスト用の...	
00013902	2024/05/15 11:55:28 am		NEW	完了		REVIEW	OK NG HOLD		登録 有 解除	TEST_REV...	優先度2_R...	テスト用の...	
00013805	2024/04/10 05:31:48 pm		OPEN	完了		REVIEW	OK NG HOLD		登録 登録 無	SEL_FURIG...	優先度2_R...	配送先番字...	
00013709	2024/04/08 06:25:52 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REV...	優先度2_R...	テスト用の...	
00013708	2024/04/08 06:23:18 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	SEL_FURIG...	優先度2_R...	配送先番字...	
00013707	2024/04/08 05:57:54 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REV...	優先度2_R...	テスト用の...	
00013706	2024/04/08 05:52:10 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	SEL_FURIG...	優先度2_R...	購入者番字...	
00013705	2024/04/08 05:49:41 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REV...	優先度2_R...	テスト用の...	
00013704	2024/04/08 05:19:29 pm		NEW	完了		REVIEW	OK NG HOLD		登録 登録 無	TEST_REV...	優先度2_R...	テスト用の...	

3.6 Jobs

3.6.1 Manual examination result acquisition - Oplux_GetEventInfo

When using the Manual examination service, the result of the Manual examination of the target order is acquired from O-PLUX and linked to Business Manager.

The default setting is to run the job every 5 minutes.

- Target order

Order information within 48 hours.

Automatic examination item is “HOLD” or “REVIEW”.

The result of Manual examination is not set.

Example :

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014005	2024/05/16 05:56:16 pm	二部 テスト	NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REVL...	優先度2_R...	テスト用の...	
00014003	2024/05/16 05:14:15 pm	二部 テスト	CANCELLED	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013902	2024/05/15 11:55:28 am	大部 テスト	NEW	完了		REVIEW	OK NG HOLD	登録	有 解除	TEST_REVL...	優先度2_R...	テスト用の...	
00013805	2024/04/10 05:31:48 pm	TEST ACK	OPEN	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	配達先部...	
00013709	2024/04/08 06:25:52 pm	TEST ACK	NEW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REVL...	優先度2_R...	テスト用の...	
00013708	2024/04/08 06:23:18 pm	TEST ACK	NEW	完了		REVIEW	OK NG HOLD	登録	登録	SEL_FURIG...	優先度2_R...	配達先部...	
00013707	2024/04/08 05:57:54 pm	TEST ACK	NFW	完了		REVIEW	OK NG HOLD	登録	登録	TEST_REVL...	優先度2_R...	テスト用の...	

After the job is executed, the contents of “Manual examination” and “Manual examination memo” of O-PLUX are linked to SFCC.

注文番号	注文日	顧客	ステータス	処理結果	再審査	自動審査	目視審査	目視審査メモ	ブラック登録	ルールコード	ルールグループ	ルール説明文	エラー詳細
00014005	2024/05/16 05:56:16 pm	二部 テスト	NEW	完了		REVIEW	OK NG HOLD	5分ジョブ...	登録	登録	TEST_REVL...	優先度2_R...	テスト用の...
00014003	2024/05/16 06:14:15 pm	二部 テスト	CANCELLED	完了		REVIEW	OK NG HOLD		登録	登録	TEST_REVL...	優先度2_R...	テスト用の...
00013902	2024/05/15 11:55:28 am	大部 テスト	NEW	完了		REVIEW	OK NG HOLD		登録	有	TEST_REVL...	優先度2_R...	テスト用の...
00013805	2024/04/10 05:31:48 pm	TEST ACK	OPEN	完了		REVIEW	OK NG HOLD		登録	登録	SET_FURIG...	優先度2_R...	配流先番字...
00013709	2024/04/08 06:25:52 pm	TEST ACK	NEW	完了		REVIEW	OK NG HOLD		登録	登録	TEST_REVL...	優先度2_R...	テスト用の...
00013708	2024/04/08 06:23:18 pm	TEST ACK	NEW	完了		REVIEW	OK NG HOLD		登録	登録	SET_FURIG...	優先度2_R...	配流先番字...
00013707	2024/04/08 05:57:54 pm	TEST ACK	NEW	完了		REVIEW	OK NG HOLD		登録	登録	TEST_REVL...	優先度2_R...	テスト用の...
00013706	2024/04/08 05:52:10 pm	しゃこうにゅう	NEW	完了		REVIEW	OK NG HOLD		登録	登録	SET_FURIG...	優先度2_R...	輸入者番字...
00013705	2024/04/08 05:49:41 pm	テスト テスト	NEW	完了		REVIEW	OK NG HOLD		登録	登録	TEST_REVL...	優先度2_R...	テスト用の...
00013704	2024/04/08 05:19:29 pm	テスト テスト	NEW	完了		REVIEW	OK NG HOLD		登録	登録	TEST_REVL...	優先度2_R...	テスト用の...

3.6.2 Settlement Status Sending - Oplux_UpdateSettle Status

The settlement status of SFCC will be linked to O-PLUX. The default setting is to run the job every minute.

For the "irregular sample" and "customization (when deferred payment is selected)," sample code exists (see Section 3.4, "Linking Settlement Status"), and the merchant must customize the code based on the sample code. In addition, orders that have selected credit card payment and the payment status has been changed to "Paid" are not eligible for jobs. When credit card payment is selected, the timing for debiting the billing amount varies among credit card companies, making it difficult for the merchant to know when the amount will be debited. Therefore, orders with the above conditions will not be renewed on the job.

Settlement status pattern.

- Standard specifications

Pattern	Settlement status
Credit order	00:Before billing
Non-credit orders (Not paid)	00:Before billing
Non-credit orders (paid)	00:Before billing → 20:Paid
Manual examination "NG"	00:Before billing
Not shipped cancel (Not paid)	00:Before billing → 99:Cancelled
Shipped cancel (Not paid)	00:Before billing → 100:Cancelled after shipped
Not shipped cancel (Non-credit , Paid) ※1	00: Before billing → 20:Paid →99:Cancelled
Not shipped cancel (Credit ,Paid) ※2	00: Before billing →99:Cancelled

Shipped cancel (Non-credit ,Paid) ※1	00:Before billing → 20:Paid →100:Cancelled after shipped
Shipped cancel (Credit ,Paid) ※2	00: Before billing →100:Cancelled after shipped
Order failed (process result "10: success", code error)	00:Before billing → 99:Cancelled
Order failed (API process result 20:error, no response)	Not linked because the event ID has not been acquired
Order failed (Automatic examination HOLD/REVIEW)	Not linked because the event ID has not been acquired

※1 : When you select a payment method other than credit card, such as deferred payment, the payment status will be updated to "00:Before Billing → 20:Paid ⇨ 99: Cancelled or 100: Cancelled after shipped ".

※2 : When you select a credit card as your payment method, the payment status will be updated to "00: Before billing →99:Cancelled or 100: Cancelled after shipped ".

- Irregular sample

Pattern	Settlement status
Automatic examination "OK" → Non-credit,Paid → Manual examination "NG"	00:Before billing → 20:Paid

- Customization (Deferred payment)

Pattern	Settlement status
Expired payment	00:Before billing → 30:Overdue
Payment overdue	00:Before billing → 30:Overdue → 20:Paid
Cancellation du to payment expiration	00:Before billing → 30:Overdue → 100:Cancelled after shipped

Example: pre-payment cancellation, it is as follows.

Salesforce Sandbox - cacco01 RefArchGlobal Merchant Tools Administration Storefront Toolkit

Merchant Tools > Ordering > Orders > Order: 00014701 (RefArchGlobal)

General Attributes Payment Notes History

Details for Order '00014701'

Information: Contains 1 line item to 1 shipping location The total price is ¥21,118.00.

Date Received: 7/26/20 8:06:41 am Etc/UTC

Site: RefArchGlobal

Created By: Customer

Customer: [Redacted]

Customer No.: [Redacted]

IP Address: [Redacted]

Email: [Redacted]

Phone: [Redacted]

Order Status: Open Confirmation Status: Confirmed

Shipping Status: Not Shipped Export Status: Ready for Export

Shipment 00056005

Qty	Product ID	Name	Manufacturer	Tax Rate	Unit Sales Price	Tax Basis	Item Total
1	883360524894M	カジュアルスリムレッグパンツ		10.00 %	¥21,102.00	¥21,102.00	¥21,102.00
Shipment Shipping Cost:							¥16.00

The final linked settlement status on the **"Attribute"** tab is "00 (before billing)".

oplux_custom_attributes

Oplux Event ID: 22091216132821887BC5B89F4D4E9FB332126120BD2AB3

Response Result: 10 (SUCCESS)

Oplux Manual Inspection Result Code: - None -

Manual Inspection Memo: [Redacted]

Oplux Error Description: [Redacted]

Sent Notification Mail to Customer: ☐

Settle Status for Oplux: 00 (Before Charge)

Rule Codes: TEST_REVIEWTEL

Rule Groups: 復元度2_REVIEW_ルール単発

Rule Descriptions: テスト用の強制審査結果Review (TEL1末尾が2)

Blacklist Register Flag: ☐

Payment Blacklist Category: - None -

Blacklist Type: - None -

Other Blacklist Category: - None -

The settlement status on the O-PLUX management screen is “before billing”.

O-PLUX イベント一覧 | 審査結果レポート | CSV一括登録・更新 | ネガティブ登録 | 管理

イベント詳細

イベントID: 220627181438279A419415CB88C4C0BA9482DBC7EB01484
 加盟店管理ID: 1abcf0b855e7635197f08ac5d2

審査情報

自動審査結果	OK	自動審査日時	2022/06/27 18:14:38	審査ステータス	審査済
目視審査結果	-	目視審査締切日時	-	審査担当者	-
決済金額合計	¥721,791	上限金額	¥999,999	判定結果グループ名	優先度3_OK_ルール準拠

発動ルール情報

ルールコード名	ルール詳細	判定グループ名
TEST_OKTEL	テスト用の強制審査結果OK (TEL1未着が0)	優先度3_OK_ルール準拠

対象・関連イベント

基本情報									
選択	加盟店管理ID	審査モデルID	自動審査結果	目視審査結果	決済ステータス	自動審査日時	決済金額	決済方法	入金までの日
☒	1abcf0b855e7635197f08ac5d2	CRD_01	OK	-	請求前	2022/06/27 18:14:38	¥3,814	クレジットカード決済	-
☐	77f6c161287c440252891cf19b	TNB_01	NG	-	請求前	2022/06/03 10:01:07	¥30,402	その他	-
☒	9579af7efca464ec493571h54c	CRD_01	RFVIEW	OK	請求前	2022/05/24 16:41:03	¥14,052	クレジットカード決済	-

SFCC order status is changed to “Cancelled”.

Salesforce
Sandbox - cacco01
RefArchGlobal
Merchant Tools ▾
Administration ▾
Storefront
Toolkit

[Merchant Tools](#) > [Ordering](#) > [Orders](#) > Order: 00014701(RefArchGlobal)

General
Attributes
Payment
Notes
History

Details for Order '00014701'

Information: Contains 1 line item to 1 shipping location The total price is ¥21,118.00.

Date Received: 7/26/20 8:06:41 am Etc/UTC
Site: RefArchGlobal
Created By: Customer
Customer: [Redacted]
Customer No.: [Redacted]
IP Address: [Redacted]
Email: [Redacted]
Phone: [Redacted]

Order Status: Cancelled

Confirmation Status: Confirmed

Cancellation Code:

Cancellation Description:

Shipping Status: Not Shipped

Export Status: Ready for Export

Shipment 00056005

Qty	Product ID	Name	Manufacturer	Tax Rate	Unit Sales Price	Tax Basis	Item Total
1	883360524894M	カジュアルスリムレッグパンツ		10.00 %	¥21,102.00	¥21,102.00	¥21,102.00

The final linked settlement status on the “**Attribute**” tab will be changed “99 (Cancel)”.

oplux_custom_attributes

Oplux Event ID: 2209161254496413B1D4EDA74E54FEF9DEEB41BC632A2E2

Response Result: 10 (SUCCESS)

Oplux Manual Inspection Result Code: - None -

Manual Inspection Memo:

Oplux Error Description:

Sent Notification Mail to Customer: ☐

Settle Status for Oplux: 99 (Canceled)

Rule Codes: TEST_REVIEWTEL

Rule Groups: 優先度2_REVIEW_ルール単発

Rule Descriptions: テスト用の強制審査結果Review (TEL1末尾が2)

Blacklist Register Flag: ☐

Payment Blacklist Category: - None -

Blacklist Type: - None -

Other Blacklist Category: - None -

The settlement status on the O-PLUX management screen will be changed to “Cancel”.

O-PLUX イベント一覧 | 審査結果レポート | CSV一括登録・更新 | ネガティブ登録 | 管理 |

イベント詳細

イベントID 220627181438279A419415CBB8C4C0BA9482DBC7EB014B4
加盟店管理ID 1abcf0b855e7635197f08ac5d2

審査情報

自動審査結果	OK	自動審査日時	2022/06/27 18:14:38	審査ステータス	審査済
目視審査結果	-	目視審査締切日時	-	審査担当者	-
決済金額合計	¥721,791	上限金額	¥999,999	判定結果グループ名	優先度3_OK_ルール単発

発動ルール情報

ルールコード名	ルール詳細	判定グループ名
TEST_OKTEL	テスト用の強制審査結果OK (TEL1末尾が0)	優先度3_OK_ルール単発

対象・関連イベント

基本情報									
加盟店管理ID	審査モジュールID	自動審査結果	目視審査結果	決済ステータス	自動審査日時	決済金額	決済方法	入金までの日	
1abcf0b855e7635197f08ac5d2	CRD_01	OK	-	キャンセル	2022/06/27 18:14:38	¥3,814	クレジットカード決済	-	
77f6c161287c440252891cf19b	TNB_01	NG	-	請求前	2022/06/03 10:01:07	¥30,402	その他	-	
0570a37efrad6d4cd2025711f5d4	CRD_01	DEVIEW	OK	請求前	2022/06/24 16:41:03	¥14,053	クレジットカード決済	-	

3.7 Customize parameters

Some parameters of O-PLUX are not supported in the SFCC default settings. If you want to use these parameters, you need to add custom attributes and modify the source code.

3.7.1 O-PLUX parameters not supported by SFCC

The following O-PLUX parameters are not targeted for transmission in API requests for the O-PLUX cartridge. Check with your service provider for details and interface specifications.

- Language : **info.lang**
- Time zone : **info.tz**
- Currency : **info.currency**
- Fields : **telegram.fields**
- Last 4 digits of card number : **telegram.event.ec.settle.credit_card.number_hash**
- Card authorization information : **telegram.event.ec.settle.credit_card.authorization_info**
- Credit card issuer : **telegram.event.ec.settle.credit_card.issuer_foreign_flag**
- Buyer first name hash : **telegram.event.ec.customers.buyer.hash_first_name**
- Buyer normalized first name hash : **telegram.event.ec.customers.buyer.hash_first_name.normalized_first_name**
- Buyer last name hash : **telegram.event.ec.customers.buyer.hash_last_name**

- Buyer normalized last name hash : **telegram.event.ec.customers.buyer.hashed_name.normalized_last_name**
- Buyer city : **telegram.event.ec.customers.buyer.address.addressB**
- Buyer email account hash 1 : **telegram.event.ec.customers.buyer.email.pc.hashed_account**
- Purchaser Email ID 1 : telegram.event.ec.customers.buyer.email.pc.emailId
- Purchaser Email Format Verification Results 1 : telegram.event.ec.customers.buyer.email.pc.isValidFormat
- Verification Results for Purchaser Email Domain Availability 1 : telegram.event.ec.customers.buyer.email.pc.isAvailableDomain
- Verification Results for Purchaser Email Delivery Capability 1 : telegram.event.ec.customers.buyer.email.pc.isDeliverable
- Purchaser Email Alias Verification Results 1 : telegram.event.ec.customers.buyer.email.pc.isAlias
- Purchaser Email Catch-All Verification Results 1 : telegram.event.ec.customers.buyer.email.pc.isCatchAll
- Verification Results for Disposable Domain Used in Purchaser Email 1 : telegram.event.ec.customers.buyer.email.pc.isDisposableDomain
- Buyer Email Proposal Domain 1 : telegram.event.ec.customers.buyer.email.pc.suggestedDomain
- Buyer email information 2 : **telegram.event.ec.customers.buyer.email.mobile**
- Buyer email account hash 2 : **telegram.event.ec.customers.buyer.email.mobile.hashed_account**
- Buyer email account sha2 hash 2 : **telegram.event.ec.customers.buyer.email.mobile.hashed_account_sha2**

- Buyer email domain 2 : **telegram.event.ec.customers.buyer.email.mobile.domain**
- Purchaser Email ID 2 : telegram.event.ec.customers.buyer.email.pc.emailId
- Purchaser Email Format Verification Results 2 : telegram.event.ec.customers.buyer.email.pc.isValidFormat
- Verification Results for Purchaser Email Domain Availability 2 : telegram.event.ec.customers.buyer.email.pc.isAvailableDomain
- Verification Results for Purchaser Email Delivery Capability 2 : telegram.event.ec.customers.buyer.email.pc.isDeliverable
- Purchaser Email Alias Verification Results 2 : telegram.event.ec.customers.buyer.email.pc.isAlias
- Purchaser Email Catch-All Verification Results 2 : telegram.event.ec.customers.buyer.email.pc.isCatchAll
- Verification Results for Disposable Domain Used in Purchaser Email 2 : telegram.event.ec.customers.buyer.email.pc.isDisposableDomain
- Buyer Email Proposal Domain 2 : telegram.event.ec.customers.buyer.email.pc.suggestedDomain
-
- Buyer department : **telegram.event.ec.customers.buyer.company.department**
- Customer category : **telegram.event.ec.customers.buyer.existing_customer_flg**
- Specified deliver datetime : **telegram.event.ec.customers.deliveries.specified_deliver_datetime**
- Delivery specified existence : **telegram.event.ec.customers.deliveries.delivery_specified_existence**

- Delivery service : **telegram.event.ec.customers.deliveries.delivery_comp
any_name**
- Delivery first name hash : **telegram.event.ec.customers.deliveries.hashe
d_name.first_name**
- Delivery normalized first name hash : **telegram.event.ec.customers.delive
ries.hashed_name.normalized_first_name**
- Delivery last name hash : **telegram.event.ec.customers.deliveries.hashed
_name.last_name**
- Delivery normalized last name hash : **telegram.event.ec.customers.deliver
ies.hashed_name.normalized_last_name**
- Delivery city : **telegram.event.ec.customers.deliveries.address.addressB**
- Delivery email account hash 1 : **telegram.event.ec.customers.deliveries.
email.pc.hashed_account**
- Delivery Destination Email ID 1 : telegram.event.ec.customers.deliveries.em
ail.pc.emailId
- Delivery Destination Email Format Verification Results 1 : telegram.event.ec.
customers.deliveries.email.pc.isValidFormat
- Recipient Email Domain Availability Verification Results 1 : telegram.event.e
c.customers.deliveries.email.pc.isAvailableDomain
- Delivery Destination Email Verification Results 1 : telegram.event.ec.custome
rs.deliveries.email.pc.isDeliverable
- Delivery Destination Email Alias Verification Results 1 : telegram.event.ec.cus
tomers.deliveries.email.pc.isAlias
- Delivery Destination Email Catch-All Verification Results 1 : telegram.event.e
c.customers.deliveries.email.pc.isCatchAll
- Verification Result for Disposable Domain Used in Delivery Address Email 1 :
telegram.event.ec.customers.deliveries.email.pc.isDisposableDomain

- Suggested email domain for delivery address 1 : telegram.event.ec.customers.deliveries.email.pc.suggestedDomain
- Delivery email information 2 : **telegram.event.ec.customers.deliveries.email.mobile**
- Delivery email account hash 2 : **telegram.event.ec.customers.deliveries.email.mobile.hashed_account**
- Delivery email account sha2 hash 2 : **telegram.event.ec.customers.deliveries.email.mobile.hashed_account_sha2**
- Delivery email domain 2 : **telegram.event.ec.customers.deliveries.email.mobile.domain**
- Delivery Destination Email ID 2 : telegram.event.ec.customers.deliveries.email.pc.emailId
- Delivery Destination Email Format Verification Results 2 : telegram.event.ec.customers.deliveries.email.pc.isValidFormat
- Recipient Email Domain Availability Verification Results 2 : telegram.event.ec.customers.deliveries.email.pc.isAvailableDomain
- Delivery Destination Email Verification Results 2 : telegram.event.ec.customers.deliveries.email.pc.isDeliverable
- Delivery Destination Email Alias Verification Results 2 : telegram.event.ec.customers.deliveries.email.pc.isAlias
- Delivery Destination Email Catch-All Verification Results 2 : telegram.event.ec.customers.deliveries.email.pc.isCatchAll
- Verification Result for Disposable Domain Used in Delivery Address Email 2 : telegram.event.ec.customers.deliveries.email.pc.isDisposableDomain
- Suggested email domain for delivery address 2 : telegram.event.ec.customers.deliveries.email.pc.suggestedDomain

- Delivery department : **telegram.event.ec.customers.deliveries.company.department**
- Stock availability : **telegram.event.ec.items.item_stock_flg**
- Shop tenant Information : **telegram.event.ec.tenant**
- Shop tenant ID : **telegram.event.ec.tenant.shop_tenant_id**
- Shop tenant limit price : **telegram.event.ec.tenant.tenant_limit_price**
- Credit line change ratio : **telegram.event.ec.tenant.member_limit_change_ratio**
- Shop tenant name : **telegram.event.ec.tenant.tenant_name**
- Shop tenant URL : **telegram.event.ec.tenant.tenant_url**
- Shop tenant registration date : **telegram.event.ec.tenant.tenant_registration_date**
- Shop tenant website ID : **telegram.event.ec.tenant.site_id**
- Shop tenant website password : **telegram.event.ec.tenant.site_pass**
- Full Name Furigana : **fullNameFurigana**
- Last name romaji : **lastRomajiFurigana**
- Full Name romaji : **fullNameRomajiFurigana**

※Some items, such as the name of the purchaser's company, are set to be requested by the O-PLUX API, but are not SFRA standard items that can be entered in Storefront, so merchants will need to modify them if necessary.

※In accordance with SFCC security, API requests for "O-PLUX" are configured as Hash TypeB requests using SHA256. No API items related to Hash TypeA are set.

※For more information, contact Cacco Inc.


※The custom attribute ID for "last name furigana" may be different for each merchants, but the cartridge is implemented on the assumption that the custom attribute ID "oplux_last_name_kana" exists. If a custom attribute for "last name furigana" exists, the cartridge will use that attribute ID.

gana " already exists, please refer to 3.7.3 and replace it with a custom attribute ID for each merchant.

3.7.2 Add Custom Attributes

When using the “delivery mobile phone number”, it is as follows.

In Business Manager, go to **Administration > Site Development > System Object Types**.

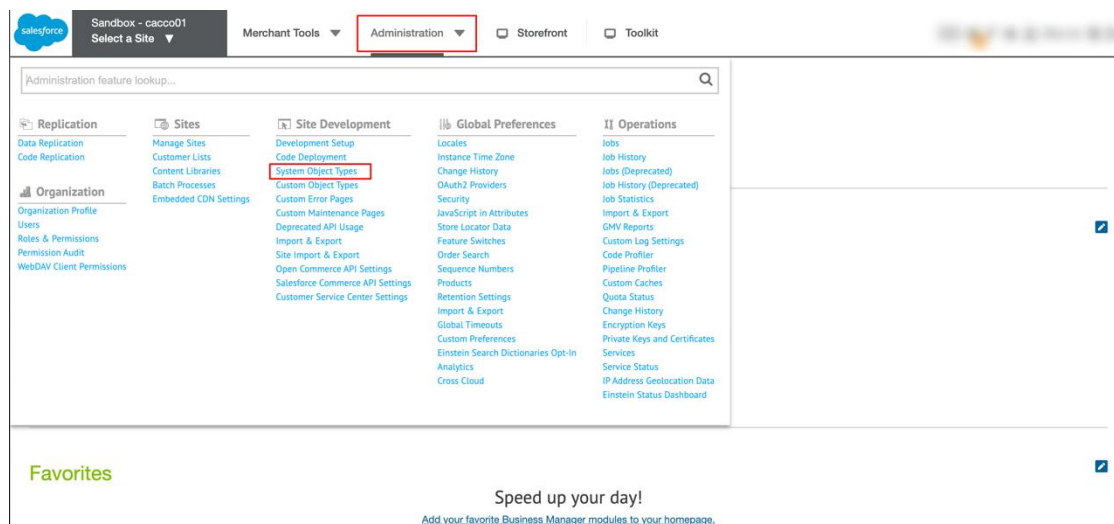

A list of System Objects Types is displayed.

Click **"OrderAddress"**.

Click "**Attribute Definitions**" tab.

Sandbox - cacco01

Select a Site ▼

Merchant Tools ▼

Administration ▼

Storefront

Toolkit

Administration > Site Development > System Object Types > Order Address

General

Attribute Definitions

Attribute Grouping

Object Type 'Order Address'

On this page you view system attributes of the selected object type. To add new attributes to this system type, use the "Attribute Definitions" tab. To group defined attributes, use the "Attribute Grouping" tab.

ID:

OrderAddress

Name:

Order Address

Description:

Object type representing billing and shipping addresses.

Customization:

Supported

Localization:

Not Supported

<< Back to List

It will be displayed as follows.

Sandbox - cacco01

Select a Site ▼

Merchant Tools ▼

Administration ▼

Storefront

Toolkit

Administration > Site Development > System Object Types > Order Address - Attribute Definitions

General

Attribute Definitions

Attribute Grouping

Object Type 'Order Address'

This page lists the attribute definitions of your object type. Use the search to find attribute definitions by ID and name.

Click **New** to create new attribute definitions. Click **Delete** to delete existing attribute definitions.

Search Attribute Definitions

ID or Name:

Find

Select All	ID	Name	Type	Attribute Settings	Values	
☐	UUID	UUID	String	*	0	Edit
☐	address1	Address 1	String	*	0	Edit
☐	address2	Address 2	String	*	0	Edit
☐	city	City	String	*	0	Edit
☐	companyName	Company	String	*	0	Edit
☐	countryCode	Country	Enum of Strings	*	6	Edit
☐	creationDate	Creation Date	Date+Time	*	0	Edit
☐	firstName	First Name	String	*	0	Edit
☐	jobTitle	Job Title	String	*	0	Edit
☐	lastModified	Last Modified	Date+Time	*	0	Edit

Click the “New” button.

Sandbox - cacco01

Select a Site

Merchant Tools

Administration

Storefront

Toolkit

Click New to create new attribute definitions. Click Delete to delete existing attribute definitions.

Search Attribute Definitions

ID or Name:

Find

Select All	ID	Name	Type	Attribute Settings	Values	
☐	UUID	UUID	String	*	0	Edit
☐	address1	Address 1	String	*	0	Edit
☐	address2	Address 2	String	*	0	Edit
☐	city	City	String	*	0	Edit
☐	companyName	Company	String	*	0	Edit
☐	countryCode	Country	Enum of Strings	*	8	Edit
☐	creationDate	Creation Date	Date+Time	*	0	Edit
☐	firstName	First Name	String	*	0	Edit
☐	jobTitle	Job Title	String	*	0	Edit
☐	lastModified	Last Modified	Date+Time	*	0	Edit

New

Delete

Showing 1 - 10 of 20 items

Show All items

1

2

Next

>>

<< Back to List

Enter the “ID”, “Display Name”, and “Value Type” of the attribute to be added, and click the “Apply” button.

For example, set as follows.

ID: phoneMobile

Display Name: 携帯電話番号

Value Type: String

Sandbox - cacco01

Select a Site

Merchant Tools

Administration

Storefront

Toolkit

Administration > Site Development > System Object Types > Order Address - Attribute Definitions > Attribute Definition Details

Object Type 'Order Address' - Attribute Definition Details

On this page you can manage details of your attribute definition. Different options are available depending on the value type of your attribute. Click **Apply** to create a new attribute definition.

Select Language: Default

Apply

ID: phoneMobile

Display Name: 携帯電話番号

Help Text:

Value Type: String

Apply

Cancel

<< Back

59

After click the “Apply” button, the following will be displayed.

The screenshot shows the Salesforce interface for defining an attribute. The breadcrumb trail is: Administration > Site Development > System Object Types > Order Address - Attribute Definitions > Attribute Definition Details. The page title is 'Object Type 'Order Address' - Attribute Definition Details'. Below the title, a note states: 'On this page you can manage details of your attribute definition. Different options are available depending on the value type of your attribute. Click Apply to create a new attribute definition or save changes to existing attributes.'

The form includes the following fields and options:

- Select Language:** Default (dropdown), with an **Apply** button.
- ID:** phoneMobile (text input).
- Display Name:** 携帯電話番号 (text input).
- Help Text:** (large text area).
- Value Type:** String (dropdown), with a note: 'Note: Searchable via query framework.'
- Mandatory:** ☐ *
- Externally Managed:** ☐
- Value Unit:** (text input)
- Min Length:** 0 (text input)
- Field Length:** (text input)
- Field Height:** (text input)

Click the “Back” button.

This screenshot is identical to the one above, showing the same form fields and layout. The only difference is that the '<< Back' button at the bottom left of the form is highlighted with a red rectangular box.

Check the added custom attribute.

 Sandbox - cacco01 Select a Site ▼		Merchant Tools ▼ Administration ▼ Storefront Toolkit		  		
Select All	ID	Name	Type	Attribute Settings	Values	
☐	 UUID	UUID	String	*	0	Edit
☐	 address1	Address 1	String	*	0	Edit
☐	 address2	Address 2	String		0	Edit
☐	 city	City	String	*	0	Edit
☐	 companyName	Company	String		0	Edit
☐	 countryCode	Country	Enum of Strings	*	6	Edit
☐	 creationDate	Creation Date	Date+Time	*	0	Edit
☐	 firstName	First Name	String	*	0	Edit
☐	 jobTitle	Job Title	String		0	Edit
☐	 lastModified	Last Modified	Date+Time	*	0	Edit
☐	 lastName	Last Name	String	*	0	Edit
☐	 phone	Contact Phone	String		0	Edit
☐	 phoneMobile	携帶電話番号	String		0	Edit
☐	 postBox	Post Box	String		0	Edit
☐	 postalCode	Postal Code	String	*	0	Edit
☐	 salutation	Salutation	String		0	Edit
☐	 secondName	Second Name	String		0	Edit
☐	 stateCode	State	String		0	Edit
☐	 suffix	Suffix	String		0	Edit
☐	 suite	Suite No.	String		0	Edit
☐	 title	Title	String		0	Edit

3.7.3 Code Modification

When adding a parameter to the O-PLUX event registration API, customize it by referring to the sample code below.

Note : It uses the custom attribute “phoneMobile” created in Step 3.7.2.
Please modify according to the environment.

- Customize **int_oplux/cartridge/scripts/utils/eventHelpers.js**

```
function getObjectForApiRegisterEvent(basketOrOrder, normalizedNames, extraRaw

var constants = require('*/cartridge/scripts/utils/constants'
var paymentMethodId
if (basketOrOrder.paymentInstruments.empty) {
    // Get payment method from page when calling from Storefront
    var server = require('server');
    var paymentForm = server.forms.getForm('billing');
    paymentMethodId = paymentForm.paymentMethod.htmlValue;
}
...
...
If (basketOrOrder.billingAddress) {
    buyerObj = {
    ...
    ...
        correctReading: normalizedNames && normalizedNames.buyer && normalizedNames.buyer.lastName && normalizedNames.buyer.lastName.correctReading ? '1' : '0',
        correctReadingMatchCount: normalizedNames && normalizedNames.buyer && normalizedNames.buyer.lastName && normalizedNames.buyer.lastName.correctReadingMatchCount || ""
    }
}
```

```

...
...
If (shipment) {
  deliveryObj = {
    ...
    ...

    correctReading: normalizedNames && normalizedNames.delivery && normalizedN
ames.delivery.lastName && normalizedNames.delivery.lastName.correctReading ? '1' :
'0',
    correctReadingMatchCount: normalizedNames && normalizedNames.delivery && no
rmalizedNames.delivery.lastName && normalizedNames.delivery.lastName.correctRead
ingMatchCount || ''
  }
  ...
  ...
If (!empty(cardNumber)) {
  eventRequestObj.telegram.event.ec.settle.credit_card = {
    bincode: cardNumber.substr(0, 8) // クレジットカード番号の上8桁
  };
}
eventObj = merge(eventObj, eventRequestObj);
if(extraRaw){
  eventObj = merge(eventObj, extraRaw);
}

return eventObj;
}

```

This cartridge is implemented as link "last name furigana" to the O-PLUX name normalization API as a request parameter, but the value used for linkage is the "oplux_last_

name_kana" custom attribute of the CustomerAddress object for convenience. If you would like to use a different attribute ID for " last name furigana " linked to O-PLUX in the merchant SFCC environment, please update "oplux_last_name_kana" in the code below to the attribute ID corresponding to " last name furigana " in the merchant's SFC C environment.

- Customize int_oplux/cartridge/scripts/utils/opluxCallHelpers.js

```
function getNormalizedNames(order) {  
  // Name Normalize  
  var buyerFirstName = order.billingAddress.firstName;  
  var buyerLastName = order.billingAddress.lastName;  
  var buyerLastNameKana = order.billingAddress.custom.oplux_last_name_kana;  
  var deliveryFirstName = order.defaultShipment.shippingAddress.firstName;  
  var deliveryLastName = order.defaultShipment.shippingAddress.lastName;  
  var deliveryLastNameKana = order.defaultShipment.shippingAddress.custom.oplux_last_name_kana;  
  var normalizedNames = {};  
  
  var buyer = OpluxServices.getNormalizedName(buyerFirstName, buyerLastName, buyerLastNameKana).getObject();  
  var delivery = OpluxServices.getNormalizedName(deliveryFirstName, deliveryLastName, deliveryLastNameKana).getObject();  
  
  if (buyer) {  
    normalizedNames.buyer = JSON.parse(buyer).response;  
  }  
  if (delivery) {  
    normalizedNames.delivery = JSON.parse(delivery).response;  
  }  
  
  return normalizedNames;  
}
```


Since "oplux_last_name_kana" is also used in the test code, please modify the code below to the merchant's custom attribute ID as well.

- Customize test/mock/int_oplux/cartridge/scripts/utils/eventHelpers.js

```
basket: {  
  billingAddress: {  
    (省略)  
    custom: {  
      oplux_last_name_kana: 'ヤマダ'  
    },  
    postalCode: '980-0022',  
    stateCode: 'テスト県',  
    phone: '012-3456-789'  
  },  
  customerEmail: 'test.co.jp',  
  defaultShipment: {  
    shippingAddress: {  
      (省略)  
      custom: {  
        oplux_last_name_kana: 'ヤマダ'  
      },  
      postalCode: '980-0022',  
      stateCode: 'テスト県',  
      phone: '012-3456-789'  
    }  
  },  
  ...  
}
```

- Customize test/unit/int_oplux/cartridge/scripts/utils/opluxCallHelpers.js

```
var successResponseNameObject = {
```

```
billingAddress: {  
  custom: {  
    oplux_last_name_kana: 'ヤマダ'  
  },  
  firstName: '山田',  
  lastName: '太郎'  
},  
defaultShipment: {  
  shippingAddress: {  
    custom: {  
      oplux_last_name_kana: 'ヤマダ'  
    },  
    firstName: '山田',  
    lastName: '太郎'  
  }  
},  
...
```

3.8 Customize Content Assets

3.8.1 opluxEventNG

Content assets that are displayed on the storefront when the order status becomes “FAILED” as a result of fraud detection.

Conditions:

- Automatic examination result “NG”

OpluxConfigs “oplux_order_status_for_api_error_limit” setting is “FAILED”:

- No API response
- API response exists, processing result “20:error”

OpluxConfigs “oplux_order_status_for_review_hold” setting is “FAILED”:


- Automatic examination result 「REVIEW」
- Automatic examination result 「HOLD」

3.8.1.1 Check Content Assets

Check the content assets added in "3.2.3 Site Import ".

Select the site to which the content asset was added in Business Manager.

Then go to **Merchant Tools > Content > Content Assets**.

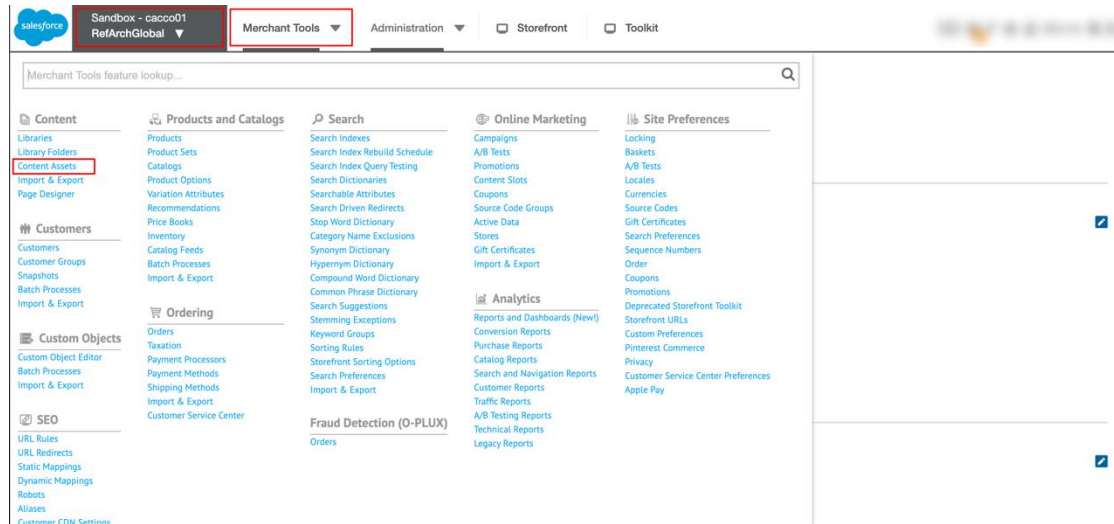

Select [opluxEventNG].

RefArch			Merchant Tools	Administration	Storefront	Toolkit
☐	noresults-help	No Search Results Help				
☐	opening-account	Opening An Account				
☐	opluxCancelledEmail	opluxCancelledEmail				
☐	opluxEventNG	opluxEventNG				
☐	ordering-canceling	Changing/Canceling Orders				
☐	payment	Valid Payment Methods				
☐	privacy-policy	Privacy Policy				
☐	returns	Information About Returns				
☐	search-result-banner	Search Result Banner				
☐	security-policy	Security Policy				

It will appear as follows.

[Merchant Tools](#) > [Content](#) > [Content](#) > opluxEventNG

[General](#) [Folders](#) [Page Meta Tag Rules](#) 

opluxEventNG

 You haven't locked this content for editing. Click [Lock](#) if you need to edit the content.

Click Lock at the top of the page to edit this content asset.

On this page you can edit the general attributes of the content asset. You may select another language to enter values for this language. Fields with a red asterisk (*) are mandatory. Click Apply to save changes. Click Reset to revert your changes.

Select Language: English  Edit Site-Specific

Standard

ID:

Name:

Description:

Online: Default  Yes  [All Site Values](#)

Searchable: Default  No  [All Site Values](#)

Search Engine Optimization Support

Page Title:

Page Description:

Page Keywords:

Page URL:

Sitemap Attributes

Included: Default  None  [All Site Values](#)

Change Frequency: Default  None  [All Site Values](#)

Priority: Default  (Number) [0.00 - 1.00] [All Site Values](#)

Presentation

Rendering Template:

Custom CSS File:

Content

Body:

<div class="hero start-down error-hero">
<h1 class="page-title">お知らせ</h1>
</div>

<div class="container">
<p class="text-center">ガイドラインによりご購入ができません。</p>
<p class="text-center">他のお支払方法でご購入ください。</p>
</div class="page">
</div class="col-sm-6 offset-sm-3">

Year:

Apply Reset

[<< Back to List](#)


The following information is entered in the Body field.

```
<div class="hero slant-down error-hero">
  <h1 class="page-title">お知らせ</h1>
</div>

<div class="container">
  <p class="text-center">ガイドラインによりご購入ができません。 </p>
  <p class="text-center">別のお支払方法でご購入ください。 </p>
  <div class="row">
    <div class="col-sm-6 offset-sm-3">
      <a href="$httpsUrl('Home-Show')$" class="btn btn-primary btn-block error co
ntinue-shopping" role="button" aria-pressed="true">
        ホームに戻る
      </a>
    </div>
  </div>
</div>
```

3.8.1.2 Sample Error Page

If the order status is “FAILED” as a result of fraud detection, it will be displayed as follows.

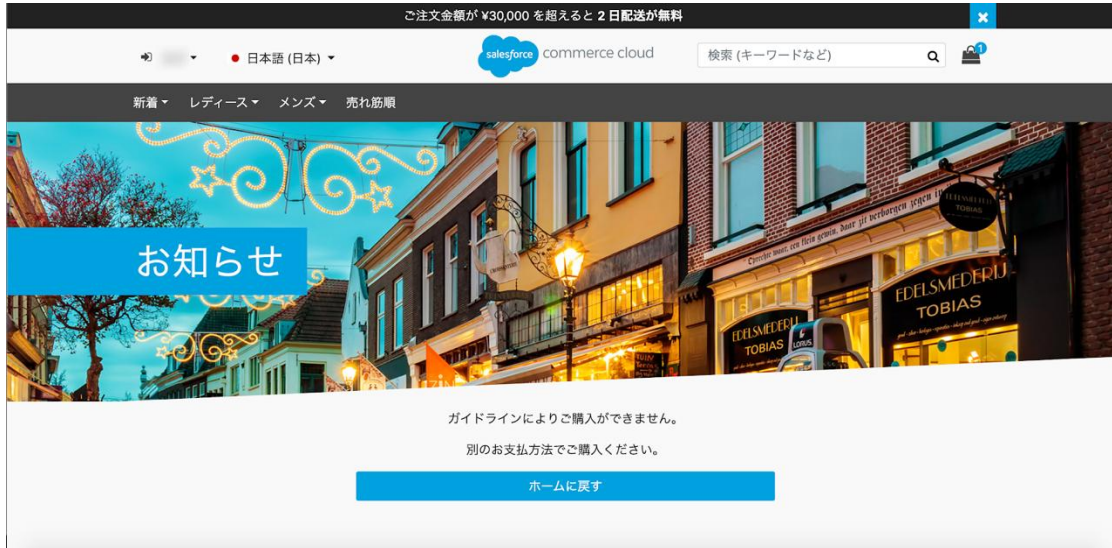


3.8.2 opluxCancelledEmail

This is a content asset for sending a cancellation email to the purchaser when the result of re-examination / Manual examination is “NG”.

3.8.2.1 Add Content Assets

Select the site which you want to add content assets in Business Manager.

Then go to **Merchant Tools > Content > Content Assets**.

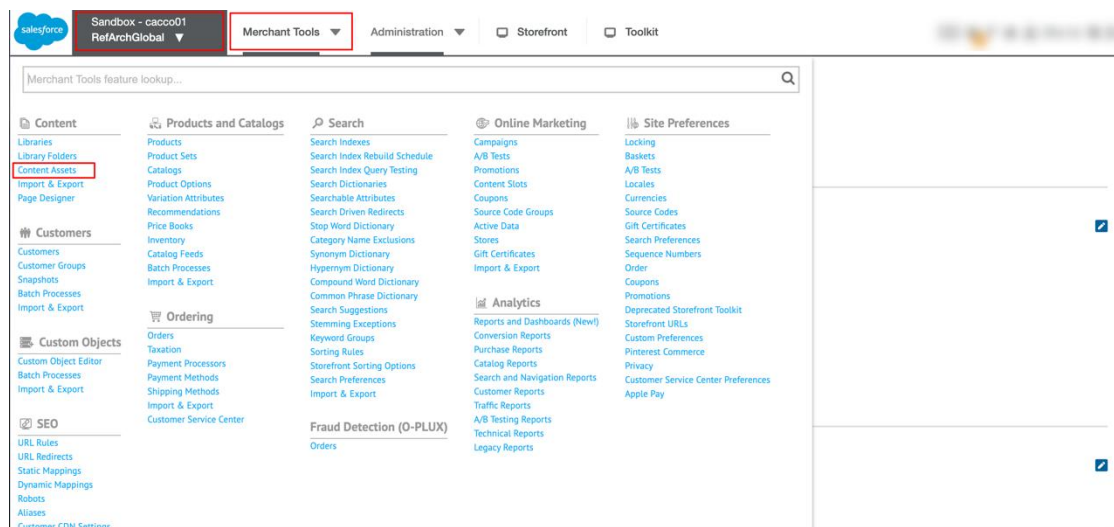

Click the “New” button.

The screenshot shows the Salesforce Merchant Tools interface. At the top, there's a navigation bar with 'Sandbox - cacco01', 'RefArchGlobal', and tabs for 'Merchant Tools', 'Administration', 'Storefront', and 'Toolkit'. Below this is a table listing various content items. The 'New' button at the bottom right of the table is highlighted with a red box.

☐	2-day-shipping-popup	2 Day Shipping Information	
☐	404-banner	404-banner	
☐	404-callout	404 Callout Message	
☐	404-service	404-service	
☐	about-us	About Us	
☐	account-banner	My Account Banner	
☐	account-help	Create Account Help	
☐	apo-fpo	APO FPO	
☐	as-seen-in-instyle	Instyle	
☐	as-seen-in-people	People	
☐	boots-marketing-page	Boots Landing Page	
☐	buying-guide-digital-camera	Buying Guide for Digital Cameras	
☐	buying-guide-gps	Buying Guide for GPS Units	
☐	buying-guide-mp3	Buying Guide for MP3 Players	
☐	buying-guide-tv	Buying Guide for TVs	

Showing 1 - 15 of 94 items Show items >>

Enter value in “ID” and “Name” fields. The “Name” value will be the title of email.

The screenshot shows the 'New Content Asset' form in the Salesforce Merchant Tools interface. The 'ID' and 'Name' fields are highlighted with red boxes. The 'Name' field contains the value 'opluxCancelledEmail'.

On this page you can edit the general attributes of the content asset. You may select another language to enter values for this language. Fields with a red asterisk (*) are mandatory. Click **Apply** to save changes. Click **Reset** to revert your changes.

Select Language:

Standard

ID*

Name*

Description:

Online:

Searchable:

As an example, the content of the email is the “Order Number”, “Customer Name”, and “Amount Refund”.

The screenshot displays the Salesforce RefArchGlobal interface for configuring an email template. The top navigation bar includes the Salesforce logo, a user profile dropdown (Sandbox - cacco01), and menu items for Merchant Tools, Administration, Storefront, and Toolkit. On the right, there are icons for a keyboard, a notification bell, a home icon, a user icon (Duy Le), and a help icon.

The main configuration area is divided into three sections:

- Metadata:** Includes dropdowns for "Included" (set to "-None-") and "Change Frequency" (set to "-None-"), and a "Priority" field (set to "(Number) [0.00 - 1.00]").
- Presentation:** Contains a "Rendering Template" field and a "Custom CSS File" field with a "Select" button.
- Content:** Features a "Body" field with a text area containing HTML code. The code is as follows:

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.0 Transitional//EN">
<html>
</html>
<body>
  <p>注文番号: {orderNumber}</p>
  <p>customerName: {customerName}</p>
  <p>amountRefund: {amountRefund}</p>
</body>
</html>
```

 The placeholders {orderNumber}, {customerName}, and {amountRefund} are highlighted with red boxes. A "HTML Editor" link is located below the text area.

At the bottom right of the configuration area, there are "Apply" and "Cancel" buttons, both highlighted with red boxes. A "<< Back to List" link is located at the bottom left.

3.8.2.2 Code Modification

Please refer to the sample code below for customization.

Note : The example uses “orderNumber”, “customerName”, and “amountRefund” in step 3.8.2.1. Please modify according to the environment.

- Customize **int_oplux/cartridge/scripts/utils/mailHelpers.js**

```
/**
 * Send Oplux email notification
 * @param {dw.order.Order} order - The current order
 * @param {string} subject The email subject
 * @returns {void}
 */
function sendCancelEmail(order, subject) {
    if (order && !order.custom.oplux_customer_notification_mail_sent_flag) {
        var Transaction = require('dw/system/Transaction');
        var email = order.customerEmail;
        var contentData = {
            customerName: order.getCustomerName(),
            orderNumber: order.getOrderNo(),
            amountRefund: order.getTotalGrossPrice().getValue()
        };


        sendContentEmail(email, 'opluxCancelledEmail', contentData, subject);

        Transaction.wrap(function () {
            order.custom.oplux_customer_notification_mail_sent_flag = true;
        });
    }
}
```


3.9 Log Settings

3.9.1 Output

In Business Manager, go to **Administration > Operations > Custom Log Settings**.

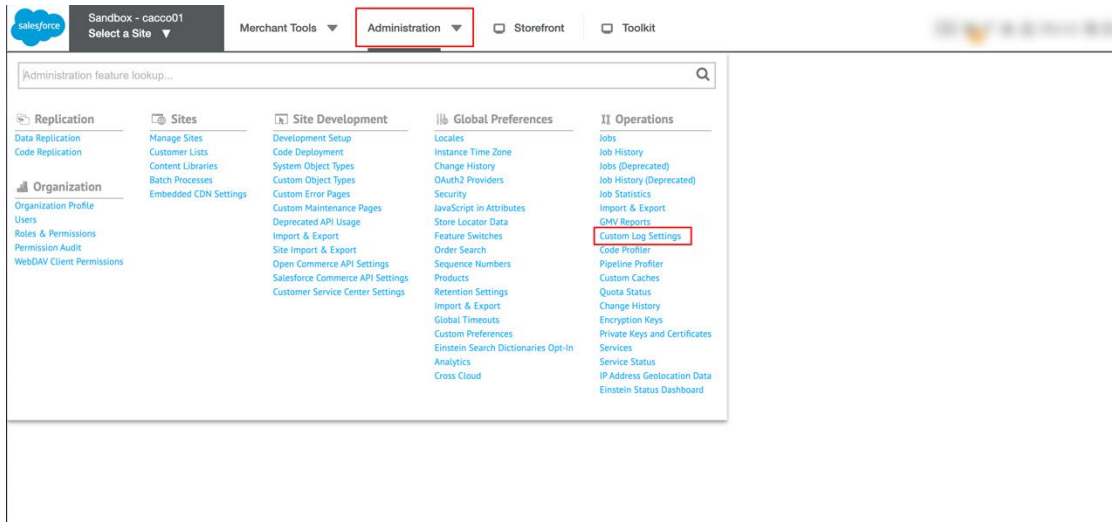

It will be displayed as follows.

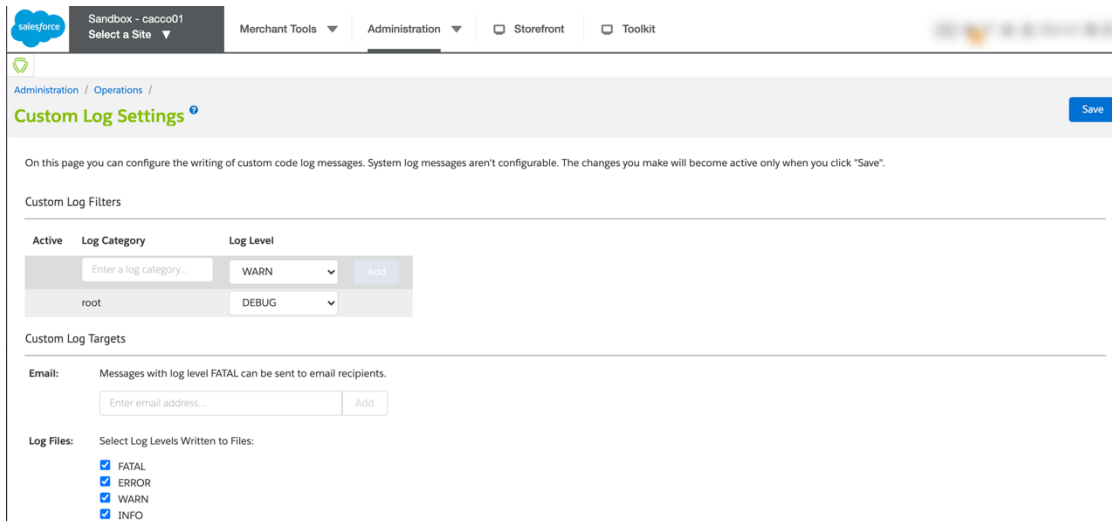

Add custom log filter settings. Enter **“O-PLUX”** in the log category, set the log level, and then click the **“Add”** button.

On this page you can configure the writing of custom code log messages. System log messages aren't configurable. The changes you make will become active only when you click "Save".

Custom Log Filters

Active	Log Category	Log Level	
	O-PLUX	WARN	Add
	root	INFO	

Custom Log Targets

Email: Messages with log level FATAL can be sent to email recipients.

Log Files: Select Log Levels Written to Files:

- ☒ FATAL
- ☒ ERROR
- ☒ WARN
- ☒ INFO

Click the **“Save”** button to save the custom log settings.

On this page you can configure the writing of custom code log messages. System log messages aren't configurable. The changes you make will become active only when you click "Save".

Custom Log Filters

Active	Log Category	Log Level	
	Enter a log category...	WARN	Add
	root	INFO	
☒	O-PLUX	INFO	

Custom Log Targets


Email: Messages with log level FATAL can be sent to email recipients.

Log Files: Select Log Levels Written to Files:

- ☒ FATAL
- ☒ ERROR
- ☒ WARN
- ☒ INFO


3.9.2 Check log files

In Business Manager, **Administration > Site Development > Development Setup**.

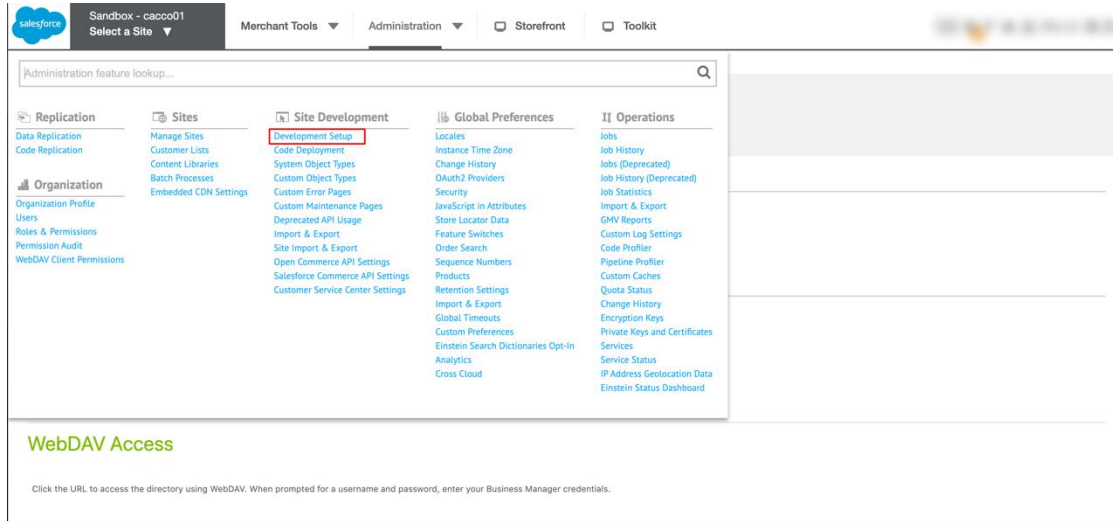


The screenshot shows the Salesforce Business Manager interface. The top navigation bar includes the Salesforce logo, a user profile dropdown (Sandbox - cacco01), and tabs for Merchant Tools, Administration (selected), Storefront, and Toolkit. Below the navigation bar is a search bar labeled 'Administration feature lookup...'. The main content area displays a list of administrative features organized into five columns: Replication, Sites, Site Development, Global Preferences, and Operations. The 'Development Setup' option under the 'Site Development' column is highlighted with a red box. Below the feature list, there is a section titled 'WebDAV Access' with instructions on how to access the directory using WebDAV.

It will be displayed as follows.

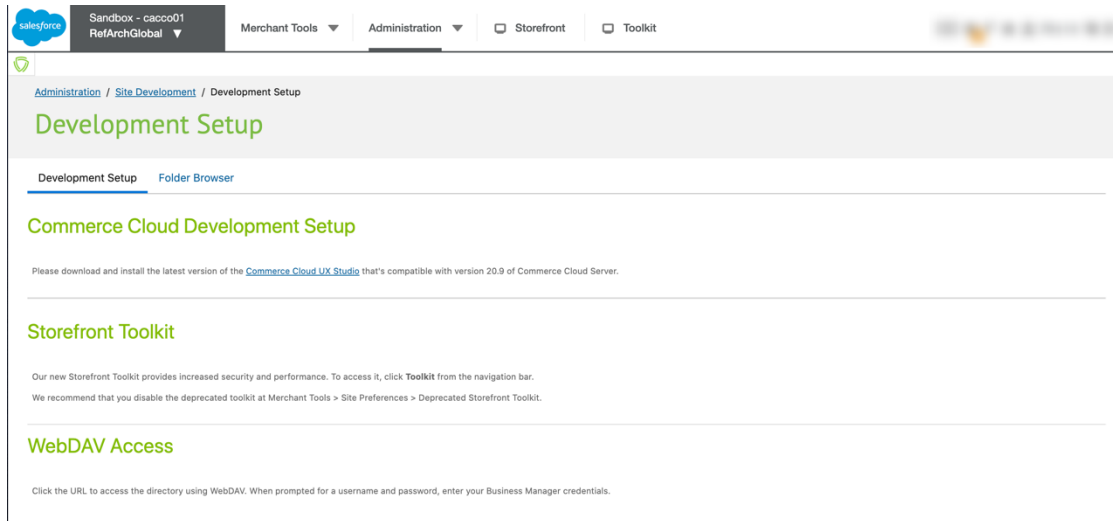

The screenshot shows the 'Development Setup' page in the Salesforce Business Manager interface. The top navigation bar is the same as the previous screenshot. Below the navigation bar, the breadcrumb trail reads 'Administration / Site Development / Development Setup'. The main heading is 'Development Setup'. Below the heading, there are two tabs: 'Development Setup' (selected) and 'Folder Browser'. The content area displays the 'Commerce Cloud Development Setup' section, which includes instructions on how to download and install the 'Commerce Cloud UX Studio' that is compatible with version 20.9 of Commerce Cloud Server. Below this, there is a section titled 'Storefront Toolkit' with instructions on how to access it and a recommendation to disable the deprecated toolkit. Finally, there is a section titled 'WebDAV Access' with instructions on how to access the directory using WebDAV.

Click the URL of the Log Files for WebDAV Access.

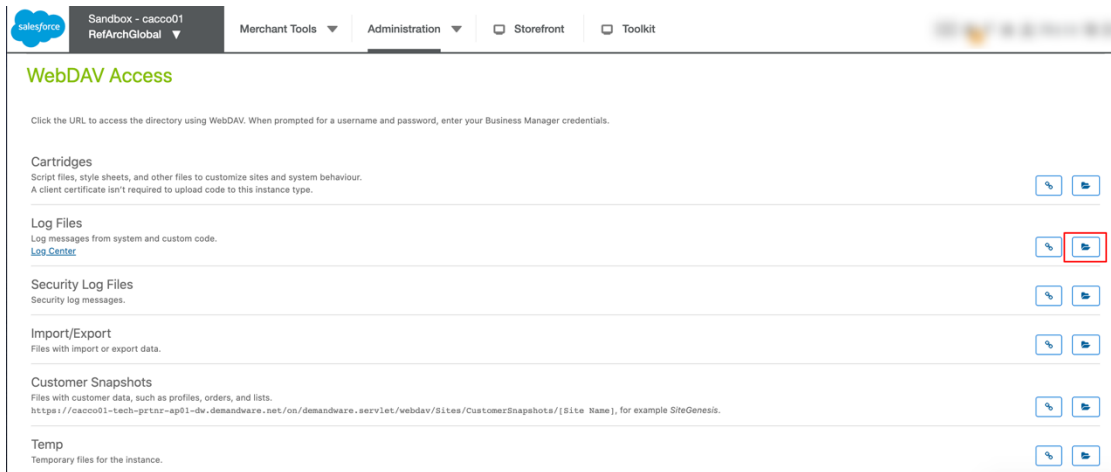

WebDAV Access

Click the URL to access the directory using WebDAV. When prompted for a username and password, enter your Business Manager credentials.

Cartridges
Script files, style sheets, and other files to customize sites and system behaviour.
A client certificate isn't required to upload code to this instance type.

Log Files
Log messages from system and custom code.
[Log Center](#)


Security Log Files
Security log messages.

Import/Export
Files with import or export data.

Customer Snapshots
Files with customer data, such as profiles, orders, and lists.
<https://cacco01-tech-ptrn-ep01-dw.demandware.net/oa/demandware.servlet/webdav/sites/CustomerSnapshots/{Site Name}>, for example SiteGenesis.

Temp
Temporary files for the instance.

It will be displayed as follows.

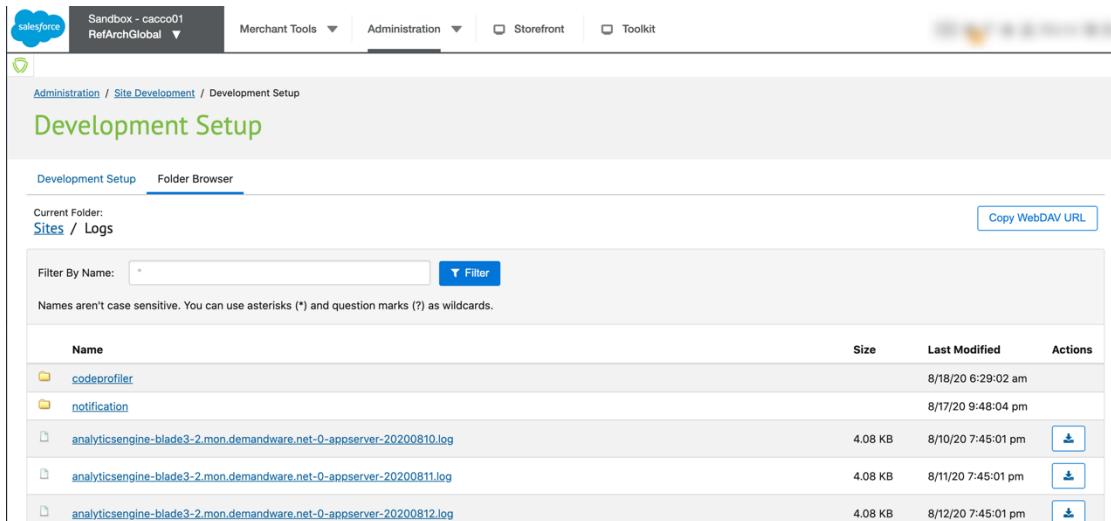

Development Setup

Administration / Site Development / Development Setup

Development Setup Folder Browser

Current Folder: [Sites](#) / [Logs](#) [Copy WebDAV URL](#)

Filter By Name: [Filter](#)

Names aren't case sensitive. You can use asterisks (*) and question marks (?) as wildcards.

Name	Size	Last Modified	Actions
codeprofiler		8/18/20 6:29:02 am	
notification		8/17/20 9:48:04 pm	
analyticsengine-blade3-2.mon.demandware.net-0-appserver-20200810.log	4.08 KB	8/10/20 7:45:01 pm	Download
analyticsengine-blade3-2.mon.demandware.net-0-appserver-20200811.log	4.08 KB	8/11/20 7:45:01 pm	Download
analyticsengine-blade3-2.mon.demandware.net-0-appserver-20200812.log	4.08 KB	8/12/20 7:45:01 pm	Download

There are two types of O-PLUX log files.

- custom-OPLUX-xxxx.log
- custom-OpluxJobLog-xxxx.log

Salesforce

Sandbox - cacco01
RefArchGlobal

Merchant Tools

Administration

Storefront

Toolkit

Administration / Site Development / Development Setup

Development Setup

Development SetupFolder Browser

Current Folder:
Sites / Logs

Copy WebDAV URL

Filter By Name: *OPLUX*Filter

Names aren't case sensitive. You can use asterisks (*) and question marks (?) as wildcards.

Name	Size	Last Modified	Actions
 custom-OPLUX-blade3-2.mon.demandware.net-0-appserver-20200811.log	8.04 KB	8/10/20 9:58:09 pm	
 custom-OPLUX-blade3-2.mon.demandware.net-0-appserver-20200818.log	218.69 KB	8/18/20 2:06:29 am	
 custom-OpluxJobLog-blade3-2.mon.demandware.net-0-appserver-20200818.log	998 B	8/18/20 5:51:53 am	
 service-oplux-blade3-2.mon.demandware.net-0-appserver-20200811.log	671 B	8/10/20 9:58:09 pm	

Showing 1 - 4 of 4 items

4. Troubleshooting

If the OPLUX service is not functioning, one configuration "oplux_order_status_for_api_error_limit (handling order status when an event registration API error occurs)" must be provided to handle order status. The default value for this setting is to abort the automatic review process and proceed to the next process.

If you wish to change the setting, please follow the steps below.

1. Select the site in Business Manager where you want to use the fraud detection service.
2. Navigate to **Merchant Tools > Site Preferences > Custom Preferences > OpluxConfigs**.
3. Select and set any status on error for oplux_order_status_for_api_error_limit.

1-8 / 8

名前	値	デフォルト値	
oplux_shop_id			
(oplux_shop_id) [文字列] OPLUXで利用する加盟店様のID。運用開始前にご連絡いたします。	SPORUBY-GROUP		サイト全体で編集
oplux_api_call_timing			
(oplux_api_call_timing)	決済完了後 (AFTER_PAYMENT)	決済完了後	サイト全体で編集
oplux_order_status_for_api_error_limit			
(oplux_order_status_for_api_error_limit) 審査のイベント登録リクエストがエラーしてリトライ回数も上限に達した場合の注文ステータス	なし 注文成功 (OK) 注文成功(出荷保留) (HOLD) 注文失敗 (FAILED)	注文成功	サイト全体で編集
oplux_order_status_for_review_hold			
(oplux_order_status_for_review_hold) 審査結果がREVIEW/HOLDの場合に設定する注文のステータスの指定。	なし	注文成功(出荷保留)	サイト全体で編集
oplux_run_background_job			
(oplux_run_background_job)	はい	いいえ	サイト全体で編集