

Zappy architecture

Generated by Doxygen 1.10.0

Chapter 1

README

1.1 ZAPPY

A multiplayer network strategy game where teams compete for supremacy!

[[LICENSE) "" "[Languages](https://img.shields.io/badge/Languages-C%2B%2B%20%7C%20C%20%7C%20Python-orange?style=for-the-badge)"]

1.1.1 About The Project

Zappy is an exciting network-based strategy game where multiple teams compete on a tile-based map filled with resources. The objective is strategic: be the first team to get **at least 6 players** to reach the **maximum elevation level**.

1.1.1.1 Key Features

- **Multiplayer Network Game** - Real-time competition between teams
- **Dynamic Tile Map** - Resource-rich environment for strategic gameplay
- **Team-Based Strategy** - Collaborate with teammates to achieve victory
- **Multiple Interfaces** - Server, [GUI](#) client, and AI bot components
- **Real-time Visualization** - Watch the action unfold with the [GUI](#)
- **AI Integration** - Develop and deploy intelligent bots

1.1.2 Architecture

The project consists of three main components:

```
Zappy
  Server    - Core game engine and network management
  GUI Client - Real-time game visualization interface
  AI Bot    - Intelligent automated players
```

1.1.2.1 Technologies Used

Component	Language	Framework/Libraries
Server	C	Custom networking
GUI	C++	Graphics libraries
AI Bot	Python	Socket programming

1.1.3 Quick Start

1.1.3.1 Prerequisites

Before running Zappy, ensure you have:

- **C/C++ Compiler** (gcc/g++)
- **Python 3.x**
- **Make** build system
- **PDF-LaTeX** (for documentation generation)

1.1.3.2 Installation

1. Clone the repository

```
git clone <repository-url>
cd zappy
```

2. Build all components

```
make
```

This will compile:

- `zappy_server` - The game server
- `zappy_gui` - The graphical interface
- `zappy_ai` - The AI bot

3. Run the game

Start the server:

```
./zappy_server -p <port> -x <width> -y <height> -n <team1> <team2> ... -c <nb_clients> -f <freq>
```

Launch the **GUI**:

```
./zappy_gui -p <port> -h <hostname>
```

Deploy AI team:

```
./zappy_ai -p <port> -n <team_name> -h <hostname>
```

1.1.4 Documentation

1.1.4.1 Docusaurus Documentation

Start the interactive documentation:

```
cd documentation/my-zappy-doc
npx docusaurus start
```

Troubleshooting: If you encounter npm error could not determine executable to run, run:

```
npm install --save-dev @docusaurus/types
```

1.1.4.2 PDF Documentation (Doxygen)

Generate comprehensive PDF documentation:

Important: Move the `my-zappy-doc` folder out of the repository before generation due to Unicode emoji conflicts.

```
./generateDoc.sh
```

Requirements: Ensure `pdf-latex` library is installed on your system.

1.1.5 Contributing

We follow a structured commit convention to maintain code quality and project organization.

1.1.5.1 Commit Convention

Format: [Gitmoji] : [Element/Module] : [MESSAGE]

- **Gitmoji:** Appropriate emoji for the modification type
- **Element/Module:** The component you modified
- **MESSAGE:** Detailed description of changes

1.1.5.2 Gitmoji Reference

Code Features

Emoji	Code	Usage
	:sparkles:	Introduce new features
	:recycle:	Refactor/update code
	:bug:	Fix a bug
	:poop:	Remove coding style errors or temporary fix
	:rotating_↩ light:	Fix compiling warnings
	:fire:	Remove code or files

Testing

Emoji	Code	Usage
	:white_check_↩ mark:	Add, update, or pass tests

Architecture

Emoji	Code	Usage
	:see_no_evil:	Add or update .gitignore files
	:construction_worker:	Add or update CI build system
	:building_↩ construction:	Make architectural changes
	:memo:	Add or update documentation

Pull Requests

Emoji	Code	Usage
	:tada:	Must be used for each PR created!
	↩ :lipstick_↩ :	Must be used for each PR merged!
	:rewind:	Must be used for each revert done!

1.1.6 Git Commands Reference

1.1.6.1 Commit Management

Modify commit message (before push):

```
git commit --amend -m "New commit message"
```

Modify commit message (after push):

```
git commit --amend -m "New commit message"
git push --force
```

1.1.6.2 File Management

Unstage accidentally added file (not yet pushed):

```
git restore --staged <file>
```

Remove file from commit (after commit):

```
git reset --soft HEAD~1
git restore --staged file-to-remove.txt
git commit -m "New commit message (without the file)"
```

1.1.7 Testing

Run the comprehensive test suite:

```
# Unit tests
make tests_run
```

```
# Functional tests
cd tests/functional
python3 Tester.py
```

Coverage reports are automatically generated in `coverage_report/`.

1.1.8 Team

Project developed by EPITECH students

- Elliott Tesnier
- Albane Merian
- Nolan Papa
- Matisse Marsac
- Alban Roussée
- Noa Roussière

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

action_queue_s	??
action_request_s	??
App.App	??
Broadcaster.Broadcaster	??
buffer_s	??
CameraManager	??
CLI	??
CLI.CLI	??
Client	??
Utils.Colors	??
command_info_t	??
command_pf_s	??
Communication.Communication	??
zappy::structs::Config	??
zappy::structs::Egg	??
egg_s	??
Exception	
Exceptions.CLIParsingException	??
Exceptions::CLIHostException	??
Exceptions.CLIInvalidArgumentException	??
Exceptions.CLIInvalidArgumentException	??
Exceptions.CLIMachineException	??
Exceptions.CLIMissingArgumentException	??
Exceptions.CLIMissingArgumentException	??
Exceptions.CLINameException	??
Exceptions.CLIPortException	??
Exceptions.CLIPortException	??
Exceptions.CommunicationException	??
Exceptions.CommunicationHandshakeException	??
Exceptions.CommunicationInvalidResponseException	??
Exceptions.PlayerDead	??
Exceptions.SocketException	??
std::exception	
Exceptions.CLIParsingException	??
Exceptions::NetworkException	??
Exceptions::ConnectionFailedException	??
Exceptions::ConnectionTimeoutException	??
Exceptions::ReceiveException	??
Exceptions::SendException	??
Exceptions::SocketCreationException	??

game_s	??
GameInfos	??
graph_net_s	??
GUI	??
Hash.Hash	??
Help	??
HUD	??
IAudio	??
Audio	??
ICommunication	??
Communication	??
IContainers	??
AContainers	??
Containers	??
zappy::structs::Incantation	??
zappy::structs::Inventory	??
inventory_s	??
item_handler_t	??
IUIElement	??
AUIElement	??
Button	??
Text	??
Map	??
map_t	??
MockServer	??
RayLib::ModelData	??
MsgHandler	??
network_s	??
OutputRedirector	??
params_s	??
Parser.Parser	??
Player.Player	??
zappy::structs::Player	??
player_s	??
RayLib	??
RelativePosition	??
server_s	??
Socket.Socket	??
std::streambuf	
OutputRedirector::NullBuffer	??
team_s	??
testing::Test	
CLITest	??
ClientTest	??
CommunicationTest	??
ExceptionsTest	??
GameInfosTest	??
TestCase.TestCase	??
unittest.TestCase	
test_hash.TestHash	??
test_cli.TestCLI	??
test_com.TestCommunication	??
test_player.TestPlayer	??
test_socket.TestSocket	??
zappy::structs::Tile	??
tiles_s	??
UIRelativePosition	??
zappy_s	??

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

AContainers	
Abstract base class for containers	??
action_queue_s	??
action_request_s	??
App.App	??
Audio	??
AUIElement	
Abstract base class for UI elements	??
Broadcaster.Broadcaster	??
buffer_s	??
Button	
Button UI element	??
CameraManager	??
CLI	??
CLI.CLI	??
Client	??
ClientTest	??
Exceptions::CLIHostException	??
Exceptions.CLIInvalidArgumentException	??
Exceptions.CLIMachineException	??
Exceptions.CLIMissingArgumentException	??
Exceptions.CLINameException	??
Exceptions.CLIParsingException	
EPITECH PROJECT, 2025 zappy File description: Exceptions	??
Exceptions.CLIPortException	??
CLITest	??
Utils.Colors	??
command_info_t	??
command_pf_s	??
Communication	??
Communication.Communication	??
Exceptions.CommunicationException	??
Exceptions.CommunicationHandshakeException	??
Exceptions.CommunicationInvalidResponseException	??
CommunicationTest	??
zappy::structs::Config	??
Exceptions::ConnectionFailedException	??
Exceptions::ConnectionTimeoutException	??
Containers	
Container class for organizing UI elements	??

zappy::structs::Egg	??
egg_s	??
ExceptionsTest	??
game_s	??
GameInfos	??
GameInfosTest	??
graph_net_s	??
GUI	??
Hash.Hash	??
Help	
Help popup display class	??
HUD	
Main HUD class to manage all UI elements	??
IAudio	??
ICommunication	??
IContainers	
Interface for HUD containers	??
zappy::structs::Incantation	??
zappy::structs::Inventory	??
inventory_s	??
item_handler_t	??
IUIElement	
Interface for all UI elements	??
Map	??
map_t	??
MockServer	??
RayLib::ModelData	??
MsgHandler	??
network_s	??
Exceptions::NetworkException	??
OutputRedirector::NullBuffer	??
OutputRedirector	??
params_s	??
Parser.Parser	??
Player.Player	??
zappy::structs::Player	??
player_s	??
Exceptions.PlayerDead	??
RayLib	??
Exceptions::ReceiveException	??
RelativePosition	
Structure to store relative positions and sizes as percentages	??
Exceptions::SendException	??
server_s	??
Socket.Socket	??
Exceptions::SocketCreationException	??
Exceptions.SocketException	??
team_s	??
TestCase.TestCase	??
test_cli.TestCLI	??
test_com.TestCommunication	??
test_hash.TestHash	??
test_player.TestPlayer	??
test_socket.TestSocket	??
Text	
Text UI element	??
zappy::structs::Tile	??
tiles_s	??

UIRelativePosition	
Structure to store relative positions and sizes as percentages	??
zappy_s	??

Chapter 4

File Index

4.1 File List

Here is a list of all documented files with brief descriptions:

gui/src/Audio/ Audio.hpp	??
gui/src/Audio/ IAudio.hpp	??
gui/src/CLI/ CLI.hpp	??
gui/src/Client/ Client.hpp	??
gui/src/Client/ MsgHandler.hpp	??
gui/src/Communication/ Communication.hpp	??
gui/src/Communication/ ICommunication.hpp	??
gui/src/Exceptions/ Exceptions.hpp	??
gui/src/Game/ GameInfos.hpp	??
gui/src/Graphic/ GUI.hpp	??
gui/src/Graphic/ Map.hpp	??
gui/src/Graphic/Camera/ CameraManager.hpp	??
gui/src/Graphic/HUD/ HUD.hpp	??
gui/src/Graphic/HUD/Button/ Button.hpp	??
gui/src/Graphic/HUD/Containers/ AContainers.hpp	??
gui/src/Graphic/HUD/Containers/ Containers.hpp	??
gui/src/Graphic/HUD/Containers/ IContainers.hpp	??
gui/src/Graphic/HUD/Help/ Help.hpp	??
gui/src/Graphic/HUD/Text/ Text.hpp	??
gui/src/Graphic/HUD/UIElement/ AUIElement.hpp	??
gui/src/Graphic/HUD/UIElement/ IUIElement.hpp	??
gui/src/RayLib/ RayLib.hpp	??
gui/src/Utils/ Constants.hpp	??
gui/src/Utils/ GamepadConstants.hpp	??
gui/src/Utils/ HelpText.hpp	??
server/include/ algo.h	??
server/include/ buffer.h	??
server/include/ game.h	??
server/include/ my.h	??
server/include/ network.h	??
server/include/ zappy.h	??
server/lib/my/ my.h	??
server/src/network/ buffer.h	??
server/src/network/ network.h	??

Chapter 5


Class Documentation

5.1 AContainers Class Reference

Abstract base class for containers.

```
#include <AContainers.hpp>
```

Inheritance diagram for AContainers:



Public Member Functions

- [AContainers](#) (std::shared_ptr< [RayLib](#) > raylib, float x, float y, float width, float height)
Construct a new [AContainers](#) object.
- virtual ~**AContainers** ()=default
Destroy the [AContainers](#) object.
- void [setPosition](#) (float x, float y) override
Set the position of the container.
- void [setSize](#) (float width, float height) override
Set the size of the container.
- Rectangle [getBounds](#) () const override
Get the current position of the container.
- bool [contains](#) (float x, float y) const override
Check if a point is within the container.
- void [setVisible](#) (bool visible) override
Set the visibility of the container.
- bool [isVisible](#) () const override
Check if the container is visible.
- void [setRelativePosition](#) (float xPercent, float yPercent, float widthPercent, float heightPercent)
Set position and size as percentages of screen dimensions.
- [RelativePosition](#) [getRelativePosition](#) () const
Get the container's relative position.
- void **updatePositionFromRelative** ()
Update the container's absolute position from relative position.

Public Member Functions inherited from IContainers

- virtual void [draw](#) ()=0
Draw the container and its contents.
- virtual void [update](#) ()=0
Update the container's state.

Protected Attributes

- std::shared_ptr< [RayLib](#) > [_raylib](#)
- Rectangle [_bounds](#)
- [RelativePosition](#) [_relativePos](#)
- Color [_backgroundColor](#)
- bool [_visible](#)
- bool [_hasBackground](#)

5.1.1 Detailed Description

Abstract base class for containers.

Provides common functionality for all container types

5.1.2 Constructor & Destructor Documentation

5.1.2.1 AContainers()

```
AContainers::AContainers (
    std::shared_ptr< RayLib > raylib,
    float x,
    float y,
    float width,
    float height )
```

Construct a new [AContainers](#) object.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate
<i>width</i>	Container width
<i>height</i>	Container height

5.1.3 Member Function Documentation

5.1.3.1 contains()

```
bool AContainers::contains (
    float x,
    float y ) const [override], [virtual]
```

Check if a point is within the container.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate

Returns

true If point is within container
false Otherwise

Implements [IContainers](#).

5.1.3.2 getBounds()

```
Rectangle AContainers::getBounds ( ) const [override], [virtual]
```

Get the current position of the container.

Returns

Rectangle Containing position and size

Implements [IContainers](#).

5.1.3.3 getRelativePosition()

```
RelativePosition AContainers::getRelativePosition ( ) const
```

Get the container's relative position.

Returns

[RelativePosition](#) The relative position and size

5.1.3.4 isVisible()

```
bool AContainers::isVisible ( ) const [override], [virtual]
```

Check if the container is visible.

Returns

true If visible
false Otherwise

Implements [IContainers](#).

5.1.3.5 setPosition()

```
void AContainers::setPosition (
    float x,
    float y ) [override], [virtual]
```

Set the position of the container.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate

Implements [IContainers](#).

5.1.3.6 setRelativePosition()

```
void AContainers::setRelativePosition (
    float xPercent,
    float yPercent,
    float widthPercent,
    float heightPercent )
```

Set position and size as percentages of screen dimensions.

Parameters

<i>xPercent</i>	X position as percentage of screen width (0-100)
<i>yPercent</i>	Y position as percentage of screen height (0-100)
<i>widthPercent</i>	Width as percentage of screen width (0-100)
<i>heightPercent</i>	Height as percentage of screen height (0-100)

5.1.3.7 setSize()

```
void AContainers::setSize (
    float width,
    float height ) [override], [virtual]
```

Set the size of the container.

Parameters

<i>width</i>	Container width
<i>height</i>	Container height

Implements [IContainers](#).

5.1.3.8 setVisible()

```
void AContainers::setVisible (
    bool visible ) [override], [virtual]
```

Set the visibility of the container.

Parameters

<i>visible</i>	Visibility state
----------------	------------------

Implements [IContainers](#).

The documentation for this class was generated from the following files:

- `gui/src/Graphic/HUD/Containers/AContainers.hpp`
- `gui/src/Graphic/HUD/Containers/AContainers.cpp`

5.2 action_queue_s Struct Reference**Public Attributes**

- [action_request_t](#) * **head**
- [action_request_t](#) * **tail**
- int **count**
- pthread_mutex_t **mutex**

The documentation for this struct was generated from the following file:

- `server/include/game.h`

5.3 action_request_s Struct Reference**Public Attributes**

- char * **command**
- time_t **timestamp**

- float **time_limit**
- action_priority_t **priority**
- [player_t](#) * **player**
- struct [action_request_s](#) * **next**

The documentation for this struct was generated from the following file:

- server/include/game.h

5.4 App.App Class Reference

Public Member Functions

- **__init__** (self, dict[str] config)
- **__del__** (self)
- int **create_new_player** (self)
- **run** (self)

Public Attributes


- **port**
- **name**
- **ip**

The documentation for this class was generated from the following file:

- ai/src/App/App.py

5.5 Audio Class Reference

Inheritance diagram for Audio:



Public Member Functions

- bool [loadSound](#) (const std::string &id, const std::string &filepath)
- void [playSound](#) (const std::string &id, float volume=1.0f)
- void [stopSound](#) (const std::string &id)
- bool [isSoundPlaying](#) (const std::string &id) const
- void [setSoundLooping](#) (const std::string &id, bool looping)
- void [setSoundVolume](#) (const std::string &id, float volume)

Private Attributes

- std::map< std::string, std::unique_ptr< sf::Music > > **_sounds**

5.5.1 Member Function Documentation

5.5.1.1 isSoundPlaying()

```
bool Audio::isSoundPlaying (
    const std::string & id ) const [virtual]
```

Implements [IAudio](#).

5.5.1.2 loadSound()

```
bool Audio::loadSound (
    const std::string & id,
    const std::string & filepath ) [virtual]
```

Implements [IAudio](#).

5.5.1.3 playSound()

```
void Audio::playSound (
    const std::string & id,
    float volume = 1.0f ) [virtual]
```

Implements [IAudio](#).

5.5.1.4 setSoundLooping()

```
void Audio::setSoundLooping (
    const std::string & id,
    bool looping ) [virtual]
```

Implements [IAudio](#).

5.5.1.5 setSoundVolume()

```
void Audio::setSoundVolume (
    const std::string & id,
    float volume ) [virtual]
```

Implements [IAudio](#).

5.5.1.6 stopSound()

```
void Audio::stopSound (
    const std::string & id ) [virtual]
```

Implements [IAudio](#).

The documentation for this class was generated from the following files:


- gui/src/Audio/Audio.hpp
- gui/src/Audio/Audio.cpp

5.6 AUIElement Class Reference

Abstract base class for UI elements.

```
#include <AUIElement.hpp>
```

Inheritance diagram for AUIElement:



Public Member Functions

- [AUIElement](#) (std::shared_ptr< [RayLib](#) > raylib, float x, float y, float width, float height)
Construct a new [AUIElement](#) object.
- virtual ~**AUIElement** ()=default

- Destroy the [AUElement](#) object.
- void [setPosition](#) (float x, float y) override
Set the position of the UI element.
- Rectangle [getBounds](#) () const override
Get the bounds of the UI element.
- bool [contains](#) (float x, float y) const override
Check if the UI element contains a point.
- void [setVisible](#) (bool visible) override
Set the visibility of the UI element.
- bool [isVisible](#) () const override
Check if the UI element is visible.
- virtual void [setSize](#) (float width, float height)
Set the element size.
- void [setRelativePosition](#) (float xPercent, float yPercent, float widthPercent, float heightPercent)
Set position and size as percentages of parent container.
- [UIRelativePosition](#) [getRelativePosition](#) () const
Get the relative position.

Public Member Functions inherited from [UIElement](#)

- virtual void [draw](#) ()=0
Draw the UI element.
- virtual void [update](#) ()=0
Update the UI element's state.

Protected Attributes

- std::shared_ptr< [RayLib](#) > [_raylib](#)
- Rectangle [_bounds](#)
- [UIRelativePosition](#) [_relativePos](#)
- bool [_visible](#)

5.6.1 Detailed Description

Abstract base class for UI elements.

Provides common functionality for all UI elements

5.6.2 Constructor & Destructor Documentation

5.6.2.1 AUElement()

```
AUElement::AUElement (
    std::shared_ptr< RayLib > raylib,
    float x,
    float y,
    float width,
    float height )
```

Construct a new [AUElement](#) object.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate
<i>width</i>	Element width
<i>height</i>	Element height

5.6.3 Member Function Documentation

5.6.3.1 contains()

```
bool AUIElement::contains (
    float x,
    float y ) const [override], [virtual]
```

Check if the UI element contains a point.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate

Returns

true If the point is inside the element
false Otherwise

Implements [IUIElement](#).

5.6.3.2 getBounds()

```
Rectangle AUIElement::getBounds ( ) const [override], [virtual]
```

Get the bounds of the UI element.

Returns

Rectangle The bounds of the element

Implements [IUIElement](#).

5.6.3.3 getRelativePosition()

```
UIRelativePosition AUIElement::getRelativePosition ( ) const
```

Get the relative position.

Returns

[UIRelativePosition](#) The relative position and size

5.6.3.4 isVisible()

```
bool AUIElement::isVisible ( ) const [override], [virtual]
```

Check if the UI element is visible.

Returns

true If visible
false Otherwise

Implements [IUIElement](#).

5.6.3.5 setPosition()

```
void AUIElement::setPosition (
    float x,
    float y ) [override], [virtual]
```

Set the position of the UI element.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate

Implements [IUIElement](#).

5.6.3.6 setRelativePosition()

```
void AUIElement::setRelativePosition (
    float xPercent,
    float yPercent,
    float widthPercent,
    float heightPercent )
```

Set position and size as percentages of parent container.

Parameters

<i>xPercent</i>	X position as percentage of container width (0-100)
<i>yPercent</i>	Y position as percentage of container height (0-100)
<i>widthPercent</i>	Width as percentage of container width (0-100)
<i>heightPercent</i>	Height as percentage of container height (0-100)

5.6.3.7 setSize()

```
void AUIElement::setSize (
    float width,
    float height ) [virtual]
```

Set the element size.

Parameters

<i>width</i>	New width
<i>height</i>	New height

Implements [IUIElement](#).

Reimplemented in [Button](#), and [Text](#).

5.6.3.8 setVisible()

```
void AUIElement::setVisible (
    bool visible ) [override], [virtual]
```

Set the visibility of the UI element.

Parameters

<i>visible</i>	Visibility state
----------------	------------------

Implements [IUIElement](#).

The documentation for this class was generated from the following files:

- gui/src/Graphic/HUD/UIElement/AUIElement.hpp
- gui/src/Graphic/HUD/UIElement/AUIElement.cpp

5.7 Broadcaster.Broadcaster Class Reference

Public Member Functions

- None `__init__` (self, [Communication](#) com, str team)
- str `revealMessage` (self, str message)
- None `broadcastMessage` (self, str message)

Public Attributes

- `com`
- `hash`
- `lastIndex`

The documentation for this class was generated from the following file:

- `ai/src/Broadcaster/Broadcaster.py`

5.8 buffer_s Struct Reference

Public Attributes

- char `data` [BUFFER_SIZE]
- int `head`
- int `tail`
- int `full`

The documentation for this struct was generated from the following files:


- `server/include/buffer.h`
- `server/src/network/buffer.h`

5.9 Button Class Reference

[Button](#) UI element.

```
#include <Button.hpp>
```

Inheritance diagram for [Button](#):



Public Member Functions

- [Button](#) (std::shared_ptr< [RayLib](#) > raylib, std::shared_ptr< [IAudio](#) > audio, float x, float y, float width, float height, const std::string &text, std::function< void()> callback)
Construct a new [Button](#).
- `~Button` () override=default
Destroy the [Button](#).
- void `draw` () override
Draw the button.
- void `update` () override

- Update the button state.*
- void [setText](#) (const std::string &text)
- Set the text of the button.*
- std::string [getText](#) () const
- Get the text of the button.*
- void [setCallback](#) (std::function< void()> callback)
- Set the callback function.*
- void [setColors](#) (Color normal, Color hover, Color pressed, Color textColor)
- Set the colors of the button.*
- void [setSize](#) (float width, float height) override
- Set the size of the button.*

Public Member Functions inherited from [AUIElement](#)

- [AUIElement](#) (std::shared_ptr< [RayLib](#) > raylib, float x, float y, float width, float height)
- Construct a new [AUIElement](#) object.*
- virtual ~[AUIElement](#) ()=default
- Destroy the [AUIElement](#) object.*
- void [setPosition](#) (float x, float y) override
- Set the position of the UI element.*
- Rectangle [getBounds](#) () const override
- Get the bounds of the UI element.*
- bool [contains](#) (float x, float y) const override
- Check if the UI element contains a point.*
- void [setVisible](#) (bool visible) override
- Set the visibility of the UI element.*
- bool [isVisible](#) () const override
- Check if the UI element is visible.*
- void [setRelativePosition](#) (float xPercent, float yPercent, float widthPercent, float heightPercent)
- Set position and size as percentages of parent container.*
- [UIRelativePosition](#) [getRelativePosition](#) () const
- Get the relative position.*

Private Attributes

- std::string **_text**
- std::function< void()> **_callback**
- Color **_normalColor**
- Color **_hoverColor**
- Color **_pressedColor**
- Color **_textColor**
- bool **_isHovered**
- bool **_isPressed**
- std::shared_ptr< [RayLib](#) > **_raylib**
- std::shared_ptr< [IAudio](#) > **_audio**

Additional Inherited Members

Protected Attributes inherited from [AUIElement](#)

- std::shared_ptr< [RayLib](#) > **_raylib**
- Rectangle **_bounds**
- [UIRelativePosition](#) **_relativePos**
- bool **_visible**

5.9.1 Detailed Description

[Button](#) UI element.

A clickable button with text that can trigger a callback when clicked

5.9.2 Constructor & Destructor Documentation

5.9.2.1 Button()

```
Button::Button (
    std::shared_ptr< RayLib > raylib,
    std::shared_ptr< IAudio > audio,
    float x,
    float y,
    float width,
    float height,
    const std::string & text,
    std::function< void()> callback )
```

Construct a new [Button](#).

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate
<i>width</i>	Button width
<i>height</i>	Button height
<i>text</i>	Button text
<i>callback</i>	Function to call when button is clicked

5.9.3 Member Function Documentation

5.9.3.1 draw()

```
void Button::draw ( ) [override], [virtual]
```

Draw the button.

Implements [IUIElement](#).

5.9.3.2 getText()

```
std::string Button::getText ( ) const
```

Get the text of the button.

Returns

std::string [Button](#) text

5.9.3.3 setCallback()

```
void Button::setCallback (
    std::function< void()> callback )
```

Set the callback function.

Parameters

<i>callback</i>	Function to call when button is clicked
-----------------	---

5.9.3.4 setColors()

```
void Button::setColors (
    Color normal,
    Color hover,
    Color pressed,
    Color textColor )
```

Set the colors of the button.

Parameters

<i>normal</i>	Normal color
<i>hover</i>	Hover color
<i>pressed</i>	Pressed color
<i>textColor</i>	Text color

5.9.3.5 setSize()

```
void Button::setSize (
    float width,
    float height ) [override], [virtual]
```

Set the size of the button.

Parameters

<i>width</i>	New button width
<i>height</i>	New button height

Reimplemented from [AUIElement](#).

5.9.3.6 setText()

```
void Button::setText (
    const std::string & text )
```

Set the text of the button.

Parameters

<i>text</i>	New text
-------------	----------

5.9.3.7 update()

```
void Button::update ( ) [override], [virtual]
```

Update the button state.

Implements [IUIElement](#).

The documentation for this class was generated from the following files:

- `gui/src/Graphic/HUD/Button/Button.hpp`
- `gui/src/Graphic/HUD/Button/Button.cpp`

5.10 CameraManager Class Reference

Public Member Functions

- **CameraManager** (std::shared_ptr< [RayLib](#) > raylib)
- void **updateCamera** (zappy::gui::CameraMode mode)

- void **updateCameraFreeMode** ()
- void **updateCameraTargetMode** ()
- void **updateCameraPlayerMode** ()
- void **setMapCenter** (const Vector3 ¢er)
- void **setMapSize** (int width, int height)
- float **getCurrentCameraDistance** () const
- void **setTargetDistance** (float distance)
- void **initTargetPositionFromCurrentCamera** ()
- void **setPlayerId** (int playerId)
- int **getPlayerId** () const
- void **setGameInfos** (std::shared_ptr< [GameInfos](#) > gameInfos)
- void **setMapInstance** (std::shared_ptr< [Map](#) > map)

Private Member Functions

- void **handlePlayerCameraMouseInput** ()
- Vector3 **calculatePlayerPosition** (const [zappy::structs::Player](#) &player)
- Vector3 **calculateCameraPosition** (const Vector3 &playerPos, float angleXZ)

Private Attributes

- std::shared_ptr< [RayLib](#) > **_raylib**
- std::shared_ptr< [GameInfos](#) > **_gameInfos**
- std::shared_ptr< [Map](#) > **_map**
- Vector3 **_mapCenter**
- int **_mapWidth**
- int **_mapHeight**
- float **_targetDistance**
- float **_targetAngleXZ**
- float **_targetAngleY**
- bool **_isDragging**
- int **_playerId**
- float **_playerAngleXZ**
- bool **_isPlayerViewDragging**

The documentation for this class was generated from the following files:

- gui/src/Graphic/Camera/CameraManager.hpp
- gui/src/Graphic/Camera/CameraManager.cpp

5.11 CLI Class Reference

Public Member Functions

- **CLI** (int ac, const char *const *av)
- [zappy::structs::Config](#) **parseArguments** (int ac, const char *const *av) const

Private Member Functions

- bool **hasCorrectNumberOfArguments** (int ac) const
- int **parsePort** (const char *portStr) const
- std::string **parseHostname** (const char *hostnameStr) const
- void **validateConfig** (bool portFound, bool hostFound) const

Private Attributes

- `int _ac`
- `const char *const * _av`

The documentation for this class was generated from the following files:

- `gui/src/CLI/CLI.hpp`
- `gui/src/CLI/CLI.cpp`

5.12 CLI.CLI Class Reference

Public Member Functions

- `__init__` (self)
- `parse_args` (self, args)
- `parse_port` (self, port_str)
- `parse_name` (self, name)
- `parse_machine` (self, machine_str)
- `validate_config` (self, port_found, name_found)

Public Attributes

- `port`
- `name`
- `machine`

The documentation for this class was generated from the following file:

- `ai/src/CLI/CLI.py`

5.13 Client Class Reference

Public Member Functions

- `Client` (int ac, const char *const *av)

Private Member Functions

- void `initialize` (int ac, const char *const *av)

Private Attributes


- `zappy::structs::Config _config`
- `std::shared_ptr< ICommunication > _communication`
- `std::shared_ptr< GameInfos > _gameInfos`
- `std::unique_ptr< MsgHandler > _msgHandler`
- `std::unique_ptr< GUI > _gui`

The documentation for this class was generated from the following files:

- `gui/src/Client/Client.hpp`
- `gui/src/Client/Client.cpp`

5.14 ClientTest Class Reference

Inheritance diagram for ClientTest:



Protected Member Functions

- void **SetUp** () override
- void **TearDown** () override
- char ** **createArgv** (const std::vector< std::string > &args)
- void **cleanupArgv** (char **argv, int argc)

Protected Attributes


- std::stringstream **buffer**
- std::streambuf * **originalCout**

The documentation for this class was generated from the following file:

- tests/unit/gui/Client/Client_test.cpp

5.15 Exceptions::CLIHostException Class Reference

Inheritance diagram for Exceptions::CLIHostException:

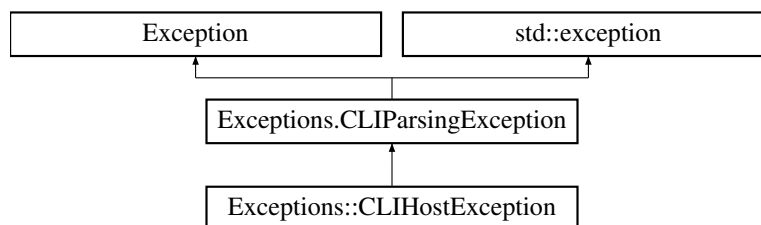

Public Member Functions

- **CLIHostException** (const std::string &message)

Public Member Functions inherited from [Exceptions.CLIParsingException](#)


- **__init__** (self, str message)
- **CLIParsingException** (const std::string &message)
- const char * **what** () const noexcept override

The documentation for this class was generated from the following file:

- gui/src/Exceptions/Exceptions.hpp

5.16 Exceptions.CLIInvalidArgumentException Class Reference

Inheritance diagram for Exceptions.CLIInvalidArgumentException:

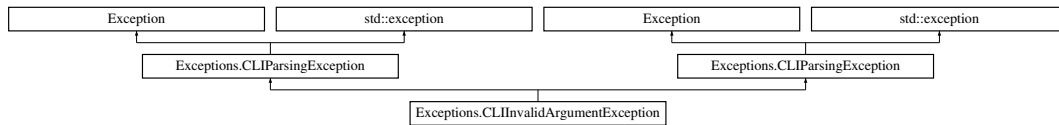

Public Member Functions

- `__init__` (self, str message)
- `CLIInvalidArgumentException` (const std::string &message)

Public Member Functions inherited from [Exceptions.CLIParsingException](#)

- `CLIParsingException` (const std::string &message)
- const char * **what** () const noexcept override

5.16.1 Constructor & Destructor Documentation

5.16.1.1 `__init__()`

```
Exceptions.CLIInvalidArgumentException.__init__ (
    self,
    str message )
```


Reimplemented from [Exceptions.CLIParsingException](#).

The documentation for this class was generated from the following files:

- ai/src/Exceptions/Exceptions.py
- gui/src/Exceptions/Exceptions.hpp

5.17 Exceptions.CLIMachineException Class Reference

Inheritance diagram for Exceptions.CLIMachineException:

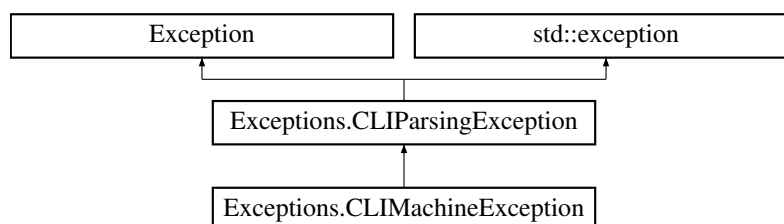

Public Member Functions

- `__init__` (self, str message)

Public Member Functions inherited from [Exceptions.CLIParsingException](#)

- `CLIParsingException` (const std::string &message)
- const char * **what** () const noexcept override

5.17.1 Constructor & Destructor Documentation

5.17.1.1 `__init__()`

```
Exceptions.CLIMachineException.__init__ (
    self,
    str message )
```


Reimplemented from [Exceptions.CLIParsingException](#).

The documentation for this class was generated from the following file:

- `ai/src/Exceptions/Exceptions.py`

5.18 Exceptions.CLIMissingArgumentException Class Reference

Inheritance diagram for Exceptions.CLIMissingArgumentException:

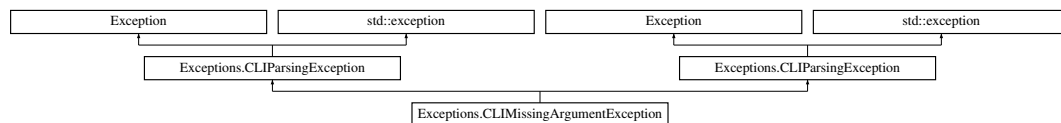

Public Member Functions

- `__init__` (self, str message)
- `CLIMissingArgumentException` (const std::string &message)

Public Member Functions inherited from [Exceptions.CLIParsingException](#)

- `CLIParsingException` (const std::string &message)
- `const char * what ()` const noexcept override

5.18.1 Constructor & Destructor Documentation

5.18.1.1 `__init__()`

```
Exceptions.CLIMissingArgumentException.__init__ (
    self,
    str message )
```


Reimplemented from [Exceptions.CLIParsingException](#).

The documentation for this class was generated from the following files:

- `ai/src/Exceptions/Exceptions.py`
- `gui/src/Exceptions/Exceptions.hpp`

5.19 Exceptions.CLINameException Class Reference

Inheritance diagram for Exceptions.CLINameException:

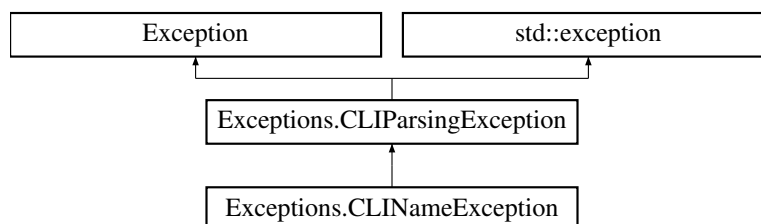

Public Member Functions

- `__init__` (self, str message)

Public Member Functions inherited from [Exceptions.CLIParsingException](#)

- **CLIParsingException** (const std::string &message)
- const char * **what** () const noexcept override

5.19.1 Constructor & Destructor Documentation**5.19.1.1 `__init__`()**

```
Exceptions.CLINameException.__init__ (
    self,
    str message )
```

Reimplemented from [Exceptions.CLIParsingException](#).


The documentation for this class was generated from the following file:

- ai/src/Exceptions/Exceptions.py

5.20 Exceptions.CLIParsingException Class Reference

EPITECH PROJECT, 2025 zappy File description: Exceptions.

Inheritance diagram for Exceptions.CLIParsingException:

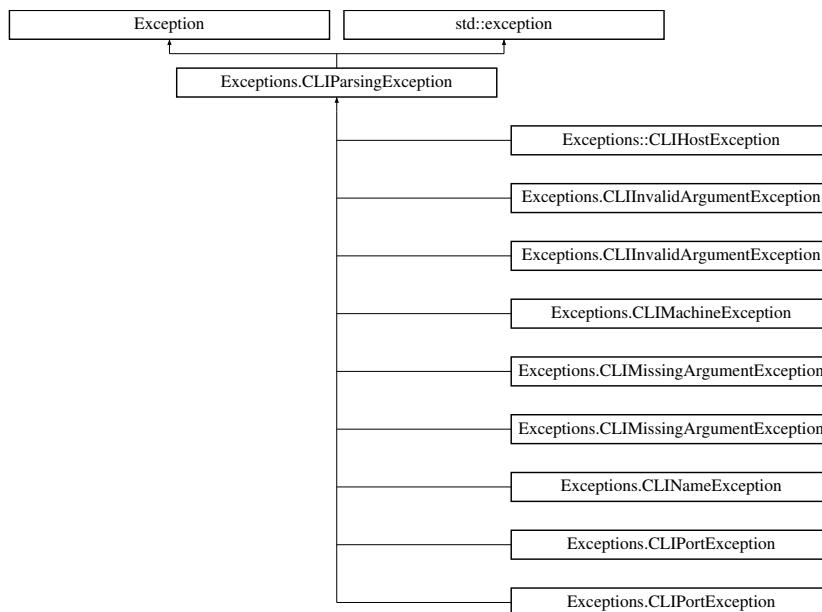**Public Member Functions**

- `__init__` (self, str message)
- **CLIParsingException** (const std::string &message)
- const char * **what** () const noexcept override

Private Attributes

- std::string **_message**

5.20.1 Detailed Description


EPITECH PROJECT, 2025 zappy File description: Exceptions.

The documentation for this class was generated from the following files:

- ai/src/Exceptions/Exceptions.py
- gui/src/Exceptions/Exceptions.hpp

5.21 Exceptions.CLIPortException Class Reference

Inheritance diagram for Exceptions.CLIPortException:

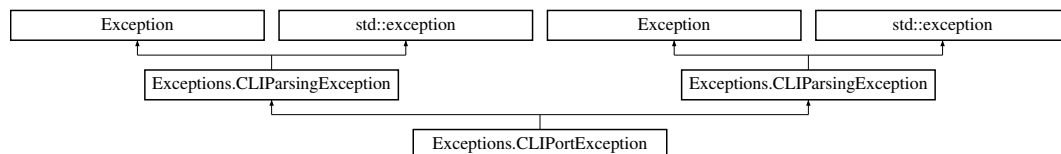

Public Member Functions

- `__init__` (self, str message)
- **CLIPortException** (const std::string &message)

Public Member Functions inherited from [Exceptions.CLIParsingException](#)

- **CLIParsingException** (const std::string &message)
- const char * **what** () const noexcept override

5.21.1 Constructor & Destructor Documentation

5.21.1.1 `__init__()`

```
Exceptions.CLIPortException.__init__ (
    self,
    str message )
```


Reimplemented from [Exceptions.CLIParsingException](#).

The documentation for this class was generated from the following files:

- ai/src/Exceptions/Exceptions.py
- gui/src/Exceptions/Exceptions.hpp

5.22 CLITest Class Reference

Inheritance diagram for CLITest:



Protected Member Functions

- void **SetUp** () override
- void **TearDown** () override
- char ** **createArgv** (const std::vector< std::string > &args)

- void **cleanupArgv** (char **argv, int argc)

The documentation for this class was generated from the following file:

- tests/unit/gui/CLI/CLI_test.cpp

5.23 Utils.Colors Class Reference

Static Public Attributes

- str **BOLD** = "\033[1m"
- str **RED** = "\033[1m\033[31m"
- str **GREEN** = "\033[1m\033[32m"
- str **YELLOW** = "\033[1m\033[33m"
- str **BLUE** = "\033[1m\033[34m"
- str **MAGENTA** = "\033[1m\033[35m"
- str **CYAN** = "\033[1m\033[36m"
- str **WHITE** = "\033[1m\033[37m"
- str **RESET** = "\033[0m"

The documentation for this class was generated from the following file:

- ai/src/Utils/Utils.py

5.24 command_info_t Struct Reference

Public Attributes

- char * **command**
- float **base_time**
- action_priority_t **priority**
- int(* **handler**)([player_t](#) *, char *, [zappy_t](#) *)

The documentation for this struct was generated from the following file:

- server/include/zappy.h

5.25 command_pf_s Struct Reference

Public Attributes


- char const * **flag**
- bool(* **checker**)(const char *, const char *, [params_t](#) *)

The documentation for this struct was generated from the following file:

- server/include/zappy.h

5.26 Communication Class Reference

Inheritance diagram for Communication:



Public Member Functions

- **Communication** ([zappy::structs::Config](#) config)
- void [sendMessage](#) (const std::string &message) override
- bool [hasMessages](#) () const override
- std::string [popMessage](#) () override
- bool [isConnected](#) () const override
- void [disconnect](#) () override

Private Member Functions

- void **setupConnection** ()
- void **createSocket** ()
- void **connectToServer** ()
- void **setupNonBlocking** ()
- void **startCommunicationThread** ()
- void **communicationLoop** ()
- bool **handlePoll** ()
- void **processWrite** ()
- void **processRead** ()
- void **parseReceivedData** ()

Private Attributes

- [zappy::structs::Config](#) **_config**
- std::thread **_thread**
- std::mutex **_mutex**
- std::condition_variable **_cv**
- std::atomic< bool > **_running**
- std::atomic< bool > **_connected**
- std::queue< std::string > **_outgoingMessages**
- std::queue< std::string > **_incomingMessages**
- std::string **_receiveBuffer**
- std::string **_sendBuffer**
- int **_socket**
- struct pollfd **_pollfd**

Static Private Attributes

- static const int **BUFFER_SIZE** = 4096
- static const int **POLL_TIMEOUT** = 100
- static const char **MESSAGE_DELIMITER** = '\n'

5.26.1 Member Function Documentation

5.26.1.1 disconnect()

void Communication::disconnect () [override], [virtual]
Implements [ICommunication](#).

5.26.1.2 hasMessages()

bool Communication::hasMessages () const [override], [virtual]
Implements [ICommunication](#).

5.26.1.3 isConnected()

bool Communication::isConnected () const [override], [virtual]
Implements [ICommunication](#).

5.26.1.4 popMessage()

std::string Communication::popMessage () [override], [virtual]
 Implements [ICommunication](#).

5.26.1.5 sendMessage()

void Communication::sendMessage (
 const std::string & message) [override], [virtual]
 Implements [ICommunication](#).

The documentation for this class was generated from the following files:

- gui/src/Communication/Communication.hpp
- gui/src/Communication/Communication.cpp

5.27 Communication.Communication Class Reference

Public Member Functions

- **__init__** (self, str name, str host, int port)
- **__del__** (self)
- None **stopLoop** (self)
- None **loop** (self)
- dict[str, int]|None **tryGetInventory** (self, str response)
- list[dict[str, int]]|None **tryGetLook** (self, str response)
- str **handleResponse** (self, str response)
- str **receiveData** (self)
- None **receive** (self)
- dict[str, int] **getInventory** (self)
- list[dict[str, int]] **getLook** (self)
- int **lenMessageQueue** (self)
- bool **hasMessages** (self)
- tuple[int, str] **getLastMessage** (self)
- int **lenResponseQueue** (self)
- bool **hasResponses** (self)
- None **addResponse** (self, str response)
- str **getLastResponse** (self)
- int **lenPendingQueue** (self)
- bool **hasPendingCommands** (self)
- int **lenRequestQueue** (self)
- bool **playerIsDead** (self)
- **connectToServer** (self)
- None **sendCommand** (self, str message)
- **sendForward** (self)
- **sendRight** (self)
- **sendLeft** (self)
- None **sendLook** (self)
- None **sendInventory** (self)
- **sendBroadcast** (self, str message)
- None **sendGetConnectNbr** (self)
- **sendFork** (self)
- **sendEject** (self)
- **sendTakeObject** (self, str object_name)
- **sendSetObject** (self, str object_name)
- **sendIncantation** (self)

Public Attributes


- **name**
- **host**
- **port**
- **socket**
- **mutex**
- **playerDead**
- **lastInventory**
- **lastLook**
- **responseBuffer**
- **messageQueue**
- **responseQueue**
- **pendingQueue**
- **requestQueue**

The documentation for this class was generated from the following file:

- ai/src/Communication/Communication.py

5.28 Exceptions.CommunicationException Class Reference

Inheritance diagram for Exceptions.CommunicationException:

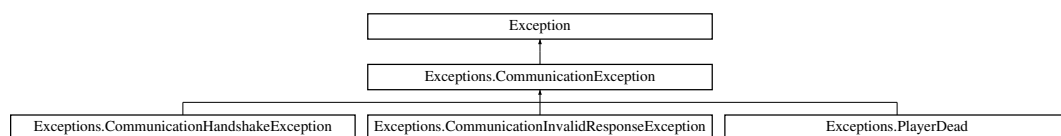

Public Member Functions


- **`__init__`** (self, str message)

The documentation for this class was generated from the following file:

- ai/src/Exceptions/Exceptions.py

5.29 Exceptions.CommunicationHandshakeException Class Reference

Inheritance diagram for Exceptions.CommunicationHandshakeException:

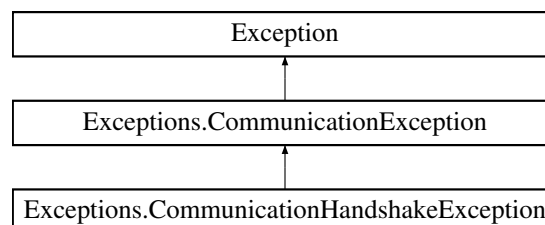

Public Member Functions

- **`__init__`** (self, str message)

5.29.1 Constructor & Destructor Documentation

5.29.1.1 `__init__()`

```
Exceptions.CommunicationHandshakeException.__init__ (
    self,
    str message )
```


Reimplemented from [Exceptions.CommunicationException](#).

The documentation for this class was generated from the following file:

- `ai/src/Exceptions/Exceptions.py`

5.30 Exceptions.CommunicationInvalidResponseException Class Reference

Inheritance diagram for Exceptions.CommunicationInvalidResponseException:

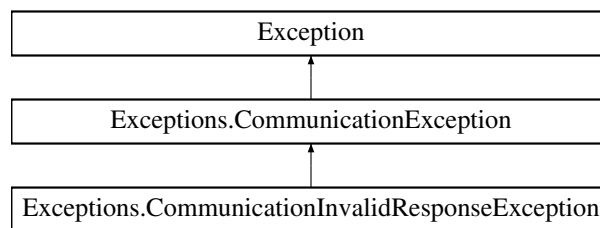

Public Member Functions

- [__init__](#) (self, str message)

5.30.1 Constructor & Destructor Documentation

5.30.1.1 `__init__()`

```
Exceptions.CommunicationInvalidResponseException.__init__ (
    self,
    str message )
```


Reimplemented from [Exceptions.CommunicationException](#).

The documentation for this class was generated from the following file:

- `ai/src/Exceptions/Exceptions.py`

5.31 CommunicationTest Class Reference

Inheritance diagram for CommunicationTest:



Protected Member Functions

- void **SetUp** () override
- void **TearDown** () override
- [zappy::structs::Config](#) **createValidConfig** ()

Protected Attributes

- `std::unique_ptr< MockServer > mockServer`

Static Protected Attributes

- `static const int TEST_PORT = 9876`

The documentation for this class was generated from the following file:

- `tests/unit/gui/Communication/Communication_test.cpp`

5.32 `zappy::structs::Config` Struct Reference

Public Attributes


- `int port`
- `std::string hostname`

The documentation for this struct was generated from the following file:

- `gui/src/Utils/Constants.hpp`

5.33 `Exceptions::ConnectionFailedException` Class Reference

Inheritance diagram for `Exceptions::ConnectionFailedException`:

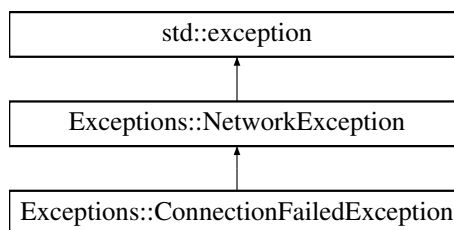

Public Member Functions

- **`ConnectionFailedException`** (`const std::string &message`)

Public Member Functions inherited from [Exceptions::NetworkException](#)


- **`NetworkException`** (`const std::string &message`)
- `const char * what () const noexcept override`

The documentation for this class was generated from the following file:

- `gui/src/Exceptions/Exceptions.hpp`

5.34 `Exceptions::ConnectionTimeoutException` Class Reference

Inheritance diagram for `Exceptions::ConnectionTimeoutException`:

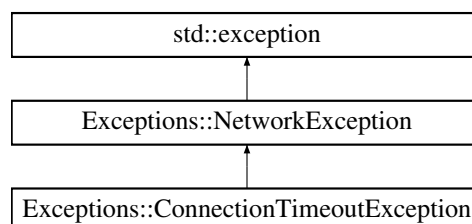

Public Member Functions

- **ConnectionTimeoutException** (const std::string &message)

Public Member Functions inherited from [Exceptions::NetworkException](#)

- **NetworkException** (const std::string &message)
- const char * **what** () const noexcept override

The documentation for this class was generated from the following file:


- gui/src/Exceptions/Exceptions.hpp

5.35 Containers Class Reference

Container class for organizing UI elements.

```
#include <Containers.hpp>
```

Inheritance diagram for Containers:



Public Member Functions

- **Containers** (std::shared_ptr< [RayLib](#) > raylib, std::shared_ptr< [IAudio](#) > audio, float x, float y, float width, float height, Color backgroundColor={40, 40, 40, 200})
Construct a new Container.
- **~Containers** () override
Destroy the Container.
- void **draw** () override
Draw the container and its contents.
- void **update** () override
Update the container state and its contents.
- void **setBackgroundColor** (Color color)
Set the background color.
- void **setHasBackground** (bool hasBackground)
Set whether to draw the background.
- void **setBackgroundTexture** (Texture2D texture)
Set background texture for the container.
- bool **hasBackgroundTexture** () const
Check if the container has a background texture.
- bool **addElement** (const std::string &id, std::shared_ptr< [IUElement](#) > element)
Add a UI element to the container.
- std::shared_ptr< [IUElement](#) > **getElement** (const std::string &id) const
Get a UI element by its ID.
- bool **removeElement** (const std::string &id)
Remove a UI element.
- std::shared_ptr< [Button](#) > **addButton** (const std::string &id, float x, float y, float width, float height, const std::string &text, std::function< void()> callback)

Create and add a button to the container.

- `std::shared_ptr< Button > addButton` (const std::string &id, float x, float y, float width, float height, const std::string &text, std::function< void()> callback, Color normalColor, Color hoverColor, Color pressedColor, Color textColor)

Create and add a button to the container with custom colors.

- `std::shared_ptr< Text > addText` (const std::string &id, float x, float y, const std::string &text, float font←Size=20.0f, Color color=BLACK)

Create and add a text element to the container.

- void **clearElements** ()

Clear all UI elements from the container.

- void `handleResize` (int oldWidth, int oldHeight, int newWidth, int newHeight)

Handle window resize event.

- `std::shared_ptr< Button > addButtonPercent` (const std::string &id, float xPercent, float yPercent, float widthPercent, float heightPercent, const std::string &text, std::function< void()> callback)

Create and add a button to the container using relative percentages.

- `std::shared_ptr< Button > addButtonPercent` (const std::string &id, float xPercent, float yPercent, float widthPercent, float heightPercent, const std::string &text, std::function< void()> callback, Color normalColor, Color hoverColor, Color pressedColor, Color textColor)

Create and add a button to the container with custom colors using relative percentages.

- `std::shared_ptr< Text > addTextPercent` (const std::string &id, float xPercent, float yPercent, const std::string &text, float fontSizePercent=5.0f, Color color=BLACK)

Create and add a text element to the container using relative percentages.

Public Member Functions inherited from AContainers

- `AContainers` (std::shared_ptr< RayLib > raylib, float x, float y, float width, float height)

Construct a new AContainers object.

- virtual `~AContainers` ()=default

Destroy the AContainers object.

- void `setPosition` (float x, float y) override

Set the position of the container.

- void `setSize` (float width, float height) override

Set the size of the container.

- Rectangle `getBounds` () const override

Get the current position of the container.

- bool `contains` (float x, float y) const override

Check if a point is within the container.

- void `setVisible` (bool visible) override

Set the visibility of the container.

- bool `isVisible` () const override

Check if the container is visible.

- void `setRelativePosition` (float xPercent, float yPercent, float widthPercent, float heightPercent)

Set position and size as percentages of screen dimensions.

- `RelativePosition` `getRelativePosition` () const

Get the container's relative position.

- void **updatePositionFromRelative** ()

Update the container's absolute position from relative position.

Private Attributes

- std::shared_ptr< RayLib > **_raylib**
- std::shared_ptr< IAudio > **_audio**
- Texture2D **_backgroundTexture**
- bool **_hasBackgroundTexture**
- std::unordered_map< std::string, std::shared_ptr< UIElement > > **_elements**

Additional Inherited Members

Protected Attributes inherited from [AContainers](#)

- `std::shared_ptr< RayLib > _raylib`
- `Rectangle _bounds`
- `RelativePosition _relativePos`
- `Color _backgroundColor`
- `bool _visible`
- `bool _hasBackground`

5.35.1 Detailed Description

Container class for organizing UI elements.

[Containers](#) can hold UI elements like buttons, text, and scrollbars. They can have a background color or texture.

5.35.2 Constructor & Destructor Documentation

5.35.2.1 Containers()

```
Containers::Containers (
    std::shared_ptr< RayLib > raylib,
    std::shared_ptr< IAudio > audio,
    float x,
    float y,
    float width,
    float height,
    Color backgroundColor = {40, 40, 40, 200} )
```

Construct a new Container.

Parameters

<i>raylib</i>	Reference to the RayLib instance
<i>audio</i>	Reference to the Audio instance
<i>x</i>	X coordinate
<i>y</i>	Y coordinate
<i>width</i>	Container width
<i>height</i>	Container height
<i>backgroundColor</i>	Background color (default: semi-transparent dark gray)

5.35.3 Member Function Documentation

5.35.3.1 addButton() [1/2]

```
std::shared_ptr< Button > Containers::addButton (
    const std::string & id,
    float x,
    float y,
    float width,
    float height,
    const std::string & text,
    std::function< void()> callback )
```

Create and add a button to the container.

Parameters

<i>id</i>	Unique identifier for the button
<i>x</i>	X coordinate relative to container

Parameters

<i>y</i>	Y coordinate relative to container
<i>width</i>	Button width
<i>height</i>	Button height
<i>text</i>	Button text
<i>callback</i>	Function to call when button is clicked

Returns

`std::shared_ptr<Button>` Pointer to the created button, or nullptr if ID already exists

5.35.3.2 addButton() [2/2]

```
std::shared_ptr< Button > Containers::addButton (
    const std::string & id,
    float x,
    float y,
    float width,
    float height,
    const std::string & text,
    std::function< void()> callback,
    Color normalColor,
    Color hoverColor,
    Color pressedColor,
    Color textColor )
```

Create and add a button to the container with custom colors.

Parameters

<i>id</i>	Unique identifier for the button
<i>x</i>	X coordinate relative to container
<i>y</i>	Y coordinate relative to container
<i>width</i>	Button width
<i>height</i>	Button height
<i>text</i>	Button text
<i>callback</i>	Function to call when button is clicked
<i>normalColor</i>	Color when not interacting
<i>hoverColor</i>	Color when mouse is hovering over button
<i>pressedColor</i>	Color when button is pressed
<i>textColor</i>	Color of the button text

Returns

`std::shared_ptr<Button>` Pointer to the created button, or nullptr if ID already exists

5.35.3.3 addButtonPercent() [1/2]

```
std::shared_ptr< Button > Containers::addButtonPercent (
    const std::string & id,
    float xPercent,
    float yPercent,
    float widthPercent,
    float heightPercent,
```

```
const std::string & text,
std::function< void()> callback )
```

Create and add a button to the container using relative percentages.

Parameters

<i>id</i>	Unique identifier for the button
<i>xPercent</i>	X position as percentage of container width (0-100)
<i>yPercent</i>	Y position as percentage of container height (0-100)
<i>widthPercent</i>	Width as percentage of container width (0-100)
<i>heightPercent</i>	Height as percentage of container height (0-100)
<i>text</i>	Button text
<i>callback</i>	Function to call when button is clicked

Returns

`std::shared_ptr<Button>` Pointer to the created button, or nullptr if ID already exists

5.35.3.4 addButtonPercent() [2/2]

```
std::shared_ptr< Button > Containers::addButtonPercent (
    const std::string & id,
    float xPercent,
    float yPercent,
    float widthPercent,
    float heightPercent,
    const std::string & text,
    std::function< void()> callback,
    Color normalColor,
    Color hoverColor,
    Color pressedColor,
    Color textColor )
```

Create and add a button to the container with custom colors using relative percentages.

Parameters

<i>id</i>	Unique identifier for the button
<i>xPercent</i>	X position as percentage of container width (0-100)
<i>yPercent</i>	Y position as percentage of container height (0-100)
<i>widthPercent</i>	Width as percentage of container width (0-100)
<i>heightPercent</i>	Height as percentage of container height (0-100)
<i>text</i>	Button text
<i>callback</i>	Function to call when button is clicked
<i>normalColor</i>	Color when not interacting
<i>hoverColor</i>	Color when mouse is hovering over button
<i>pressedColor</i>	Color when button is pressed
<i>textColor</i>	Color of the button text

Returns

`std::shared_ptr<Button>` Pointer to the created button, or nullptr if ID already exists

5.35.3.5 addElement()

```
bool Containers::addElement (
    const std::string & id,
    std::shared_ptr< UIElement > element )
```

Add a UI element to the container.

Parameters

<i>id</i>	Unique identifier for the element
<i>element</i>	UI element to add

Returns

`true` If element was added successfully

`false` If element with same ID already exists

5.35.3.6 addText()

```
std::shared_ptr< Text > Containers::addText (
    const std::string & id,
    float x,
    float y,
    const std::string & text,
    float fontSize = 20.0f,
    Color color = BLACK )
```

Create and add a text element to the container.

Parameters

<i>id</i>	Unique identifier for the text element
<i>x</i>	X coordinate relative to container
<i>y</i>	Y coordinate relative to container
<i>text</i>	Text content
<i>fontSize</i>	Font size
<i>color</i>	Text color

Returns

`std::shared_ptr<Text>` Pointer to the created text element, or nullptr if ID already exists

5.35.3.7 addTextPercent()

```
std::shared_ptr< Text > Containers::addTextPercent (
    const std::string & id,
    float xPercent,
    float yPercent,
    const std::string & text,
    float fontSizePercent = 5.0f,
    Color color = BLACK )
```

Create and add a text element to the container using relative percentages.

Parameters

<i>id</i>	Unique identifier for the text element
<i>xPercent</i>	X position as percentage of container width (0-100)
<i>yPercent</i>	Y position as percentage of container height (0-100)
<i>text</i>	Text content
<i>fontSizePercent</i>	Font size as percentage of container height (0-100)
<i>color</i>	Text color

Returns

`std::shared_ptr<Text>` Pointer to the created text element, or `nullptr` if ID already exists

5.35.3.8 draw()

```
void Containers::draw ( ) [override], [virtual]
```

Draw the container and its contents.

Implements [IContainers](#).

5.35.3.9 getElement()

```
std::shared_ptr< IUElement > Containers::getElement (
    const std::string & id ) const
```

Get a UI element by its ID.

Parameters

<i>id</i>	Element identifier
-----------	--------------------

Returns

`std::shared_ptr<IUElement>` Pointer to the element, or `nullptr` if not found

5.35.3.10 handleResize()

```
void Containers::handleResize (
    int oldWidth,
    int oldHeight,
    int newWidth,
    int newHeight )
```

Handle window resize event.

Parameters

<i>oldWidth</i>	Previous window width
<i>oldHeight</i>	Previous window height
<i>newWidth</i>	New window width
<i>newHeight</i>	New window height

5.35.3.11 hasBackgroundTexture()

```
bool Containers::hasBackgroundTexture ( ) const
```

Check if the container has a background texture.

Returns

true If the container has a background texture
false Otherwise

5.35.3.12 removeElement()

```
bool Containers::removeElement (
    const std::string & id )
```

Remove a UI element.

Parameters

<i>id</i>	Element identifier
-----------	--------------------

Returns

true If element was found and removed
false If element was not found

5.35.3.13 setBackgroundColor()

```
void Containers::setBackgroundColor (
    Color color )
```

Set the background color.

Parameters

<i>color</i>	New background color
--------------	----------------------

5.35.3.14 setBackgroundTexture()

```
void Containers::setBackgroundTexture (
    Texture2D texture )
```

Set background texture for the container.

Parameters

<i>texture</i>	Texture to use as background
----------------	------------------------------

5.35.3.15 setHasBackground()

```
void Containers::setHasBackground (
    bool hasBackground )
```

Set whether to draw the background.

Parameters

<i>hasBackground</i>	True to draw background, false otherwise
----------------------	--

5.35.3.16 update()

```
void Containers::update ( ) [override], [virtual]
```

Update the container state and its contents.

Implements [IContainers](#).

The documentation for this class was generated from the following files:

- gui/src/Graphic/HUD/Containers/Containers.hpp
- gui/src/Graphic/HUD/Containers/Containers.cpp

5.36 zappy::structs::Egg Struct Reference

Public Member Functions

- **Egg** (int _eggNumber=0, int _playerNumber=0, int _x=0, int _y=0, bool _hatched=false, const std::string &_teamName="")

Public Attributes

- int **eggNumber**
- int **playerNumber**
- int **x**
- int **y**
- bool **hatched**
- std::string **teamName**

The documentation for this struct was generated from the following file:

- gui/src/Utils/Constants.hpp

5.37 egg_s Struct Reference

Public Attributes


- int **id**
- int **posX**
- int **posY**
- char * **teamName**
- int **idLayer**
- bool **isHatched**
- struct [egg_s](#) * **next**

The documentation for this struct was generated from the following file:

- server/include/game.h

5.38 ExceptionsTest Class Reference

Inheritance diagram for ExceptionsTest:



Protected Member Functions

- void **SetUp** () override
- void **TearDown** () override

The documentation for this class was generated from the following file:

- tests/unit/gui/Exceptions/Exceptions_test.cpp

5.39 game_s Struct Reference

Public Attributes

- [team_t](#) * teams
- [map_t](#) * map

The documentation for this struct was generated from the following file:

- server/include/game.h

5.40 GameInfos Class Reference

Public Member Functions

- void **setMapSize** (int width, int height)
- std::pair< int, int > **getMapSize** () const
- void **setTimeUnit** (int timeUnit)
- int **getTimeUnit** () const
- void **updateTile** (const [zappy::structs::Tile](#) tile)
- const std::vector< [zappy::structs::Tile](#) > **getTiles** () const
- const [zappy::structs::Tile](#) **getTile** (int x, int y) const
- void **updateTeamName** (const std::string &teamName)
- const std::vector< std::string > **getTeamNames** () const
- void **addPlayer** (const [zappy::structs::Player](#) player)
- void **updatePlayerPosition** (int playerNumber, int x, int y)
- void **updatePlayerOrientation** (int playerNumber, int orientation)
- void **updatePlayerLevel** (int playerNumber, int level)
- void **updatePlayerInventory** (int playerNumber, const [zappy::structs::Inventory](#) inventory)
- void **updatePlayerExpulsion** (int playerNumber)
- void **updatePlayerDeath** (int playerNumber)
- void **updatePlayerResourceAction** (int playerNumber, int resourceId, bool isCollecting)
- void **updatePlayerFork** (int playerNumber)
- const std::vector< [zappy::structs::Player](#) > **getPlayers** () const
- void **addPlayerBroadcast** (int playerNumber, const std::string &message)
- std::vector< std::pair< int, std::string > > **getPlayersBroadcasting** () const
- void **addIncantation** (const [zappy::structs::Incantation](#) incantation)
- void **removeIncantation** (int x, int y, int result)
- void **addEgg** (const [zappy::structs::Egg](#) egg)
- void **updateEggHatched** (int eggNumber)
- void **updateEggDeath** (int eggNumber)
- const std::vector< [zappy::structs::Egg](#) > **getEggs** () const
- void **setGameOver** (const std::string &winningTeam)
- std::pair< bool, std::string > **isGameOver** () const

Private Attributes

- int **_mapWidth**
- int **_mapHeight**
- int **_timeUnit**
- std::vector< [zappy::structs::Tile](#) > **_tiles**
- std::vector< std::string > **_teamNames**
- std::vector< [zappy::structs::Player](#) > **_players**
- std::vector< std::pair< int, bool > > **_playersExpulsing**
- std::vector< std::pair< int, std::string > > **_playersBroadcasting**
- std::vector< [zappy::structs::Incantation](#) > **_incantations**
- std::vector< [zappy::structs::Egg](#) > **_eggs**


- bool **_gameOver**
- std::string **_winningTeam**
- std::mutex **_dataMutex**

The documentation for this class was generated from the following files:

- gui/src/Game/GameInfos.hpp
- gui/src/Game/GameInfos.cpp

5.41 GameInfosTest Class Reference

Inheritance diagram for GameInfosTest:



Protected Member Functions

- void **SetUp** () override
- void **TearDown** () override

Protected Attributes

- std::unique_ptr< [GameInfos](#) > **gameInfos**

The documentation for this class was generated from the following file:

- tests/unit/gui/Game/GameInfos_test.cpp

5.42 graph_net_s Struct Reference

Public Attributes

- int **fd**
- bool **mapSent**
- struct [graph_net_s](#) * **next**

The documentation for this struct was generated from the following file:

- server/include/zappy.h

5.43 GUI Class Reference

Public Member Functions

- **GUI** (std::shared_ptr< [GameInfos](#) > gameInfos)
- void **run** ()
- int **getWindowWidth** () const
- int **getWindowHeight** () const
- void **setWindowWidth** (int width)
- void **setWindowHeight** (int height)
- void **switchCameraMode** (zappy::gui::CameraMode mode)
- void **switchCameraModeNext** ()
- void **setPlayerToFollow** (int playerId)

- int **getPlayerToFollow** () const
- bool **selectFirstAvailablePlayer** ()
- void **switchToNextPlayer** ()
- void **switchToPreviousPlayer** ()

Private Member Functions

- void **updateCamera** ()
- void **update** ()
- void **draw** ()
- bool **playerExists** (int playerId) const
- void **initModels** ()

Private Attributes

- bool **_isRunning**
- std::shared_ptr< [RayLib](#) > **_raylib**
- std::shared_ptr< [GameInfos](#) > **_gameInfos**
- std::unique_ptr< [Map](#) > **_map**
- std::unique_ptr< [HUD](#) > **_hud**
- std::shared_ptr< [IAudio](#) > **_audio**
- std::unique_ptr< [CameraManager](#) > **_cameraManager**
- int **_windowWidth**
- int **_windowHeight**
- zappy::gui::CameraMode **_cameraMode**

The documentation for this class was generated from the following files:

- gui/src/Graphic/GUI.hpp
- gui/src/Graphic/GUI.cpp

5.44 Hash.Hash Class Reference

Public Member Functions

- **__init__** (self, str hash_key)
- bytes **simple_xor** (self, bytes data)
- str **hashMessage** (self, str message)
- str **unHashMessage** (self, str hex_message)

Public Attributes

- **key**

The documentation for this class was generated from the following file:

- ai/src/Hash/Hash.py

5.45 Help Class Reference

[Help](#) popup display class.

```
#include <Help.hpp>
```

Public Member Functions

- [Help](#) (std::shared_ptr< [RayLib](#) > raylib, std::shared_ptr< [IAudio](#) > audio)
Construct a new [Help](#) object.
- ~[Help](#) ()=default
Destroy the [Help](#) object.
- void **show** ()
Show the help popup.
- void **hide** ()
Hide the help popup.
- bool [isVisible](#) () const
Check if the help popup is visible.
- void **update** ()
Updates the help popup state.
- void **draw** ()
Draw the help popup.
- void [handleResize](#) (int oldWidth, int oldHeight, int newWidth, int newHeight)
Handle window resize events.

Private Member Functions

- void **initHelpContainer** ()
Initialize the help popup container and its elements.

Private Attributes

- std::shared_ptr< [RayLib](#) > **_raylib**
- std::shared_ptr< [IAudio](#) > **_audio**
- std::shared_ptr< [Containers](#) > **_helpContainer**
- bool **_visible**

5.45.1 Detailed Description

[Help](#) popup display class.

This class manages the help popup that appears when the help button is clicked. It displays helpful information about the game and provides a close button.

5.45.2 Constructor & Destructor Documentation**5.45.2.1 Help()**

```
Help::Help (
    std::shared_ptr< RayLib > raylib,
    std::shared_ptr< IAudio > audio )
```

Construct a new [Help](#) object.

Parameters

<i>raylib</i>	Reference to the RayLib instance
<i>audio</i>	Reference to the audio system

5.45.3 Member Function Documentation

5.45.3.1 handleResize()

```
void Help::handleResize (
    int oldWidth,
    int oldHeight,
    int newWidth,
    int newHeight )
```

Handle window resize events.

Parameters

<i>oldWidth</i>	Previous window width
<i>oldHeight</i>	Previous window height
<i>newWidth</i>	New window width
<i>newHeight</i>	New window height

5.45.3.2 isVisible()

```
bool Help::isVisible ( ) const
```

Check if the help popup is visible.

Returns

true if visible, false otherwise

The documentation for this class was generated from the following files:

- gui/src/Graphic/HUD/Help/Help.hpp
- gui/src/Graphic/HUD/Help/Help.cpp

5.46 HUD Class Reference

Main [HUD](#) class to manage all UI elements.

```
#include <HUD.hpp>
```

Public Member Functions

- [HUD](#) (std::shared_ptr< [RayLib](#) > raylib, std::shared_ptr< [GameInfos](#) > gameInfos, std::shared_ptr< [IAudio](#) > audio)
Construct a new [HUD](#) object.
- [~HUD](#) ()
Destroy the [HUD](#) object.
- void **draw** ()
Draw all visible [HUD](#) elements.
- void **update** ()
Update all [HUD](#) elements.
- std::shared_ptr< [Containers](#) > **addContainer** (const std::string &id, float x, float y, float width, float height, Color backgroundColor={40, 40, 40, 200})
Add a new container to the [HUD](#).
- std::shared_ptr< [Containers](#) > **getContainer** (const std::string &id) const
Get a container by its ID.
- bool **removeContainer** (const std::string &id)
Remove a container and all its child elements.
- void **handleResize** (int oldWidth, int oldHeight, int newWidth, int newHeight)

- Handle window resize event.*
- void **clearAllContainers** ()
 - Clear all containers from the HUD.*
- void **initDefaultLayout** (float sideWidthPercent=15.0f, float bottomHeightPercent=20.0f)
 - Initialize default layout with side and bottom containers.*
- std::shared_ptr< Containers > **getSideContainer** () const
 - Get the side container.*
- std::shared_ptr< Containers > **getBottomContainer** () const
 - Get the bottom container.*
- std::shared_ptr< Containers > **getSquareContainer** () const
 - Get the square container in the top-left corner.*
- void **initExitButton** ()
 - Initialize an exit button in the square container.*
- void **initSettingsButton** ()
 - Initialize a settings button in the square container.*
- void **initHelpButton** ()
 - Initialize a help button in the square container.*
- void **initCameraResetButton** ()
 - Initialize a camera reset button in the square container.*
- void **initTeamPlayersDisplay** (std::shared_ptr< GameInfos > gameInfos)
 - Initialize team and player display in the side container.*
- void **updateTeamPlayersDisplay** (std::shared_ptr< GameInfos > gameInfos)
 - Update team and player display in the side container.*

Private Member Functions

- std::shared_ptr< Containers > **createSquareContainer** (float squareSize, float sideWidthPercent)
 - Create the square container in the top-left corner.*
- std::shared_ptr< Containers > **createSideContainer** (float sideYStart, float sideWidth, float sideHeight, float sideWidthPercent, float bottomHeightPercent)
 - Create the side container for team information.*
- std::shared_ptr< Containers > **createBottomContainer** (int screenWidth, int screenHeight, float bottomHeight, float bottomHeightPercent)
 - Create the bottom container.*
- void **recordElementPositions** (std::shared_ptr< Containers > container, std::unordered_map< std::string, float > &initialYPositions, float &lastContainerHeight)
 - Record element positions for scrolling.*
- void **updateElementPositions** (std::shared_ptr< Containers > container, const std::unordered_map< std::string, float > &initialYPositions, float offset)
 - Update elements positions based on scroll value.*
- std::pair< float, float > **calculateContentMetrics** (std::shared_ptr< Containers > container, const std::unordered_map< std::string, float > &initialYPositions)
 - Calculate content height and scroll distance.*
- void **clearTeamDisplayElements** (std::shared_ptr< Containers > container)
 - Clear all team display elements from the container.*
- std::vector< int > **getTeamPlayerNumbers** (const std::string &teamName, const std::vector< zappy::structs::Player > &players)
 - Get player numbers for a specific team.*
- std::string **createPlayerListText** (const std::vector< int > &playerNumbers)
 - Create player list text representation.*
- void **addPlayerListText** (std::shared_ptr< Containers > container, const std::string &teamId, float yPos, const std::vector< int > &playerNumbers)
 - Add player list text to the container.*

Private Attributes

- `std::unordered_map< std::string, std::shared_ptr< Containers > > _containers`
- `std::shared_ptr< RayLib > _raylib`
- `std::shared_ptr< GameInfos > _gameInfos`
- `std::shared_ptr< IAudio > _audio`
- `std::shared_ptr< Help > _help`

5.46.1 Detailed Description

Main [HUD](#) class to manage all UI elements.

This class handles the creation, management, and rendering of all UI containers and their elements like buttons, text, scrollbars, etc.

5.46.2 Constructor & Destructor Documentation

5.46.2.1 HUD()

```
HUD::HUD (
    std::shared_ptr< RayLib > raylib,
    std::shared_ptr< GameInfos > gameInfos,
    std::shared_ptr< IAudio > audio )
```

Construct a new [HUD](#) object.

Parameters

<i>raylib</i>	Reference to the RayLib instance
---------------	--

5.46.3 Member Function Documentation

5.46.3.1 addContainer()

```
std::shared_ptr< Containers > HUD::addContainer (
    const std::string & id,
    float x,
    float y,
    float width,
    float height,
    Color backgroundColor = {40, 40, 40, 200} )
```

Add a new container to the [HUD](#).

Parameters

<i>id</i>	Unique identifier for the container
<i>x</i>	X coordinate
<i>y</i>	Y coordinate
<i>width</i>	Container width
<i>height</i>	Container height
<i>backgroundColor</i>	Background color (optional)

Returns

`std::shared_ptr<Containers>` Pointer to the created container

5.46.3.2 addPlayerListText()

```
void HUD::addPlayerListText (
```



```
std::shared_ptr< Containers > container,
const std::string & teamId,
float yPos,
const std::vector< int > & playerNumbers ) [private]
```

Add player list text to the container.

Parameters

<i>container</i>	Container to add text to
<i>teamId</i>	Team identifier
<i>yPos</i>	Y position percentage
<i>playerNumbers</i>	List of player numbers

5.46.3.3 calculateContentMetrics()

```
std::pair< float, float > HUD::calculateContentMetrics (
    std::shared_ptr< Containers > container,
    const std::unordered_map< std::string, float > & initialYPositions ) [private]
```

Calculate content height and scroll distance.

Parameters

<i>container</i>	The container
<i>initialYPositions</i>	Map with initial positions

Returns

std::pair<float, float> First: content height, Second: team count

5.46.3.4 clearTeamDisplayElements()

```
void HUD::clearTeamDisplayElements (
    std::shared_ptr< Containers > container ) [private]
```

Clear all team display elements from the container.

Parameters

<i>container</i>	Container to clear elements from
------------------	----------------------------------

5.46.3.5 createBottomContainer()

```
std::shared_ptr< Containers > HUD::createBottomContainer (
    int screenWidth,
    int screenHeight,
    float bottomHeight,
    float bottomHeightPercent ) [private]
```

Create the bottom container.

Parameters

<i>screenWidth</i>	Width of the screen
<i>screenHeight</i>	Height of the screen
<i>bottomHeight</i>	Height of the bottom container
<i>bottomHeightPercent</i>	Height as percentage of screen height

Returns

`std::shared_ptr<Containers>` The created container

5.46.3.6 createPlayerListText()

```
std::string HUD::createPlayerListText (
    const std::vector< int > & playerNumbers ) [private]
```

Create player list text representation.

Parameters

<i>playerNumbers</i>	List of player numbers
----------------------	------------------------

Returns

`std::string` Formatted string representation of players

5.46.3.7 createSideContainer()

```
std::shared_ptr< Containers > HUD::createSideContainer (
    float sideYStart,
    float sideWidth,
    float sideHeight,
    float sideWidthPercent,
    float bottomHeightPercent ) [private]
```

Create the side container for team information.

Parameters

<i>sideYStart</i>	Y coordinate start position
<i>sideWidth</i>	Width of the side container
<i>sideHeight</i>	Height of the side container
<i>sideWidthPercent</i>	Width as percentage of screen width
<i>bottomHeightPercent</i>	Height of bottom as percentage of screen height

Returns

`std::shared_ptr<Containers>` The created container

5.46.3.8 createSquareContainer()

```
std::shared_ptr< Containers > HUD::createSquareContainer (
    float squareSize,
    float sideWidthPercent ) [private]
```

Create the square container in the top-left corner.

Parameters

<i>squareSize</i>	Size of the square
<i>sideWidthPercent</i>	Width as percentage of screen width

Returns

`std::shared_ptr<Containers>` The created container

5.46.3.9 getBottomContainer()

```
std::shared_ptr< Containers > HUD::getBottomContainer ( ) const
```

Get the bottom container.

Returns

`std::shared_ptr<Containers>` Pointer to the bottom container

5.46.3.10 getContainer()

```
std::shared_ptr< Containers > HUD::getContainer (
    const std::string & id ) const
```

Get a container by its ID.

Parameters

<i>id</i>	Container identifier
-----------	----------------------

Returns

`std::shared_ptr<Containers>` Pointer to the container, or nullptr if not found

5.46.3.11 getSideContainer()

```
std::shared_ptr< Containers > HUD::getSideContainer ( ) const
```

Get the side container.

Returns

`std::shared_ptr<Containers>` Pointer to the side container

5.46.3.12 getSquareContainer()

```
std::shared_ptr< Containers > HUD::getSquareContainer ( ) const
```

Get the square container in the top-left corner.

Returns

`std::shared_ptr<Containers>` Pointer to the square container

5.46.3.13 getTeamPlayerNumbers()

```
std::vector< int > HUD::getTeamPlayerNumbers (
    const std::string & teamName,
    const std::vector< zappy::structs::Player > & players ) [private]
```

Get player numbers for a specific team.

Parameters

<i>teamName</i>	Team name to filter players
<i>players</i>	List of all players

Returns

std::vector<int> List of player numbers belonging to the team

5.46.3.14 handleResize()

```
void HUD::handleResize (
    int oldWidth,
    int oldHeight,
    int newWidth,
    int newHeight )
```

Handle window resize event.

Updates all containers and UI elements to adjust to the new window size

Parameters

<i>oldWidth</i>	Previous window width
<i>oldHeight</i>	Previous window height
<i>newWidth</i>	New window width
<i>newHeight</i>	New window height

5.46.3.15 initCameraResetButton()

```
void HUD::initCameraResetButton ( )
```

Initialize a camera reset button in the square container.

Creates a button that resets the camera position when clicked

5.46.3.16 initDefaultLayout()

```
void HUD::initDefaultLayout (
    float sideWidthPercent = 15.0f,
    float bottomHeightPercent = 20.0f )
```

Initialize default layout with side and bottom containers.

Creates and adds default containers for the left side and bottom of the screen

Parameters

<i>sideWidth</i>	Width of the side container (default: 250 pixels)
<i>bottomHeight</i>	Height of the bottom container (default: 200 pixels)

Initialize default layout with side and bottom containers

Parameters

<i>sideWidthPercent</i>	Width of side container as percentage of screen width (default: 15%)
<i>bottomHeightPercent</i>	Height of bottom container as percentage of screen height (default: 20%)

5.46.3.17 initExitButton()

```
void HUD::initExitButton ( )
```

Initialize an exit button in the square container.

Creates a button that closes the application when clicked

5.46.3.18 initHelpButton()

```
void HUD::initHelpButton ( )
```

Initialize a help button in the square container.
Creates a button that opens the help menu when clicked

5.46.3.19 initSettingsButton()

```
void HUD::initSettingsButton ( )
```

Initialize a settings button in the square container.
Creates a button that opens the settings menu when clicked

5.46.3.20 initTeamPlayersDisplay()

```
void HUD::initTeamPlayersDisplay (
    std::shared_ptr< GameInfos > gameInfos )
```

Initialize team and player display in the side container.
Creates text elements to show teams and their players

Parameters

<i>gameInfos</i>	The game information containing teams and players
------------------	---

5.46.3.21 recordElementPositions()

```
void HUD::recordElementPositions (
    std::shared_ptr< Containers > container,
    std::unordered_map< std::string, float > & initialYPositions,
    float & lastContainerHeight ) [private]
```

Record element positions for scrolling.

Parameters

<i>container</i>	The container with elements
<i>initialYPositions</i>	Map to store initial positions
<i>lastContainerHeight</i>	Last container height for comparison

5.46.3.22 removeContainer()

```
bool HUD::removeContainer (
    const std::string & id )
```

Remove a container and all its child elements.

Parameters

<i>id</i>	Container identifier
-----------	----------------------

Returns

true If container was found and removed
false If container was not found

5.46.3.23 updateElementPositions()

```
void HUD::updateElementPositions (
    std::shared_ptr< Containers > container,
    const std::unordered_map< std::string, float > & initialYPositions,
    float offset ) [private]
```

Update elements positions based on scroll value.

Parameters

<i>container</i>	The container with elements
<i>initialYPositions</i>	Map with initial positions
<i>offset</i>	Scroll offset to apply

5.46.3.24 updateTeamPlayersDisplay()

```
void HUD::updateTeamPlayersDisplay (
    std::shared_ptr< GameInfos > gameInfos )
```

Update team and player display in the side container.

Updates the text elements showing teams and their players

Parameters


<i>gameInfos</i>	The game information containing teams and players
------------------	---

The documentation for this class was generated from the following files:

- gui/src/Graphic/HUD/HUD.hpp
- gui/src/Graphic/HUD/HUD.cpp

5.47 IAudio Class Reference

Inheritance diagram for IAudio:

**Public Member Functions**


- virtual bool **loadSound** (const std::string &id, const std::string &filepath)=0
- virtual void **playSound** (const std::string &id, float volume=1.0f)=0
- virtual void **stopSound** (const std::string &id)=0
- virtual bool **isSoundPlaying** (const std::string &id) const =0
- virtual void **setSoundLooping** (const std::string &id, bool looping)=0
- virtual void **setSoundVolume** (const std::string &id, float volume)=0

The documentation for this class was generated from the following file:

- gui/src/Audio/IAudio.hpp

5.48 ICommunication Class Reference

Inheritance diagram for ICommunication:



Public Member Functions

- virtual void **sendMessage** (const std::string &message)=0
- virtual bool **hasMessages** () const =0
- virtual std::string **popMessage** ()=0
- virtual bool **isConnected** () const =0
- virtual void **disconnect** ()=0

The documentation for this class was generated from the following file:


- gui/src/Communication/ICommunication.hpp

5.49 IContainers Class Reference

Interface for HUD containers.

```
#include <IContainers.hpp>
```

Inheritance diagram for IContainers:



Public Member Functions

- virtual void **draw** ()=0
Draw the container and its contents.
- virtual void **update** ()=0
Update the container's state.
- virtual void **setPosition** (float x, float y)=0
Set the position of the container.
- virtual void **setSize** (float width, float height)=0
Set the size of the container.
- virtual Rectangle **getBounds** () const =0
Get the current position of the container.
- virtual bool **contains** (float x, float y) const =0
Check if a point is within the container.
- virtual void **setVisible** (bool visible)=0
Set the visibility of the container.
- virtual bool **isVisible** () const =0
Check if the container is visible.

5.49.1 Detailed Description

Interface for HUD containers.

Containers are UI elements that can hold and organize other UI elements like buttons, text, scrollbars, etc.

5.49.2 Member Function Documentation

5.49.2.1 contains()

```
virtual bool IContainers::contains (
    float x,
    float y ) const [pure virtual]
```

Check if a point is within the container.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate

Returns

true If point is within container
false Otherwise

Implemented in [AContainers](#).

5.49.2.2 draw()

```
virtual void IContainers::draw ( ) [pure virtual]
```

Draw the container and its contents.

Implemented in [Containers](#).

5.49.2.3 getBounds()

```
virtual Rectangle IContainers::getBounds ( ) const [pure virtual]
```

Get the current position of the container.

Returns

Rectangle Containing position and size

Implemented in [AContainers](#).

5.49.2.4 isVisible()

```
virtual bool IContainers::isVisible ( ) const [pure virtual]
```

Check if the container is visible.

Returns

true If visible
false Otherwise

Implemented in [AContainers](#).

5.49.2.5 setPosition()

```
virtual void IContainers::setPosition (
    float x,
    float y ) [pure virtual]
```

Set the position of the container.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate

Implemented in [AContainers](#).

5.49.2.6 setSize()

```
virtual void IContainers::setSize (
    float width,
    float height ) [pure virtual]
```

Set the size of the container.

Parameters

<i>width</i>	Container width
<i>height</i>	Container height

Implemented in [AContainers](#).

5.49.2.7 setVisible()

```
virtual void IContainers::setVisible (
    bool visible ) [pure virtual]
```

Set the visibility of the container.

Parameters

<i>visible</i>	Visibility state
----------------	------------------

Implemented in [AContainers](#).

5.49.2.8 update()

```
virtual void IContainers::update ( ) [pure virtual]
```

Update the container's state.

Implemented in [Containers](#).

The documentation for this class was generated from the following file:

- `gui/src/Graphic/HUD/Containers/IContainers.hpp`

5.50 zappy::structs::Incantation Struct Reference

Public Member Functions

- **Incantation** (int *_x*=0, int *_y*=0, int *_level*=1, const std::vector< int > &*_players*={})

Public Attributes

- int **x**
- int **y**
- int **level**
- std::vector< int > **players**

The documentation for this struct was generated from the following file:

- `gui/src/Utils/Constants.hpp`

5.51 zappy::structs::Inventory Struct Reference

Public Member Functions

- **Inventory** (int *_food*=0, int *_linemate*=0, int *_derauumere*=0, int *_sibur*=0, int *_mendiane*=0, int *_phiras*=0, int *_thystame*=0)

Public Attributes

- int **food**
- int **linemate**

- int **deraumere**
- int **sibur**
- int **mendiane**
- int **phiras**
- int **thystame**

The documentation for this struct was generated from the following file:

- `gui/src/Utils/Constants.hpp`

5.52 inventory_s Struct Reference

Public Attributes

- int **nbFood**
- int **nbLinemate**
- int **nbDeraumere**
- int **nbSibur**
- int **nbMendiane**
- int **nbPhiras**
- int **nbThystame**

The documentation for this struct was generated from the following file:

- `server/include/game.h`

5.53 item_handler_t Struct Reference

Public Attributes

- char * **name**
- void(* **add_func**)(inventory_t *)

The documentation for this struct was generated from the following file:


- `server/include/zappy.h`

5.54 UIElement Class Reference

Interface for all UI elements.

```
#include <UIElement.hpp>
```

Inheritance diagram for UIElement:



Public Member Functions

- virtual void **draw** ()=0
Draw the UI element.
- virtual void **update** ()=0

Update the UI element's state.

- virtual void [setPosition](#) (float x, float y)=0

Set the position of the UI element.

- virtual void [setSize](#) (float width, float height)=0

Set the size of the UI element.

- virtual Rectangle [getBounds](#) () const =0

Get the bounds of the UI element.

- virtual bool [contains](#) (float x, float y) const =0

Check if the UI element contains a point.

- virtual void [setVisible](#) (bool visible)=0

Set the visibility of the UI element.

- virtual bool [isVisible](#) () const =0

Check if the UI element is visible.

5.54.1 Detailed Description

Interface for all UI elements.

Base interface that all UI elements (buttons, text, scrollbars, etc.) must implement

5.54.2 Member Function Documentation

5.54.2.1 contains()

```
virtual bool UIElement::contains (
    float x,
    float y ) const [pure virtual]
```

Check if the UI element contains a point.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate

Returns

true If the point is inside the element

false Otherwise

Implemented in [AUElement](#).

5.54.2.2 draw()

```
virtual void UIElement::draw ( ) [pure virtual]
```

Draw the UI element.

Implemented in [Button](#), and [Text](#).

5.54.2.3 getBounds()

```
virtual Rectangle UIElement::getBounds ( ) const [pure virtual]
```

Get the bounds of the UI element.

Returns

Rectangle The bounds of the element

Implemented in [AUElement](#).

5.54.2.4 isVisible()

```
virtual bool UIElement::isVisible ( ) const [pure virtual]
```

Check if the UI element is visible.

Returns

true If visible
false Otherwise

Implemented in [AUElement](#).

5.54.2.5 setPosition()

```
virtual void UIElement::setPosition (
    float x,
    float y ) [pure virtual]
```

Set the position of the UI element.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate

Implemented in [AUElement](#).

5.54.2.6 setSize()

```
virtual void UIElement::setSize (
    float width,
    float height ) [pure virtual]
```

Set the size of the UI element.

Parameters

<i>width</i>	New width
<i>height</i>	New height

Implemented in [AUElement](#), [Button](#), and [Text](#).

5.54.2.7 setVisible()

```
virtual void UIElement::setVisible (
    bool visible ) [pure virtual]
```

Set the visibility of the UI element.

Parameters

<i>visible</i>	Visibility state
----------------	------------------

Implemented in [AUElement](#).

5.54.2.8 update()

```
virtual void UIElement::update ( ) [pure virtual]
```

Update the UI element's state.

Implemented in [Button](#), and [Text](#).

The documentation for this class was generated from the following file:

- `gui/src/Graphic/HUD/UIElement/UIElement.hpp`

5.55 Map Class Reference

Public Member Functions

- **Map** (std::shared_ptr< [GameInfos](#) > gameInfos, std::shared_ptr< [RayLib](#) > raylib)
- void **draw** ()
- void **drawTile** (int x, int y, const [zappy::structs::Tile](#) &tile)
- void **drawRock** (int x, int y, const [zappy::structs::Tile](#) &tile)
- void **drawFood** (int x, int y, const [zappy::structs::Tile](#) &tile)
- void **drawPlayers** (int x, int y)
- void **drawEggs** (int x, int y)
- Color **getTeamColor** (const std::string &teamName)
- float **getOffset** (DisplayPriority priority, int x, int y, size_t stackIndex=0)

Private Member Functions

- void **drawOrientationArrow** (const Vector3 &position, int orientation, float playerHeight)

Private Attributes

- std::shared_ptr< [GameInfos](#) > **_gameInfos**
- std::shared_ptr< [RayLib](#) > **_raylib**
- std::unordered_map< std::string, Color > **_teamColors**

Static Private Attributes

- static constexpr float **BASE_HEIGHT_TILE** = 0.0f
- static constexpr float **BASE_HEIGHT_FOOD** = 0.2f
- static constexpr float **BASE_HEIGHT_ROCK** = 0.2f
- static constexpr float **BASE_HEIGHT_EGG** = 0.2f
- static constexpr float **BASE_HEIGHT_PLAYER** = 0.2f
- static constexpr float **FOOD_HEIGHT** = 0.3f
- static constexpr float **ROCK_HEIGHT** = 0.3f
- static constexpr float **EGG_HEIGHT** = 0.3f
- static constexpr float **PLAYER_HEIGHT** = 1.1f

The documentation for this class was generated from the following files:

- gui/src/Graphic/Map.hpp
- gui/src/Graphic/Map.cpp

5.56 map_t Struct Reference

Public Attributes

- int **width**
- int **height**
- [egg_t](#) * **currentEggs**
- [inventory_t](#) ** **tiles**

The documentation for this struct was generated from the following file:

- server/include/game.h

5.57 MockServer Class Reference

Public Member Functions

- **MockServer** (int port)
- bool **start** ()
- void **stop** ()
- bool **sendToAllClients** (const std::string &message)
- bool **hasClients** () const

Private Member Functions

- void **acceptLoop** ()

Private Attributes

- int **_port**
- bool **_running**
- int **_serverSocket**
- std::thread **_thread**
- std::vector< int > **_clientSockets**

The documentation for this class was generated from the following file:

- tests/unit/gui/Communication/Communication_test.cpp

5.58 RayLib::ModelData Struct Reference

Public Attributes

- Model **model**
- unsigned int **animationCount**
- Vector3 **center**

The documentation for this struct was generated from the following file:

- gui/src/RayLib/RayLib.hpp

5.59 MsgHandler Class Reference

Public Member Functions

- **MsgHandler** (std::shared_ptr< [GameInfos](#) > gameInfos, std::shared_ptr< [ICommunication](#) > communication)
- void **start** ()
- void **stop** ()

Protected Member Functions

- void **messageLoop** ()
- void **handleMessage** (const std::string &message)
- bool **handleWelcomeMessage** (const std::string &message)
- bool **handleMszMessage** (const std::string &message)
- bool **handleBctMessage** (const std::string &message)
- bool **handleTnaMessage** (const std::string &message)
- bool **handlePnwMessage** (const std::string &message)
- bool **handlePpoMessage** (const std::string &message)
- bool **handlePlvMessage** (const std::string &message)

- bool **handlePinMessage** (const std::string &message)
- bool **handlePexMessage** (const std::string &message)
- bool **handlePbcMessage** (const std::string &message)
- bool **handlePicMessage** (const std::string &message)
- bool **handlePieMessage** (const std::string &message)
- bool **handlePfkMessage** (const std::string &message)
- bool **handlePdrMessage** (const std::string &message)
- bool **handlePgtMessage** (const std::string &message)
- bool **handlePdiMessage** (const std::string &message)
- bool **handleEnwMessage** (const std::string &message)
- bool **handleEboMessage** (const std::string &message)
- bool **handleEdiMessage** (const std::string &message)
- bool **handleSgtMessage** (const std::string &message)
- bool **handleSstMessage** (const std::string &message)
- bool **handleSegMessage** (const std::string &message)
- bool **handleSmgMessage** (const std::string &message)
- bool **handleSucMessage** (const std::string &message)
- bool **handleSbpMessage** (const std::string &message)

Private Attributes

- std::thread **_thread**
- std::atomic< bool > **_running**
- std::mutex **_mutex**
- std::condition_variable **_condition**
- std::shared_ptr< [GameInfos](#) > **_gameInfos**
- std::shared_ptr< [ICommunication](#) > **_communication**
- std::mutex **_gameInfosMutex**
- std::map< std::string, std::function< bool(const std::string &)> > **_messageHandlers**)

The documentation for this class was generated from the following files:

- gui/src/Client/MsgHandler.hpp
- gui/src/Client/MsgHandler.cpp

5.60 network_s Struct Reference

Public Attributes


- int **fd**
- [buffer_t](#) * **buffer**

The documentation for this struct was generated from the following file:

- server/include/game.h

5.61 Exceptions::NetworkException Class Reference

Inheritance diagram for Exceptions::NetworkException:



Public Member Functions

- **NetworkException** (const std::string &message)
- const char * **what** () const noexcept override

Private Attributes


- std::string **_message**

The documentation for this class was generated from the following file:

- gui/src/Exceptions/Exceptions.hpp

5.62 OutputRedirector::NullBuffer Class Reference

Inheritance diagram for OutputRedirector::NullBuffer:

**Protected Member Functions**

- int **overflow** (int c) override

The documentation for this class was generated from the following file:

- tests/unit/gui/main_test.cpp

5.63 OutputRedirector Class Reference**Classes**

- class [NullBuffer](#)

Private Attributes

- std::streambuf * **originalCout**
- std::streambuf * **originalCerr**
- [NullBuffer](#) **nullBuffer**

The documentation for this class was generated from the following file:

- tests/unit/gui/main_test.cpp

5.64 params_s Struct Reference**Public Attributes**

- int **port**
- int **x**
- int **y**
- int **nb_team**
- char ** **teams**
- int **nb_client**
- int **freq**

- bool **is_debug**

The documentation for this struct was generated from the following file:

- server/include/zappy.h

5.65 Parser.Parser Class Reference

Public Member Functions

- **__init__** (self)
- **run** (self)
- **parseConfig** (self)
- **parseJsons** (self)
- **getTests** (self)

Public Attributes

- **tests_folder**
- **tests_files_names**
- **tests_files**
- **output_folder**
- **testsObjects**

The documentation for this class was generated from the following file:

- tests/functional/Parser.py

5.66 Player.Player Class Reference

Public Member Functions

- None **__init__** (self, str name, str ip, int port=4242)
- **__del__** (self)
- **__str__** (self)
- int **create_child** (self)
- None **startComThread** (self)
- None **setMapSize** (self, int x, int y)
- list[str] **getNeededStonesByPriority** (self)
- None **dropStonesForSurvival** (self)
- str **getDirectionFromSound** (self, int direction)
- None **roombaAction** (self)
- None **handleResponseInventory** (self)
- None **handleResponseLook** (self)
- None **handleResponseKO** (self)
- None **handleResponseOK** (self)
- None **handleCommandResponse** (self, str response)
- None **loop** (self)

Public Attributes

- **x**
- **y**
- **look**
- **inventory**
- **handleResponseInventory**
- **handleResponseLook**

- **handleResponseKO**
- **handleResponseOK**

The documentation for this class was generated from the following file:

- ai/src/Player/Player.py

5.67 zappy::structs::Player Struct Reference

Public Member Functions

- **Player** (int _number=0, int _x=0, int _y=0, int _orientation=0, int _level=1, const std::string &_teamName="", struct [Inventory](#) _inventory=[Inventory](#)())

Public Attributes

- int **number**
- int **x**
- int **y**
- int **orientation**
- int **level**
- std::string **teamName**
- struct [Inventory](#) **inventory**

The documentation for this struct was generated from the following file:

- gui/src/Utils/Constants.hpp

5.68 player_s Struct Reference

Public Attributes


- int **id**
- [network_t](#) * **network**
- int **level**
- int **posX**
- int **posY**
- [direction_t](#) **direction**
- [inventory_t](#) * **inventory**
- char * **team**
- [action_queue_t](#) * **pending_actions**
- [time_t](#) **last_action_time**
- bool **is_busy**
- int **remaining_cooldown**
- struct [player_s](#) * **next**

The documentation for this struct was generated from the following file:

- server/include/game.h

5.69 Exceptions.PlayerDead Class Reference

Inheritance diagram for Exceptions.PlayerDead:

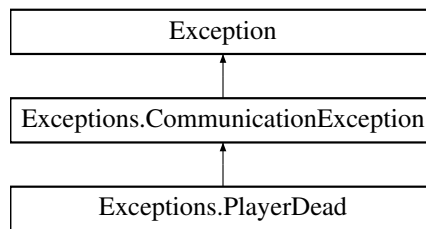

Public Member Functions

- [__init__](#) (self)

5.69.1 Constructor & Destructor Documentation

5.69.1.1 __init__()

Exceptions.PlayerDead.__init__ (
 self)

Reimplemented from [Exceptions.CommunicationException](#).

The documentation for this class was generated from the following file:

- ai/src/Exceptions/Exceptions.py

5.70 RayLib Class Reference

Classes

- struct [ModelData](#)

Public Member Functions

- void **initWindow** (int width, int height, const std::string &title)
- void **closeWindow** ()
- bool **windowShouldClose** () const
- void **beginDrawing** ()
- void **endDrawing** ()
- void **clearBackground** (Color color=WHITE)
- bool **isWindowReady** () const
- int **getMonitorWidth** (int monitor) const
- int **getMonitorHeight** (int monitor) const
- void **waitTime** (float seconds) const
- void **setTargetFPS** (int fps) const
- int **getFPS** () const
- float **getFrameTime** () const
- bool **checkCollisionPointRec** (Vector2 point, Rectangle rec) const
- void **drawTextureRec** (Texture2D texture, Rectangle source, Vector2 position, Color tint)
- void **unloadTexture** (Texture2D texture)
- bool **isMouseButtonDown** (int button) const
- bool **isMouseButtonPressed** (int button) const
- bool **isMouseButtonReleased** (int button) const
- bool **isKeyDown** (int key) const
- bool **isKeyPressed** (int key) const
- bool **isKeyReleased** (int key) const
- Vector2 **getMouseDelta** ()
- Vector2 **getMousePosition** () const
- void **setMousePosition** (int x, int y)

- void **disableCursor** ()
- void **enableCursor** ()
- int **getScreenWidth** () const
- int **getScreenHeight** () const
- float **getMouseWheelMove** () const
- bool **isGamepadAvailable** (int gamepad) const
- bool **isGamepadButtonPressed** (int gamepad, int button) const
- bool **isGamepadButtonDown** (int gamepad, int button) const
- bool **isGamepadButtonReleased** (int gamepad, int button) const
- float **getGamepadAxisMovement** (int gamepad, int axis) const
- void **beginScissorMode** (int x, int y, int width, int height)
- void **endScissorMode** ()
- void **begin3DMode** ()
- void **end3DMode** ()
- float **vector3Distance** (Vector3 v1, Vector3 v2) const
- Vector3 **vector3Normalize** (Vector3 v) const
- Vector3 **vector3Subtract** (Vector3 v1, Vector3 v2) const
- Vector3 **vector3Add** (Vector3 v1, Vector3 v2) const
- void **initCamera** ()
- void **setCameraPosition** (Vector3 position)
- void **setCameraTarget** (Vector3 target)
- void **setCameraUp** (Vector3 up)
- void **setCameraFovy** (float fovy)
- void **setCameraProjection** (int projection)
- void **updateCamera** (int mode=CAMERA_FREE)
- void **updateCameraFreeMode** ()
- Camera3D **getCamera** () const
- void **drawGrid** (int slices, float spacing)
- void **drawCube** (Vector3 position, float width, float height, float length, Color color)
- void **drawCubeWires** (Vector3 position, float width, float height, float length, Color color)
- void **drawSphere** (Vector3 position, float radius, Color color)
- void **drawSphereWires** (Vector3 position, float radius, int rings, int slices, Color color)
- void **drawCylinder** (Vector3 position, float radiusTop, float radiusBottom, float height, int slices, Color color)
- void **drawCylinderWires** (Vector3 position, float radiusTop, float radiusBottom, float height, int slices, Color color)
- void **drawCylinderEx** (Vector3 startPos, Vector3 endPos, float startRadius, float endRadius, int sides, Color color)
- void **drawPlane** (Vector3 position, Vector2 size, Color color)
- void **drawLine3D** (Vector3 startPos, Vector3 endPos, Color color)
- bool **loadModel** (const std::string &id, const std::string &filepath, Vector3 center={0.0f, 0.0f, 0.0f})
- void **drawModel** (const std::string &id, Vector3 position, float scale, Color tint=WHITE)
- void **drawModelEx** (const std::string &id, Vector3 position, Vector3 rotationAxis, float rotationAngle, Vector3 scale, Color tint=WHITE)
- void **drawModelWires** (const std::string &id, Vector3 position, float scale, Color tint=WHITE)
- void **drawModelWiresEx** (const std::string &id, Vector3 position, Vector3 rotationAxis, float rotationAngle, Vector3 scale, Color tint=WHITE)
- void **unloadModel** (const std::string &id)
- void **unloadAllModels** ()
- bool **modelExists** (const std::string &id) const
- void **drawRectangleRec** (Rectangle rec, Color color)
- void **drawText** (const std::string &text, float x, float y, float fontSize, Color color)
- float **measureText** (const std::string &text, float fontSize) const

Private Attributes


- bool **_isInitialized**
- Camera3D **_camera**
- Vector2 **_previousMousePosition**
- bool **_isCursorLocked**
- std::map< std::string, [ModelData](#) > **_models**
- std::map< std::string, Sound > **_sounds**
- std::map< std::string, Music > **_musics**

The documentation for this class was generated from the following files:

- gui/src/RayLib/RayLib.hpp
- gui/src/RayLib/RayLib.cpp
- gui/src/RayLib/Raylib3dDrawing.cpp
- gui/src/RayLib/Raylib3dEnv.cpp
- gui/src/RayLib/Raylib3dModel.cpp
- gui/src/RayLib/RaylibCamera.cpp
- gui/src/RayLib/RaylibGamepad.cpp
- gui/src/RayLib/RaylibInput.cpp
- gui/src/RayLib/RaylibWindow.cpp

5.71 Exceptions::ReceiveException Class Reference

Inheritance diagram for Exceptions::ReceiveException:

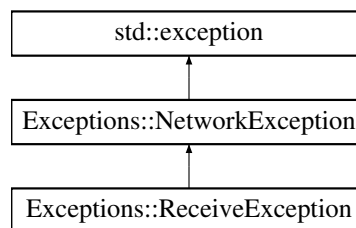**Public Member Functions**

- **ReceiveException** (const std::string &message)

Public Member Functions inherited from [Exceptions::NetworkException](#)

- **NetworkException** (const std::string &message)
- const char * **what** () const noexcept override

The documentation for this class was generated from the following file:

- gui/src/Exceptions/Exceptions.hpp

5.72 RelativePosition Struct Reference

Structure to store relative positions and sizes as percentages.

```
#include <AContainers.hpp>
```

Public Attributes

- float **xPercent**
- float **yPercent**
- float **widthPercent**
- float **heightPercent**

5.72.1 Detailed Description


Structure to store relative positions and sizes as percentages.

The documentation for this struct was generated from the following file:

- `gui/src/Graphic/HUD/Containers/AContainers.hpp`

5.73 Exceptions::SendException Class Reference

Inheritance diagram for Exceptions::SendException:

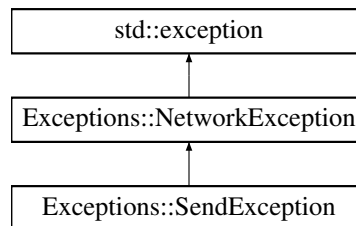

Public Member Functions

- **SendException** (const std::string &message)

Public Member Functions inherited from Exceptions::NetworkException

- **NetworkException** (const std::string &message)
- const char * **what** () const noexcept override

The documentation for this class was generated from the following file:

- `gui/src/Exceptions/Exceptions.hpp`

5.74 server_s Struct Reference

Public Attributes

- int **sockfd**
- struct pollfd **pollserver**

The documentation for this struct was generated from the following file:

- `server/include/zappy.h`

5.75 Socket.Socket Class Reference

Public Member Functions

- **__init__** (self, str host, int port)
- **connect** (self)
- int **get_fd** (self)
- **send** (self, str content)
- str **receive** (self)
- **close** (self)

Protected Attributes


- `_host`
- `_port`
- `_address`
- `_socket`

The documentation for this class was generated from the following file:

- `ai/src/Communication/Socket.py`

5.76 Exceptions::SocketCreationException Class Reference

Inheritance diagram for Exceptions::SocketCreationException:

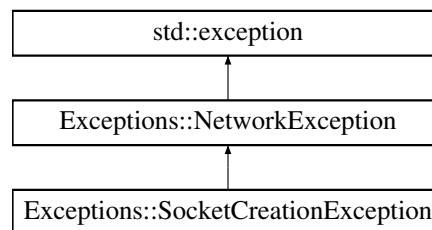**Public Member Functions**

- **SocketCreationException** (const std::string &message)

Public Member Functions inherited from [Exceptions::NetworkException](#)


- **NetworkException** (const std::string &message)
- const char * **what** () const noexcept override

The documentation for this class was generated from the following file:

- `gui/src/Exceptions/Exceptions.hpp`

5.77 Exceptions.SocketException Class Reference

Inheritance diagram for Exceptions.SocketException:

**Public Member Functions**

- **__init__** (self, str message)

The documentation for this class was generated from the following file:

- `ai/src/Exceptions/Exceptions.py`

5.78 team_s Struct Reference

Public Attributes

- char * **name**
- int **nbPlayers**
- int **nbPlayerAlive**
- [player_t](#) * **players**
- struct [team_s](#) * **next**

The documentation for this struct was generated from the following file:

- server/include/game.h

5.79 TestCase.TestCase Class Reference

Public Member Functions

- **__init__** (self, name, desc, input, output, value, output_folder)
- **execute** (self)
- **check** (self)
- **displayPassed** (self, index)
- **displayFailed** (self, index)

Public Attributes

- **name**
- **desc**
- **input**
- **output**
- **value**
- **tty_mode**
- **tty_input**
- **succeed_after**
- **succeed_forced**
- **real_output**
- **real_value**
- **raw_output**

Protected Member Functions

- **_execute_normal** (self)
- **_execute_tty** (self)

The documentation for this class was generated from the following file:

- tests/functional/TestCase.py

5.80 test_cli.TestCLI Class Reference

Public Member Functions

- [test_parse_args_valid](#) (self)
- [test_parse_args_valid_ip](#) (self)
- [test_parse_args_invalid_option](#) (self)
- [test_parse_args_missing_value](#) (self)
- [test_parse_args_not_enough_args](#) (self)
- [test_parse_port_invalid](#) (self)

- [test_parse_port_negative](#) (self)
- [test_parse_port_too_large](#) (self)
- [test_parse_name_empty](#) (self)
- [test_parse_name_whitespace](#) (self)
- [test_parse_machine_empty](#) (self)
- [test_parse_machine_invalid_ip_format](#) (self)
- [test_parse_machine_invalid_ip_value](#) (self)
- [test_parse_machine_invalid_ip_chars](#) (self)
- [test_validate_config_missing_port](#) (self)
- [test_validate_config_missing_name](#) (self)

5.80.1 Member Function Documentation

5.80.1.1 test_parse_args_invalid_option()

```
test_cli.TestCLI.test_parse_args_invalid_option (  
    self )
```

Test parsing invalid option

5.80.1.2 test_parse_args_missing_value()

```
test_cli.TestCLI.test_parse_args_missing_value (  
    self )
```

Test parsing missing value for option

5.80.1.3 test_parse_args_not_enough_args()

```
test_cli.TestCLI.test_parse_args_not_enough_args (  
    self )
```

Test parsing not enough arguments

5.80.1.4 test_parse_args_valid()

```
test_cli.TestCLI.test_parse_args_valid (  
    self )
```

Test parsing valid command line arguments

5.80.1.5 test_parse_args_valid_ip()

```
test_cli.TestCLI.test_parse_args_valid_ip (  
    self )
```

Test parsing valid IP address

5.80.1.6 test_parse_machine_empty()

```
test_cli.TestCLI.test_parse_machine_empty (  
    self )
```

Test parsing empty machine name

5.80.1.7 test_parse_machine_invalid_ip_chars()

```
test_cli.TestCLI.test_parse_machine_invalid_ip_chars (
    self )
```

Test parsing IP with invalid characters

5.80.1.8 test_parse_machine_invalid_ip_format()

```
test_cli.TestCLI.test_parse_machine_invalid_ip_format (
    self )
```

Test parsing invalid IP format

5.80.1.9 test_parse_machine_invalid_ip_value()

```
test_cli.TestCLI.test_parse_machine_invalid_ip_value (
    self )
```

Test parsing invalid IP value

5.80.1.10 test_parse_name_empty()

```
test_cli.TestCLI.test_parse_name_empty (
    self )
```

Test parsing empty team name

5.80.1.11 test_parse_name_whitespace()

```
test_cli.TestCLI.test_parse_name_whitespace (
    self )
```

Test parsing whitespace team name

5.80.1.12 test_parse_port_invalid()

```
test_cli.TestCLI.test_parse_port_invalid (
    self )
```

Test parsing invalid port

5.80.1.13 test_parse_port_negative()

```
test_cli.TestCLI.test_parse_port_negative (
    self )
```

Test parsing negative port

5.80.1.14 test_parse_port_too_large()

```
test_cli.TestCLI.test_parse_port_too_large (
    self )
```

Test parsing port that is too large

5.80.1.15 test_validate_config_missing_name()

```
test_cli.TestCLI.test_validate_config_missing_name (
    self )
```

Test validating config with missing name

5.80.1.16 test_validate_config_missing_port()

```
test_cli.TestCLI.test_validate_config_missing_port (
    self )
```

Test validating config with missing port

The documentation for this class was generated from the following file:

- tests/unit/ai/CLI/test_cli.py


5.81 test_com.TestCommunication Class Reference

The documentation for this class was generated from the following file:

- tests/unit/ai/Communication/test_com.py

5.82 test_hash.TestHash Class Reference

Inheritance diagram for test_hash.TestHash:

**Public Member Functions**

- **setUp** (self)
- **test_hash_initialization** (self)
- **test_simple_xor** (self)
- **test_hash_message** (self)
- **test_unhash_message** (self)
- **test_hash_unhash_roundtrip** (self)
- **test_different_keys_produce_different_hashes** (self)

Public Attributes

- **hash_obj**

The documentation for this class was generated from the following file:

- tests/unit/ai/Hash/test_hash.py

5.83 test_player.TestPlayer Class Reference

The documentation for this class was generated from the following file:

- tests/unit/ai/Player/test_player.py

5.84 test_socket.TestSocket Class Reference

Public Member Functions

- [test_socket_init](#) (self)
- [test_socket_connect_success](#) (self, mock_socket)
- [test_socket_connect_failure](#) (self, mock_socket)
- [test_socket_send_success](#) (self, mock_socket)
- [test_socket_send_unicode](#) (self, mock_socket)
- [test_socket_receive_connection_closed](#) (self, mock_socket)
- [test_socket_receive_unicode](#) (self, mock_socket)
- [test_socket_close](#) (self, mock_socket)
- [test_socket_different_hosts_and_ports](#) (self)

5.84.1 Member Function Documentation

5.84.1.1 test_socket_close()

```
test_socket.TestSocket.test_socket_close (  
    self,  
    mock_socket )
```

Test socket close

5.84.1.2 test_socket_connect_failure()

```
test_socket.TestSocket.test_socket_connect_failure (  
    self,  
    mock_socket )
```

Test socket connection failure

5.84.1.3 test_socket_connect_success()

```
test_socket.TestSocket.test_socket_connect_success (  
    self,  
    mock_socket )
```

Test successful socket connection

5.84.1.4 test_socket_different_hosts_and_ports()

```
test_socket.TestSocket.test_socket_different_hosts_and_ports (  
    self )
```

Test socket creation with different hosts and ports

5.84.1.5 test_socket_init()

```
test_socket.TestSocket.test_socket_init (  
    self )
```

Test socket initialization

5.84.1.6 test_socket_receive_connection_closed()

```
test_socket.TestSocket.test_socket_receive_connection_closed (
    self,
    mock_socket )
```

Test handling closed connection during receive

5.84.1.7 test_socket_receive_unicode()

```
test_socket.TestSocket.test_socket_receive_unicode (
    self,
    mock_socket )
```

Test receiving unicode messages

5.84.1.8 test_socket_send_success()

```
test_socket.TestSocket.test_socket_send_success (
    self,
    mock_socket )
```

Test successful message sending

5.84.1.9 test_socket_send_unicode()

```
test_socket.TestSocket.test_socket_send_unicode (
    self,
    mock_socket )
```

Test sending unicode messages

The documentation for this class was generated from the following file:


- tests/unit/ai/Communication/test_socket.py

5.85 Text Class Reference

[Text](#) UI element.

```
#include <Text.hpp>
```

Inheritance diagram for [Text](#):

**Public Member Functions**

- [Text](#) (std::shared_ptr< [RayLib](#) > raylib, float x, float y, const std::string &text, float fontSize=20.0f, Color color=BLACK)
Construct a new [Text](#) element.
- ~[Text](#) () override=default
Destroy the [Text](#) element.

- void **draw** () override
Draw the text.
- void **update** () override
Update the text (does nothing for text elements)
- void **setText** (const std::string &text)
Set the text content.
- std::string **getText** () const
Get the text content.
- void **setFontSize** (float fontSize)
Set the font size.
- float **getFontSize** () const
Get the font size.
- void **setColor** (Color color)
Set the text color.
- Color **getColor** () const
Get the text color.
- void **setSize** (float width, float height) override
Set the size of the text element For text elements, height determines font size and width is calculated based on text content.

Public Member Functions inherited from **AUIElement**

- **AUIElement** (std::shared_ptr< **RayLib** > raylib, float x, float y, float width, float height)
*Construct a new **AUIElement** object.*
- virtual ~**AUIElement** ()=default
*Destroy the **AUIElement** object.*
- void **setPosition** (float x, float y) override
Set the position of the UI element.
- Rectangle **getBounds** () const override
Get the bounds of the UI element.
- bool **contains** (float x, float y) const override
Check if the UI element contains a point.
- void **setVisible** (bool visible) override
Set the visibility of the UI element.
- bool **isVisible** () const override
Check if the UI element is visible.
- void **setRelativePosition** (float xPercent, float yPercent, float widthPercent, float heightPercent)
Set position and size as percentages of parent container.
- **UIRelativePosition** **getRelativePosition** () const
Get the relative position.

Private Attributes

- std::string **_text**
- float **_fontSize**
- Color **_color**
- std::shared_ptr< **RayLib** > **_raylib**

Additional Inherited Members

Protected Attributes inherited from [AUIElement](#)

- `std::shared_ptr< RayLib > _raylib`
- `Rectangle _bounds`
- `UIRelativePosition _relativePos`
- `bool _visible`

5.85.1 Detailed Description

[Text](#) UI element.

A UI element for rendering text

5.85.2 Constructor & Destructor Documentation

5.85.2.1 Text()

```
Text::Text (
    std::shared_ptr< RayLib > raylib,
    float x,
    float y,
    const std::string & text,
    float fontSize = 20.0f,
    Color color = BLACK )
```

Construct a new [Text](#) element.

Parameters

<i>x</i>	X coordinate
<i>y</i>	Y coordinate
<i>text</i>	Text content
<i>fontSize</i>	Font size
<i>color</i>	Text color

5.85.3 Member Function Documentation

5.85.3.1 draw()

```
void Text::draw ( ) [override], [virtual]
```

Draw the text.

Implements [IUIElement](#).

5.85.3.2 getColor()

```
Color Text::getColor ( ) const
```

Get the text color.

Returns

Color [Text](#) color

5.85.3.3 getFontSize()

```
float Text::getFontSize ( ) const
```

Get the font size.

Returns

float Font size

5.85.3.4 getText()

```
std::string Text::getText ( ) const
```

Get the text content.

Returns

std::string [Text](#) content

5.85.3.5 setColor()

```
void Text::setColor (
    Color color )
```

Set the text color.

Parameters

<i>color</i>	New text color
--------------	----------------

5.85.3.6 setFontSize()

```
void Text::setFontSize (
    float fontSize )
```

Set the font size.

Parameters

<i>fontSize</i>	New font size
-----------------	---------------

5.85.3.7 setSize()

```
void Text::setSize (
    float width,
    float height ) [override], [virtual]
```

Set the size of the text element For text elements, height determines font size and width is calculated based on text content.

Parameters

<i>width</i>	Desired width (may be adjusted based on text content)
<i>height</i>	Desired height (used as font size)

Reimplemented from [AUIElement](#).

5.85.3.8 setText()

```
void Text::setText (
    const std::string & text )
```

Set the text content.

Parameters

<i>text</i>	New text content
-------------	------------------

5.85.3.9 update()

```
void Text::update ( ) [override], [virtual]
```

Update the text (does nothing for text elements)

Implements [IUIElement](#).

The documentation for this class was generated from the following files:

- `gui/src/Graphic/HUD/Text/Text.hpp`
- `gui/src/Graphic/HUD/Text/Text.cpp`

5.86 zappy::structs::Tile Struct Reference

Public Member Functions

- **Tile** (int `_x`=0, int `_y`=0, int `_food`=0, int `_linemate`=0, int `_deraumere`=0, int `_sibur`=0, int `_mendiane`=0, int `_phiras`=0, int `_thystame`=0)

Public Attributes

- int **x**
- int **y**
- int **food**
- int **linemate**
- int **deraumere**
- int **sibur**
- int **mendiane**
- int **phiras**
- int **thystame**

The documentation for this struct was generated from the following file:

- `gui/src/Utils/Constants.hpp`

5.87 tiles_s Struct Reference

Public Attributes

- int **x**
- int **y**

The documentation for this struct was generated from the following file:

- `server/include/algo.h`

5.88 UIRelativePosition Struct Reference

Structure to store relative positions and sizes as percentages.

```
#include <AUIElement.hpp>
```

Public Attributes

- float **xPercent**
- float **yPercent**
- float **widthPercent**
- float **heightPercent**

5.88.1 Detailed Description

Structure to store relative positions and sizes as percentages.

The documentation for this struct was generated from the following file:

- `gui/src/Graphic/HUD/UIElement/AUIElement.hpp`

5.89 zappy_s Struct Reference

Public Attributes

- `server_t` * **network**
- `game_t` * **game**
- `graph_net_t` * **graph**
- `params_t` * **params**

The documentation for this struct was generated from the following file:

- `server/include/zappy.h`

Chapter 6

File Documentation

6.1 Audio.hpp

```
00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** Audio
00006 */
00007
00008 #ifndef AUDIO_HPP_
00009 #define AUDIO_HPP_
00010
00011 #include <string>
00012 #include <map>
00013 #include <memory>
00014 #include <SFML/Audio.hpp>
00015 #include "IAudio.hpp"
00016
00017 class Audio : public IAudio {
00018     public:
00019         Audio();
00020         ~Audio();
00021
00022         bool loadSound(const std::string& id, const std::string& filepath);
00023
00024         void playSound(const std::string& id, float volume = 1.0f);
00025         void stopSound(const std::string& id);
00026         bool isSoundPlaying(const std::string& id) const;
00027
00028         void setSoundLooping(const std::string& id, bool looping);
00029         void setSoundVolume(const std::string& id, float volume);
00030
00031     private:
00032         std::map<std::string, std::unique_ptr<sf::Music> _sounds;
00033 };
00034
00035 #endif /* !AUDIO_HPP_ */
```

6.2 IAudio.hpp

```
00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** IAudio
00006 */
00007
00008 #ifndef IAUDIO_HPP_
00009 #define IAUDIO_HPP_
00010
00011 #include <string>
00012
00013 class IAudio {
00014     public:
00015         virtual ~IAudio() = default;
00016
00017         virtual bool loadSound(const std::string& id, const std::string& filepath) = 0;
00018
00019         virtual void playSound(const std::string& id, float volume = 1.0f) = 0;
00020         virtual void stopSound(const std::string& id) = 0;
00021         virtual bool isSoundPlaying(const std::string& id) const = 0;
```

```

00022
00023     virtual void setSoundLooping(const std::string& id, bool looping) = 0;
00024     virtual void setSoundVolume(const std::string& id, float volume) = 0;
00025 };
00026
00027 #endif /* !IAUDIO_HPP_ */

```

6.3 CLI.hpp

```

00001 /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** CLI
00006  */
00007
00008 #ifndef CLI_HPP_
00009 #define CLI_HPP_
00010
00011 #include <string>
00012 #include "../Utils/Constants.hpp"
00013
00014 class CLI {
00015     public:
00016         CLI(int ac, const char *const *av);
00017         ~CLI();
00018
00019         zappy::structs::Config parseArguments(int ac, const char *const *av) const;
00020
00021     private:
00022         int _ac;
00023         const char *const *_av;
00024
00025         bool hasCorrectNumberOfArguments(int ac) const;
00026         int parsePort(const char *portStr) const;
00027         std::string parseHostname(const char *hostnameStr) const;
00028         void validateConfig(bool portFound, bool hostFound) const;
00029 };
00030
00031 #endif /* !CLI_HPP_ */

```

6.4 Client.hpp

```

00001 /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** Client
00006  */
00007
00008 #ifndef CLIENT_HPP_
00009 #define CLIENT_HPP_
00010
00011 #include <memory>
00012
00013 #include "../Utils/Constants.hpp"
00014 #include "../Communication/ICommunication.hpp"
00015 #include "../Game/GameInfos.hpp"
00016 #include "../Graphic/GUI.hpp"
00017 #include "MsgHandler.hpp"
00018
00019 class Client {
00020     public:
00021         Client(int ac, const char *const *av);
00022         ~Client();
00023
00024     private:
00025         zappy::structs::Config _config;
00026         void initialize(int ac, const char *const *av);
00027
00028         std::shared_ptr<ICommunication> _communication;
00029         std::shared_ptr<GameInfos> _gameInfos;
00030         std::unique_ptr<MsgHandler> _msgHandler;
00031         std::unique_ptr<GUI> _gui;
00032 };
00033
00034 #endif /* !CLIENT_HPP_ */

```

6.5 MsgHandler.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** MsgHandler
00006  */
00007
00008  #ifndef MSGHANDLER_HPP_
00009  #define MSGHANDLER_HPP_
00010
00011  #include <memory>
00012  #include <map>
00013  #include <functional>
00014  #include <thread>
00015  #include <mutex>
00016  #include <atomic>
00017  #include <queue>
00018  #include <condition_variable>
00019  #include <string>
00020
00021  #include "../Game/GameInfos.hpp"
00022  #include "../Communication/ICommunication.hpp"
00023  #include "../Utils/Constants.hpp"
00024
00025  class MsgHandler {
00026  public:
00027      MsgHandler(std::shared_ptr<GameInfos> gameInfos,
00028                std::shared_ptr<ICommunication> communication);
00029      ~MsgHandler();
00030
00031      void start();
00032      void stop();
00033
00034  protected:
00035      void messageLoop();
00036
00037      void handleMessage(const std::string& message);
00038      bool handleWelcomeMessage(const std::string& message);
00039      bool handleMszMessage(const std::string& message);
00040      bool handleBctMessage(const std::string& message);
00041      bool handleTnaMessage(const std::string& message);
00042      bool handlePnwMessage(const std::string& message);
00043      bool handlePpoMessage(const std::string& message);
00044      bool handlePlvMessage(const std::string& message);
00045      bool handlePinMessage(const std::string& message);
00046      bool handlePexMessage(const std::string& message);
00047      bool handlePbcMessage(const std::string& message);
00048      bool handlePicMessage(const std::string& message);
00049      bool handlePieMessage(const std::string& message);
00050      bool handlePfkMessage(const std::string& message);
00051      bool handlePdrMessage(const std::string& message);
00052      bool handlePgtMessage(const std::string& message);
00053      bool handlePdiMessage(const std::string& message);
00054      bool handleEnwMessage(const std::string& message);
00055      bool handleEboMessage(const std::string& message);
00056      bool handleEdiMessage(const std::string& message);
00057      bool handleSgtMessage(const std::string& message);
00058      bool handleSstMessage(const std::string& message);
00059      bool handleSegMessage(const std::string& message);
00060      bool handleSmgMessage(const std::string& message);
00061      bool handleSucMessage(const std::string& message);
00062      bool handleSbpMessage(const std::string& message);
00063
00064  private:
00065      std::thread _thread;
00066      std::atomic<bool> _running;
00067      std::mutex _mutex;
00068      std::condition_variable _condition;
00069
00070      std::shared_ptr<GameInfos> _gameInfos;
00071      std::shared_ptr<ICommunication> _communication;
00072      std::mutex _gameInfosMutex;
00073
00074      std::map<std::string, std::function<bool(const std::string&)>> _messageHandlers;
00075  };
00076
00077  #endif /* !MSGHANDLER_HPP_ */

```

6.6 Communication.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025

```

```

00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** Communication
00006  */
00007
00008  #ifndef COMMUNICATION_HPP_
00009  #define COMMUNICATION_HPP_
00010
00011  #include <sys/socket.h>
00012  #include <netinet/in.h>
00013  #include <arpa/inet.h>
00014  #include <unistd.h>
00015  #include <fcntl.h>
00016  #include <poll.h>
00017  #include <netdb.h>
00018  #include <thread>
00019  #include <mutex>
00020  #include <atomic>
00021  #include <condition_variable>
00022  #include <queue>
00023  #include <string>
00024  #include <vector>
00025
00026  #include "../Utils/Constants.hpp"
00027  #include "../Exceptions/Exceptions.hpp"
00028  #include "ICommunication.hpp"
00029
00030  class Communication : public ICommunication {
00031  public:
00032      explicit Communication(zappy::structs::Config config);
00033      ~Communication();
00034
00035      void sendMessage(const std::string &message) override;
00036      bool hasMessages() const override;
00037      std::string popMessage() override;
00038      bool isConnected() const override;
00039      void disconnect() override;
00040
00041  private:
00042      void setupConnection();
00043      void createSocket();
00044      void connectToServer();
00045      void setupNonBlocking();
00046
00047      void startCommunicationThread();
00048      void communicationLoop();
00049      bool handlePoll();
00050      void processWrite();
00051      void processRead();
00052
00053      void parseReceivedData();
00054
00055      zappy::structs::Config _config;
00056      std::thread _thread;
00057      std::mutex _mutex;
00058      std::condition_variable _cv;
00059      std::atomic<bool> _running;
00060      std::atomic<bool> _connected;
00061
00062      std::queue<std::string> _outgoingMessages;
00063      std::queue<std::string> _incomingMessages;
00064
00065      std::string _receiveBuffer;
00066      std::string _sendBuffer;
00067
00068      int _socket;
00069      struct pollfd _pollfd;
00070      static const int BUFFER_SIZE = 4096;
00071      static const int POLL_TIMEOUT = 100;
00072      static const char MESSAGE_DELIMITER = '\n';
00073  };
00074
00075  #endif /* !COMMUNICATION_HPP_ */

```

6.7 ICommunication.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** ICommunication
00006  */
00007
00008  #ifndef ICOMMUNICATION_HPP_
00009  #define ICOMMUNICATION_HPP_

```



```

00010
00011 #include <string>
00012
00013 class ICommunication {
00014     public:
00015         virtual ~ICommunication() = default;
00016
00017         virtual void sendMessage(const std::string &message) = 0;
00018         virtual bool hasMessages() const = 0;
00019         virtual std::string popMessage() = 0;
00020         virtual bool isConnected() const = 0;
00021         virtual void disconnect() = 0;
00022 };
00023
00024 #endif /* !ICOMMUNICATION_HPP_ */

```

6.8 Exceptions.hpp

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** Exceptions
00006 */
00007
00008 #ifndef EXCEPTIONS_HPP_
00009 #define EXCEPTIONS_HPP_
00010
00011 #include <exception>
00012 #include <string>
00013 #include "../Utils/Constants.hpp"
00014
00015 namespace Exceptions {
00016
00017     // CLI Exceptions
00018     class CLIParsingException : public std::exception {
00019     public:
00020         explicit CLIParsingException(const std::string &message)
00021             : _message(std::string(colors::T_RED) +
00022                 "CLI Parsing Error: " + message +
00023                 colors::RESET) {}
00024
00025         const char *what() const noexcept override {
00026             return _message.c_str();
00027         }
00028
00029     private:
00030         std::string _message;
00031     };
00032
00033     class CLIPortException : public CLIParsingException {
00034     public:
00035         explicit CLIPortException(const std::string &message)
00036             : CLIParsingException(std::string(colors::T_CYAN) +
00037                 "Port Error: " + message +
00038                 colors::RESET) {}
00039     };
00040
00041     class CLIHostException : public CLIParsingException {
00042     public:
00043         explicit CLIHostException(const std::string &message)
00044             : CLIParsingException(std::string(colors::T_CYAN) +
00045                 "Hostname Error: " + message +
00046                 colors::RESET) {}
00047     };
00048
00049     class CLIMissingArgumentException : public CLIParsingException {
00050     public:
00051         explicit CLIMissingArgumentException(const std::string &message)
00052             : CLIParsingException(std::string(colors::T_CYAN) +
00053                 "Missing Argument: " + message +
00054                 colors::RESET) {}
00055     };
00056
00057     class CLIInvalidArgumentException : public CLIParsingException {
00058     public:
00059         explicit CLIInvalidArgumentException(const std::string &message)
00060             : CLIParsingException(std::string(colors::T_CYAN) +
00061                 "Invalid Argument: " + message +
00062                 colors::RESET) {}
00063     };
00064
00065     class NetworkException : public std::exception {
00066     public:
00067         explicit NetworkException(const std::string &message)

```

```

00068         : _message(std::string(colors::T_RED) +
00069                 "Network Error: " + message +
00070                 colors::RESET) {}
00071
00072         const char *what() const noexcept override {
00073             return _message.c_str();
00074         }
00075
00076     private:
00077         std::string _message;
00078     };
00079
00080     class ConnectionFailedException : public NetworkException {
00081     public:
00082         explicit ConnectionFailedException(const std::string &message)
00083             : NetworkException(std::string(colors::T_CYAN) +
00084                               "Connection Failed: " + message +
00085                               colors::RESET) {}
00086     };
00087
00088     class SocketCreationException : public NetworkException {
00089     public:
00090         explicit SocketCreationException(const std::string &message)
00091             : NetworkException(std::string(colors::T_CYAN) +
00092                               "Socket Creation Failed: " + message +
00093                               colors::RESET) {}
00094     };
00095
00096     class ConnectionTimeoutException : public NetworkException {
00097     public:
00098         explicit ConnectionTimeoutException(const std::string &message)
00099             : NetworkException(std::string(colors::T_CYAN) +
00100                               "Connection Timeout: " + message +
00101                               colors::RESET) {}
00102     };
00103
00104     class SendException : public NetworkException {
00105     public:
00106         explicit SendException(const std::string &message)
00107             : NetworkException(std::string(colors::T_CYAN) +
00108                               "Send Error: " + message +
00109                               colors::RESET) {}
00110     };
00111
00112     class ReceiveException : public NetworkException {
00113     public:
00114         explicit ReceiveException(const std::string &message)
00115             : NetworkException(std::string(colors::T_CYAN) +
00116                               "Receive Error: " + message +
00117                               colors::RESET) {}
00118     };
00119 }
00120
00121 #endif /* !EXCEPTIONS_HPP_ */

```

6.9 GameInfos.hpp

```

00001 /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** GameInfos
00006  */
00007
00008 #ifndef GAMEINFOS_HPP_
00009 #define GAMEINFOS_HPP_
00010
00011 #include <utility>
00012 #include <vector>
00013 #include <memory>
00014 #include <mutex>
00015 #include <string>
00016
00017 #include "../Utils/Constants.hpp"
00018
00019 class GameInfos {
00020     public:
00021         GameInfos();
00022         ~GameInfos();
00023
00024         void setMapSize(int width, int height);
00025         std::pair<int, int> getMapSize() const;
00026
00027         void setTimeUnit(int timeUnit);
00028         int getTimeUnit() const;

```

```

00029
00030     void updateTile(const zappy::structs::Tile tile);
00031     const std::vector<zappy::structs::Tile> getTiles() const;
00032     const zappy::structs::Tile getTile(int x, int y) const;
00033
00034     void updateTeamName(const std::string &teamName);
00035     const std::vector<std::string> getTeamNames() const;
00036
00037     void addPlayer(const zappy::structs::Player player);
00038     void updatePlayerPosition(int playerNumber, int x, int y);
00039     void updatePlayerOrientation(int playerNumber, int orientation);
00040     void updatePlayerLevel(int playerNumber, int level);
00041     void updatePlayerInventory(int playerNumber,
00042                               const zappy::structs::Inventory inventory);
00043     void updatePlayerExpulsion(int playerNumber);
00044     void updatePlayerDeath(int playerNumber);
00045     void updatePlayerResourceAction(int playerNumber, int resourceId, bool isCollecting);
00046     void updatePlayerFork(int playerNumber);
00047     const std::vector<zappy::structs::Player> getPlayers() const;
00048
00049     void addPlayerBroadcast(int playerNumber, const std::string &message);
00050     std::vector<std::pair<int, std::string>> getPlayersBroadcasting() const;
00051
00052     void addIncantation(const zappy::structs::Incantation incantation);
00053     void removeIncantation(int x, int y, int result);
00054
00055     void addEgg(const zappy::structs::Egg egg);
00056     void updateEggHatched(int eggNumber);
00057     void updateEggDeath(int eggNumber);
00058     const std::vector<zappy::structs::Egg> getEggs() const;
00059
00060     void setGameOver(const std::string &winningTeam);
00061     std::pair<bool, std::string> isGameOver() const;
00062
00063     private:
00064         int _mapWidth;
00065         int _mapHeight;
00066         int _timeUnit;
00067
00068         std::vector<zappy::structs::Tile> _tiles;
00069         std::vector<std::string> _teamNames;
00070         std::vector<zappy::structs::Player> _players;
00071         std::vector<std::pair<int, bool>> _playersExpulsing;
00072         std::vector<std::pair<int, std::string>> _playersBroadcasting;
00073         std::vector<zappy::structs::Incantation> _incantations;
00074         std::vector<zappy::structs::Egg> _eggs;
00075
00076         bool _gameOver;
00077         std::string _winningTeam;
00078
00079         mutable std::mutex _dataMutex;
00080 };
00081
00082 #endif /* !GAMEINFOS_HPP_ */

```

6.10 CameraManager.hpp

```

00001 /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** CameraManager
00006  */
00007
00008 #ifndef CAMERA_MANAGER_HPP_
00009 #define CAMERA_MANAGER_HPP_
00010
00011 #include <memory>
00012 #include "../RayLib/RayLib.hpp"
00013 #include "../Utils/Constants.hpp"
00014 #include "../Game/GameInfos.hpp"
00015 #include "../Map.hpp"
00016
00017 class CameraManager {
00018     public:
00019         explicit CameraManager(std::shared_ptr<RayLib> raylib);
00020         ~CameraManager();
00021
00022         void updateCamera(zappy::gui::CameraMode mode);
00023         void updateCameraFreeMode();
00024         void updateCameraTargetMode();
00025         void updateCameraPlayerMode();
00026
00027         void setMapCenter(const Vector3& center);
00028         void setMapSize(int width, int height);

```

```

00029
00030     float getCurrentCameraDistance() const;
00031     void setTargetDistance(float distance);
00032     void initTargetPositionFromCurrentCamera();
00033
00034     void setPlayerId(int playerId);
00035     int getPlayerId() const;
00036     void setGameInfos(std::shared_ptr<GameInfos> gameInfos);
00037     void setMapInstance(std::shared_ptr<Map> map);
00038
00039     private:
00040         std::shared_ptr<RayLib> _raylib;
00041         std::shared_ptr<GameInfos> _gameInfos;
00042         std::shared_ptr<Map> _map;
00043         Vector3 _mapCenter;
00044         int _mapWidth;
00045         int _mapHeight;
00046
00047         float _targetDistance;
00048         float _targetAngleXZ;
00049         float _targetAngleY;
00050         bool _isDragging;
00051         int _playerId;
00052
00053         float _playerAngleXZ;
00054         bool _isPlayerViewDragging;
00055
00056         void handlePlayerCameraMouseInput();
00057         Vector3 calculatePlayerPosition(const zappy::structs::Player& player);
00058         Vector3 calculateCameraPosition(const Vector3& playerPos, float angleXZ);
00059 };
00060
00061 #endif /* !CAMERA_MANAGER_HPP_ */

```

6.11 GUI.hpp

```

00001 /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** GUI
00006  */
00007
00008 #ifndef GUI_HPP_
00009 #define GUI_HPP_
00010
00011 #include <memory>
00012
00013 #include "../RayLib/RayLib.hpp"
00014 #include "../Game/GameInfos.hpp"
00015 #include "Map.hpp"
00016 #include "HUD/HUD.hpp"
00017 #include "../Audio/IAudio.hpp"
00018 #include "../Utils/Constants.hpp"
00019 #include "Camera/CameraManager.hpp"
00020
00021 class GUI {
00022     public:
00023         explicit GUI(std::shared_ptr<GameInfos> gameInfos);
00024         ~GUI();
00025
00026         void run();
00027
00028         int getWindowWidth() const;
00029         int getWindowHeight() const;
00030         void setWindowWidth(int width);
00031         void setWindowHeight(int height);
00032
00033         void switchCameraMode(zappy::gui::CameraMode mode);
00034         void switchCameraModeNext();
00035         void setPlayerToFollow(int playerId);
00036         int getPlayerToFollow() const;
00037         bool selectFirstAvailablePlayer();
00038         void switchToNextPlayer();
00039         void switchToPreviousPlayer();
00040
00041     private:
00042         void updateCamera();
00043         void update();
00044         void draw();
00045         bool playerExists(int playerId) const;
00046
00047         void initModels();
00048
00049         bool _isRunning;

```

```

00050         std::shared_ptr<RayLib> _raylib;
00051         std::shared_ptr<GameInfos> _gameInfos;
00052         std::unique_ptr<Map> _map;
00053         std::unique_ptr<HUD> _hud;
00054         std::shared_ptr<IAudio> _audio;
00055         std::unique_ptr<CameraManager> _cameraManager;
00056
00057         int _windowWidth;
00058         int _windowHeight;
00059
00060         zappy::gui::CameraMode _cameraMode;
00061     };
00062
00063 #endif /* !GUI_HPP_ */

```

6.12 Button.hpp

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** Button
00006 */
00007
00008 #pragma once
00009
00010 #include <string>
00011 #include <functional>
00012 #include <memory>
00013
00014 #include "../UIElement/AUIElement.hpp"
00015 #include "../../../RayLib/RayLib.hpp"
00016 #include "../../../Audio/IAudio.hpp"
00017
00023 class Button : public AUIElement {
00024     public:
00035         Button(
00036             std::shared_ptr<RayLib> raylib,
00037             std::shared_ptr<IAudio> audio,
00038             float x, float y,
00039             float width, float height,
00040             const std::string& text,
00041             std::function<void()> callback
00042         );
00043
00047         ~Button() override = default;
00048
00052         void draw() override;
00053
00057         void update() override;
00058
00064         void setText(const std::string& text);
00065
00071         std::string getText() const;
00072
00078         void setCallback(std::function<void()> callback);
00079
00088         void setColors(
00089             Color normal,
00090             Color hover,
00091             Color pressed,
00092             Color textColor
00093         );
00094
00101         void setSize(float width, float height) override;
00102
00103     private:
00104         std::string _text;
00105         std::function<void()> _callback;
00106
00107         Color _normalColor;
00108         Color _hoverColor;
00109         Color _pressedColor;
00110         Color _textColor;
00111
00112         bool _isHovered;
00113         bool _isPressed;
00114
00115         std::shared_ptr<RayLib> _raylib;
00116         std::shared_ptr<IAudio> _audio;
00117 };

```

6.13 AContainers.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** AContainers
00006  */
00007
00008  #pragma once
00009
00010  #include <string>
00011  #include <vector>
00012  #include <memory>
00013
00014  #include "IContainers.hpp"
00015  #include "../.../RayLib/RayLib.hpp"
00016
00020  struct RelativePosition {
00021      float xPercent;
00022      float yPercent;
00023      float widthPercent;
00024      float heightPercent;
00025  };
00026
00032  class AContainers : public IContainers {
00033  public:
00042      AContainers(std::shared_ptr<RayLib> raylib, float x, float y, float width,
00043                  float height);
00044
00048      virtual ~AContainers() = default;
00049
00050      void setPosition(float x, float y) override;
00051      void setSize(float width, float height) override;
00052      Rectangle getBounds() const override;
00053      bool contains(float x, float y) const override;
00054      void setVisible(bool visible) override;
00055      bool isVisible() const override;
00056
00065      void setRelativePosition(float xPercent, float yPercent, float widthPercent,
00066                              float heightPercent);
00067
00073      RelativePosition getRelativePosition() const;
00074
00078      void updatePositionFromRelative();
00079
00080  protected:
00081      std::shared_ptr<RayLib> _raylib;
00082      Rectangle _bounds;
00083      RelativePosition _relativePos;
00084      Color _backgroundColor;
00085      bool _visible;
00086      bool _hasBackground;
00087  };

```

6.14 Containers.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** Containers
00006  */
00007
00008  #pragma once
00009
00010  #include <vector>
00011  #include <functional>
00012  #include <unordered_map>
00013  #include <memory>
00014  #include <string>
00015
00016  #include "AContainers.hpp"
00017  #include "../UIElement/UIElement.hpp"
00018  #include "../Button/Button.hpp"
00019  #include "../Text/Text.hpp"
00020  #include "../.../RayLib/RayLib.hpp"
00021  #include "../.../Audio/IAudio.hpp"
00022
00029  class Containers : public AContainers {
00030  public:
00042      Containers(std::shared_ptr<RayLib> raylib, std::shared_ptr<IAudio> audio,
00043                  float x, float y, float width, float height,
00044                  Color backgroundColor = {40, 40, 40, 200});

```

```

00045
00049     ~Containers() override;
00050
00054     void draw() override;
00055
00059     void update() override;
00060
00066     void setBackgroundColor(Color color);
00067
00073     void setHasBackground(bool hasBackground);
00074
00080     void setBackgroundTexture(Texture2D texture);
00081
00088     bool hasBackgroundTexture() const;
00089
00099     bool addElement(const std::string& id, std::shared_ptr<UIElement> element);
00100
00108     std::shared_ptr<UIElement> getElement(const std::string& id) const;
00109
00118     bool removeElement(const std::string& id);
00119
00133     std::shared_ptr<Button> addButton(
00134         const std::string& id,
00135         float x, float y,
00136         float width, float height,
00137         const std::string& text,
00138         std::function<void()> callback
00139     );
00140
00158     std::shared_ptr<Button> addButton(
00159         const std::string& id,
00160         float x, float y,
00161         float width, float height,
00162         const std::string& text,
00163         std::function<void()> callback,
00164         Color normalColor,
00165         Color hoverColor,
00166         Color pressedColor,
00167         Color textColor
00168     );
00169
00182     std::shared_ptr<Text> addText(
00183         const std::string& id,
00184         float x, float y,
00185         const std::string& text,
00186         float fontSize = 20.0f,
00187         Color color = BLACK
00188     );
00189
00193     void clearElements();
00194
00203     void handleResize(int oldWidth, int oldHeight, int newWidth, int newHeight);
00204
00218     std::shared_ptr<Button> addButtonPercent(
00219         const std::string& id,
00220         float xPercent, float yPercent,
00221         float widthPercent, float heightPercent,
00222         const std::string& text,
00223         std::function<void()> callback
00224     );
00225
00243     std::shared_ptr<Button> addButtonPercent(
00244         const std::string& id,
00245         float xPercent, float yPercent,
00246         float widthPercent, float heightPercent,
00247         const std::string& text,
00248         std::function<void()> callback,
00249         Color normalColor,
00250         Color hoverColor,
00251         Color pressedColor,
00252         Color textColor
00253     );
00254
00267     std::shared_ptr<Text> addTextPercent(
00268         const std::string& id,
00269         float xPercent, float yPercent,
00270         const std::string& text,
00271         float fontSizePercent = 5.0f,
00272         Color color = BLACK
00273     );
00274
00275     private:
00276         std::shared_ptr<RayLib> _raylib;
00277         std::shared_ptr<IAudio> _audio;
00278         Texture2D _backgroundTexture;
00279         bool _hasBackgroundTexture;
00280         std::unordered_map<std::string, std::shared_ptr<UIElement> _elements;

```

```
00281 };
```

6.15 IContainers.hpp

```
00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** IContainers
00006 */
00007
00008 #pragma once
00009
00010 #include <string>
00011 #include <memory>
00012 #include <vector>
00013 #include "../RayLib/RayLib.hpp"
00014
00021 class IContainers {
00022     public:
00023         virtual ~IContainers() = default;
00024
00028         virtual void draw() = 0;
00029
00033         virtual void update() = 0;
00034
00041         virtual void setPosition(float x, float y) = 0;
00042
00049         virtual void setSize(float width, float height) = 0;
00050
00056         virtual Rectangle getBounds() const = 0;
00057
00067         virtual bool contains(float x, float y) const = 0;
00068
00074         virtual void setVisible(bool visible) = 0;
00075
00082         virtual bool isVisible() const = 0;
00083 };
```

6.16 Help.hpp

```
00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** Help
00006 */
00007
00008 #pragma once
00009
00010 #include <memory>
00011 #include <string>
00012 #include "../Containers/Containers.hpp"
00013 #include "../RayLib/RayLib.hpp"
00014 #include "../Audio/IAudio.hpp"
00015
00022 class Help {
00023     public:
00030         Help(std::shared_ptr<RayLib> raylib, std::shared_ptr<IAudio> audio);
00031
00035         ~Help() = default;
00036
00040         void show();
00041
00045         void hide();
00046
00052         bool isVisible() const;
00053
00057         void update();
00058
00062         void draw();
00063
00072         void handleResize(int oldWidth, int oldHeight, int newWidth, int newHeight);
00073
00074     private:
00078         void initHelpContainer();
00079
00080         std::shared_ptr<RayLib> _raylib;
00081         std::shared_ptr<IAudio> _audio;
00082         std::shared_ptr<Containers> _helpContainer;
00083         bool _visible;
00084 };
```


6.17 HUD.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** HUD
00006  */
00007
00008  #pragma once
00009
00010  #include <vector>
00011  #include <unordered_map>
00012  #include <memory>
00013  #include <string>
00014  #include <utility>
00015  #include "Containers/Containers.hpp"
00016  #include "../RayLib/RayLib.hpp"
00017  #include "../Game/GameInfos.hpp"
00018  #include "../Audio/IAudio.hpp"
00019  #include "Help/Help.hpp"
00020
00021  class HUD {
00022  public:
00023      HUD(std::shared_ptr<RayLib> raylib, std::shared_ptr<GameInfos> gameInfos,
00024          std::shared_ptr<IAudio> audio);
00025
00026      ~HUD();
00027
00028      void draw();
00029
00030      void update();
00031
00032      std::shared_ptr<Containers> addContainer(
00033          const std::string& id,
00034          float x, float y,
00035          float width, float height,
00036          Color backgroundColor = {40, 40, 40, 200}
00037      );
00038
00039      std::shared_ptr<Containers> getContainer(const std::string& id) const;
00040
00041      bool removeContainer(const std::string& id);
00042
00043      void handleResize(int oldWidth, int oldHeight, int newWidth, int newHeight);
00044
00045      void clearAllContainers();
00046
00047      void initDefaultLayout(float sideWidthPercent = 15.0f,
00048          float bottomHeightPercent = 20.0f);
00049
00050      std::shared_ptr<Containers> getSideContainer() const;
00051
00052      std::shared_ptr<Containers> getBottomContainer() const;
00053
00054      std::shared_ptr<Containers> getSquareContainer() const;
00055
00056      void initExitButton();
00057
00058      void initSettingsButton();
00059
00060      void initHelpButton();
00061
00062      void initCameraResetButton();
00063
00064      void initTeamPlayersDisplay(std::shared_ptr<GameInfos> gameInfos);
00065
00066      void updateTeamPlayersDisplay(std::shared_ptr<GameInfos> gameInfos);
00067
00068  private:
00069      std::shared_ptr<Containers> createSquareContainer(float squareSize,
00070          float sideWidthPercent);
00071
00072      std::shared_ptr<Containers> createSideContainer(
00073          float sideYStart,
00074          float sideWidth,
00075          float sideHeight,
00076          float sideWidthPercent,
00077          float bottomHeightPercent);
00078
00079      std::shared_ptr<Containers> createBottomContainer(
00080          int screenWidth,
00081          int screenHeight,
00082          float bottomHeight,
00083          float bottomHeightPercent);
00084
00085      void recordElementPositions(

```

```

00245         std::shared_ptr<Containers> container,
00246         std::unordered_map<std::string, float>& initialYPositions,
00247         float& lastContainerHeight);
00248
00256     void updateElementPositions(
00257         std::shared_ptr<Containers> container,
00258         const std::unordered_map<std::string, float>& initialYPositions,
00259         float offset);
00260
00269     std::pair<float, float> calculateContentMetrics(
00270         std::shared_ptr<Containers> container,
00271         const std::unordered_map<std::string, float>& initialYPositions);
00272
00278     void clearTeamDisplayElements(std::shared_ptr<Containers> container);
00279
00288     std::vector<int> getTeamPlayerNumbers(const std::string& teamName,
00289         const std::vector<zappy::structs::Player>& players);
00290
00298     std::string createPlayerListText(const std::vector<int>& playerNumbers);
00299
00308     void addPlayerListText(std::shared_ptr<Containers> container,
00309         const std::string& teamId,
00310         float yPos, const std::vector<int>& playerNumbers);
00311
00312     std::unordered_map<std::string, std::shared_ptr<Containers>> _containers;
00313     std::shared_ptr<RayLib> _raylib;
00314     std::shared_ptr<GameInfos> _gameInfos;
00315     std::shared_ptr<IAudio> _audio;
00316     std::shared_ptr<Help> _help;
00317 };

```

6.18 Text.hpp

```

00001 /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** Text
00006  */
00007
00008 #pragma once
00009
00010 #include <memory>
00011 #include <string>
00012
00013 #include "../UIElement/AUIElement.hpp"
00014 #include "../../../RayLib/RayLib.hpp"
00015
00021 class Text : public AUIElement {
00022     public:
00032         Text(
00033             std::shared_ptr<RayLib> raylib,
00034             float x, float y,
00035             const std::string& text,
00036             float fontSize = 20.0f,
00037             Color color = BLACK
00038         );
00039
00043         ~Text() override = default;
00044
00048         void draw() override;
00049
00053         void update() override;
00054
00060         void setText(const std::string& text);
00061
00067         std::string getText() const;
00068
00074         void setFontSize(float fontSize);
00075
00081         float getFontSize() const;
00082
00088         void setColor(Color color);
00089
00095         Color getColor() const;
00096
00104         void setSize(float width, float height) override;
00105
00106     private:
00107         std::string _text;
00108         float _fontSize;
00109         Color _color;
00110         std::shared_ptr<RayLib> _raylib;
00111 };

```

6.19 AUIElement.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** AUIElement
00006  */
00007
00008  #pragma once
00009
00010  #include <memory>
00011  #include "IUIElement.hpp"
00012  #include "../RayLib/RayLib.hpp"
00013
00017  struct UIRelativePosition {
00018      float xPercent;
00019      float yPercent;
00020      float widthPercent;
00021      float heightPercent;
00022  };
00023
00029  class AUIElement : public IUIElement {
00030  public:
00039      AUIElement(std::shared_ptr<RayLib> raylib, float x, float y, float width,
00040                float height);
00041
00045      virtual ~AUIElement() = default;
00046
00047      // IUIElement implementation
00048      void setPosition(float x, float y) override;
00049      Rectangle getBounds() const override;
00050      bool contains(float x, float y) const override;
00051      void setVisible(bool visible) override;
00052      bool isVisible() const override;
00053
00060      virtual void setSize(float width, float height);
00061
00070      void setRelativePosition(float xPercent, float yPercent, float widthPercent,
00071                              float heightPercent);
00072
00078      UIRelativePosition getRelativePosition() const;
00079
00080  protected:
00081      std::shared_ptr<RayLib> _raylib;
00082      Rectangle _bounds;
00083      UIRelativePosition _relativePos;
00084      bool _visible;
00085  };

```

6.20 IUIElement.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** IUIElement
00006  */
00007
00008  #pragma once
00009
00010  #include "../RayLib/RayLib.hpp"
00011
00017  class IUIElement {
00018  public:
00019      virtual ~IUIElement() = default;
00020
00024      virtual void draw() = 0;
00025
00029      virtual void update() = 0;
00030
00037      virtual void setPosition(float x, float y) = 0;
00038
00045      virtual void setSize(float width, float height) = 0;
00046
00052      virtual Rectangle getBounds() const = 0;
00053
00063      virtual bool contains(float x, float y) const = 0;
00064
00070      virtual void setVisible(bool visible) = 0;
00071
00078      virtual bool isVisible() const = 0;
00079  };

```

6.21 Map.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** Map
00006  */
00007
00008  #ifndef MAP_HPP_
00009  #define MAP_HPP_
00010
00011  #include <memory>
00012  #include <unordered_map>
00013  #include <string>
00014  #include "../Game/GameInfos.hpp"
00015  #include "../RayLib/RayLib.hpp"
00016
00017  enum class DisplayPriority {
00018      TILE = 0,
00019      EGG = 1,
00020      PLAYER = 2,
00021      FOOD = 3,
00022      ROCK = 4,
00023  };
00024
00025  class Map {
00026  public:
00027      Map(std::shared_ptr<GameInfos> gameInfos, std::shared_ptr<RayLib> raylib);
00028      ~Map();
00029
00030      void draw();
00031      void drawTile(int x, int y, const zappy::structs::Tile &tile);
00032      void drawRock(int x, int y, const zappy::structs::Tile &tile);
00033      void drawFood(int x, int y, const zappy::structs::Tile &tile);
00034      void drawPlayers(int x, int y);
00035      void drawEggs(int x, int y);
00036      Color getTeamColor(const std::string &teamName);
00037
00038      float getOffset(DisplayPriority priority, int x, int y, size_t stackIndex = 0);
00039
00040  private:
00041      std::shared_ptr<GameInfos> _gameInfos;
00042      std::shared_ptr<RayLib> _raylib;
00043      std::unordered_map<std::string, Color> _teamColors;
00044
00045      static constexpr float BASE_HEIGHT_TILE = 0.0f;
00046      static constexpr float BASE_HEIGHT_FOOD = 0.2f;
00047      static constexpr float BASE_HEIGHT_ROCK = 0.2f;
00048      static constexpr float BASE_HEIGHT_EGG = 0.2f;
00049      static constexpr float BASE_HEIGHT_PLAYER = 0.2f;
00050      static constexpr float FOOD_HEIGHT = 0.3f;
00051      static constexpr float ROCK_HEIGHT = 0.3f;
00052      static constexpr float EGG_HEIGHT = 0.3f;
00053      static constexpr float PLAYER_HEIGHT = 1.1f;
00054
00055      void drawOrientationArrow(const Vector3 &position, int orientation,
00056                              float playerHeight);
00057  };
00058
00059  #endif /* !MAP_HPP_ */

```

6.22 RayLib.hpp

```

00001  /*
00002  ** EPITECH PROJECT, 2025
00003  ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004  ** File description:
00005  ** RayLib
00006  */
00007
00008  #ifndef RAYLIB_HPP_
00009  #define RAYLIB_HPP_
00010
00011  #include <string>
00012  #include <map>
00013  #include <memory>
00014  #include "raylib.h"
00015
00016  class RayLib {
00017  public:
00018      RayLib();
00019      ~RayLib();
00020

```

```

00021     // Window management methods
00022     void initWindow(int width, int height, const std::string &title);
00023     void closeWindow();
00024     bool windowShouldClose() const;
00025     void beginDrawing();
00026     void endDrawing();
00027     void clearBackground(Color color = WHITE);
00028     bool isWindowReady() const;
00029     int getMonitorWidth(int monitor) const;
00030     int getMonitorHeight(int monitor) const;
00031     void waitTime(float seconds) const;
00032     void setTargetFPS(int fps) const;
00033     int getFPS() const;
00034     float getFrameTime() const;
00035
00036     // Collision methods
00037     bool checkCollisionPointRec(Vector2 point, Rectangle rec) const;
00038
00039     // Texture methods
00040     void drawTextureRec(Texture2D texture, Rectangle source, Vector2 position, Color tint);
00041     void unloadTexture(Texture2D texture);
00042
00043     // Input methods
00044     bool isMouseButtonDown(int button) const;
00045     bool isMouseButtonPressed(int button) const;
00046     bool isMouseButtonReleased(int button) const;
00047     bool isKeyDown(int key) const;
00048     bool isKeyPressed(int key) const;
00049     bool isKeyReleased(int key) const;
00050     Vector2 getMouseDelta();
00051     Vector2 getMousePosition() const;
00052     void setMousePosition(int x, int y);
00053     void disableCursor();
00054     void enableCursor();
00055     int getScreenWidth() const;
00056     int getScreenHeight() const;
00057     float getMouseWheelMove() const;
00058
00059     // Gamepad methods
00060     bool isGamepadAvailable(int gamepad) const;
00061     bool isGamepadButtonPressed(int gamepad, int button) const;
00062     bool isGamepadButtonDown(int gamepad, int button) const;
00063     bool isGamepadButtonReleased(int gamepad, int button) const;
00064     float getGamepadAxisMovement(int gamepad, int axis) const;
00065
00066     // Scissor mode methods for clipping
00067     void beginScissorMode(int x, int y, int width, int height);
00068     void endScissorMode();
00069
00070     // 3D Environment methods
00071     void begin3DMode();
00072     void end3DMode();
00073     float vector3Distance(Vector3 v1, Vector3 v2) const;
00074     Vector3 vector3Normalize(Vector3 v) const;
00075     Vector3 vector3Subtract(Vector3 v1, Vector3 v2) const;
00076     Vector3 vector3Add(Vector3 v1, Vector3 v2) const;
00077
00078     // Camera methods
00079     void initCamera();
00080     void setCameraPosition(Vector3 position);
00081     void setCameraTarget(Vector3 target);
00082     void setCameraUp(Vector3 up);
00083     void setCameraFovy(float fovy);
00084     void setCameraProjection(int projection);
00085     void updateCamera(int mode = CAMERA_FREE);
00086     void updateCameraFreeMode();
00087     Camera3D getCamera() const;
00088
00089     // 3D Drawing methods
00090     void drawGrid(int slices, float spacing);
00091     void drawCube(Vector3 position, float width, float height, float length, Color color);
00092     void drawCubeWires(Vector3 position, float width, float height, float length,
00093         Color color);
00094     void drawSphere(Vector3 position, float radius, Color color);
00095     void drawSphereWires(Vector3 position, float radius, int rings, int slices,
00096         Color color);
00097     void drawCylinder(Vector3 position, float radiusTop, float radiusBottom,
00098         float height, int slices, Color color);
00099     void drawCylinderWires(Vector3 position, float radiusTop, float radiusBottom,
00100         float height, int slices, Color color);
00101     void drawCylinderEx(Vector3 startPos, Vector3 endPos, float startRadius,
00102         float endRadius, int sides, Color color);
00103     void drawPlane(Vector3 position, Vector2 size, Color color);
00104     void drawLine3D(Vector3 startPos, Vector3 endPos, Color color);
00105
00106     // 3D Model methods
00107     bool loadModel(const std::string& id, const std::string& filepath,

```



```

00047     struct Tile {
00048         int x;
00049         int y;
00050         int food;
00051         int linemate;
00052         int deraumere;
00053         int sibur;
00054         int mendiane;
00055         int phiras;
00056         int thystame;
00057
00058         Tile(int _x = 0, int _y = 0, int _food = 0, int _linemate = 0,
00059             int _deraumere = 0, int _sibur = 0, int _mendiane = 0,
00060             int _phiras = 0, int _thystame = 0)
00061             : x(_x), y(_y), food(_food), linemate(_linemate),
00062             deraumere(_deraumere), sibur(_sibur),
00063             mendiane(_mendiane), phiras(_phiras), thystame(_thystame) {}
00064     };
00065
00066     struct Inventory {
00067         int food;
00068         int linemate;
00069         int deraumere;
00070         int sibur;
00071         int mendiane;
00072         int phiras;
00073         int thystame;
00074
00075         Inventory(int _food = 0, int _linemate = 0, int _deraumere = 0,
00076             int _sibur = 0, int _mendiane = 0, int _phiras = 0,
00077             int _thystame = 0)
00078             : food(_food), linemate(_linemate), deraumere(_deraumere),
00079             sibur(_sibur), mendiane(_mendiane), phiras(_phiras),
00080             thystame(_thystame) {}
00081     };
00082     struct Player {
00083         int number;
00084         int x;
00085         int y;
00086         int orientation;
00087         int level;
00088         std::string teamName;
00089         struct Inventory inventory;
00090
00091         Player(int _number = 0, int _x = 0, int _y = 0, int _orientation = 0,
00092             int _level = 1, const std::string &_teamName = "",
00093             struct Inventory _inventory = Inventory())
00094             : number(_number), x(_x), y(_y), orientation(_orientation),
00095             level(_level), teamName(_teamName), inventory(_inventory) {}
00096     };
00097
00098     struct Incantation {
00099         int x;
00100         int y;
00101         int level;
00102         std::vector<int> players;
00103
00104         Incantation(int _x = 0, int _y = 0, int _level = 1,
00105             const std::vector<int> &_players = {})
00106             : x(_x), y(_y), level(_level), players(_players) {}
00107     };
00108
00109     struct Egg {
00110         int eggNumber;
00111         int playerNumber;
00112         int x;
00113         int y;
00114         bool hatched;
00115         std::string teamName;
00116
00117         Egg(int _eggNumber = 0, int _playerNumber = 0, int _x = 0, int _y = 0,
00118             bool _hatched = false, const std::string &_teamName = "")
00119             : eggNumber(_eggNumber), playerNumber(_playerNumber), x(_x), y(_y),
00120             hatched(_hatched), teamName(_teamName) {}
00121     };
00122 };
00123
00124 namespace zappy::gui {
00125
00126     inline const std::string WINDOW_TITLE = "Zappy GUI";
00127     inline const int FPS = 120;
00128     inline const float CAMERA_SPEED = 7.5f;
00129     inline const float CAMERA_SENSITIVITY = 0.001f;
00130     inline const float CAMERA_ROTATE_SPEED_KEY = 2.0f;
00131     inline const float GAMEPAD_STICK_SENSITIVITY = 3.0f;
00132     inline const float GAMEPAD_DEADZONE = 0.2f; // Ignore small movements
00133

```

```

00134     inline const float PLAYER_SCALE = 0.005f;
00135
00136     enum class CameraMode {
00137         FREE = 0,
00138         TARGETED = 1,
00139         PLAYER = 2,
00140         NB_MODES = 3,
00141     };
00142 }
00143
00144 #endif /* !CONSTANTS_HPP_ */

```

6.24 GamepadConstants.hpp

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** GamepadConstants
00006 */
00007
00008 #ifndef GAMEPAD_CONSTANTS_HPP_
00009 #define GAMEPAD_CONSTANTS_HPP_
00010
00011 #ifndef GAMEPAD_AXIS_LEFT_X
00012     #define GAMEPAD_AXIS_LEFT_X      0
00013     #define GAMEPAD_AXIS_LEFT_Y      1
00014     #define GAMEPAD_AXIS_RIGHT_X     2
00015     #define GAMEPAD_AXIS_RIGHT_Y     3
00016     #define GAMEPAD_AXIS_LEFT_TRIGGER 4
00017     #define GAMEPAD_AXIS_RIGHT_TRIGGER 5
00018 #endif
00019
00020 #ifndef GAMEPAD_BUTTON_A
00021     #define GAMEPAD_BUTTON_A          6
00022     #define GAMEPAD_BUTTON_B          5
00023     #define GAMEPAD_BUTTON_X          9
00024     #define GAMEPAD_BUTTON_Y          8
00025     #define GAMEPAD_BUTTON_START      17
00026     #define GAMEPAD_BUTTON_SELECT     16
00027     #define GAMEPAD_BUTTON_UP         1
00028     #define GAMEPAD_BUTTON_RIGHT      2
00029     #define GAMEPAD_BUTTON_DOWN       3
00030     #define GAMEPAD_BUTTON_LEFT       4
00031     #define GAMEPAD_BUTTON_LEFT_SHOULDER 10
00032     #define GAMEPAD_BUTTON_RIGHT_SHOULDER 12
00033     #define GAMEPAD_BUTTON_LEFT_TRIGGER 13
00034     #define GAMEPAD_BUTTON_RIGHT_TRIGGER 15
00035 #endif
00036
00037 #endif /* !GAMEPAD_CONSTANTS_HPP_ */

```

6.25 HelpText.hpp

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** HelpText
00006 */
00007
00008 #ifndef HELP_TEXT_HPP_
00009 #define HELP_TEXT_HPP_
00010
00011 namespace zappy::constants {
00012
00013     inline const char *HELP_TITLE =
00014         "HELP";
00015
00016     inline const char *HELP_SECTION_1 =
00017         "Game Overview";
00018
00019     inline const char *HELP_SECTION_1_CONTENT =
00020         "Zappy is a game where AI-controlled players compete to collect resources\n"
00021         "and level up on a dynamically changing map. The GUI allows you to visualize\n"
00022         "the game state, players, and resources in real-time.";
00023
00024     inline const char *HELP_SECTION_2 =
00025         "Controls";
00026
00027     inline const char *HELP_SECTION_2_CONTENT =
00028         "Camera Movement:\n"

```



```

00029         " - Arrow keys or ZQSD: Move camera\n"
00030         " - Controller: Use left stick to move camera\n"
00031         " - Right mouse button + drag: Rotate camera\n\n"
00032         "Interface:\n"
00033         " - Click on players to see their stats\n"
00034         " - Use the RESET CAMERA button to return to default view\n"
00035         " - Use the Settings button to adjust game settings";
00036
00037     inline const char *HELP_SECTION_3 =
00038         "Teams and Players";
00039
00040     inline const char *HELP_SECTION_3_CONTENT =
00041         "The left panel shows all teams and their player IDs.\n"
00042         "Players have different levels based on collected resources.\n"
00043         "The team that first gets a player to level 8 wins the game.";
00044
00045     inline const char *HELP_SECTION_4 =
00046         "Resources";
00047
00048     inline const char *HELP_SECTION_4_CONTENT =
00049         "Resources on the map are represented by different colored objects.\n"
00050         "Players collect these resources to perform rituals and level up.";
00051
00052 } // namespace zappy::constants
00053
00054 #endif /* !HELP_TEXT_HPP_ */

```

6.26 algo.h

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** algo
00006 */
00007
00008 #ifndef ALGO_H_
00009     #define ALGO_H_
00010
00011     typedef struct tiles_s {
00012         int x;
00013         int y;
00014     } tiles_t;
00015
00016 /* Algo.c */
00017 tiles_t *shuffle_fisher(int width, int height);
00018
00019 #endif /* !ALGO_H_ */

```

6.27 game.h

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** game
00006 */
00007
00008 #include "buffer.h"
00009 #include <time.h>
00010 #include <pthread.h>
00011
00012 #ifndef GAME_H_
00013     #define GAME_H_
00014
00015     typedef struct action_request_s action_request_t;
00016     typedef struct action_queue_s action_queue_t;
00017     typedef struct player_s player_t;
00018
00019 /* Definition of the directions */
00020     typedef enum direction_e {
00021         NORTH = 1,
00022         EAST = 2,
00023         SOUTH = 3,
00024         WEST = 4
00025     } direction_t;
00026
00027 /* definition of the different element on the map */
00028     typedef enum crystal_e {
00029         FOOD,
00030         LINEMATE,
00031         DERAUMERE,

```

```

00032     SIBUR,
00033     MENDIANE,
00034     PHIRAS,
00035     THYSTAME
00036 } crystal_t;
00037
00038
00039 /* This enum defines the priority of the action in the queue */
00040 typedef enum action_priority_e {
00041     PRIORITY_CRITICAL = 0,
00042     PRIORITY_HIGH = 1,
00043     PRIORITY_MEDIUM = 2,
00044     PRIORITY_LOW = 3
00045 } action_priority_t;
00046
00047 /* This structure allows use to define a 'queue' of the requests */
00048 typedef struct action_queue_s {
00049     action_request_t *head;
00050     action_request_t *tail;
00051     int count;
00052     pthread_mutex_t mutex;
00053 } action_queue_t;
00054
00055
00056 typedef struct egg_s {
00057     int id; /* Id of the egg */
00058     int posX;
00059     int posY;
00060     char *teamName; /* Name of the team that laid it */
00061     int idLayer; /* Id of the player that layed it */
00062     bool isHatched;
00063     struct egg_s *next;
00064 } egg_t;
00065
00066 /* Struct that "handles" the network element */
00067 typedef struct network_s {
00068     int fd;
00069     buffer_t *buffer;
00070 } network_t;
00071
00072 /* Struct defining the inventory of tiles and players */
00073 typedef struct inventory_s {
00074     int nbFood;
00075     int nbLinemate;
00076     int nbDeraumere;
00077     int nbSibur;
00078     int nbMendiane;
00079     int nbPhiras;
00080     int nbThystame;
00081 } inventory_t;
00082
00083
00084 /* Player struct */
00085 typedef struct player_s {
00086     int id;
00087     network_t *network;
00088     int level;
00089     int posX;
00090     int posY;
00091     direction_t direction;
00092     inventory_t *inventory;
00093     char *team;
00094     /* New additions for the smart pollin */
00095     action_queue_t *pending_actions;
00096     time_t last_action_time;
00097     bool is_busy;
00098     int remaining_cooldown;
00099
00100     struct player_s *next;
00101 } player_t;
00102
00103 /* This structure define the request strut */
00104 typedef struct action_request_s {
00105     char *command;
00106     time_t timestamp;
00107     float time_limit; // in game ticks (7/f, 42/f, etc.)
00108     action_priority_t priority;
00109     player_t *player;
00110     struct action_request_s *next;
00111 } action_request_t;
00112
00113 /* Team Strcut */
00114 typedef struct team_s {
00115     char *name;
00116     int nbPlayers;
00117     int nbPlayerAlive;
00118     player_t *players;

```

```

00119     struct team_s *next;
00120 } team_t;
00121
00122
00123 /* Structure that holds the size and array of tiles */
00124 typedef struct map_t {
00125     int width;
00126     int height;
00127     egg_t *currentEggs; /* List of current eggs */
00128     inventory_t **tiles; /* Here we call inv for the tile*/
00129 } map_t;
00130
00131
00132 /* Map struct */
00133 typedef struct game_s {
00134     team_t *teams;
00135     map_t *map;
00136 } game_t;
00137
00138 #endif /* !GAME_H_ */

```

6.28 my.h

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** my
00006 */
00007
00008 #ifndef MY_H_
00009     #define MY_H_
00010
00011 int int_str_len(int value);
00012 char *my_itoa(unsigned int nb);
00013 int is_only_digits(const char *str);
00014 int my_unsignedlen(unsigned int nb);
00015
00016 #endif /* !MY_H_ */

```

6.29 my.h

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** my
00006 */
00007
00008 #ifndef MY_H_
00009     #define MY_H_
00010
00011 int int_str_len(int value);
00012 char *my_itoa(unsigned int nb);
00013 int is_only_digits(const char *str);
00014 int my_unsignedlen(unsigned int nb);
00015
00016 #endif /* !MY_H_ */

```

6.30 zappy.h

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** Zappy
00004 ** File description:
00005 ** Server :: Zappy header
00006 */
00007
00008 #include <stdbool.h>
00009 #include <poll.h>
00010 #include "game.h"
00011 #include "my.h"
00012
00013 #ifndef ZAPPY_H_
00014     #define ZAPPY_H_
00015
00016 /* items handler */
00017 typedef struct {
00018     char *name;

```

```

00019     void (*add_func)(inventory_t *);
00020 } item_handler_t;
00021
00022
00023 /* Cli parameter of the server */
00024 typedef struct params_s {
00025     int port;
00026     int x;
00027     int y;
00028     int nb_team;
00029     char **teams;
00030     int nb_client;
00031     int freq;
00032     bool is_debug;
00033 } params_t;
00034
00035 /* Structure to handle the network side of the gui*/
00036 typedef struct graph_net_s {
00037     int fd;
00038     bool mapSent;
00039     struct graph_net_s *next;
00040 } graph_net_t;
00041
00042 /* Server part of the network */
00043 typedef struct server_s {
00044     int sockfd;
00045     struct pollfd pollserver;
00046 } server_t;
00047
00048 typedef struct zappy_s {
00049     server_t *network;
00050     game_t *game;
00051     graph_net_t *graph;
00052     params_t *params;
00053 } zappy_t;
00054
00055 typedef struct command_pf_s {
00056     char const *flag;
00057     bool (*checker)(const char *, const char *, params_t *);
00058 } command_pf_t;
00059
00060 typedef struct {
00061     char *command;
00062     float base_time;
00063     action_priority_t priority;
00064     int (*handler)(player_t *, char *, zappy_t *);
00065 } command_info_t;
00066
00067 /* messages.c */
00068 int helper(void);
00069 void error_message(const char *message);
00070 void valid_message(char const *message);
00071
00072 /* checkers.c */
00073 bool check_port(char const *flag, char const *value, params_t *params);
00074 bool check_width(char const *flag, char const *value, params_t *params);
00075 bool check_height(char const *flag, char const *value, params_t *params);
00076 bool check_client(char const *flag, char const *value, params_t *params);
00077 bool check_freq(char const *flag, char const *value, params_t *params);
00078
00079 /* signal.c */
00080 void setup_signal(void);
00081 int *get_running_state(void);
00082
00083 /* params.c */
00084 params_t *check_args(int argc, char **argv);
00085 void *free_params(params_t *params);
00086
00087 /* params_checker.c */
00088 bool validate_no_extra_args(int argc, char **argv);
00089
00090 /* server.c */
00091 zappy_t *init_server(int argc, char **argv);
00092 void *free_zappy(zappy_t *server);
00093
00094 /* protocol.c */
00095 int start_protocol(zappy_t *server);
00096
00097 /* client.c */
00098 bool process_new_client(const char *team_name, int fd, zappy_t *server);
00099 team_t *add_client_to_team(const char *team_name, int fd, zappy_t *server);
00100 int get_next_free_id(zappy_t *server);
00101 void check_player_status(zappy_t *zappy);
00102
00103 /* init_map.c */
00104 void init_game(zappy_t *server);
00105

```

```

00106 /* accept.c */
00107 int accept_client(zappy_t *server);
00108
00109 /* free server */
00110 void *free_zappy(zappy_t *server);
00111 void *free_params(params_t *params);
00112 void *free_player(player_t *player);
00113 void free_map(map_t *map);
00114
00115 /* Function to send info to the gui */
00116 int send_map_size(zappy_t *server);
00117 int send_entrie_map(zappy_t *server);
00118 int send_map_tile(inventory_t **tiles, zappy_t *server,
00119 int posX, int posY);
00120 int send_team_name(zappy_t *server);
00121 int send_egg(zappy_t *zappy, egg_t *egg);
00122 int send_entire_egg_list(zappy_t *zappy);
00123 int send_time_message(zappy_t *zappy);
00124 int send_egg_death(zappy_t *zappy, egg_t *egg);
00125 int send_egg_connect(zappy_t *zappy, egg_t *currentEgg);
00126 int send_player_connect(zappy_t *zappy, player_t *player);
00127 int send_player_pos(zappy_t *zappy, player_t *player);
00128 int send_player_level(zappy_t *zappy, player_t *player);
00129 int send_player_inventory(zappy_t *zappy, player_t *player);
00130 int send_player_expelled(zappy_t *zappy, player_t *player);
00131 int send_broadcast_to_all(zappy_t *zappy, const char *message);
00132 int send_broadcast_to_player(zappy_t *zappy, player_t *player,
00133 const char *message);
00134 int send_player_laying_egg(zappy_t *zappy, player_t *player);
00135 int send_ressource_dropped(zappy_t *zappy, player_t *player,
00136 int ressourceType);
00137 int send_ressource_collected(zappy_t *zappy, player_t *player,
00138 int ressourceType);
00139 int send_player_death(zappy_t *zappy, player_t *player);
00140 int send_updated_time(zappy_t *zappy, int time);
00141 int send_end_game(zappy_t *zappy, const char *teamName);
00142 int send_str_message(zappy_t *zappy, const char *message);
00143 int send_unknown_command(zappy_t *zappy);
00144 int send_command_parameter(zappy_t *zappy);
00145
00146 /* init_egg.c */
00147 void init_egg(zappy_t *zappy);
00148 egg_t *kil_egg_node(egg_t **head, int egg_id);
00149
00150 /* AI messages */
00151 int forward_message(player_t *player, params_t *params);
00152
00153 /* Pollin handler */
00154 void smart_poll_players(zappy_t *zappy);
00155 void execute_action(player_t *player, action_request_t *action,
00156 zappy_t *zappy);
00157 void queue_action(player_t *player, char *command, zappy_t *zappy);
00158 action_queue_t *init_action_queue(void);
00159 void free_action_queue(action_queue_t *queue);
00160 action_request_t *create_action_request(char *command, player_t *player,
00161 int frequency);
00162 const command_info_t *find_command_info(char *command);
00163 action_request_t *dequeue_highest_priority_action(action_queue_t *queue);
00164 void free_action_request(action_request_t *action);
00165 void insert_action_by_priority(action_queue_t *queue,
00166 action_request_t *action);
00167
00168 /* This is the definition of the array function of the commands */
00169 int handle_forward(player_t *player, char *command, zappy_t *zappy);
00170 int handle_left(player_t *player, char *command, zappy_t *zappy);
00171 int handle_right(player_t *player, char *command, zappy_t *zappy);
00172 int handle_connect_nbr(player_t *player, char *command, zappy_t *zappy);
00173 int handle_eject(player_t *player, char *command, zappy_t *zappy);
00174 int handle_fork(player_t *player, char *command, zappy_t *zappy);
00175 int handle_incantation(player_t *player, char *command, zappy_t *zappy);
00176 int handle_inventory(player_t *player, char *command, zappy_t *zappy);
00177 int handle_broadcast(player_t *player, char *command, zappy_t *zappy);
00178 int handle_look(player_t *player, char *command, zappy_t *zappy);
00179 int handle_set(player_t *player, char *command, zappy_t *zappy);
00180 int handle_take(player_t *player, char *command, zappy_t *zappy);
00181
00182 /* graphic_clinet.c */
00183 graph_net_t *add_graph_node(graph_net_t **head, int fd);
00184 graph_net_t *remove_graph_node(graph_net_t **head, int fd);
00185 void poll_graphic_clients(zappy_t *zappy);
00186
00187
00188 /* Element handler.c */
00189 void add_food(inventory_t *inventory);
00190 void add_linemate(inventory_t *inventory);
00191 void add_deraumere(inventory_t *inventory);
00192 void add_sibur(inventory_t *inventory);

```

```

00193 void add_mendiane(inventory_t *inventory);
00194 void add_phras(inventory_t *inventory);
00195 void add_thystame(inventory_t *inventory);
00196
00197 void rm_food(inventory_t *inventory);
00198 void rm_linemate(inventory_t *inventory);
00199 void rm_deraumere(inventory_t *inventory);
00200 void rm_sibur(inventory_t *inventory);
00201 void rm_mendiane(inventory_t *inventory);
00202 void rm_phras(inventory_t *inventory);
00203 void rm_thystame(inventory_t *inventory);
00204 #endif /* !ZAPPY_H_ */

```

6.31 buffer.h

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** buffer
00006 */
00007
00008 #include <stddef.h>
00009
00010 #ifndef BUFFER_H_
00011     #define BUFFER_H_
00012
00013     #define BUFFER_SIZE 1024
00014
00015
00016 typedef struct buffer_s {
00017     char data[BUFFER_SIZE];
00018     int head;
00019     int tail;
00020     int full;
00021 } buffer_t;
00022
00023 /* buffer.c */
00024 int advance(int idx);
00025 void cb_write(buffer_t *cb, char c);
00026 int cb_getline(buffer_t *cb, char *line, int max_len);
00027
00028 #endif /* !BUFFER_H_ */

```

6.32 buffer.h

```

00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** buffer
00006 */
00007
00008 #include <stddef.h>
00009
00010 #ifndef BUFFER_H_
00011     #define BUFFER_H_
00012
00013     #define BUFFER_SIZE 1024
00014
00015
00016 typedef struct buffer_s {
00017     char data[BUFFER_SIZE];
00018     int head;
00019     int tail;
00020     int full;
00021 } buffer_t;
00022
00023 /* buffer.c */
00024 int advance(int idx);
00025 void cb_write(buffer_t *cb, char c);
00026 int cb_getline(buffer_t *cb, char *line, int max_len);
00027
00028 #endif /* !BUFFER_H_ */

```

6.33 network.h

```

00001 /*
00002 ** EPITECH PROJECT, 2025

```

```
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** network
00006 */
00007
00008 #ifndef NETWORK_H_
00009     #define NETWORK_H_
00010
00011 /* Write an error message */
00012 void error_print(char const *message);
00013 /* Set the socket of the file descriptor */
00014 int set_socket(void);
00015 /* Bind the file descriptor to the port */
00016 int bind_socket(int fd, int port);
00017 /* Specify the queue the fd will use */
00018 int listen_socket(int fd, int backlog);
00019
00020 /* Close the server */
00021 void close_fd(int fd);
00022
00023 /* Accept new connection */
00024 int accept_connection(int server_fd);
00025 /* Handle Message input */
00026 char *get_message(int fd, int timeout);
00027 /* Hello */
00028 int write_message(int fd, const char *message);
00029 #endif /* !NETWORK_H_ */
```

6.34 network.h

```
00001 /*
00002 ** EPITECH PROJECT, 2025
00003 ** B-YEP-400-NAN-4-1-zappy-albane.merian
00004 ** File description:
00005 ** network
00006 */
00007
00008 #ifndef NETWORK_H_
00009     #define NETWORK_H_
00010
00011 /* Write an error message */
00012 void error_print(char const *message);
00013 /* Set the socket of the file descriptor */
00014 int set_socket(void);
00015 /* Bind the file descriptor to the port */
00016 int bind_socket(int fd, int port);
00017 /* Specify the queue the fd will use */
00018 int listen_socket(int fd, int backlog);
00019
00020 /* Close the server */
00021 void close_fd(int fd);
00022
00023 /* Accept new connection */
00024 int accept_connection(int server_fd);
00025 /* Handle Message input */
00026 char *get_message(int fd, int timeout);
00027 /* Hello */
00028 int write_message(int fd, const char *message);
00029 #endif /* !NETWORK_H_ */
```

