

```
[ OK ] Started Journal Service.
[ OK ] Started Apply Kernel Variables.
[ OK ] Started Tog Kernel Errors.
{"system": "ClawOS", "version": "4.2.0-alpha", "boot_time": "2024-05-21T10:00:00Z", "status": "INITIALIZING"}
Mounting /dev/sda1 on /boot...
Mounting /dev/sda1 on /boot...
[ OK ] Mounted Configuration File System.
Checking for new hardware...
[ OK ] Found device Claw-Engine-v2
[ OK ] Started Apply Kernel Variables.
[ OK ] Started Mount Configuration File System.
```

高能效与低幻觉：如何让 Claw 帮你安心摸鱼

探索支付级外置护栏与双擎模型架构

```
[ OK ] Started Mount Configuration File System.
Mounting /dev/sda1 on /boot...
[ OK ] Started Apply Kernel Variables.
[ OK ] Started Journal Service.
[ OK ] Started Apply Process Variables.
[ OK ] Started Journal Service.
[ OK ] Started Apply Kernel Variables.
Mounting /dev/sda1 on /boot...
Mounting /dev/sda1 on /boot...
[ OK ] Mounted Configuration File System.
Checking for new hardware...
[ OK ] Found device Claw-Engine-v2
```

> whoami

蚂蚁百灵模型团队 | 四盘 (cafe3310) | 模型产品工程师

1% 的幻觉 = 100% 的周末救火

当大模型作为工程组件接入自动化流时，概率性的幻觉就是一场灾难。
我们需要的是稳定干活的机器，而不是会聊天的朋友。

Syntax: incorrect values

The Expectation



```
1
2 你是一个严谨的 JSON 提取器，仅输出合法数据对象结构...
3
4 {
5
6
7
8
9
10
11
12
13
14
15
```

The Reality



```
at Process.nextTick (internal/process/task_queues.js:97:5)
at System.create(error.js:31:15)
at JSON.parse (<anonymous>)
at Process.nextTick (internal/process/task_queues.js:97:5)
at Process.nextTick (internal/process/task_queues.js:97:5)
at System.stackDump (internal/process/user.js:38:1)
at System.stackDump (internal/process.js:32:8)
SyntaxError: Unexpected string in JSON... '好的，这是为您生成的代码：{'
at JSON.parse (<anonymous>)
at Process.nextTick (internal/process/task_queues.js:97:5)
at Process.nextTick (internal/process/task_queues.js:97:5)
at System.stackDump (internal/process/user.js:38:1)
[CRITICAL] Pipeline FAILED at step: DATA_EXTRACTION
[ERROR] Service degraded. Automatic rollback initiated.
[ALERT] On-call engineer notified: Weekend ruined.
[SYSTEM] Memory usage spike detected.
[LOG] Attempting to retry operation (1/5)... FAILED
[LOG] Attempting to retry operation (2/5)... FAILED
[LOG] Attempting to retry operation (3/5)... FAILED
[LOG] Attempting to retry operation (4/5)... FAILED
[LOG] Attempting to retry operation (5/5)... FAILED
[FATAL] Unrecoverable error in module: ai_integration_service.js:412
[INFO] Weekend plans cancelled.
```

CPU: 98%
STATUS: CRITICAL
MEMORY: LEAK DETECTED

STATUS: CRITICAL

CPU: 98%
MEMORY: LEAK DETECTED

STATUS: OK


认清边界：什么任务值得交给 Agent？

放弃“大模型是万能的”错觉。真实的业务（尤其是涉及资金与底层权限）要求绝对的确定性。在红区，错一次的代价远高于效率的提升。



防御法则一：物理隔离，保持上下文绝对纯净

带有强烈“人设”或情绪记忆的助手，幻觉率会直线上升。绝对不要让模型因为“感觉用户今天很想买”，就顺着情绪凭空捏造一个买入信号。

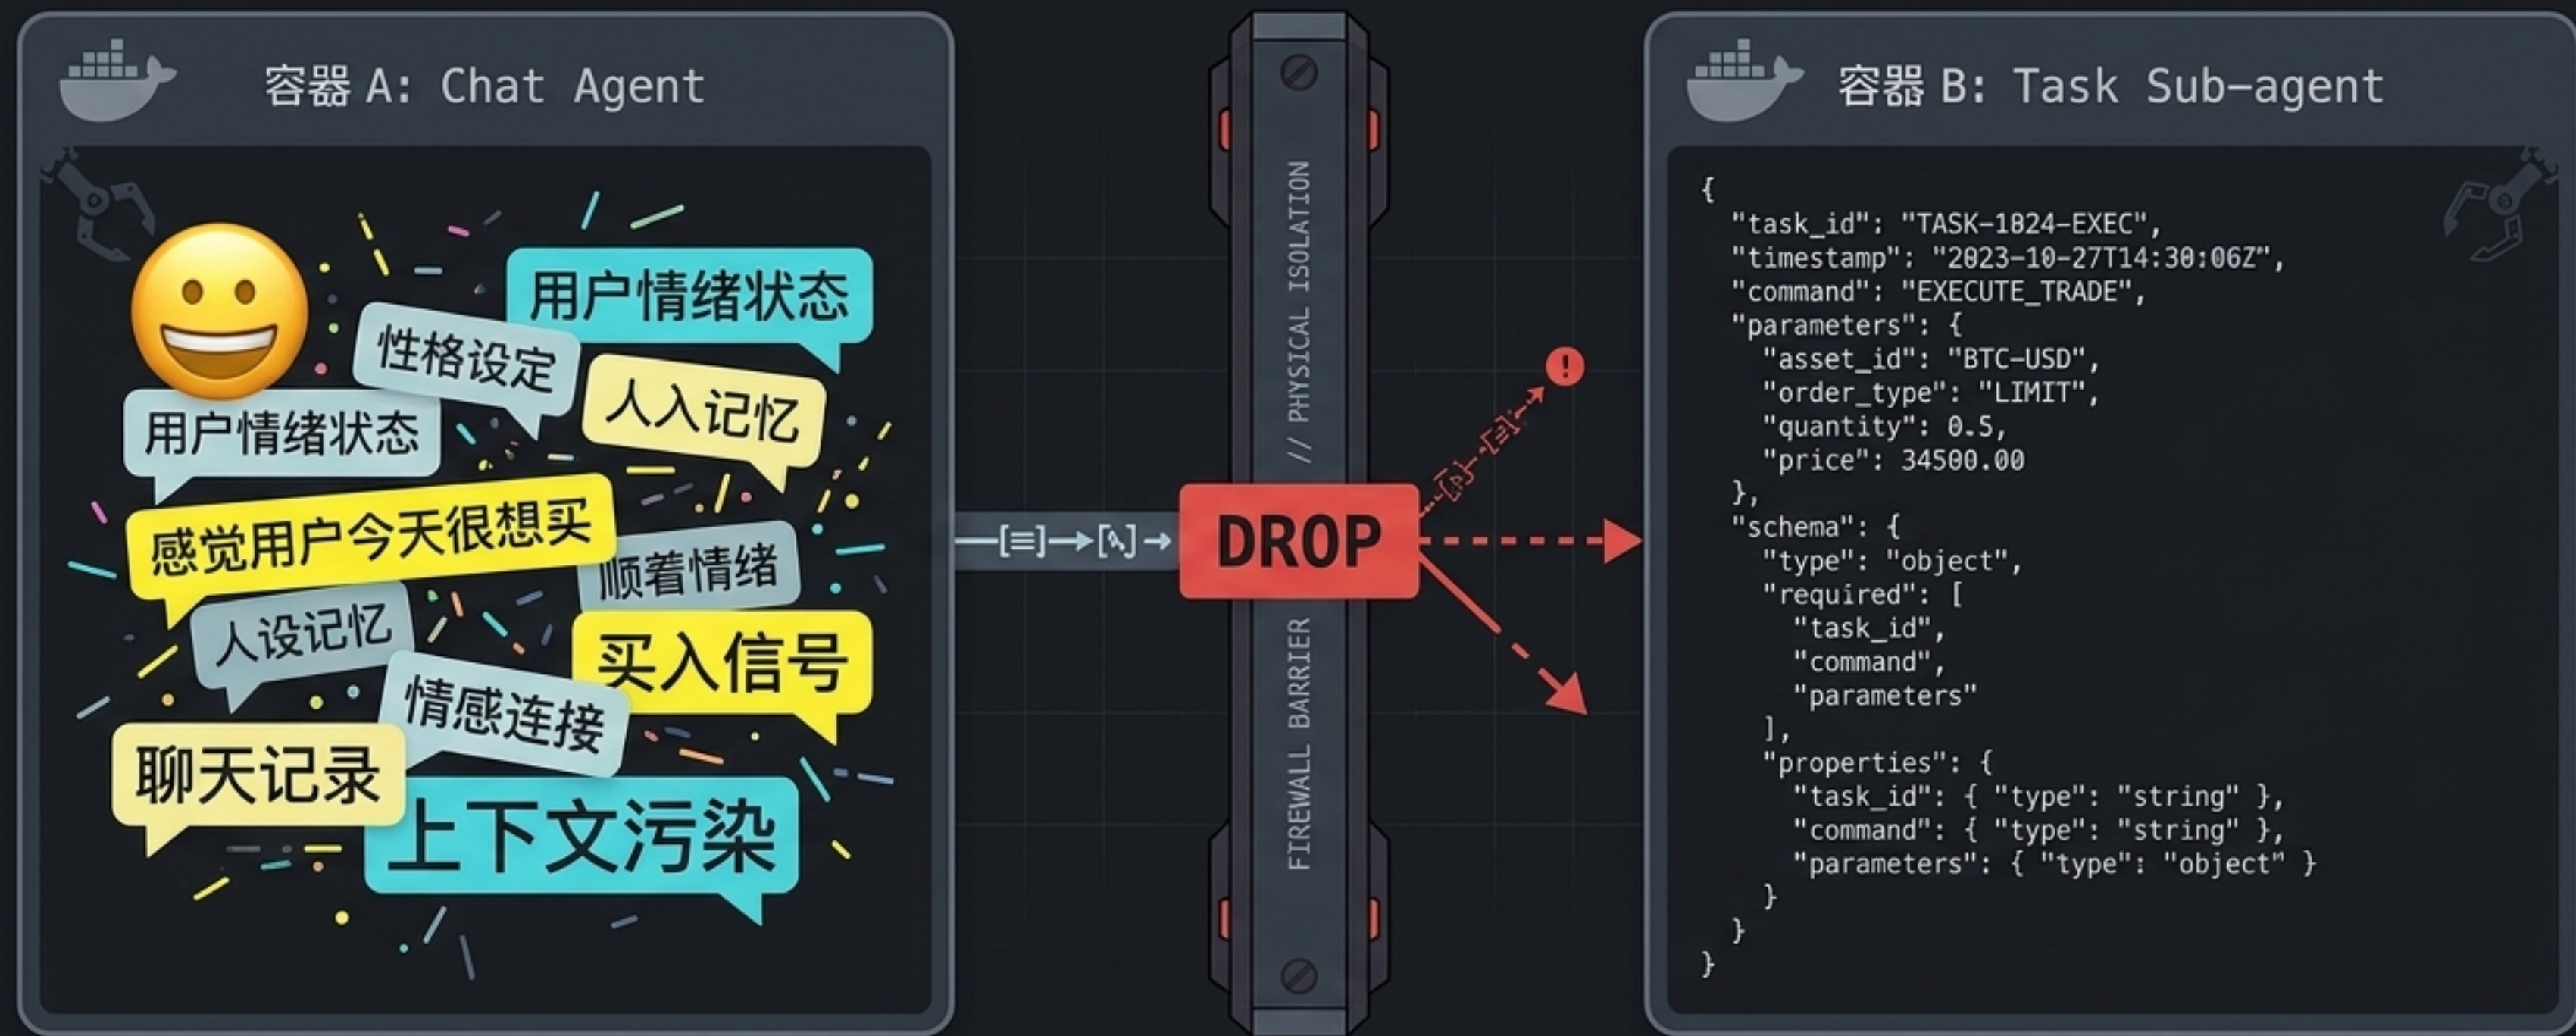

虚幻的防御：用魔法打败魔法是行不通的

截至 2026 年 4 月，单靠 System Prompt 在面对对抗性注入时，防御成功率仅为 17%。指望模型靠“自我反思”来保证业务安全，无异于裸奔。




防御法则二：永远不信任，始终验证

在资金与高危执行流中，安全机制必须做在模型之外。模型只负责生成，外围必须由死板的正则表达式、硬编码规则引擎和容器沙箱进行物理拦截。



7×24 小时的代价：算力与 Token 黑洞

OpenClaw 的单网关全天候自主架构，带来了惊人的算力消耗。让旗舰全能模型去跑后台循环和工具调用，就像用跑车去拉砖，不仅极度昂贵，还会因过度发散导致幻觉累积。

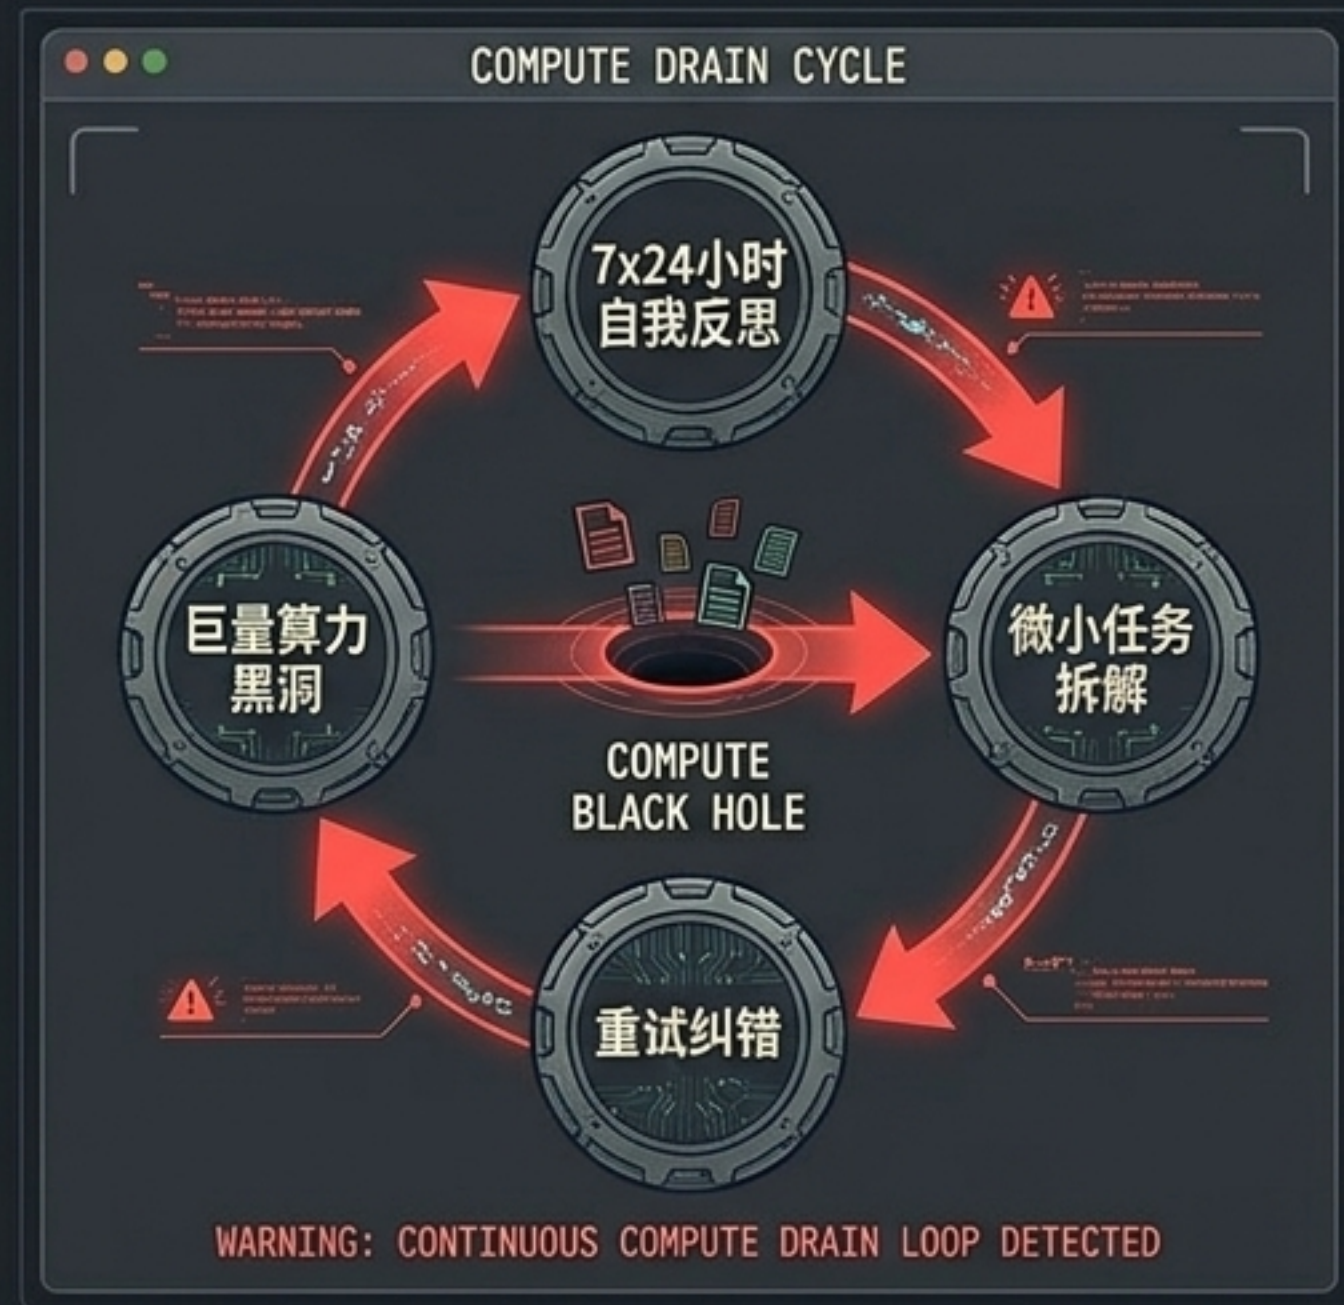

任务分流：为不同的齿轮匹配不同的引擎

截断模型的发散能力，从物理层面降低幻觉概率。


把前台闲聊交给最贵的模型，把底层苦力活交给最死板、最便宜的打工节点。

旗舰全能模型 (Chat Agent)



- 高昂成本
- 极易发散
- 适合前台多模态交互与意图解析

底层执行节点 (百灵 Ring-2.6-1T)

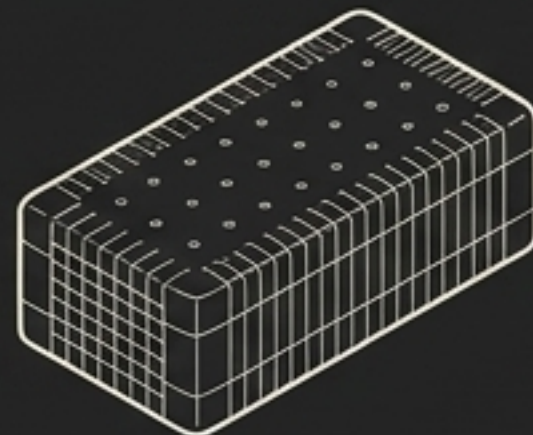

- 极限低成本
- 无情绪与零发散
- 结构化输出极稳
- 适合后台批量跑批与 API 调用

重构 OpenClaw: 一条让你准时下班的工业级管线

确定性的输入，外加确定性的 Guardrail，配合一个只干活不说话的底层模型。
这就是工业界能活下去的交付流。



蚂蚁百灵 Ring-2.6-1T: 宁可报错, 绝不幻觉

主打极致的 Token Efficiency 和零情绪的确定性交付。它的性格就是: 即使左右脑互搏直接抛出 None, 也绝对不给你捏造一个虚假的字段来搞崩下游代码。


```
1 // Model Configuration
2 model: "Ring-2.6-1T"
```

TECHNICAL SPECIFICATION

核心架构: MLA (Multi-head Latent Attention) + Linear Attention 混合架构

首 Token 延迟 (TTFT)

~12ms



不免费，但贼便宜。

支付级的稳定性需要实打实的算力成本。用它跑满一个月的账单，绝对比你因为业务崩溃被扣的绩效少得多。

本周 OpenRouter 接口限时免费开放。扫码拿 Key，把系统的默认推理节点换成它，试试它能不能帮你省钱又保命。



Time_Remaining: 45s