



LLM Gateway API Usage Guide

Base URL: <https://imllm.intermesh.net>

Authentication: Access Key (Bearer Token)

Model Access: Provided model names only (e.g., [qwen/qwen3-32b](#))



Authentication

Each request must include an **Authorization header** with your personal access key.

Example:

```
Authorization: Bearer <your-access-key>
```



Making Requests

LLM Gateway follows the OpenAI-compatible REST API format. This means you can use standard OpenAI clients or tools with just the base URL and your key.

Endpoint:

```
POST /v1/chat/completions
```

Headers:

```
Content-Type: application/json
```

```
Authorization: Bearer <your-access-key>
```

Sample Request:

```
curl https://imllm.intermesh.net/v1/chat/completions \
-H "Authorization: Bearer sk-xxx" \
-H "Content-Type: application/json" \
-d '{
  "model": "openrouter/qwen/qwen3-32b",
  "messages": [
    {"role": "user", "content": "Explain quantum computing in simple
terms"}
  ]
}'
```

Supported Parameters

Parameter	Description
model	The exact model name you were provided access to (e.g., openrouter/qwen/qwen3-32b)
messages	List of messages with role as user , assistant , or system
temperature	(Optional) Controls randomness (default: 1.0)
top_p	(Optional) Controls diversity via nucleus sampling (default: 1.0)
max_tokens	(Optional) Max number of tokens to generate in the reply
stream	(Optional) Set to true for streamed responses

For more information or swagger please visit <https://imllm.intermesh.net>

Example in Python

```
import openai

openai.api_key = "sk-xxx" // LLM Gateway access key
openai.base_url = "https://imllm.intermesh.net/v1"

response = openai.ChatCompletion.create(
    model="qwen/qwen3-32b",
    messages=[
        {"role": "user", "content": "Summarize the book Sapiens in 5 sentences."}
    ]
)

print(response['choices'][0]['message']['content'])
```

Streamed Response Example (Curl)

```
curl https://imllm.intermesh.net/v1/chat/completions \
-H "Authorization: Bearer sk-xxx" \ // LLM Gateway access key
-H "Content-Type: application/json" \
-d '{
    "model": "qwen/qwen3-32b",
    "messages": [{"role": "user", "content": "Write a short poem on rain"}],
    "stream": true
}'
```

? FAQs

1. How do I know which models I can use?

You will be explicitly granted access to specific models. Use only those in the "model" parameter.

2. Can I use OpenAI SDKs?

Yes. Just set:

```
openai.api_base = "https://imllm.intermesh.net/v1"
```

And the key will be the LLM Gateway provided key.

3. Can I use it from Postman or REST clients?


Absolutely. Just make sure to:

- Set the **Authorization** header
- Use POST method
- Send JSON body with required parameters


4. Can the same used with n-8-n

Absolutely. Just make sure to follow the below steps.

Step 1: Add OpenAI Chat Model as Language Models

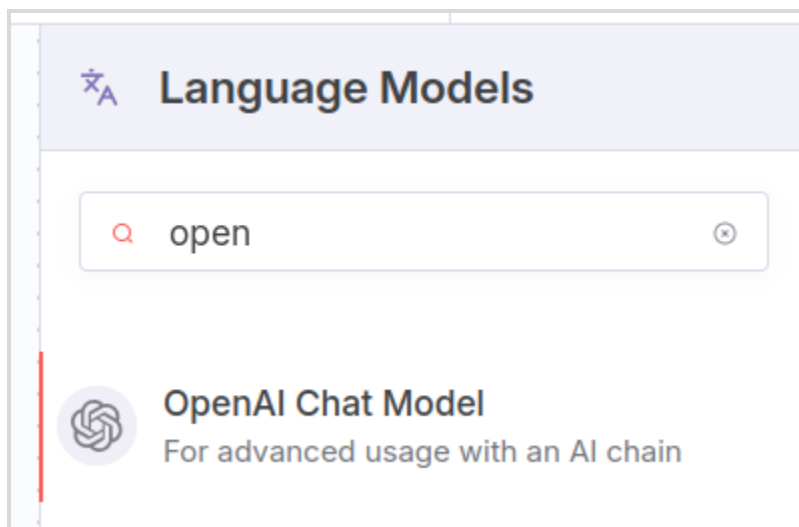

Step2: Create New Credentials

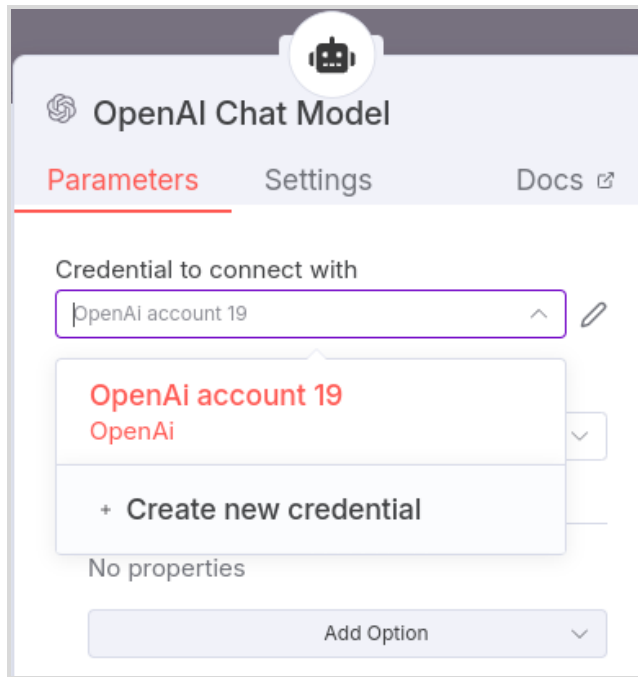

OpenAI Chat Model

Parameters Settings Docs

Credential to connect with

OpenAi account 19


OpenAi account 19
OpenAi

+ Create new credential

No properties

Add Option

Step3: Set the base URL as <https://imllm.intermesh.net> and API Key as provided API key.

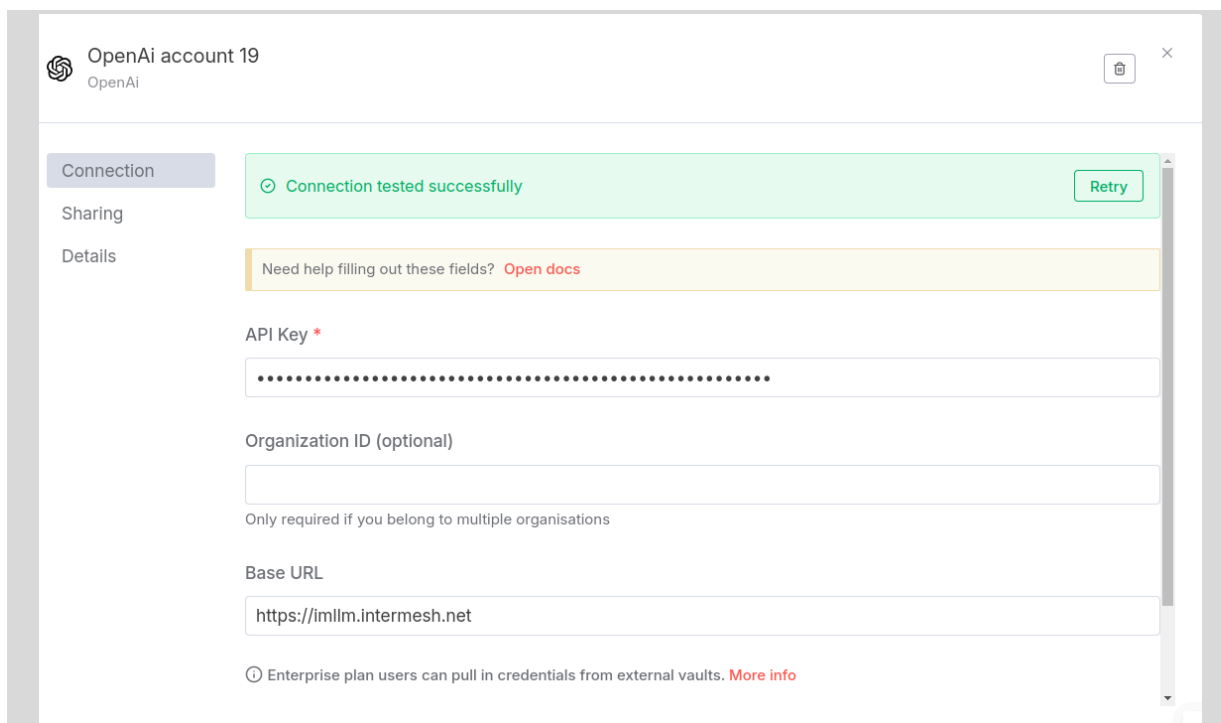

OpenAi account 19
OpenAi

Connection

Sharing

Details

Connection tested successfully

Retry

Need help filling out these fields? [Open docs](#)

API Key *

Organization ID (optional)

Only required if you belong to multiple organisations

Base URL

<https://imllm.intermesh.net>

Enterprise plan users can pull in credentials from external vaults. [More info](#)

