

# Api-Test-Sonuçları

```
C:\Windows\System32\cmd.exe
Running: actions.cy.js (1 of 1)

User Tests
✓ Create User (939ms)
✓ Get User Info (165ms)
✓ Update User (194ms)
✓ Delete User (162ms)
✓ Add Dog (169ms)
✓ get dog id (177ms)
✓ Update Dog (166ms)
✓ Update New Dog (180ms)
✓ Delete Dog (168ms)
✓ Order Place (180ms)
✓ Get Order Id (177ms)
✓ Delete Order (217ms)

12 passing (3s)

(Results)


Tests:      12
Passing:    12
Failing:    0
Pending:    0
Skipped:    0
Screenshots: 0
Video:      false
Duration:   3 seconds
Spec Ran:   actions.cy.js

=====

(Run Finished)

Spec                                Tests  Passing  Failing  Pending  Skipped
✓ actions.cy.js                    00:03   12       12       -        -        -
✓ All specs passed!                00:03   12       12       -        -        -
```

- Burada tüm testlerin başarılı sonuçlarını komut ekranında aldım

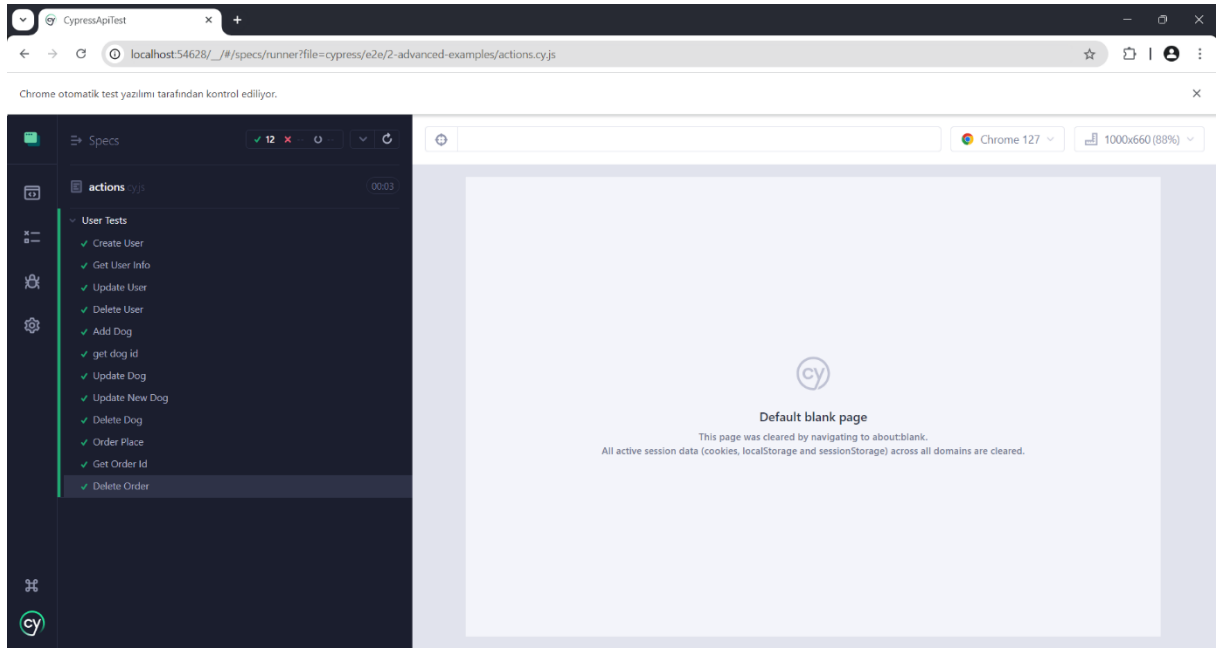

- `npx cypress open` komutu ile çalıştırdığım cypress chrome browser çıktısı.

```
Running:  apiTests.cy.js

User Tests
  ✓ Create User (1055ms)
  ✓ Get User Info (197ms)
  ✓ Update User (178ms)
  ✓ Delete User (193ms)
  ✓ Add Dog (199ms)
  1) get dog id
  ✓ Update Dog (225ms)
  ✓ Update New Dog (194ms)
  2) Delete Dog
  ✓ Order Place (187ms)
  ✓ Get Order Id (172ms)
  ✓ Delete Order (194ms)

10 passing (4s)
2 failing
```

- Tekrar `npx cypress run` komutu ile çalıştırdığımda görülen 2 fail (Bunun sebebini bi sonraki görselimizde açıklayacağım)

```
1) User Tests
   get dog id :
     CypressError: `cy.request()` failed on:
https://petstore.swagger.io/v2/pet/9222968140497186340
The response we received from your web server was:
  > 404: Not Found
This was considered a failure because the status code was not `2xx` or `3xx`.
If you do not want status codes to cause failures pass the option: `failOnStatusCode: false`
-----
The request we sent was:
Method: GET
URL: https://petstore.swagger.io/v2/pet/9222968140497186340
Headers: {
  "Connection": "keep-alive",
  "user-agent": "Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko)
  "accept": "*/*",
  "accept-encoding": "gzip, deflate"
}
```

- Gerçekleştirmiş olduğumuz ilk işlemde tüm case'lerimiz başarılı sonuç vermişti. Dolayısıyla eklemiş olduğumuz köpeğimizin id'sini DELETE metodumuzda silmiştik. Bu sebeple bi sonraki run işlemlerimizde köpeğimize ait olan id'yi bulamıyor. Bu yüzden 404: Not Found mesajını almış oluyoruz.

## 2) User Tests

Delete Dog :

CypressError: `cy.request()` failed on:

<https://petstore.swagger.io/v2/pet/9222968140497186340>

The response we received from your web server was:

> 404: Not Found

This was considered a failure because the status code was not `2xx` or `3xx`.

If you do not want status codes to cause failures pass the option: `failOnStatusC

The request we sent was:

Method: DELETE

URL: <https://petstore.swagger.io/v2/pet/9222968140497186340>

Headers: {

"Connection": "keep-alive",

"user-agent": "Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KH


"accept": "\*//\*",

"accept-encoding": "gzip, deflate",

"content-length": 0

}

- Bir önceki case'de bahsettiğim gibi gerçekleştirdiğimiz başarılı işlemden sonra eklemiş olduğumuz köpeğimizi DELETE metodumuzda silmiştik. Bu sebeple köpeğimizin bulunmadığına dair 404: Not Found mesajını görüyoruz.

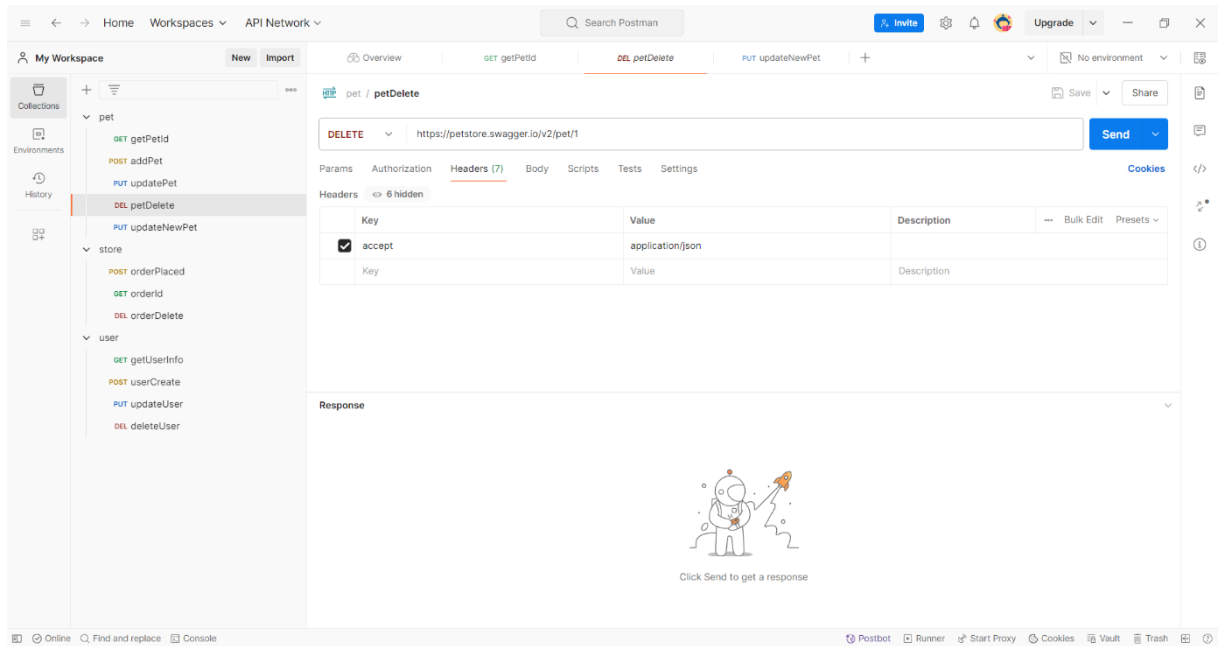

- Postman collections (Ayrıca txt dosyası olarak github repo kısmına göndereceğim)