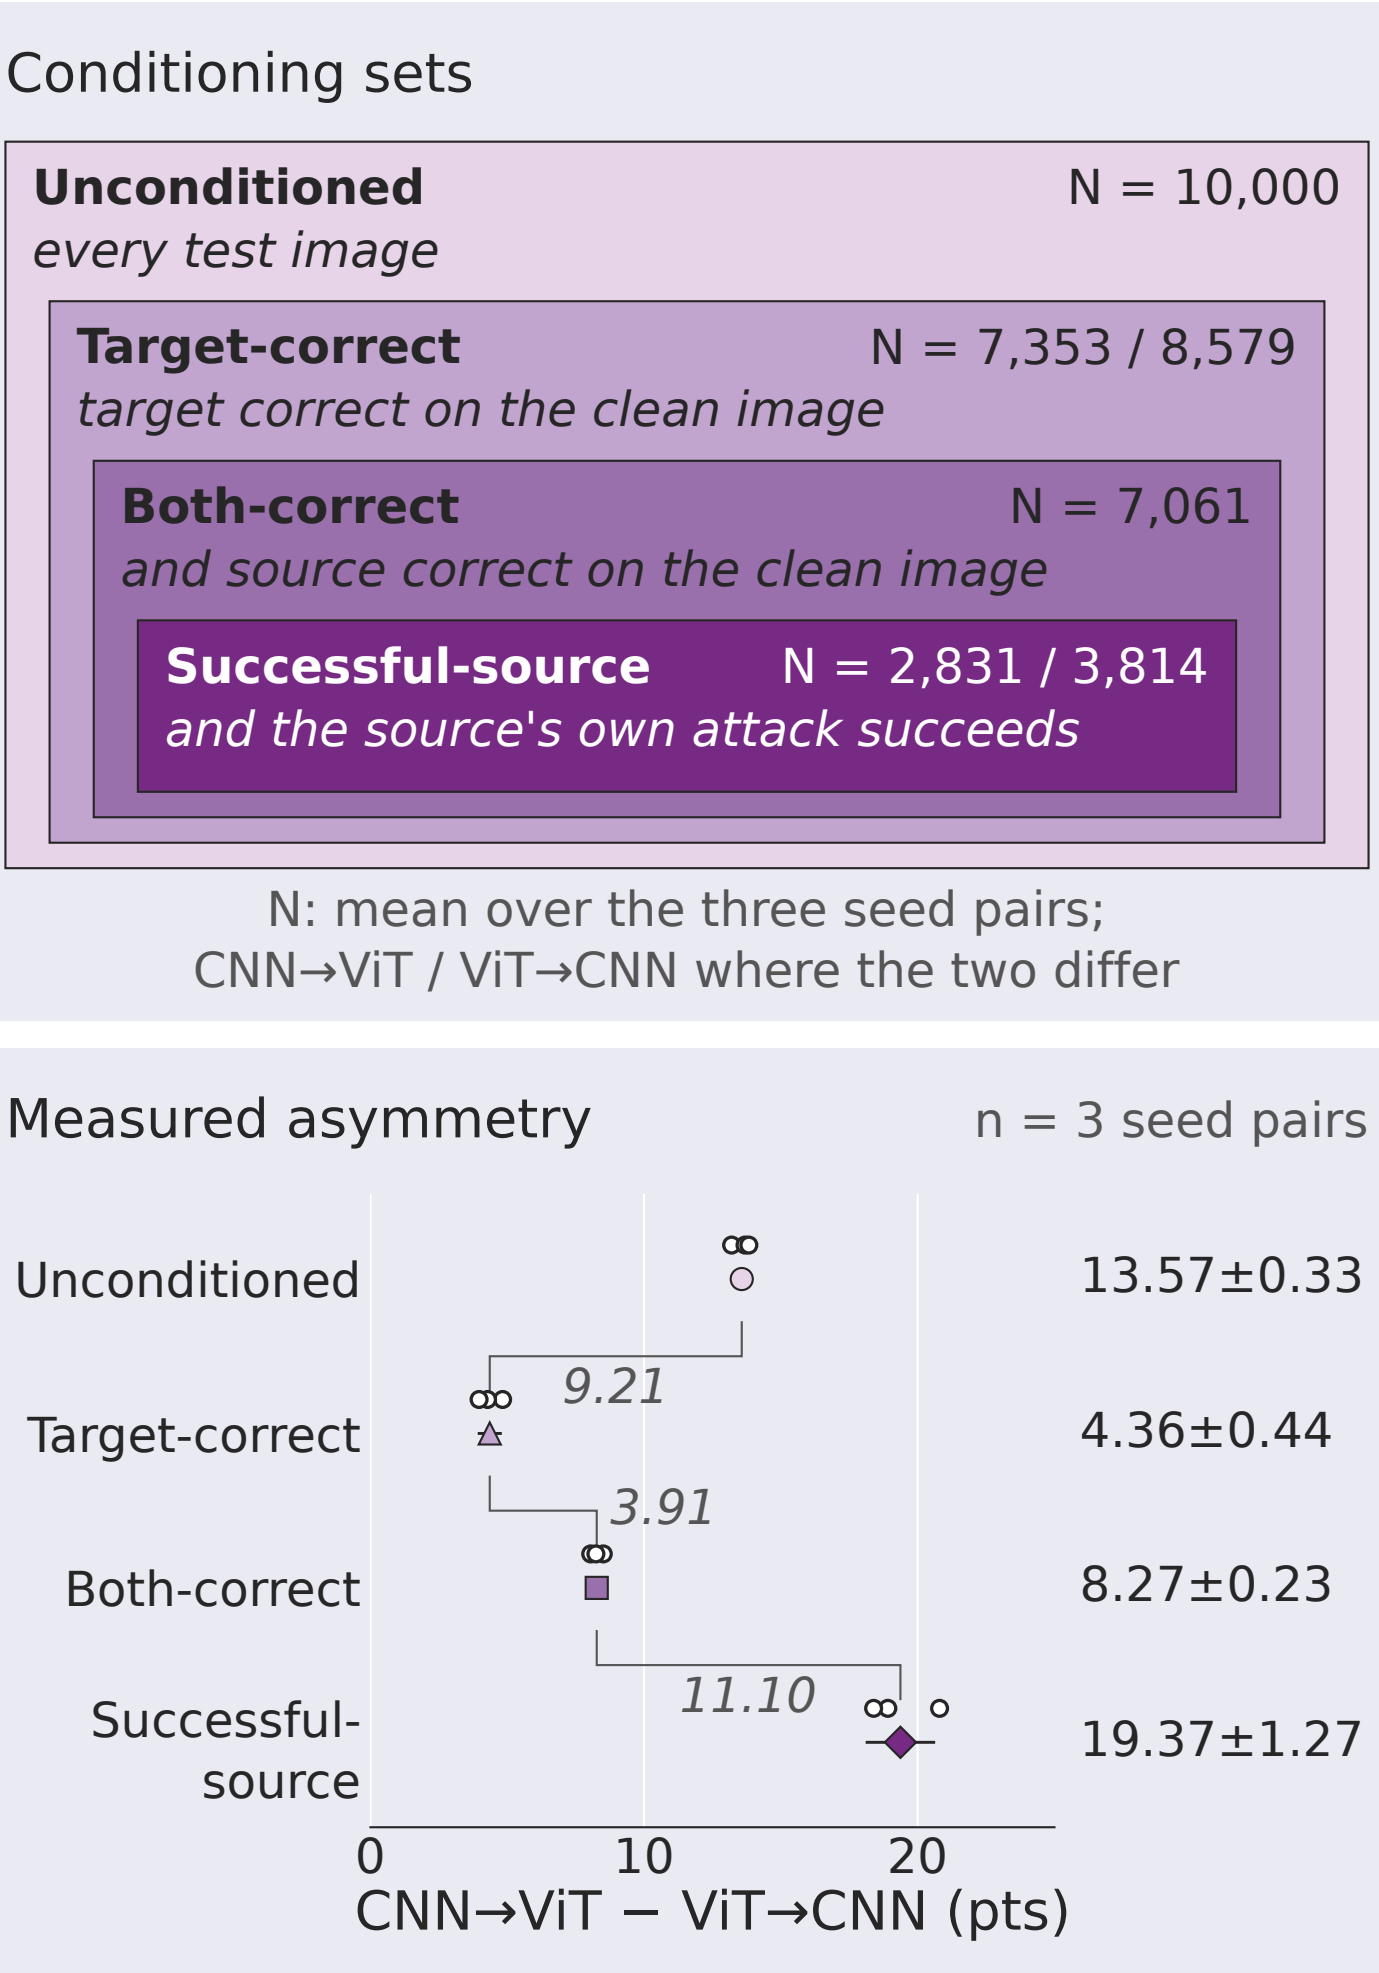
Conditioning sets
Unconditioned
N = 10,000
every test image
Target-correct
N = 7,353 / 8,579
target correct on the clean image
Both-correct
N = 7,061
and source correct on the clean image
Successful-source
N = 2,831 / 3,814
and the source's own attack succeeds
N: mean over the three seed pairs;
CNN→ViT / ViT→CNN where the two differ
Measured asymmetry
n = 3 seed pairs
Unconditioned
Target-correct
Both-correct
Successful-source
9.21
3.91
11.10
13.57±0.33
4.36±0.44
8.27±0.23
19.37±1.27
0
10
20
CNN→ViT − ViT→CNN (pts)