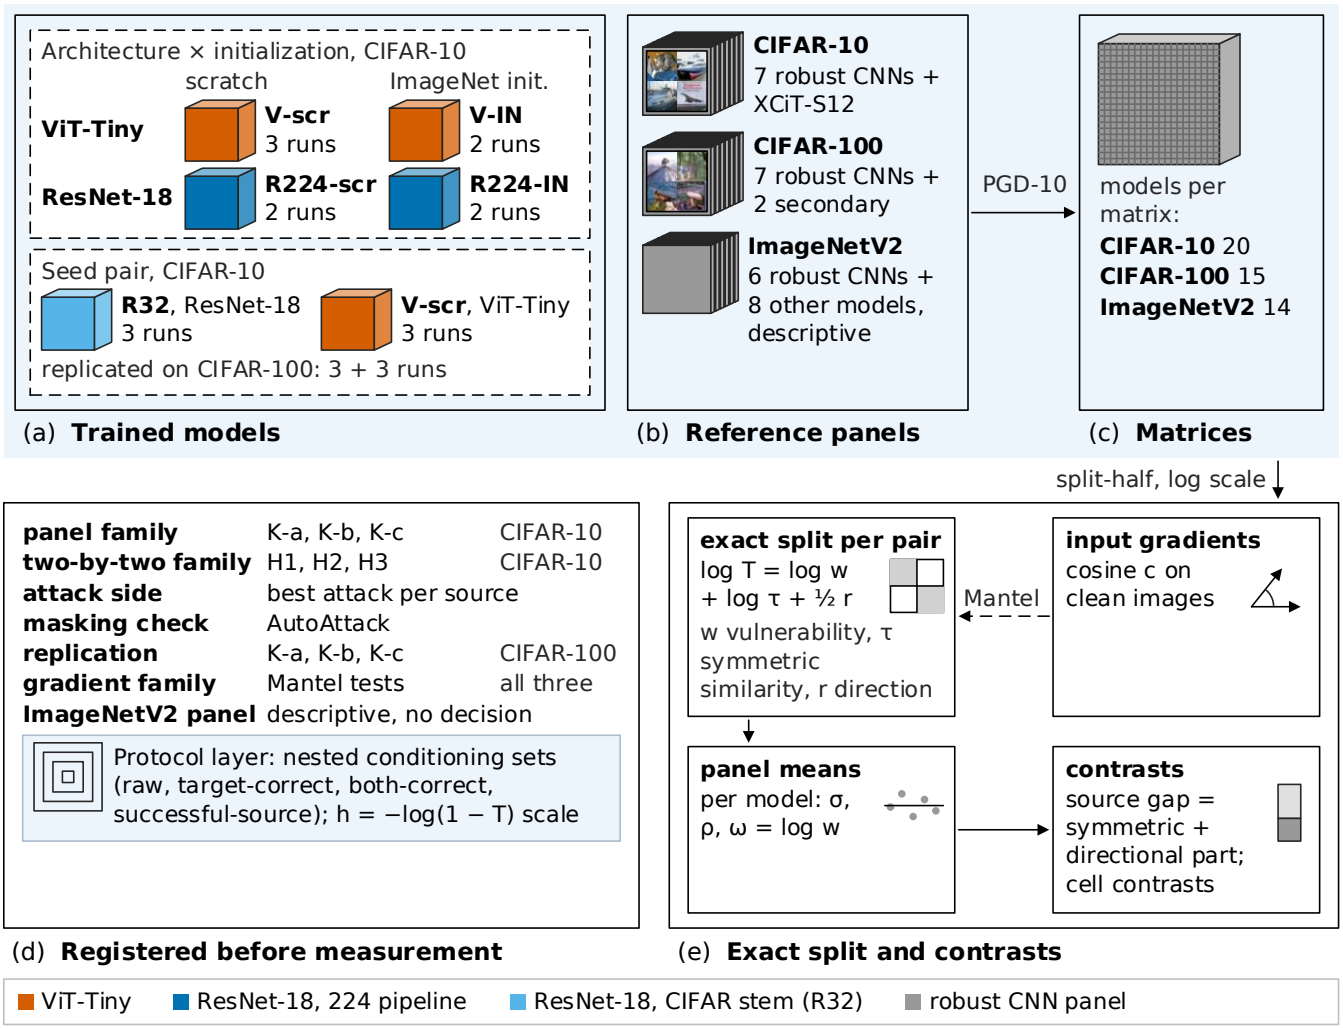

Architecture × initialization, CIFAR-10
scratch
ImageNet init.
ViT-Tiny
V-scr
3 runs
V-IN
2 runs
ResNet-18
R224-scr
2 runs
R224-IN
2 runs
Seed pair, CIFAR-10
R32, ResNet-18
3 runs
V-scr, ViT-Tiny
3 runs
replicated on CIFAR-100: 3 + 3 runs
(a) Trained models
CIFAR-10
7 robust CNNs +
XCiT-S12
CIFAR-100
7 robust CNNs +
2 secondary
ImageNetV2
6 robust CNNs +
8 other models,
descriptive
(b) Reference panels
PGD-10
models per
matrix:
CIFAR-10 20
CIFAR-100 15
ImageNetV2 14
(c) Matrices
split-half, log scale
panel family K-a, K-b, K-c CIFAR-10
two-by-two family H1, H2, H3 CIFAR-10
attack side best attack per source
masking check AutoAttack
replication K-a, K-b, K-c CIFAR-100
gradient family Mantel tests all three
ImageNetV2 panel descriptive, no decision
Protocol layer: nested conditioning sets
(raw, target-correct, both-correct,
successful-source); h = −log(1 − T) scale
(d) Registered before measurement
exact split per pair
log T = log w
+ log τ + ½ r
w vulnerability, τ
symmetric
similarity, r direction
Mantel
input gradients
cosine c on
clean images
panel means
per model: σ,
ρ, ω = log w
contrasts
source gap =
symmetric +
directional part;
cell contrasts
(e) Exact split and contrasts
ViT-Tiny
ResNet-18, 224 pipeline
ResNet-18, CIFAR stem (R32)
robust CNN panel