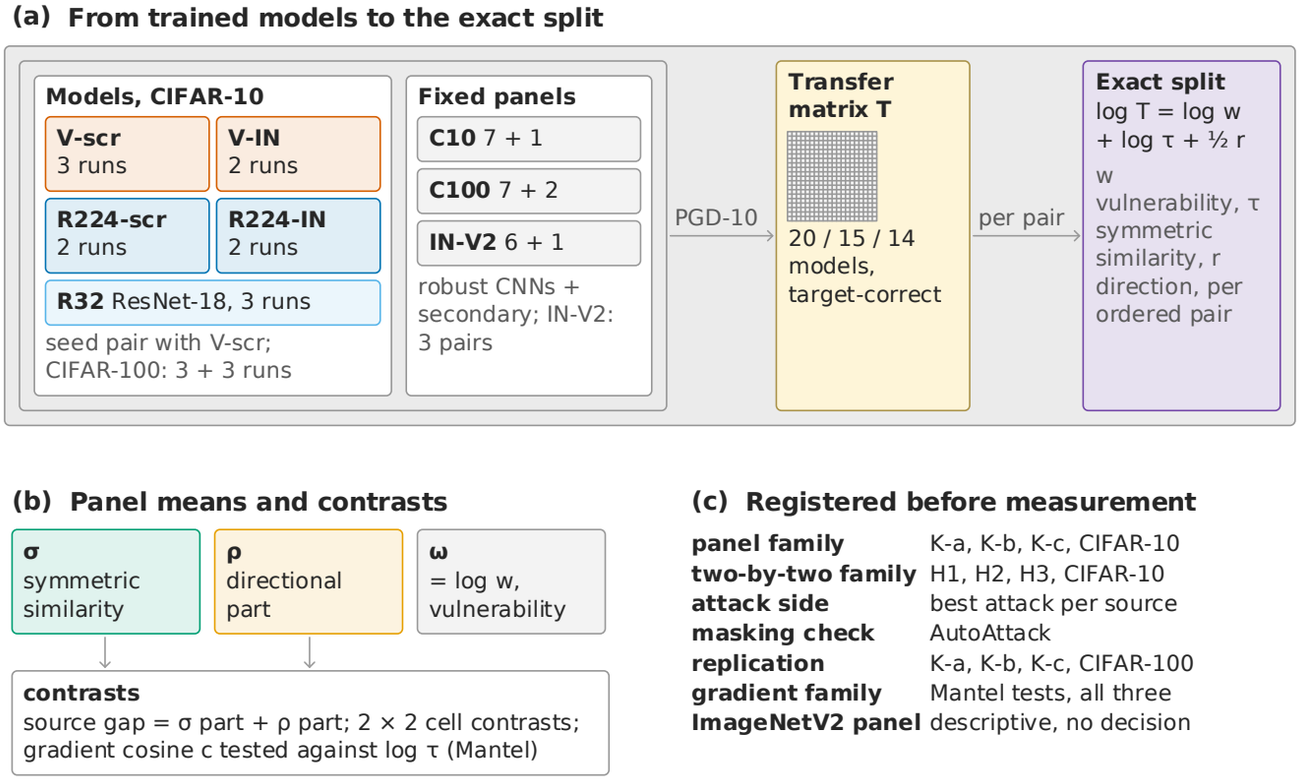


Figure 1. Study overview. A ResNet-18 and ViT-Tiny pair and a two-by-two architecture-by-initialization design are evaluated against fixed panels of robust CNNs on CIFAR-10 and CIFAR-100, with a descriptive extension to independently trained ImageNet models on ImageNetV2. Transfer rates are factored into vulnerability w, symmetric similarity $\bar{\tau}$ and directional residual r; the registered test families and the conditioning-protocol layer appear at the bottom.

Üslup 3 (aday) · _onizleme_study_overview_uslup_3.pdf · ieee_access, double · kar/cm² 3.90 [2.30-4.30] · yazı kutusu 0.23 [0.13-0.28] · sayısal 0.10 · veri alanı 0.16 · derinlik 4 · akış 4/3 etiketli · ton 0.35 [0.06-0.49] · mürekkep 0.104 | beğeniye uzaklık 0.00 (0/5 beğenilmeyen tarafında) | eşik dışı: yalniz_metin_kutu_orani