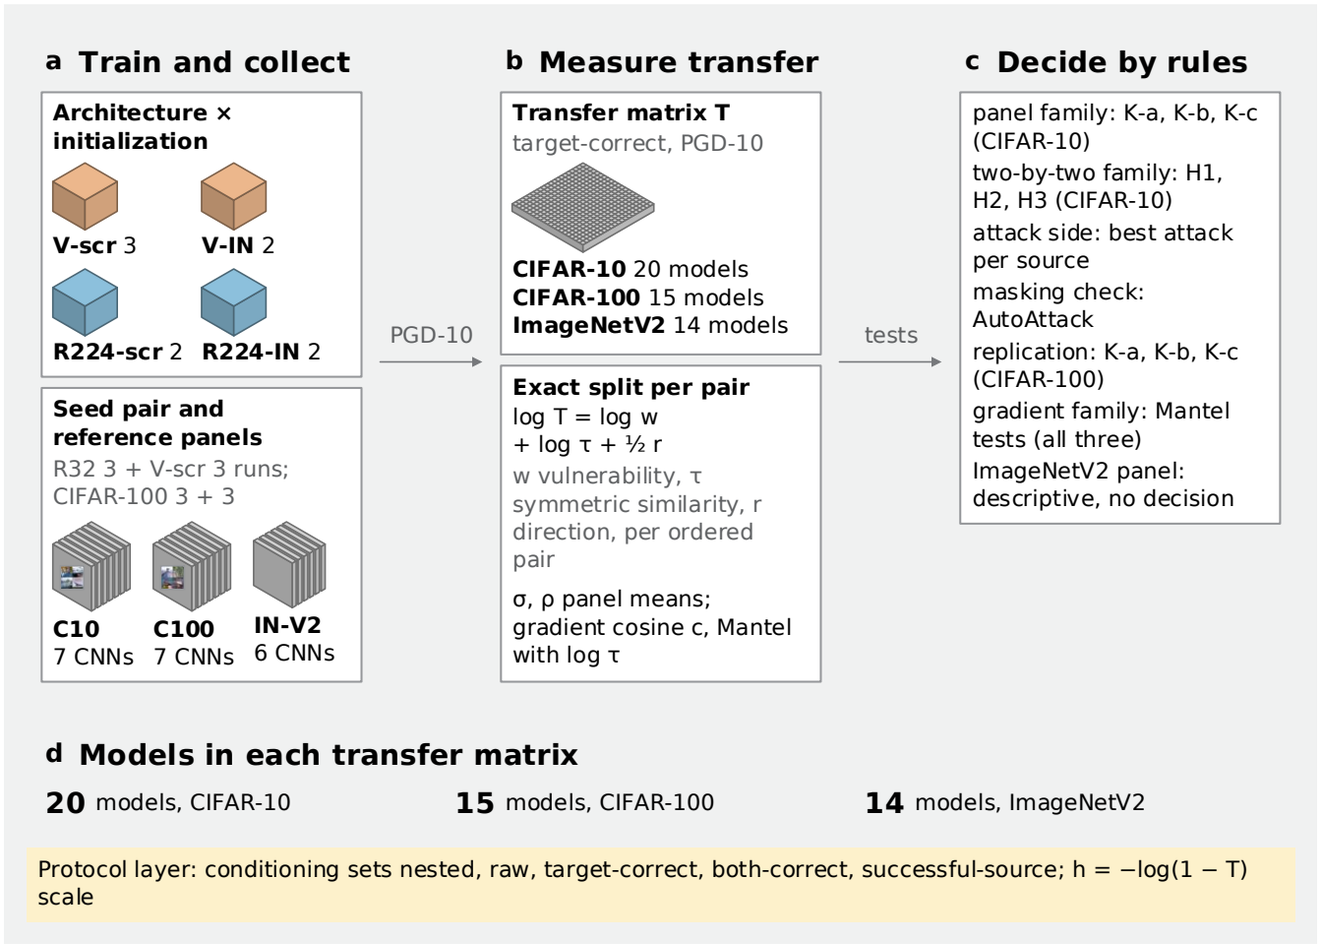


Figure 1. Study overview. A ResNet-18 and ViT-Tiny pair and a two-by-two architecture-by-initialization design are evaluated against fixed panels of robust CNNs on CIFAR-10 and CIFAR-100, with a descriptive extension to independently trained ImageNet models on ImageNetV2. Transfer rates are factored into vulnerability w, symmetric similarity $\bar{\tau}$ and directional residual r; the registered test families and the conditioning-protocol layer appear at the bottom.

Üslup 5 (atlandı: 8 ile TOKEN-ONLY) · _onizleme_study_overview_uslup_5.pdf · ieee_access, double · kar/cm² 3.66 [2.30-4.30] · yazı kutusu 0.23 [0.13-0.28] · sayısal 0.10 · veri alanı 0.14 · derinlik 4 · akış 2/1 etiketli · ton 0.56 [0.06-0.49] · mürekkep 0.109 | beğeniye uzaklık 0.88 (0/5 beğenilmeyen tarafında) | eşikler tamam