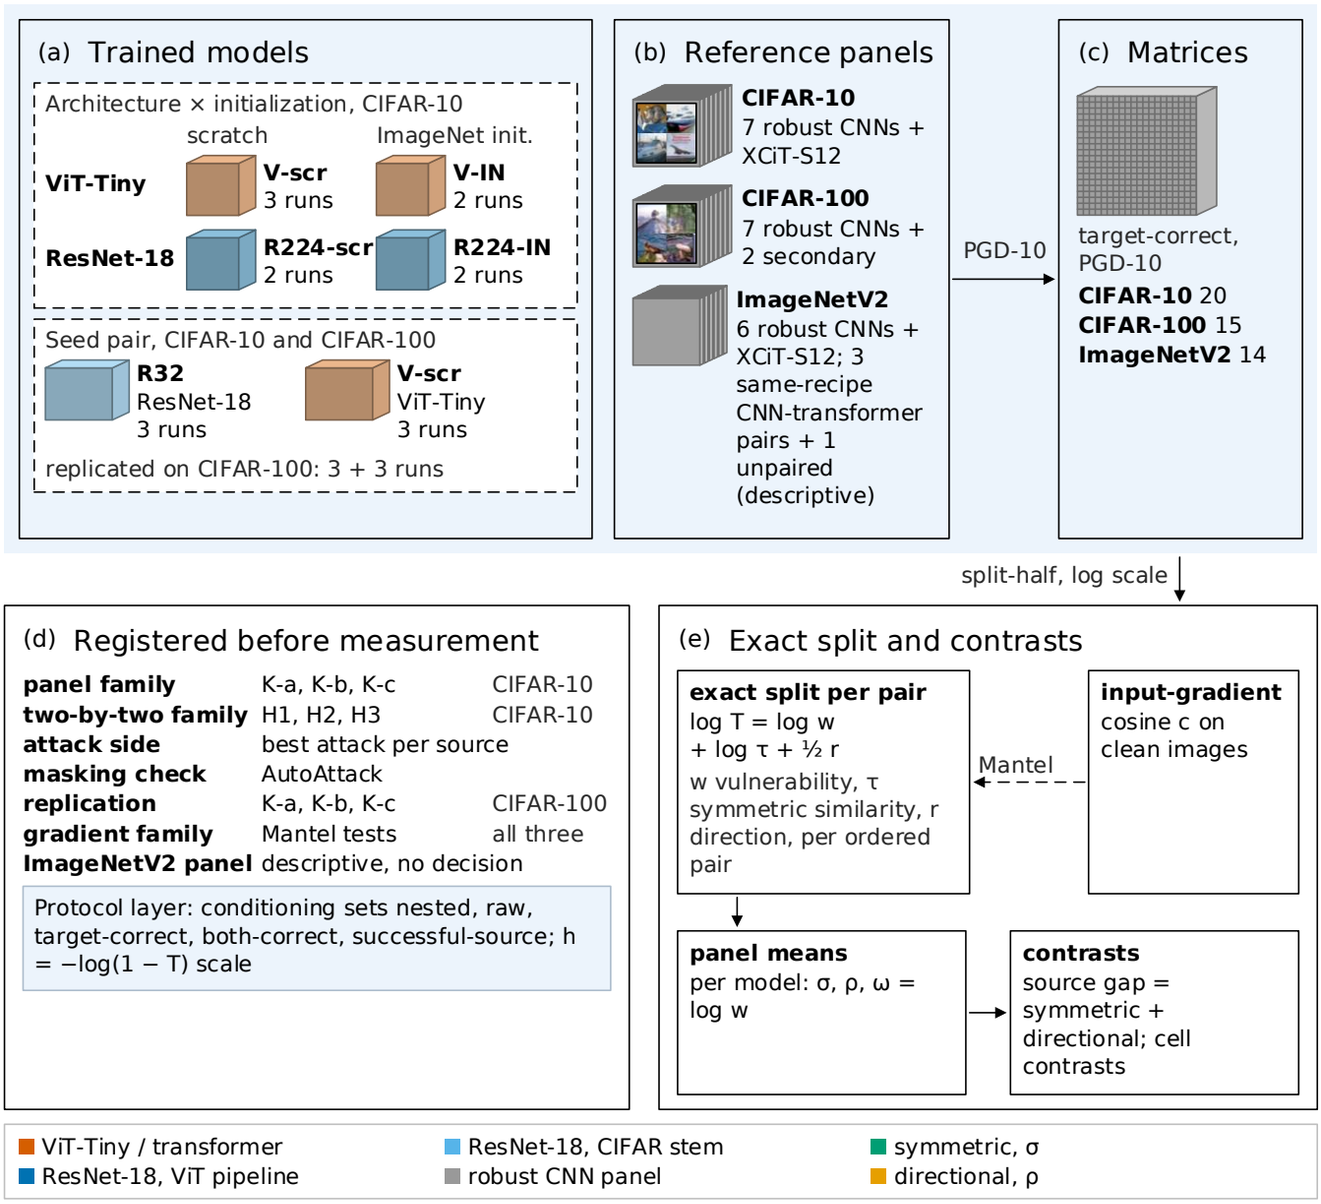


Figure 1. Study overview. A ResNet-18 and ViT-Tiny pair and a two-by-two architecture-by-initialization design are evaluated against fixed panels of robust CNNs on CIFAR-10 and CIFAR-100, with a descriptive extension to independently trained ImageNet models on ImageNetV2. Transfer rates are factored into vulnerability w, symmetric similarity $\bar{\tau}$ and directional residual r; the registered test families and the conditioning-protocol layer appear at the bottom.

Üslup 8 (seçilen) · _onizleme_study_overview_uslup_8.pdf · ieee_access, double · kar/cm² 4.05 [2.30-4.30] · yazı kutusu 0.24 [0.13-0.28] · sayısal 0.08 · veri alanı 0.16 · derinlik 4 · akış 5/5 etiketli · ton 0.32 [0.06-0.49] · mürekkep 0.146 | beğeniye uzaklık 0.00 (0/5 beğenilmeyen tarafında) | eşik dışı: yalniz_metin_kutu_orani