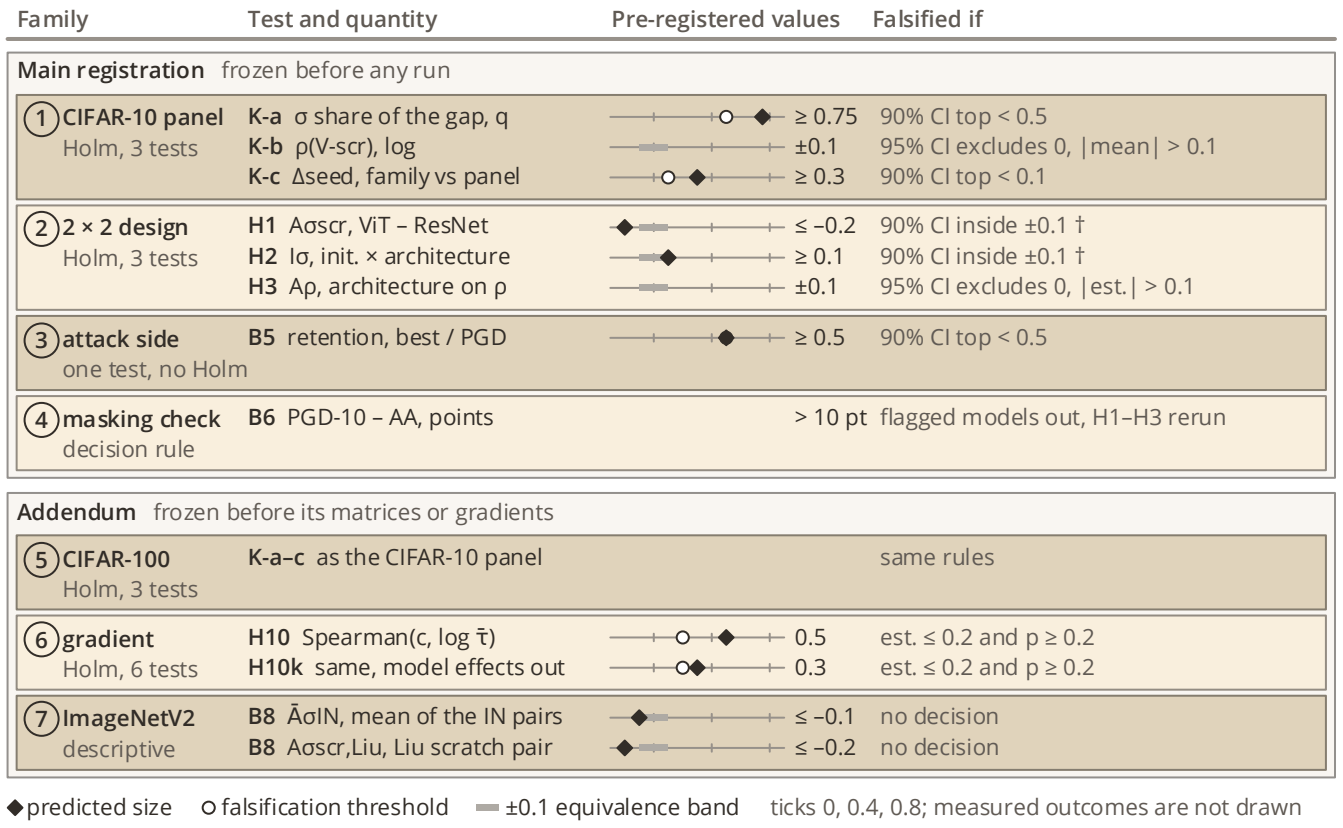

Family
Test and quantity
Pre-registered values
Falsified if
Main registration frozen before any run
1 CIFAR-10 panel
Holm, 3 tests
K-a σ share of the gap, q
≥ 0.75
90% CI top < 0.5
K-b ρ(V-scr), log
±0.1
95% CI excludes 0, |mean| > 0.1
K-c Δseed, family vs panel
≥ 0.3
90% CI top < 0.1
2 2 × 2 design
Holm, 3 tests
H1 Aσscr, ViT – ResNet
≤ –0.2
90% CI inside ±0.1 †
H2 Iσ, init. × architecture
≥ 0.1
90% CI inside ±0.1 †
H3 Aρ, architecture on ρ
±0.1
95% CI excludes 0, |est.| > 0.1
3 attack side
one test, no Holm
B5 retention, best / PGD
≥ 0.5
90% CI top < 0.5
4 masking check
decision rule
B6 PGD-10 – AA, points
> 10 pt
flagged models out, H1–H3 rerun
Addendum frozen before its matrices or gradients
5 CIFAR-100
Holm, 3 tests
K-a–c as the CIFAR-10 panel
same rules
6 gradient
Holm, 6 tests
H10 Spearman(c, log τ̄)
0.5
est. ≤ 0.2 and p ≥ 0.2
H10k same, model effects out
0.3
est. ≤ 0.2 and p ≥ 0.2
7 ImageNetV2
descriptive
B8 ĀσIN, mean of the IN pairs
≤ –0.1
no decision
B8 Aσscr,Liu, Liu scratch pair
≤ –0.2
no decision
predicted size
falsification threshold
±0.1 equivalence band
ticks 0, 0.4, 0.8; measured outcomes are not drawn