① Trained models


2×2 on CIFAR-10: scratch | ImageNet init.
seed pair R32 and V-scr replicated
on CIFAR-100: 3 + 3 runs

② Panels sliced into their PGD-10 matrices

CIFAR-10
7 robust CNNs
+ 1 secondary (XCiT-S12)
matrix of 20 models

CIFAR-100
7 robust CNNs
+ 2 secondary
matrix of 15 models

ImageNetV2
6 robust CNNs
+ 8 other, descriptive
matrix of 14 models

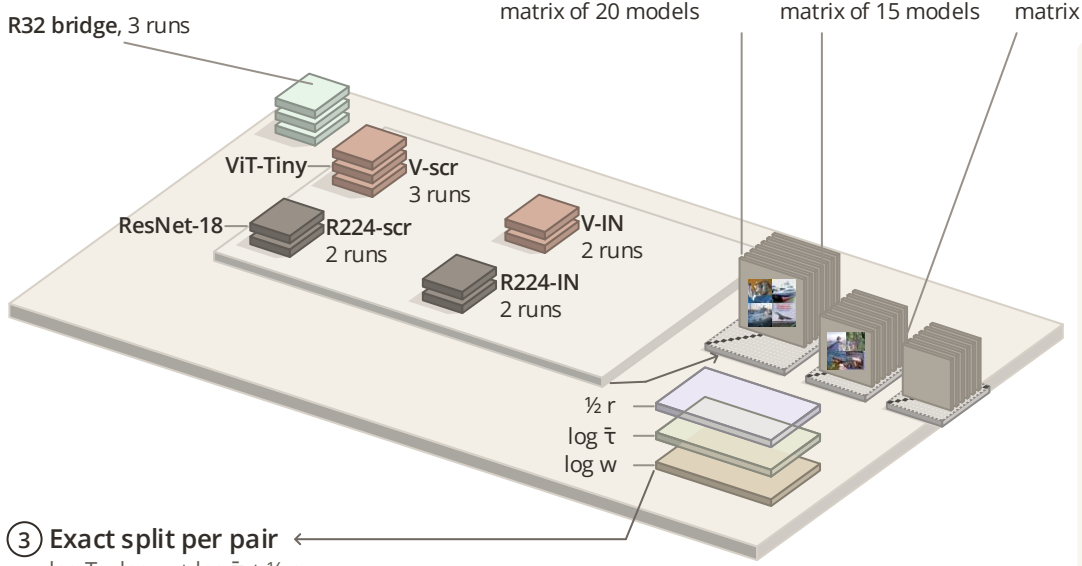

③ Exact split per pair

$\log T = \log w + \log \bar{\tau} + \tfrac{1}{2} r$

vulnerability, symmetric similarity, direction;
then panel means per model

④ Registered before measurement

panel family
K-a, K-b, K-c · CIFAR-10
two-by-two family
H1, H2, H3 · CIFAR-10
attack side
best attack per source
masking check
AutoAttack
replication
K-a, K-b, K-c · CIFAR-100
gradient family
Mantel tests · all three
ImageNetV2 panel
descriptive, no decision
protocol layer
four nested sets